









# Git

**inventon/whosts**

**Acceptance**

**Random**


# Automation



# Ansible







--

all:


children:

dev:


test:

acc:

prod:







**prod**




















- Stages are not exactly alike, use variables to deal with differences
- Separate specific environment data from configuration
- Hostnames are taken care of, only groups in hosts file



# Staging

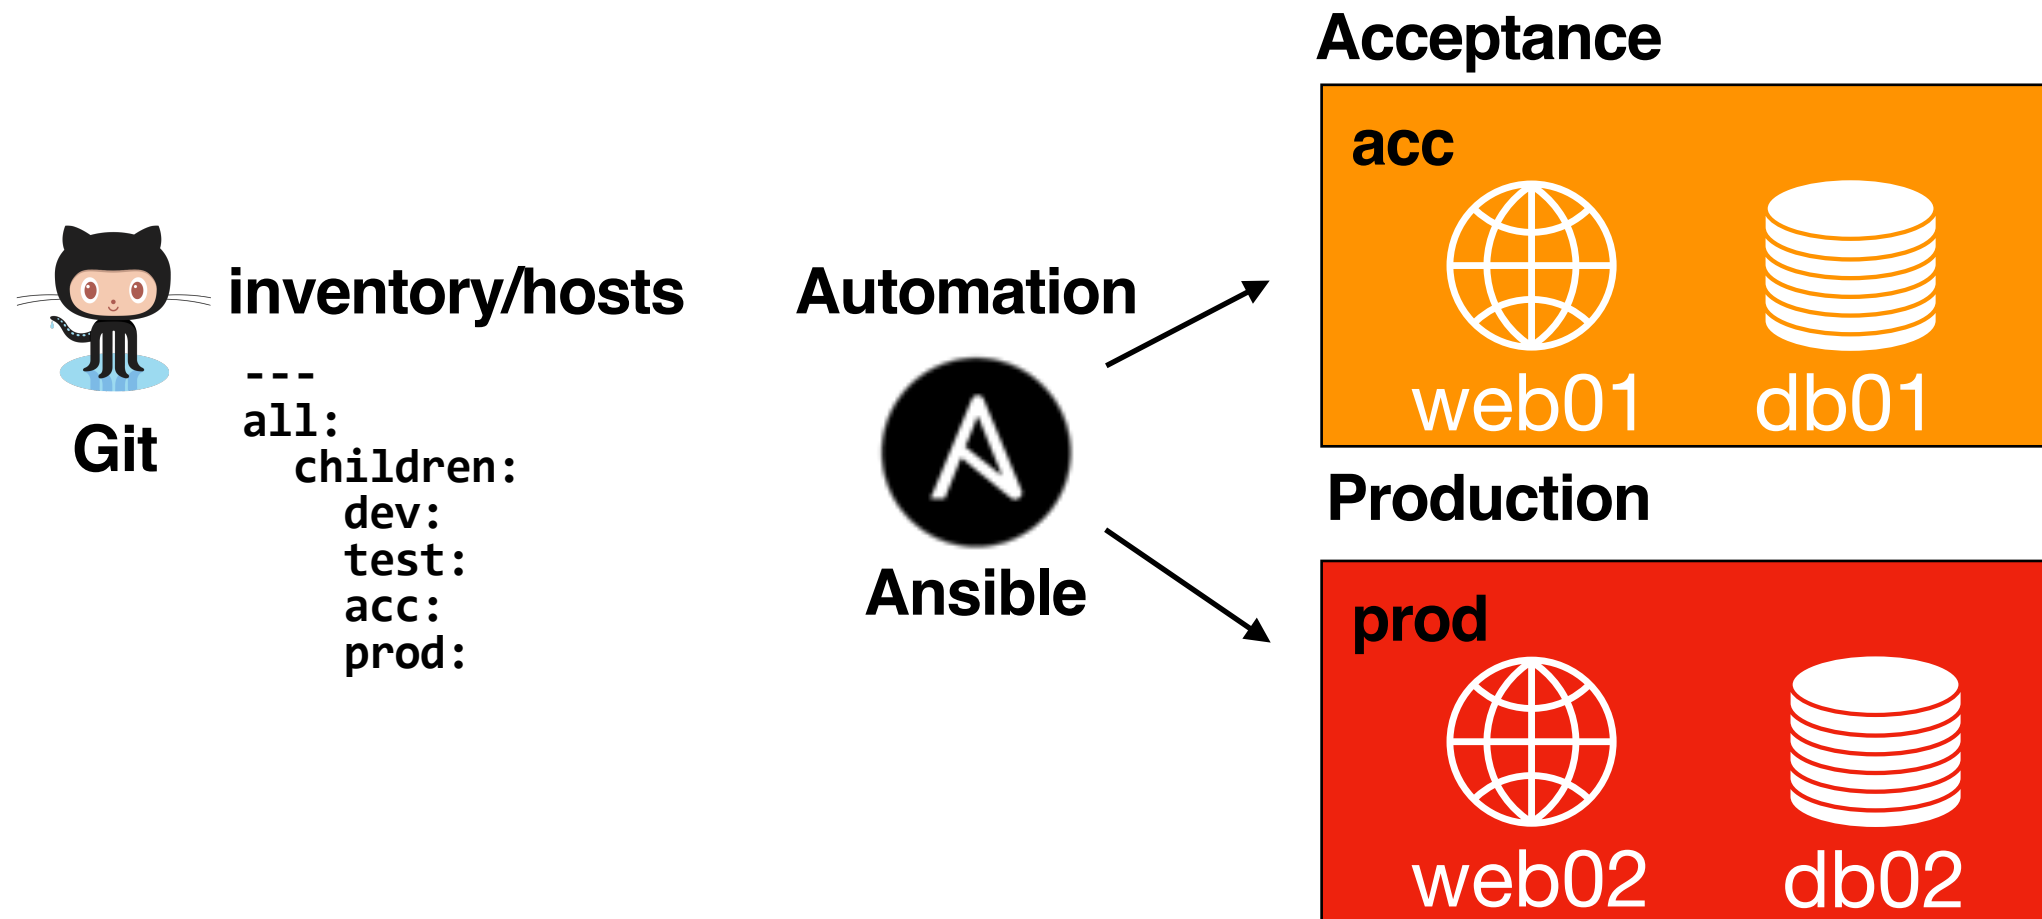

- Stages are not exactly alike, use variables to deal with differences
- Separate specific environment data from configuration
- Hostnames are taken care of, only groups in hosts file

# Inventory layout

## ansible\_inventory.git:

```
dev/           # an inventory defines one environment
  hosts        # define the groups in the inventory
  group_vars/  # variables for particular groups
    all        # all is reserved, don't use it
    db/        # directory for db group
      vars.yml  # plaintext variables for db group
    web/       # directory for web group
      vars.yml  # plaintext variables for web group
  host_vars/   # we rather not use this
    hostname1  # if systems need specific variables,
```