







**TEST**

**ACC**



**Development**





**operator**



# Git




# Jenkins

# Source Control



**Artifactory**

**Automatic Tests**



RRORD



**DEV**

Automation



**Version 1.0**

**Ansible**




































**Acceptance**




**Production**



# Inventory for CI/CD

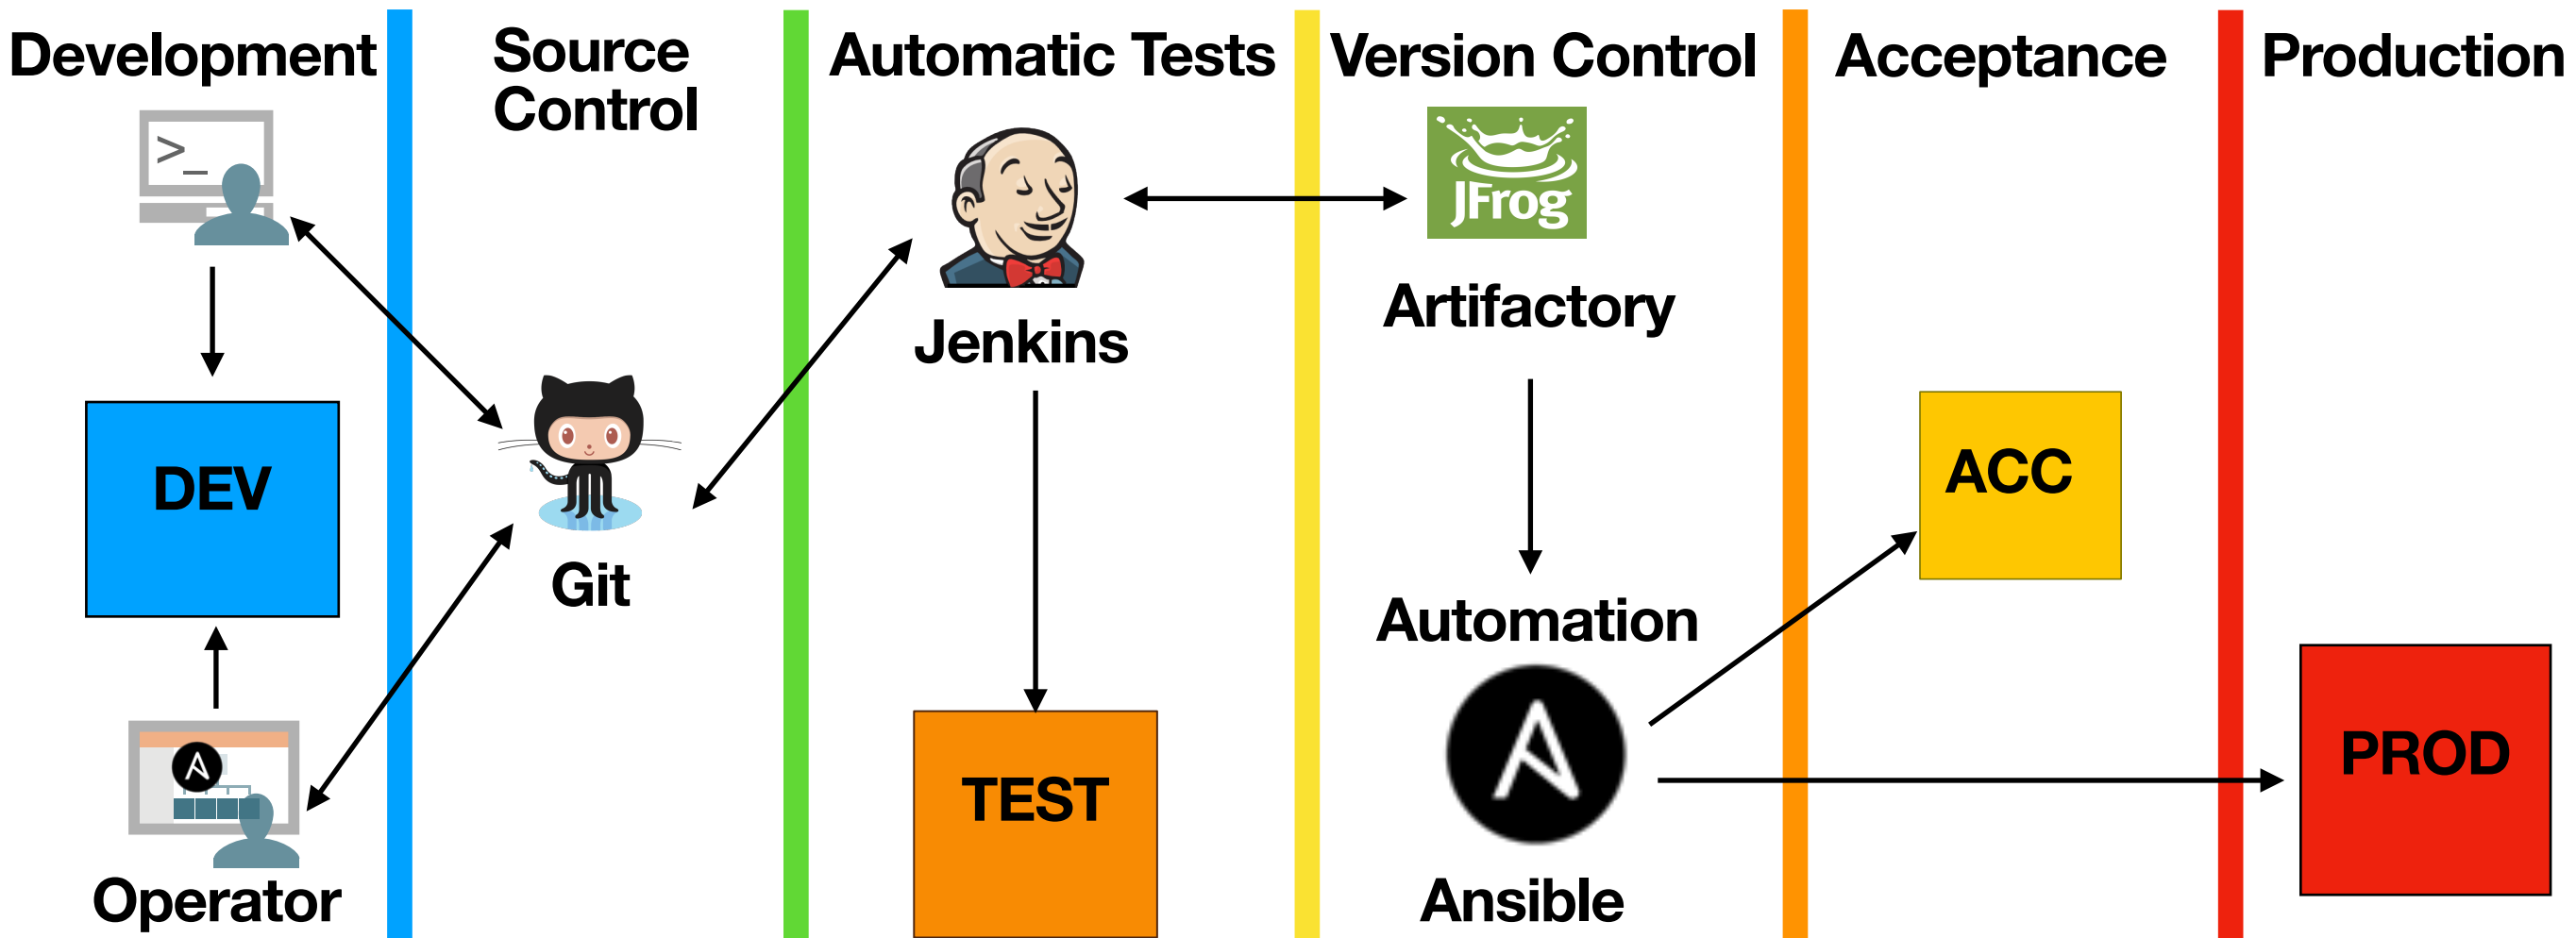

# Staging

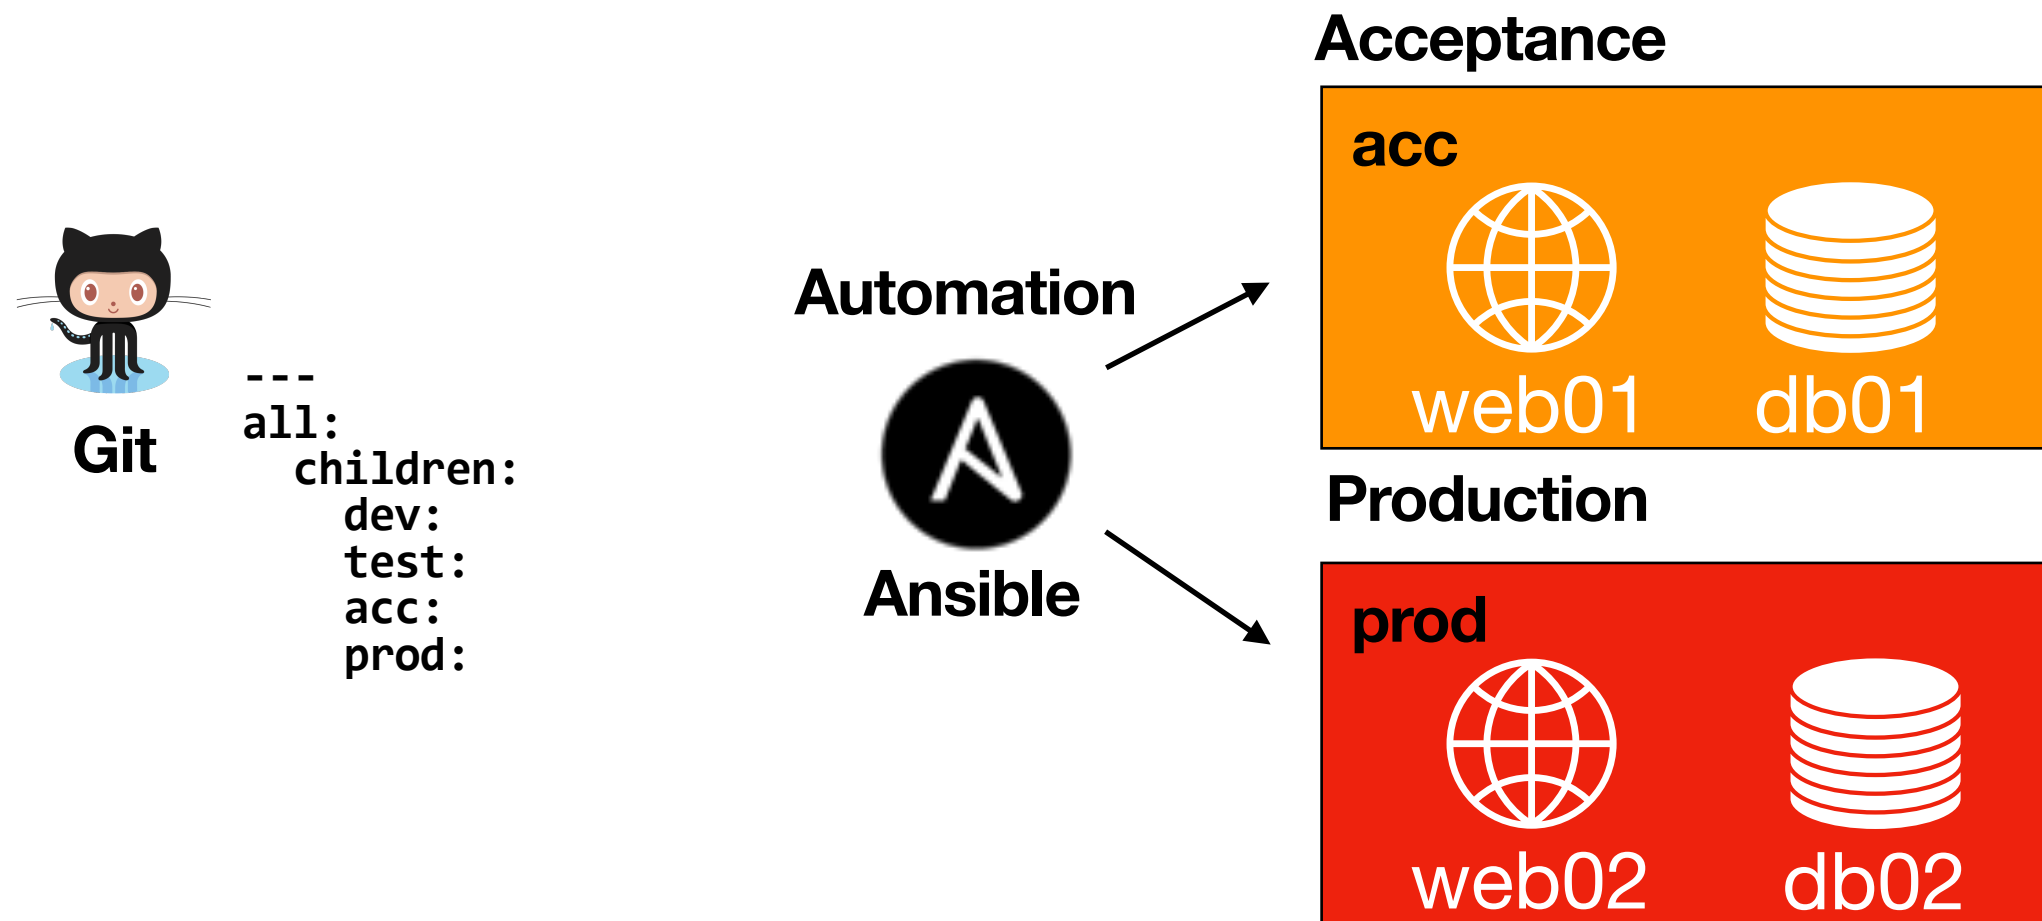

- Stages are not exactly alike, use variables to deal with differences
- Separate specific environment data from configuration
- Hostnames are taken care of, only groups in hosts file