



CI/CD Automation (Embedded)

Admin Guide

Version 2.4

Table of Content

Overview	4
Dependencies	4
Installing The Accelerator	5
CICD Embedded Accelerator Assets	5
Import Accelerator Packages	7
Set Account Properties	9
Mandatory Properties	9
Optional Properties	10
Setup Connections	13
Connect to Workato environments	13
CICD LT Env Info	15
Sample Data	16
Setup Slack workspace (if using Slack)	16
Setup MS Teams workspace (if using MS Teams)	19
Optional Configurations	22
Enabling ACL for Workbot	22
CICD LT ACL	22
Role Definition	22
Setup GitHub	22
GitHub connection options	23
GitHub webhook configuration	26
Setup Azure Repos	29
Azure Repos connection options	30
Azure Repos webhook configuration	30
Setup Configuration Store	33
Lookup Table as Configuration Store	33
GitHub Repo as Configuration Store	34
Enabling AQS Scan	36
Post Installation Tasks	36
Using NONE for Version Control (default)	36
Migration Utility (V1 to V2)	36
Migration from V1 to V2 (Only for GitHub)	37
Start the recipes	38
Using The Accelerator	39
Start the automation	39
Administration	40
Configure environments	40

Config Management	43
User Management	43
View Users	43
Add User	44
Solution Management	44
Create New Release	44
View Release	49
Create New Version	49
View Pipeline	50
View Customer Workspace	51
On-Demand Deployments	52
Deploy release	52
Distribute Release	57
Create Connection	59
Approvals	61
Get Pending Requests	61
Troubleshooting	61
Monitor errors	61
Error while connecting Slack	61
Error when downloading package	63
Feedback and Questions	63

Overview

Continuous Integration and Continuous Delivery or CI/CD is a practice to deliver quality automations reliably and securely.

The goal of CI/CD accelerator is to automate the way teams build, test, and package their automations. It helps automate the delivery to multiple environments (and data centers) such as test and production and also distribute it to customer workspaces. Automating release processes makes it easier for teams to coordinate deployments, run quality controls on release, and reduce errors.

The CI/CD automation accelerator drives consistent release practices across multiple teams in an organization. Once the release processes are automated, teams can build better solutions and reduce change defect rates.

Using a standardized and automated approach, organizations can:

- Introduce new services faster.
- Increase the business value through improved quality of service.
- Enhance production environment stability by reducing post-implementation incident spikes.

Note: Workato Accelerators are not formally supported beyond the standard platform support provided as part of your existing Workato agreement. Accelerators are intended as a starting point for your solution development and can be modified/customized to your organization's needs. You may reach out to your Workato customer success team to provide feedback on this Accelerator or email accelerators.feedback@workato.com.

Dependencies

1. Once installed, this accelerator includes 11 active recipes. This is in addition to any recipes you may create to customize the accelerator.
2. A GitHub account and repositories (optional).
3. Slack workspace with access to Workbot for Slack from Workato **or** MS Teams with access to Workbot for MS Teams from Workato.

Installing The Accelerator

The following high-level steps are required to install this accelerator. Details for each step are covered in the following sections.

1. Import Accelerator Packages
2. Set Account Properties
3. Setup Connections
 - a. Connect to Workato environments
 - b. Slack/MS Teams setup
4. Optional Configurations
 - a. Enabling ACL for Workbot
 - b. Setup GitHub repositories (Optional)
 - c. Setup Azure Repos repositories (Optional)
 - d. Setup Configuration Store
 - e. Enable AQS (Optional)
5. Post Installation Tasks

CICD Embedded Accelerator Assets

After downloading the Accelerator zip file, you will need to extract the contents locally. Inside you will find:

1. **core-Accelerators-Common.zip** - This is the accelerators common asset package which needs to be imported into selected Workato workspace
2. **core-cicd-automation-V002.4 (Embedded).zip** - This is the core asset package which will be imported into selected Workato workspace
3. **CICD Automation (Embedded) V2.4 - Admin Guide.pdf** - Administration guide for accelerator installation and usage

Import Manifest in Workato workspace:

1. Create a project/folder to import the package. This guide assumes a project named "**CICD Automation**" is used for importing the package.

2. Import the package **core-cicd-automation-V002.4 (Embedded).zip** using the Recipe Lifecycle Management tool. For detailed steps please refer to the [docs](#).

core-Accelerators-Common.zip

This package includes the following:

1. 2 connections
 - a. ACCL | CON | Workbot for Microsoft Teams
 - b. ACCL | CON | Workbot for Slack


core-cicd-automation-V002.4 (Embedded).zip

This package contains the following assets:


1. Connector SDKs
 - a. CICD for Workato
 - b. CICD for GitHub
 - c. Azure Repos
2. Recipes
 - a. 14 Workbot for Slack/12 Workbot for MS Teams recipes
 - b. 57 recipe functions
 - c. 1 standard recipe (GitHub)
 - d. 1 standard recipe (Azure Repos)
3. Lookup tables
 - a. Environment Configuration
 - b. Release Details
 - c. Distribution Details
 - d. Environment Properties Configuration (Optional)
 - e. Audit logs
 - f. Release Approvals
 - g. Access Control List
 - h. API Collection Info
4. Connections
 - a. Workato API
 - b. GitHub account
 - c. Azure Repos
5. 21 Account Properties

Import Accelerator Packages

1. Create project with name “Accelerators Common”
 - a. Go to “Tools” in the navigation bar and select “Recipe lifecycle management”:

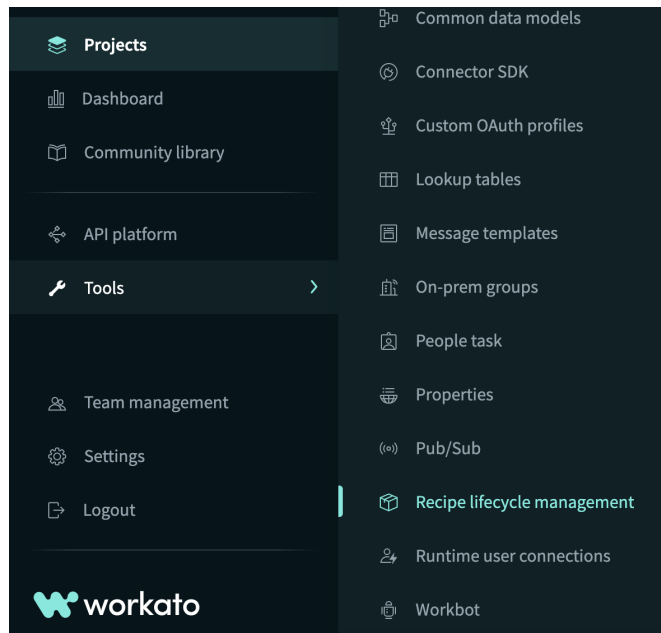

- b. Toggle to the “Import” tab and click on “Import package to a new folder”:

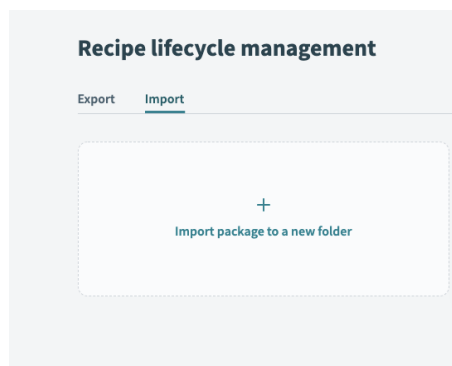

- c. Toggle to the “Import” tab and click on “Import package to a new folder”:
 - d. Select the zip file **core-Accelerators-Common.zip** and specify the target folder (select “Accelerators Common”):

Import package

1 Select zip file to import

2 Review content

3 Import

Select zip file *

Browse or drag and drop file here

Browse

Target folder *

Home


All recipes and dependent assets from the package will be imported into this folder

Next


- e. Let the “Import data” checkbox be checked, to import configurations.
- f. Click “Next” and “Finish”. If successful, you should be able to see the assets within the “Accelerators Common” folder.

2. Create project with name **“CICD Automation”**


- a. Go to “Tools” in the navigation bar and select “Recipe lifecycle management”:

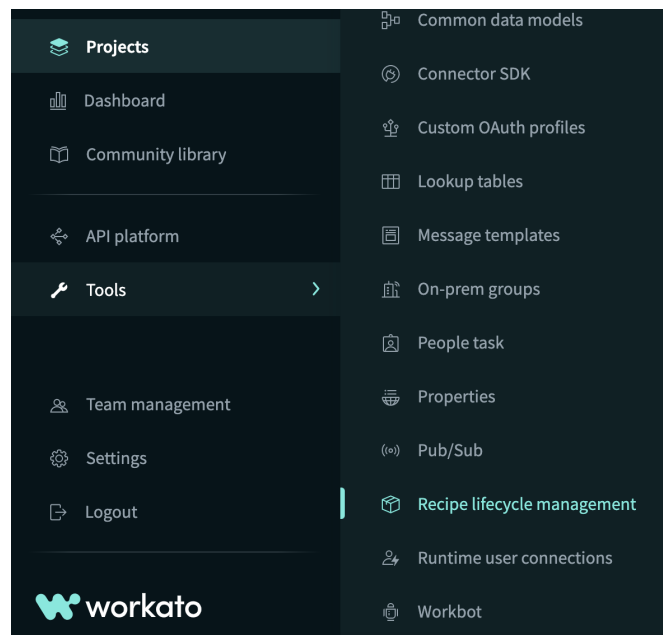

- b. Toggle to the “Import” tab and click on “Import package to a new folder”:

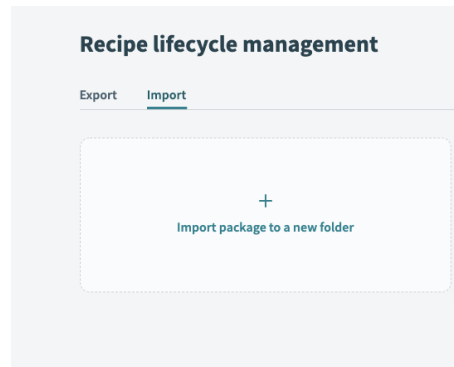

- c. Toggle to the “Import” tab and click on “Import package to a new folder”:
- d. Select the zip file **core-cicd-automation-V002.4 (Embedded).zip** and specify the target folder (select “**CICD Automation**”)

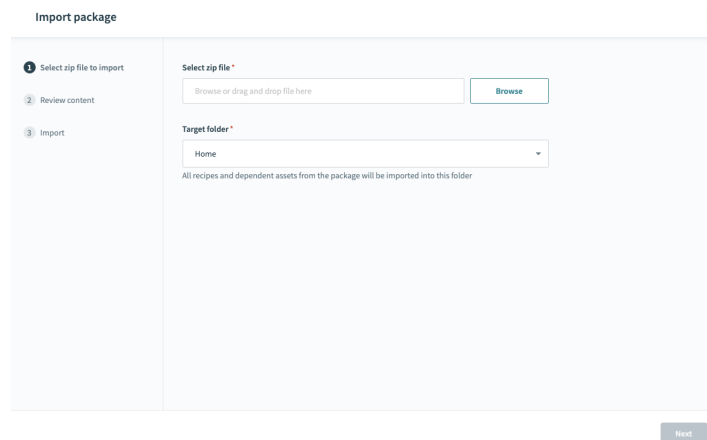

- e. Let the “Import data” checkbox be checked, to import configurations.
- f. Click “Next” and “Finish”. If successful, you should be able to see the assets within the “Automation Quality & Security” folder.

Set Account Properties

Set account property as per below description of each property.

Mandatory Properties

Setting up these properties are mandatory for functionality of accelerator.

Property Name	Description	Sample Value
cicd.error.notification	Channel or email for sending notification for any error in accelerator	abc@yourcompany.com or #cicd-alerts

cicd.release.announcements.channel	Channel for sending release announcements	#release-announcements
cicd.app	Application for Workbot. Supported values are <i>slack</i> , <i>ms-teams</i>	slack


Optional Properties

Following are optional properties. You can set values to override default behavior. If you don't set any value default values will be used.

Property Name	Description	Default Value	Sample Value
cicd.properties.store	System for storing environment specific configuration for account properties/connection authentications. Supported values: <i>lookup</i> , <i>github</i> . See Setup Configuration Store for more information This is an optional feature and it is required only if properties/connections need to be configured as part of deployment. Possible values are lookup, github, azurerepos	lookup	github
cicd.properties.git.repo	If the value of cicd.properties.store is github or azurerepos, provide github/azurerepos repository name. This property is required only if cicd.properties.store is set to github or azurerepos	null	environment-config
cicd.config.version.control.system	Version control to be used by this accelerator. Currently supported values: NONE, github, azurerepos For github,, refer to Setup GitHub For azurerepos, refer to Setup Azure Repos	NONE	NONE
cicd.aqs.enable	This flag enables/disables AQS scanning during build. See Enabling AQS Scan	false	true

<code>cicd.aqs.strict.enforce</code>	This flag is used if AQS scan is enabled to enforce code scanning strictly i.e. if code quality check fails then release will be stopped. This property is required only if <code>cicd.aqs.enable</code> is Set to true	false	true
<code>cicd.config.package.store</code>	Indicates where the package is downloaded for import. Supported values are <i>github</i>, <i>workato-api</i>	workato-api	github
<code>cicd.encryption.key</code>	Encryption key to encrypt/decrypt secrets stored in configuration store. This property needs to be set only if keys need to be encrypted/decrypted when stored in the configuration store.	null	sample-key
<code>cicd.git.autocreate.repo</code>	Flag to indicate if the github repo should be created and configured if it doesn't exist. Set this flag to false if you prefer to create and configure repo manually to be used by CICD accelerator. <i>This property is required only if <code>cicd.config.version.control.system</code> is set to <i>github</i> or <i>azurerepos</i>.</i>	false	true
<code>cicd.git.autocreate.template.org</code>	When <code>cicd.git.autocreate.repo</code> is set to true and repo needs to be created from template then provide name of github organization where template is stored. <i>This property is required only if <code>cicd.config.version.control.system</code> is set to <i>github</i>.</i>	null	accelerator-embedded
<code>cicd.git.autocreate.template.repo</code>	When <code>cicd.git.autocreate.repo</code> is set to true and repo needs to be created from template then provide name of github template repository. <i>This property is required only if <code>cicd.config.version.control.system</code> is set to <i>github</i>.</i>	null	template

cicd.git.autocreate.visibility	Use this property to set visibility for auto created GitHub repositories. Possible values are private, public, internal <i>This property is required if cicd.config.version.control.system is set to github and cicd.git.autocreate.repo is set to true.</i>	private	public
cicd.git.autocreate.collaborator.admin	Use this property to add team as collaborator with permission admin This property is required if cicd.config.version.control.system is set to github and cicd.git.autocreate.repo is set to true.	null	team-name
cicd.git.branching	Set branching strategy for git. Possible values are simple, per_env. Simple is creating the pull request to master when release is created. Per_env is creating the pull request for each env and to master when it is deployed to prod. <i>This property is required only if cicd.config.version.control.system is set to github or azurerepos.</i> <i>When you set this property to per_env, make sure that Environment Git Branch Name is defined for each environment in CICD LT Env Info lookup table</i>	simple	per_env
cicd.git.project.name	This property is required only if cicd.config.version.control.system is set to azurerepos.		integrations
cicd.git.single.repo.name	Set this property in case you want single repo functionality enabled. <i>This property is required only if cicd.config.version.control.system is set to github or azurerepos.</i>	Repo for each manifest	workato-cicd-repo
cicd.git.webhook.url	Webhook URL to get pull events from GitHub.	null	https://www.workato.com/webhook

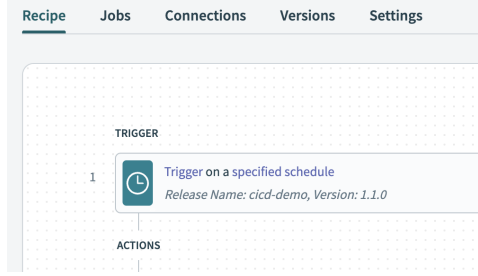	This property is required if <code>cicd.config.version.control.system</code> is set to <code>github</code> and <code>cicd.git.autocreate.repo</code> is set to <code>true</code>. <i>This property is used for setting up webhook when repo is created in github.</i>		<code>s/rest/17271ab2-7cb6-4f90-b676-ec580981b227/pull-request-merged</code>
<code>cicd.acl.enabled</code>	If Role based access is required please set this property to <code>true</code> else <code>false</code>. If this is set to <code>true</code> then CICD accelerator users need to be configured to access the accelerator. See Administration for more info.	<code>false</code>	<code>true</code>
<code>cicd.recipe.version.tracing</code>	Set this property to <code>true</code> if you want the release name and version to be inserted in the recipe for tracing the release and identify the release name and version that created the release as below.  The screenshot shows a 'Recipe' configuration window with tabs for 'Recipe', 'Jobs', 'Connections', 'Versions', and 'Settings'. The 'Recipe' tab is active, displaying a visual workflow editor. It features a 'TRIGGER' section with a single trigger: 'Trigger on a specified schedule' (indicated by a clock icon), with the configuration 'Release Name: cicd-demo, Version: 1.1.0'. Below the trigger is an 'ACTIONS' section, which is currently empty.	<code>false</code>	<code>true</code>

Setup Connections

Connect to Workato environments

CICD | CON | Workato API SDK connection uses Workato developer APIs ([docs](#)) to perform various actions for package export and import with added advantage of long actions to handle asynchronous requests.

It also supports configuring multiple Workato workspaces in the same connection for ease of use and provides a secure connectivity to all Workato environments.

Navigate to the “Core/Connectors” folder under imported package to update the connection placeholder to configure your Workato environments.

Asset name	CICD CON Workato API SDK
Asset type	Connection
Asset path	CICD Automation/Core/Connectors

Provide an environment name along with corresponding environment email and/or API key.

Workato environments

▼ Hide

Environment #1 *

▼ Hide

Environment name *

DEV

Workato environment identifier. For example, DEV, TEST, or PROD.

Data center *

US

Email address *

workato-environments+accel-embedded-env@cs.workato.com

Email address to access Workato platform APIs.

API key *



You can find your API key in the [settings page](#).

Connectors support both legacy API key as well as new scope based API key.

- To generate scope based API keys refer to the [Creating API Client page](#).
 - Don't set email id when scope based API key.
- Legacy Key Generation
 - You can find your personal API key in the respective environment workspace [settings page](#).
 - Open Account Settings from the left navigation bar in your workspace. Navigate to the API key section. Here, you can retrieve your email and Workato API key and refresh the API key if necessary.


For Data center, select data center where Workato workspace is located.

Repeat above steps for configuring all admin accounts.

Note: Account settings are accessible using the workspace owner account only.

After configuring all required environments, setup the following lookup table for each environment. **Setting up this lookup table is also available via Bot interface.**

CICD | LT | Env Info

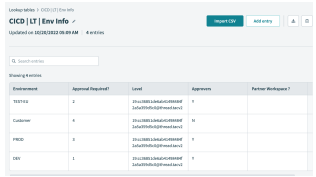Column Name	Description	Sample Value
Environment	Name of environment. (name should match environment name in CICD CON Workato API SDK). Note: Record with Customer environment is required for enabling installation in customer workspaces.	DEV
Description	Description of the environment. Not used during processing.	Description
Approval Required?	Specify if approval is required for deployment to this environment. Possible values: Yes, No	Yes
Level	Level of environment. Starting from 1 for lowest environment and increment number. - Environment where the manifest is created should have value 1. It is mandatory to have level one. - Subsequent environments should have incremental value. E.g. 1 for DEV, 2 for TEST, 3 for UAT, 3 for ACC, 4 for PROD. - Level number cannot be skipped for defined environments. E.g. it should be 1,2,3,4. It cannot be 1,3,4	1 
Approvers	This field is required if "Approval Required?" is set to Yes. Notification channel or person for getting approval requests for deployment. In case the git repository is used as	#release-approvers

	version control system (i.e. github, azure repo) and cicd.git.branching is set to per_env. Set value as git	
Partner Workspace ?	Specify Y for partner/admin workspace. N for Customer record	Y
Git Branch Name	This value is required when Approvers is set to git. Provide the name of the branch for creating pull requests for the environment.	develop

Sample Data

Environment	Description	Approval Required?	Level	Approvers	Partner Workspace ?	Git Branch Name
Customer	NA	Yes	3	#release-approvers	N	
PROD	Customer	Yes	2	#release-approvers	Y	
DEV	PROD	Yes	1	#release-approvers	Y	

Setup Slack workspace (if using Slack)

Navigate to the “Connectors” folder under imported package to connect the Slack connection placeholder. It uses standard Slack OAuth for authorization. Select the appropriate workspace during the authentication to create the connection.

Asset name	CICD CON Workbot for Slack
Asset type	Connection
Asset path	CICD Automation/Core/Connectors

NLU provider

No items

Choose a connection for your conversational interface. Supports Google's DialogFlow and Amazon Lex.

Advanced

Additional fields that are not needed for most users

Show

Custom OAuth profile

No value selected

When selected, all requests to the app will use the profile specified [here](#). Create new profile [here](#).

Disconnect

Create channels for release announcement as mentioned in account properties (`cicd.error.notification`, `cicd.release.announcements.channel`) and approval as mentioned in Environment Info lookup table (if approval is enabled).

Add Workbot as Integration in all the channels.

accelerators-dev

Threads

All DMs

Slack Connect

More

Channels

release-announcements

Direct messages

Apps

release-announcements

Add a bookmark

Full

Yesterday


New release deployed

New release was created and deployed to test environment. Please refer to link above for release details.


Project name	ID
CICD Demo for MS Teams	954617
Package	References
1154	MS-1234
Release log	Release version
Submitted from MS Teams v2.	0.2.0
Release mode	

Connected Workbot should be added to the created channels to allow notifications.

To add Workbot to channel right click on channel and click on View Channel details

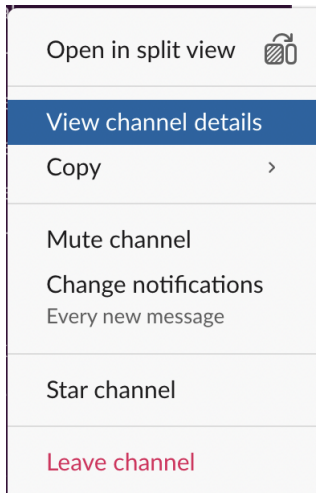

Go to Integrations and click on Add and App

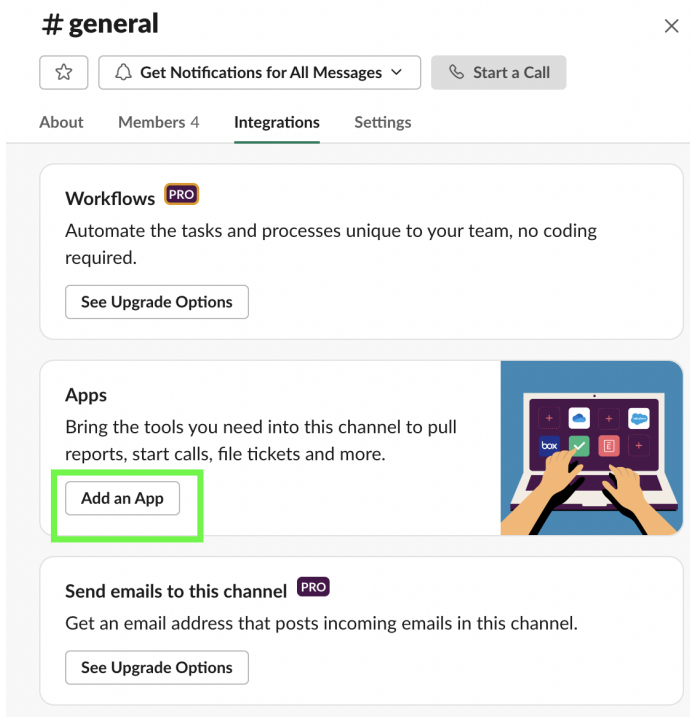

Search for Workbot and click on Add to add Workbot to Channel. (if you are using Workato in US datacenter name is **Workbot**, for Singapore data center name is **Workbot SG**, for Japan datacenter name is **Workbot JP** and for Europe datacenter name is **Workbot EU**)

Add apps to # general

View App Directory

Q Search by name or category (e.g. productivity, sales)

Add apps to get things done

Schedule meetings, share docs, and more — straight from Slack. [See app suggestions](#)



In your workspace (1)



Workbot

Bot platform for Workflows & ChatOps

Add

It should display workbot as an integration app.

general

×



Get Notifications for All Messages

Start a Call

About

Members 4

Integrations

Settings

Workflows **PRO**

Automate the tasks and processes unique to your team, no coding required.

See Upgrade Options

Apps

[Add apps](#)



workbot

Bot platform for Workflows & ChatOps

Send emails to this channel **PRO**

Get an email address that posts incoming emails in this channel.

See Upgrade Options


Setup MS Teams workspace (if using MS Teams)

Navigate to the “Connectors” folder under imported package to connect the MS Teams connection placeholder. It uses standard MS Teams OAuth for authorization. Select the appropriate workspace during the authentication to create the connection.

Asset name	CICD CON MS Teams
Asset type	Connection

Asset path


CICD Automation/Core/Connectors

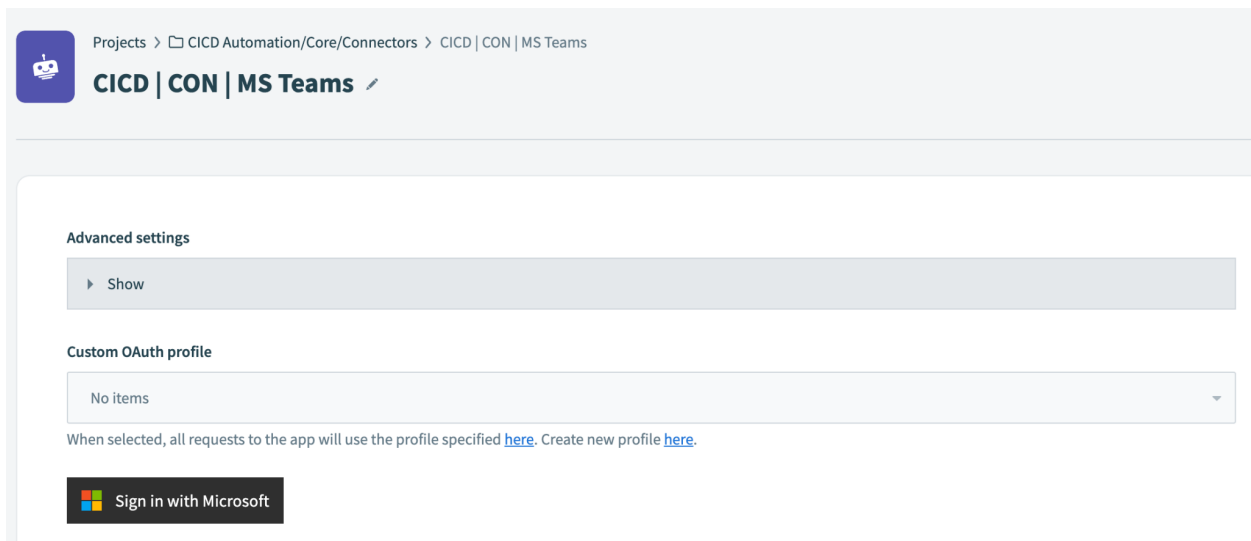

Create channels for release announcement as mentioned in account properties (`cicd.error.notification`, `cicd.release.announcements.channel`) and approval as mentioned in Environment Config lookup table (if approval is enabled).

Add Workbot as Integration in the Team where channels are defined.

To get Channel name, right click on channel and click on **Get Link to Channel** and copy link.

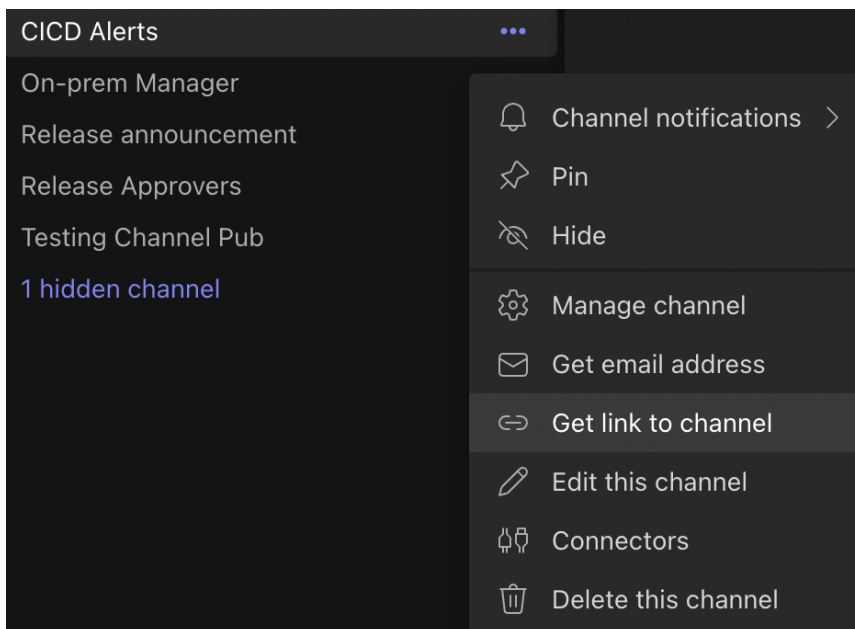

It should be in format like this:

<https://teams.microsoft.com/l/channel/19%3a16c07a6a0dca4d9381a582c02fca888f%40thread.tacv2/CICD%2520Alerts?groupId=0bb0be74-ea4d-428e-bb4d-381ae6a5fdf5&tenantId=ecd3ae51-fabe-481f-97f6-b3693a20cf4d>

Copy text between **channel/** and next **/**

19%3a16c07a6a0dca4d9381a582c02fca888f%40thread.tacv2

Replace **%3a** with **:** and **%40** with **@**

19:16c07a6a0dca4d9381a582c02fca888f@thread.tacv2

This is the channel name that should be used when required in configuration.

Optional Configurations

Enabling ACL for Workbot

CICD | LT | ACL

This lookup table needs to be configured only if `cicd.acl.enabled` is set to true in [Account Properties](#).

Column Name	Description	Sample Value
User Email	Slack or MS Teams user id	joe@workato.com Or Joe
Role	Role that user does have. Comma separated list of roles. Possible values are: distribute,view,deploy,admin,approve	distribute,view,deploy,admin,approve

Role Definition

admin: Access to user management, config management, environment definitions

approve: Access to approve deployment requests

deploy: Access to deployment to partner workspaces

distribute: Access to deployment to customer workspaces

view: View access to release status for partner and customer workspaces

Setup GitHub

This step is required only if you are using GitHub as a version control system.

CI/CD Automation accelerator is shipped with recipes to work with GitHub as a version control system out-of-the box.

The accelerator assumes that each manifest is mapped directly to the GitHub repositories.

Note: GitHub repositories required for storing releases can be created automatically by the accelerator. If you choose to create repositories yourself, you can disable auto creation from property. In that case, please initialize the GitHub

repository before using with CI/CD automation accelerator. You can use a sample readme file offered by GitHub while creating the repository for this purpose.

Asset name	CICD CON GitHub
Asset type	Connection
Asset path	CICD Automation/Core/Connectors

Update the connection placeholder in the imported package to configure your GitHub account.

GitHub connection options

OAuth Client ID and secret	Create a GitHub OAuth app for use with the accelerator. Use this document for a step-by-step guide. Use the following values for setting up OAuth app: Application name: Workato CICD Automation Homepage URL: https://www.workato.com Application description: Workato CICD Automation Authorization callback URL: https://www.workato.com/oauth/callback
----------------------------	---

Connection type	Connection type * GitHub.com Select if GitHub is hosted on-prem or in cloud. Client ID * 4748d1ffeff884885d9 Learn more about setting up OAuth 2.0 for your GitHub account. Client secret *  ***** Base branch name * Main Select the name of your base branch. Repository owner name * ea-demo E.g., octocat is owner for repository https://github.com/octocat/hello-world. Is this app in a private network? No gateway If it is, you need to access it via a Workato on-prem agent. Learn more Connect Select if GitHub is hosted on-prem or in the cloud.
Base branch name	Select the name of the repository base branch. For older setup it may be referred as “master”.
Repository owner name	Provide a repository owner name (GitHub organization name). In the example below, the owner name is “workato” for the repository “custom_connector_docs”.  Search or jump to... / Pull requests  workato / custom_connector_docs
Additional configuration for on-prem edition	

GitHub hostname

Assets > CICD Automation/Connections > [CICD] CONN - GitHub

[CICD] CONN - GitHub

Connection type *

On Premise

Select if GitHub is hosted on-prem or in cloud.

GitHub hostname *

GitHub hostname for authentication and API interactions. Enter your on-prem enterprise edition hostname.

API base URL *

API base URL for on-prem version. Typically, http(s)://[hostname]/api/v3. Refer to GitHub documentation for more details.

Client ID *

59819edba13f0954fbd7

[Learn more](#) about setting up OAuth 2.0 for your GitHub account.

Client secret *

Base branch name *

Master

Select the name of your base branch.

Repository owner name *

workato

E.g., octocat is owner for repository https://github.com/octocat/hello-world.

Is this app in a private network?

No gateway

If it is, you need to access it via a Workato on-prem agent. [Learn more](#)

Connect

Provide hostname for on-premise GitHub server.

Is this app in a private network?

You need to access the on-prem GitHub edition via a Workato on-prem agent (OPA). [Learn more](#) about how to configure the OPA. Accelerator uses [HTTP profile](#) for making the connection.

GitHub webhook configuration

Note: If you have allowed creating repositories by the accelerator, you don't need to perform steps in this section.

- For each GitHub repository, set up webhook events by going to the “Settings” page of the repository. If the organization is set up only for Workato projects then this setting can also be done at GitHub organization level.
- Select the Webhooks option.
- Update Payload URL to match imported from “CICD Automation/Extension/GitHub/CICD | REC | WebHook Trigger from GitHub” recipe’s webhook endpoint. You can find it in Trigger (step 1) of the recipe.

Projects > CICDAutomationV3/Extension/GitHub > CICD | REC | WebHook Trigger from GitHub : Recipe

CICD | REC | WebHook Trigger from GitHub

Recipe Jobs Versions Settings

TRIGGER

1 Pull request merged via HTTP webhook (Real-time)

IF Action Step 1 equals closed

AND Merged Step 1 is true

Webhook to listen on pull request merge events from GitHub repository to trigger release creation and continuous delivery process

ACTIONS

2 Lookup entry from CICD | LT | Release Details lookup table

3 Call CICD | FUNC | Create Release in GitHub

HELP

This trigger executes recipe actions when webhooks are received. When a recipe is stopped, it will not process webhooks. [Learn more](#)

Event name

Pull Request Merged

Workato webhook address

<https://www.workato.com/webhooks/rest/17271ab2-7cb6-4f90-b676-ec580981b227/pull-request-merged>

In your app, set up your webhook events to be sent to this URL, then proceed to the next step to listen for a sample event.

- Change the content type to “application/json”.
- Select “Let me select individual events” option and select only the “Pull requests” checkbox. If any other checkboxes are selected, unselect them.

11. Click “Add webhook” to save.

The screenshot shows the GitHub 'Webhooks / Manage webhook' settings page. The left sidebar contains a menu with the following items: Options, Manage access, Security & analysis, Branches, Webhooks (highlighted with a red bar and a green circle with the number 2), Notifications, Integrations, Deploy keys, Actions, Secrets, and Pages. The main content area is titled 'Webhooks / Manage webhook' and has two tabs: 'Settings' (selected) and 'Recent Deliveries'. Below the tabs, there is a descriptive paragraph: 'We'll send a POST request to the URL below with details of any subscription to receive (JSON, x-www-form-urlencoded, etc). More information c...'. The 'Payload URL' field (marked with a green circle 3) contains the value 'https://www.workato.com/webhooks/rest/1dc07d46-718b-4a36'. The 'Content type' dropdown menu (marked with a green circle 4) is set to 'application/json'. Below this is a 'Secret' field. The 'SSL verification' section has a note: 'By default, we verify SSL certificates when delivering payloads.' and two radio buttons: 'Enable SSL verification' (selected, marked with a green circle 5) and 'Disable (not recommended)'. The 'Which events would you like to trigger this webhook?' section has three radio buttons: 'Just the push event.', 'Send me everything.', and 'Let me select individual events.' (selected).

Select Pull Requests. Unselect any other preselected options.

Which events would you like to trigger this webhook?

☐ Just the push event.

☐ Send me **everything**.

☒ Let me select individual events.

☐ Branch or tag creation Branch or tag created.	☐ Branch or tag deletion Branch or tag deleted.
☐ Check runs Check run is created, requested, rerequested, or completed.	☐ Check suites Check suite is requested, rerequested, or completed.
☐ Code scanning alerts Code Scanning alert created, fixed in branch, or closed	☐ Collaborator add, remove, or changed Collaborator added to, removed from, or has changed permissions for a repository.
☐ Commit comments Commit or diff commented on.	☐ Deploy keys A deploy key is created or deleted from a repository.
☐ Deployment statuses Deployment status updated from the API.	☐ Deployments Repository was deployed or a deployment was deleted.
☐ Discussion comments  Discussion comment created, edited, or deleted.	☐ Discussions  Discussion created, edited, pinned, unpinned, locked, unlocked, transferred, answered, unanswered, labeled, unlabeled, had its category changed, or was deleted.
☐ Forks Repository forked.	☐ Issue comments Issue comment created, edited, or deleted.
☐ Issues Issue opened, edited, deleted, transferred, pinned, unpinned, closed, reopened, assigned, unassigned, labeled, unlabeled, milestone, demilestoned, locked, or unlocked.	☐ Labels Label created, edited or deleted.
☐ Meta This particular hook is deleted.	☐ Milestones Milestone created, closed, opened, edited, or deleted.
☐ Packages GitHub Packages published or updated in a repository.	☐ Page builds Pages site built.
☐ Project cards Project card created, updated, or deleted.	☐ Project columns Project column created, updated, moved or deleted.
☐ Projects Project created, updated, or deleted.	☐ Pull request review comments Pull request diff comment created, edited, or deleted.
☐ Pull request review threads A pull request review thread was resolved or unresolved.	☐ Pull request reviews Pull request review submitted, edited, or dismissed.
☒ Pull requests Pull request opened, closed, reopened, edited, assigned, unassigned, review requested, review request removed, labeled, unlabeled, synchronized, ready for review, converted to draft, locked, unlocked, auto merge enabled,	☐ Pushes Git push to a repository.

Setup Azure Repos

This step is required only if you are using Azure Repos as a version control system.

CI/CD Automation accelerator is shipped with recipes to work with Azure Repos as a version control system out-of-the box.

The accelerator assumes that each manifest is mapped directly to the Azure Repos repositories.

Note: Azure Repos repositories required for storing releases can be created automatically by the accelerator. If you choose to create repositories yourself, you can disable auto creation from property. In that case, please initialize the Azure Repo repository before using it with CI/CD automation accelerator. You can use a sample readme file offered by GitHub while creating the repository for this purpose.

Asset name	CICD CON Azure Repos
Asset type	Connection
Asset path	CICD Automation/Core/Connectors

Update the connection placeholder in the imported package to configure your GitHub account.

Azure Repos connection options

There are two options to authenticate the connection

- Personal Access Token
- Authorization Code

Personal Access Token

OAuth 2.0 grant type	Personal Access Token
Organization	Name of organization in Azure DevOps
Api version	Azure Repos API Version E.g. 1.0, 1.1, 1.2-preview, 2.0 Click here to learn more about API versioning. Default: 7.0
Username	Provide the username(email) to use with the Personal access token.
Personal access token	Visit Azure DevOps documentation to create a Personal access token.


Authorization Code

OAuth 2.0 grant type	Authorization Code
Organization	Name of organization in Azure DevOps
Api version	Azure Repos API Version E.g. 1.0, 1.1, 1.2-preview, 2.0 Click here to learn more about API versioning. Default: 7.0
Client ID	Visit Azure DevOps documentation to register client app.
Client secret	Visit Azure DevOps documentation to register client app.
Scopes	Provide the scopes from the client app. E.g. vso.code_full vso.work_full


Azure Repos webhook configuration

Note: If you have allowed creating repositories by the accelerator, you don't need to perform steps in this section.

1. Go to **Project** → **Settings** → **Service Hooks** → **Create Subscription** → **Web hooks**

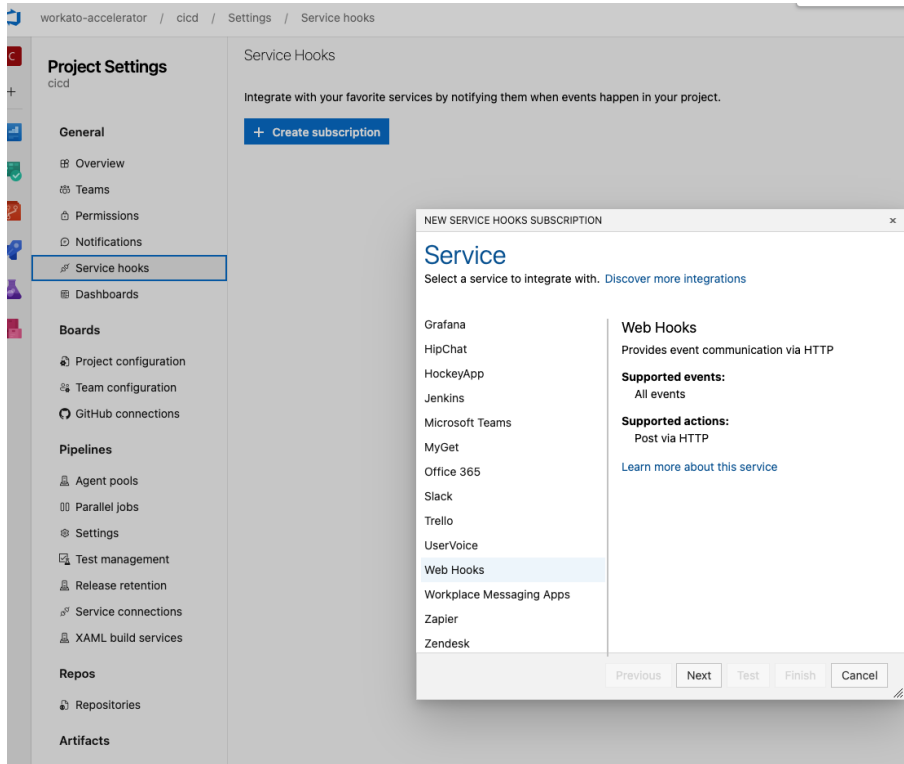

2. **Trigger** → **Trigger on this type of Event**: select “Pull request merge attempted” and click on **Next**.

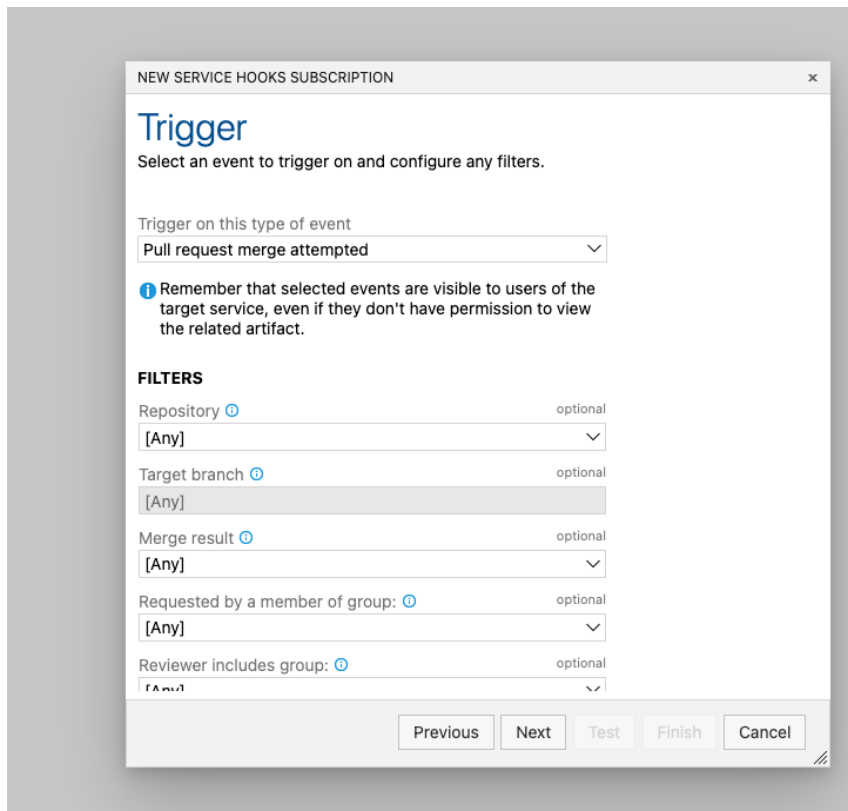

3. **Action** → **SETTINGS** → **URL**: Get **“Workato webhook address”** from the step mentioned in sub-step.

NEW SERVICE HOOKS SUBSCRIPTION

Perform this action

Post via HTTP

This action posts a JSON object representation of the event to the specified URL.

It's recommended that you only use HTTPS endpoints due to the potential for private data including any authentication headers in the event payload. [Learn more about Webhooks](#)

SETTINGS

URL  required

!

☐ Accept untrusted SSL certificates  optional

Basic authentication username  optional

Basic authentication password  optional

HTTP headers  optional

Resource details to send  optional

Previous

Next

Test

Finish

Cancel

a. Go to “**CICD Automation/Extension/Azure Repos/CICD | REC | WebHook Trigger from Azure Repos**” recipe’s. Click on Trigger (step 1) of the recipe. Copy **Workato webhook address**

Projects > CICDAutomationV3/Extension/GitHub > CICD | REC | WebHook Trigger from GitHub : Recipe

CICD | REC | WebHook Trigger from GitHub

Recipe Jobs Versions Settings

1

TRIGGER

Pull request merged via HTTP webhook Real-time

IF  Action Step 1 equals closed

AND  Merged Step 1 is true

Webhook to listen on pull request merge events from GitHub repository to trigger release creation and continuous delivery process

2

ACTIONS

Lookup entry from CICD | LT | Release Details lookup table

Call CICD | FUNC | Create Release in GitHub

Pull request merged via HTTP webhook Real-time

IF  Action Step 1 equals closed

AND  Merged Step 1 is true

HELP

This trigger executes recipe actions when webhooks are received. When a recipe is stopped, it will not process webhooks.

[Learn more](#)

Event name *

ABC Pull Request Merged


Workato webhook address

https://www.workato.com/webhooks/rest/17271ab2-7cb6-4f90-b676-ec580981b227/pull-request-merged

Copy

In your app, set up your webhook events to be sent to this URL, then proceed to the next step to listen for a sample event.

- Click on **Test** to ensure that webhook is configured correctly and then click on **Finish**.

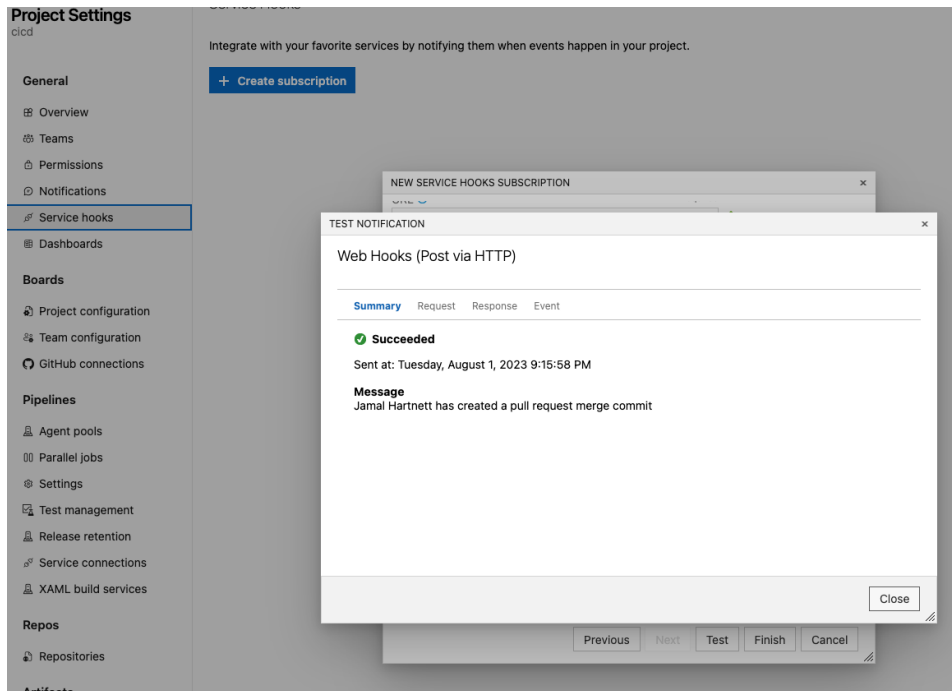

Setup Configuration Store

This setup needs to be done only if properties needs to be changed per workspace or automatic connection needs to be done for customer workspaces

Configuration store is used for replacing environment/customer specific properties or connection authentication string for connections in customer workspaces.

There are two options for configuration store

- Lookup Tables
- GitHub Repository

The decision to use either option is based on Account property: `cicd.properties.store`

Lookup Table as Configuration Store

For using a lookup table as an environment configuration store, this table needs to be populated with environment specific values for account properties/connection settings.

CICD | LT | Environment Properties Config

Column Name	Description	Sample Value
Environment	Name of partner workspace e.g. DEV, TEST, PROD, Staging, Stage, QA, UAT (<i>name should match environment name mentioned in CICD CON Workato API SDK</i>) or identifier for customer workspace or Customer (if it is applicable for all customer workspaces).	DEV
Name	Name of account property. It should match account property to be defined in Workato workspace Or Name of Connection	Type Property: cicd.properties.store Or Type Connection: CICD CON HTTP Connection
Value	Value for the account property Or Connection input string. Refer to https://docs.workato.com/oem/oem-api/connections-parameters.html#configuration-parameters-by-connector for reference for defining input string	Type Property: NONE Or Type Connection: "input": { "auth_type": "headers", "header_auth": "API-TOKEN: secret" }
Type	Defines if record is for Property or Connection	Property Or Connection

GitHub Repo as Configuration Store

Create GitHub/Azure Repos repository as per name specified in Account Property:
cicd.properties.git.repo

This repository should contain a json file prepended with an environment name e.g.
Dev-properties.json

For common customer properties the name should be customer-properties.json. To override, customer specific values json file should be created with name <<customer user id>>-properties.json

Example:

 main ▾

 1 branch

 0 tags

Go to file

Add file ▾

Code ▾

 **dipakkumar83** Create 662028-properties.json 9d08a78 on 20 May 4 commits

 662028-properties.json	Create 662028-properties.json	2 months ago
 README.md	Initial commit	2 months ago
 dev-properties.json	Create dev-properties.json	2 months ago
 prod-properties.json	Create prod-properties.json	2 months ago

Following is a sample json with account properties.

 main ▾

[environment-config](#) / 662028-properties.json

 **dipakkumar83** Update 662028-properties.json

1 contributor

20 lines (19 sloc) | 497 Bytes

```
1  {
2      "config": [
3          {
4              "name": "cicd.test.scheduler",
5              "value": "scheduler value from github repo",
6              "type": "Property"
7          },
8          {
9              "name": "cicd.test.function",
10             "value": "function value from github repo",
11             "type": "Property"
12          },
13          {
14              "name": "CICDT | CON | HTTP Connection",
15              "value": "\"input\": { \"auth_type\": \"headers\", \"header_auth\": \"API-TOKEN: secret\" }",
16              "type": "Connection"
17          }
18      ]
19  }
```

Sample:

```
{
  "config": [
    {
      "name": "cicd.test.scheduler",
      "value": "scheduler value from github repo",
      "type": "Property"
    },
    {
```

```

    "name": "cicd.test.function",
    "value": "function value from github repo",
    "type": "Property"
  },
  {
    "name": "CICDT | CON | HTTP Connection",
    "value": "\"input\": { \"auth_type\": \"headers\", \"header_auth\": \"API-TOKEN: secret\" }",
    "type": "Connection"
  }
]
}

```

Enabling AQS Scan

To enable AQS scanning

- Set [cicd.aqs.enable](#) property to true
- Install and configure AQS V1 accelerator in same workspace as CICD Accelerator
- Unskip all the steps in recipe **CICD Automation** → **Extension** → **AQS** → **AQS | FUNC | Get Artifact Quality Score**
 - Reselect recipe in function call for **AQS | FUNC | Execute Rules for Assets**
 - Start recipe

Post Installation Tasks

Using NONE for Version Control (default)

Delete recipe “CICD Automation/Extension/GitHub/CICD | REC | WebHook Trigger from GitHub”

Migration Utility (V1 to V2)

For users who are upgrading from V1 to V2 of this accelerator.

1. Take backup of **CICD | LT | Audit** lookup table
2. Run utility recipe in test mode: **CICD Automation** → **Migration** → **CICD | FUNC | Migrate Lookup Table**
3. Verify that records in **CICD | LT | Audit** are correct as per headers
4. Delete **CICD Automation** → **Migration** → **CICD | FUNC | Migrate Lookup Table**

Considerations:

- To be able to deploy older releases, keep value of account property: `cicd.config.package.store` to `workato-api`

- Reconnect CICD | CON | Workato API SDK. If it is connected then disconnect and provide authentication values again.

Migration from V1 to V2 (Only for GitHub)

If webhooks are defined at organization level and create a webhook for existing repositories at repository level and remove it from organization level.

Start the recipes

Once you have successfully set up the connections, please start the following recipes. You can click on the dropdown menu on each recipe to start the recipe.

Folder	Action
Core	Start all recipes
Core/Functions	Start all recipes
Extension/AQS	Start recipe if AQS is enabled
Extension/GitHub	Start recipes if GitHub is used for properties/package
Extension/LookupTables	Start recipes if Lookup Tables are used for properties
Source/Slack	Start all recipes, if Slack is used
Source/MS Teams	Start all recipes, if MS Teams is used

Using The Accelerator

Start the automation

Start the CI/CD automation by using the Workbot command as below.

Slack:

Go to Messages tab and type below command

```
workato cicc start
```

MS Teams:

Go to Chat tab and send below command

```
workato_cicc_start
```

Note: All screenshots in this section have screenshots for Slack interface. MS Teams interface is also identical in terms of functionality.

The above command will present different options to the user, select an appropriate option to continue.

 **Welcome to Workato CI/CD**

Solution Management

Create solutions using manifest and deployment configurations. Create new version of existing solutions.
View/Manage Partner/Customer workspace installations

 **Create New Release**

 **View Release**

 **View Customer Workspace**

On-Demand Deployments

Deploy solutions to customer and partner workspace on-demand

 **Deploy Release**

 **Distribute Release**

 **Create Connection**

Approvals

Approve/Reject release requests

 **Get Pending Requests**

Administration

Manage environments and users

 **Configure Environments**

 **Config Management**

 **View Users**

 **Add User**

Administration

Configure environments

Following is an alternative way to set up environments to the configuration you have done in this [section](#).

You will need to configure environments for use with CI/CD automation before you can use automated export and import capabilities. You can configure the project by selecting the “Configure Environments” option.

It will provide options to add or modify existing environments.

 **Configure Environments**  

 **New Environment** Add

Configured Environments

DEV



Level: 1

Approvers: [#release-approvers](#)

Partner Workspace?: Y

Git Branch Name:

PROD



Level: 2

Approvers: [#release-approvers](#)

Partner Workspace?: Y

Git Branch Name:

Customer



Level: 3

Approvers: [#release-approvers](#)

Partner Workspace?: N

Git Branch Name:

Cancel Submit

When you click on **Add**, it will open a modal wizard to configure a new project with the following input fields.

You can refer to this [link](#) for explanation of fields.

 **New Environment**  

Environment Name

Approval Required

- ☐ Yes
- ☐ No

Level

Write something

Integer value. 1 for lowest environment e.g. DEV and incremental for subsequent environments.

Approvers

Write something

Is Partner Workspace?

- ☐ Yes
- ☐ No

Git Branch Name (optional)

Write something

Name of Branch name for Git Advance Branching.

Cancel

Submit

When you click on **Edit**, it will show existing values for you to modify that.

 **Update Environment**  

Environment Name: DEV

Approval Required

☒ Yes

☐ No

Approvers (optional)

Level

Integer value. 1 for lowest environment e.g. DEV and incremental for subsequent environments.

Is Partner Workspace?

☒ Yes

☐ No

Git Branch Name (optional)

Cancel

Submit

Config Management

This action provides utility to encrypt/decrypt secrets that you may need to use in properties or connection strings.

 **workbot** APP 3:03 PM

 **Configuration Management**
Utility to encrypt and decrypt passwords

 Encrypt String

 Decrypt String

User Management

See section [Role Definition](#) for assigning access to users.

[View Users](#)

This action provides a view into existing users and provides the option to edit/delete users.

 **Users**  

User: dipakkumar.kachhadiya@workato.com

Access:
distribute,view,deploy,admin,approve,release

 **Edit User**  **Delete User**

Close

Add User

This action allows you to add new users with roles to access CICD accelerator.

 **Add User**  

User Email

Access

comma seperated list. Possible values are: distribute,approve,admin,view,deploy.

Cancel **Create User**

Solution Management

All three options of the Solution Management section are explained in sections below.

Create New Release

You can create new releases for manifest for continuous integration and continuous delivery.

When you select **Create New Release** you will get the screen as below.



Manifest Details

🔗 ✕

Manifest Id

Manifest Name

Release Type

☐ Major

☐ Minor

☐ Fix

Folder Name

Name of the folder existing/non-existing.

Comments

Name of manifest or any additional information.

Cancel

Create

Following is an explanation on input fields.

Name	Description	Optional
Manifest Id	Manifest Id from workato workspace	No
Manifest Name	Name of manifest. It should match the GitHub repository in case GitHub is used. Space is not allowed.	No
Release Type	Select from the Major, Minor, Bug-fix options for automatic release tagging based on semantic versioning policy.	No
Folder Name	Name of folder where manifest will be imported in workspace	No

Comments	Release comments used as GitHub commit messages.	No
-----------------	--	----

After you submit the request, you will get the message with the release id like below.

Release request submitted


Release ID:
2022-10-18 01:50:12 -0700-f6ea

Release Name:
cicd-test

Release Type:
Major

Comments:
First Release



You will see message on release announcement channel #release-announcements when it is created

There are three scenarios when release is created.

- Git (github/azurerepos) is used for version control system with simple Branching
- Git (github/azurerepos) is used for version control system with per_env (advanced) Branching
- No version control system is used

Git (github/azurerepos) is used for version control system with simple Branching	• Upon successful build and commit of the package to GitHub repository, a pull request will be created. It will need to be reviewed and managed by the assigned reviewer/user to continue with the rest of the CI/CD process of creating and importing the project release to the test environment. • Reviewers and requesters will be notified of pull request creation events in the Slack message.  Release Notification Release Id: 2022-10-17 05:47:09 -0700-0c5d Release Name: cicd-demo Version: 1.0.0 1.0.0 Pull Request URL: Click to open URL Release Quality Score: NA  Release is created and pull request is created.
--	--

	Reviewers can use the attached pull request link to open it in GitHub. The reviewers can review pull request changed files for adherence to defined guidelines, provide review comments, and request fixes in the dev environment. Or approve the change for promotion to the test environment by merging the pull request. Pull request for JIRA-4321 #20 Open ea-demo wants to merge 1 commit into main from feature-JIRA-4321-1618999226 Conversation 0 Commits 1 Checks 0 Files changed 0 ea-demo commented 1 minute ago No description provided. BREAKING CHANGE: Added new customer sync automation b95a9e6 Add more commits by pushing to the feature-JIRA-4321-1618999226 branch on ea-demo/finance. Continuous integration has not been set up GitHub Actions and several other apps can be used to automatically catch bugs and enforce style. This branch has no conflicts with the base branch Merging can be performed automatically. Merge pull request You can also open this in GitHub Desktop or view command line instructions. Reviewers should also ensure that the merge does not have any conflict with the main branch due to any changes/removal of asset files from the project and resolve such issues before merging the pull request. When a pull request is approved, a message is displayed with details. Release Notification Release Id: 2022-10-17 05:47:09 -0700-0c5d Version: 1.0.0 1.0.0 Release Quality Score: NA Pull Request is Merged by: dipakkumar83 You can use "workato cidc start" command for automated deployment. Release Name: cidc-demo Pull Request URL: Click to open URL
--	--

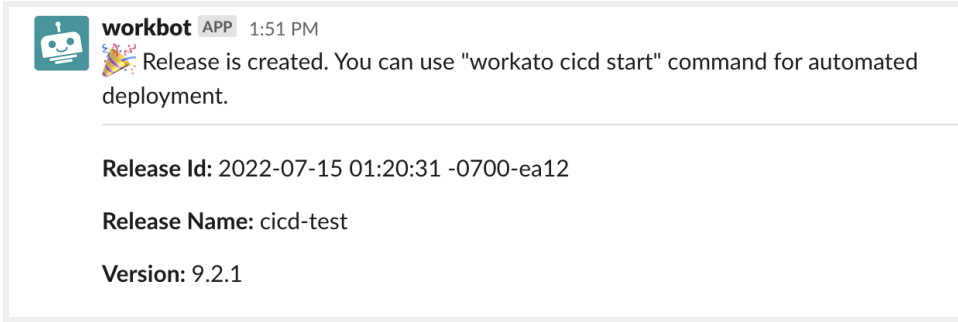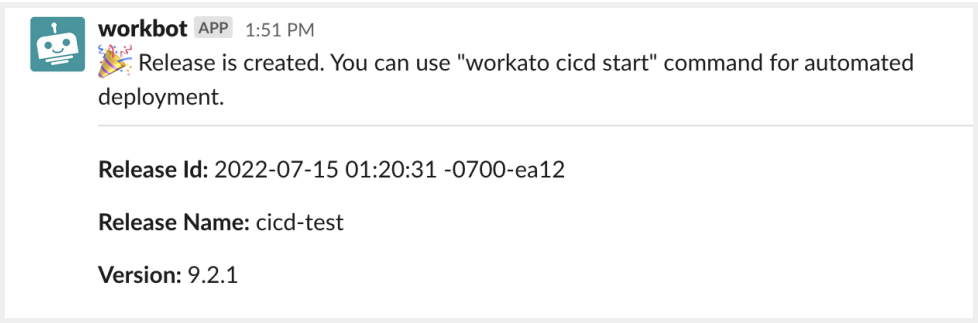for version control system with per_env (advanced) Branching	There will be a notification without Pull URL on slack channel as below when release is created. 
No version control system is used	There will be a notification without Pull URL on slack channel as below when release is created. 

Note: Following steps are executed by accelerator when you create release (these are steps are just for information, you don't need to execute them).:

1. Export the manifest from the Workato development environment.
2. Download, unzip, and commit the package to a new feature branch in the GitHub repository or lookup table.
3. Generate version number
4. Create record in release details in CICD accelerator lookup table and store package.
5. Create a pull request and assign it to the configured reviewer (if GitHub is a version control system).
6. Monitor pull request merge event and create new release based on commit message details such as release type and last release version (if GitHub is version control system).
7. Update release details in CICD accelerator lookup table

View Release

This option displays the current status of release and also presents actions that can be performed by a user depending on the role.

 **Releases**  

Select Release

--Select-- 

Cancel

Submit

 **workbot** APP 2:28 PM

Release Name: cidc-demo

Version: 1.2.0 Current Environment: PROD

Status: Deployed

+ Create New Version

Partner Workspace

 View Pipeline

 Promote Release

 Redeploy Release

 View History for Version

Customer Workspaces

 Distribute

 View Installations

Create New Version

This action will allow the user to create a new version of this release.

 **Create Release**  

Creating New Release from Existing Release Release Name: cicd-testing
Last Release Version: 5.2.0

Release Type
☐ Major
☐ Minor
☐ Fix

Comments

First Release

Update if required.

Cancel

Create

View Pipeline

This action will give you progress on the latest version

9:38 Release Name: Version: 1.0.0	
Level: 1 Status: Release Approved	
Environment: DEV Status: Release Created Timestamp: 2022-10-17T05:47:26.713-07:00 By: dipakkumar.kachhadiya@workato.com	Environment: DEV Status: Release Approved Timestamp: 2022-10-17T05:47:42.139-07:00 By: dipakkumar83
Level: 2 Status: Deployed	
Environment: TEST-EU Status: Deployed Timestamp: 2022-10-17T05:51:15.289-07:00 By: dipakkumar.kachhadiya@workato.com	
Level: 3 Status: Not Deployed	

View Customer Workspace

This option displays the status of all releases deployed to the selected customer workspace. It will also compare releases with the latest version and present options accordingly.

 **Select Status**  

Select Environment

☒ DEV

☐ PROD

☐ TEST-EU

Cancel

Select

 **Releases**  

Select Customer Workspace

--Select-- 

Cancel

Submit

2:29

Customer Workspace: 662028
Environment: DEV

Release Name: aof
Deployed Version: 1.0.0
Deployment Date: 2022-09-28T04:50:25.613847-07:00
Latest Version Available: 1.1.4

↑ Upgrade

Deployment Status

↓ Inactivate

Release Name: ccd-test
Deployed Version: 12.0.0
Deployment Date: 2022-09-28T04:55:25.614826-07:00
Latest Version Available: 13.0.0

↑ Upgrade

Deployment Status

↓ Inactivate

Release Name: ccd-demo
Deployed Version: 1.2.0
Deployment Date: 2022-09-30T06:37:34.278-07:00
Latest Version Available: 1.2.0

✓ Redeploy

Deployment Status

↓ Inactivate

On-Demand Deployments

Deploy release

You can deploy any existing release using the “Deploy release” option. This option will be useful to promote configured projects to the next environment upon successful completion of the testing phase. But you can also use it to deploy changes to other environments such as testing to rollback changes to previous release versions.

After you click on Deploy Release, you will be presented with the option to select release and version.



Select Release



Select Release

Select Release



Cancel

Select Release



Select Version



Release Name: CICD Testing

CICD Testing : Select Version

Select Release

Select Release



Cancel

Select Version

After you select release for deployment, please provide an environment for deployment and if recipes should be started after deployment.

 **Select Environment**  

Release Id: 2023-10-26 05:19:31 -0700-5c3f Release Name: cicd-demo
Release Version: 1.0.0 Current Release Environment: PROD
Current Release Status: Deployed Project/Folder Name: CICD Demo

Environment
☒ DEV
☐ PROD

Start Recipe on Deployment?
☐ Yes
☒ No

Enable API Endpoints
☐ Yes
☒ No

Select 'Yes', if you want to enable API endpoints present in this release.

Cancel

Submit

If the deployment request is **successful**, you should get the message below.

If approval is required,

 **workbot** APP 11:00 PM

Deployment is triggered with Release Id: 2022-07-19 10:11:13 -0700-e654, Environment: DEV

Status : Approval is required for deployment Approval is requested from:
[#release-approvers](#)

Release Id : 2022-07-19 10:11:13 -0700-e654

Environment : DEV

Job URL
<https://app.workato.com/recipes/2447494/job/14141684808>

If release status is **Success** , lookout for notification on * [#release-announcements](#) *

No Approval is required or release is already approved,

If release status is **Success**, lookout for notification on * [#release-announcements](#) *

Deployment is triggered with Release Id: 2022-07-19 01:21:03 -0700-5a6c, Environment: PROD

Status : Success

Environment : PROD

Release Id : 2022-07-19 01:21:03 -0700-5a6c

Job URL

<https://app.workato.com/recipes/2447494/job/13947913617>

If the deployment request is **blocked**, you will see the message below.



workbot APP 8:40 PM

Deployment is triggered with Release Id: 6507cc3d-40fd-4c02-becd-690c824b11f2, Environment: dev

Status : **Blocked**

Environment : dev

Release Id : 6507cc3d-40fd-4c02-becd-690c824b11f2

Job URL

<https://app.workato.com/recipes/2447494/job/12260082242>

Release will be blocked if,

- Release in previous environment (based on level in environment config) is failed, not approved
- Release is rejected previously

If approval is required for deployment to the next environment, you will get a message for approval.



workbot APP 10:02 PM

New release is available for approval: **Release Id**: 2022-07-08 09:31:44 -0700-2d82,

Environment: PROD

CICD Testing: 9.0.5

[Approve Deployment](#)

[Reject Deployment](#)

After approval, you will get notification as below.

 **Workbot EU** APP 6:20 PM

 **Following deployment request requires your approval**

Release Id: 2022-10-17 05:47:09 -0700-0c5d
Environment: TEST-EU
Release: CICD Demo: 1.0.0

dipakkumar.kachhadiya has **Approved** Release

After rejection, you will get a popup to fill-in rejection details.

 **Rejection Message**  

Rejection Comment

Cancel

Submit

After you fill in comments, the following message will be displayed in workbot.

 **workbot** APP 10:10 PM

Your action is recorded **Rejected**

Release Id: 2022-07-08 09:00:13 -0700-acc8, **Environment:** DEV with comments: **Not Required**

Successful merge events will then be captured by the CI/CD automation accelerator to automatically and import the package to the next environment. After deployment is done, there will be a message on the slack channel as below.

2022-10-17 05:51:17 -0700



New Release/Connection is Deployed:

Release Id: 2022-10-17 05:47:09 -0700-0c5d, **Environment:** TEST-EU

Project/Folder: CICD Demo **Version/Provider:** 1.0.0

If Recipes or Connections are not in desired state please fix it and click on:

Get Release Status

Connection: CICD Demo | CON | HTTP Connection

Status: Disconnected

Recipe: CICD Demo | FUNC | Test: Scheduler

Status: Stopped

Status of recipes and connection will be displayed after deployment. You can start/connect recipe/connection from workspace and then click on **Get Release Status** to see updated status of recipes and connections.

Distribute Release

This option can be used to distribute releases to any of the customer workspaces. When you click on the button, it will prompt you to select release and version.

**Select Release**

Select Release

Cancel

Select Release

 **Select Version**  

Release Name: CICD Testing

Select Version



Cancel

Select Version

After you select the release and version, it will present you the screen below.

 **Select Customer**  

Release Id: 2023-10-26 05:19:31 -0700-5c3f Release Name:
Release Version: 1.0.0 Current Environment: PROD
Current Release Status: Deployed

Select Customer Workspaces

☐ All

☐ Select Customer

☐ New Customer Account

Start Recipes on Deployment?

☐ Yes

☒ No

Enable API Endpoints

☐ Yes

☒ No

Select 'Yes', if you want to enable API endpoints present in this release.

Select Environment



Folder (optional)


Cancel

Submit

Select Customer workspaces


You can choose to distribute release to,

- All customer workspace
- Selected customer workspace (one or more)

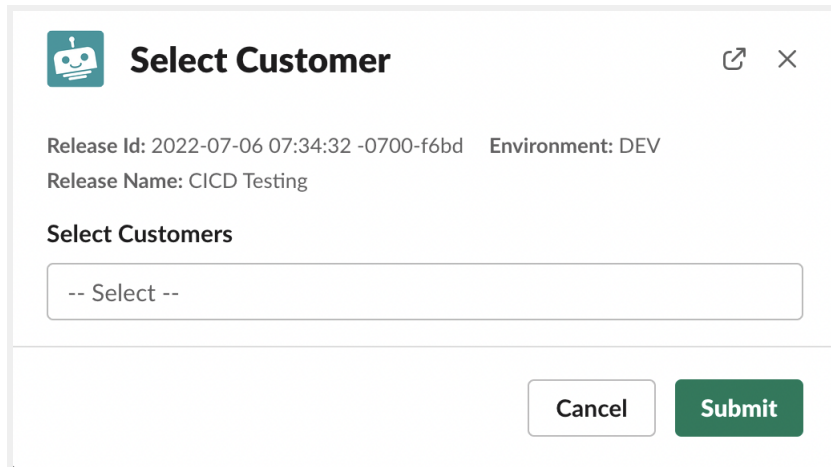

The dialog box titled "Select Customer" features a robot icon in the top left corner. It displays the "Release Id: 2022-07-06 07:34:32 -0700-f6bd" and "Environment: DEV". Below this, the "Release Name: CICD Testing" is shown. A section labeled "Select Customers" contains a dropdown menu with the text "-- Select --". At the bottom right, there are two buttons: "Cancel" and "Submit".

- New customer account (It will prompt dialogue to create customer account and then do deployment)

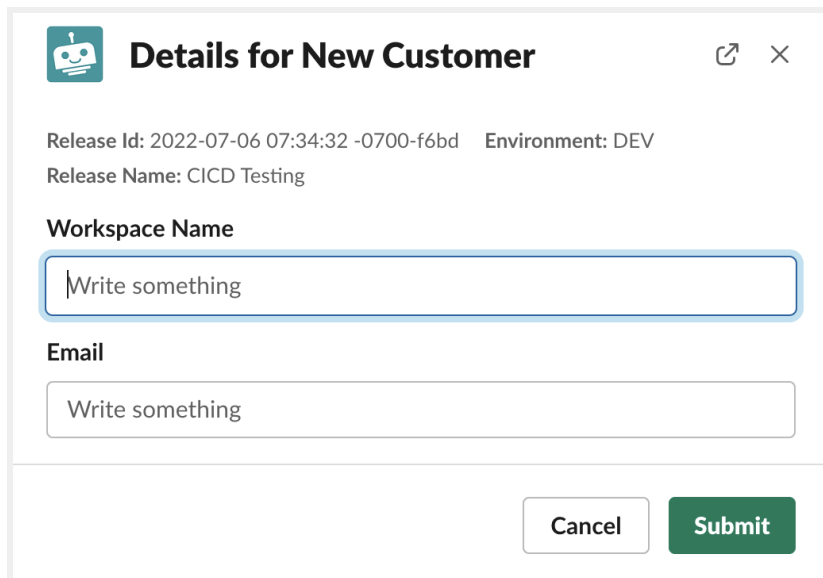

The dialog box titled "Details for New Customer" features a robot icon in the top left corner. It displays the "Release Id: 2022-07-06 07:34:32 -0700-f6bd" and "Environment: DEV". Below this, the "Release Name: CICD Testing" is shown. A section labeled "Workspace Name" has a text input field with the placeholder "Write something". Below that, an "Email" section has another text input field with the placeholder "Write something". At the bottom right, there are two buttons: "Cancel" and "Submit".


Start Recipes on Deployment?: Select Yes if recipe needs to be started after deployment

Select Environment: Select environment for customer workspaces,

Create Connection

This option provides a way to distribute connections from partner workspaces to selected customer workspaces.

When you click on this button, you will be asked to select the customer and the environment.

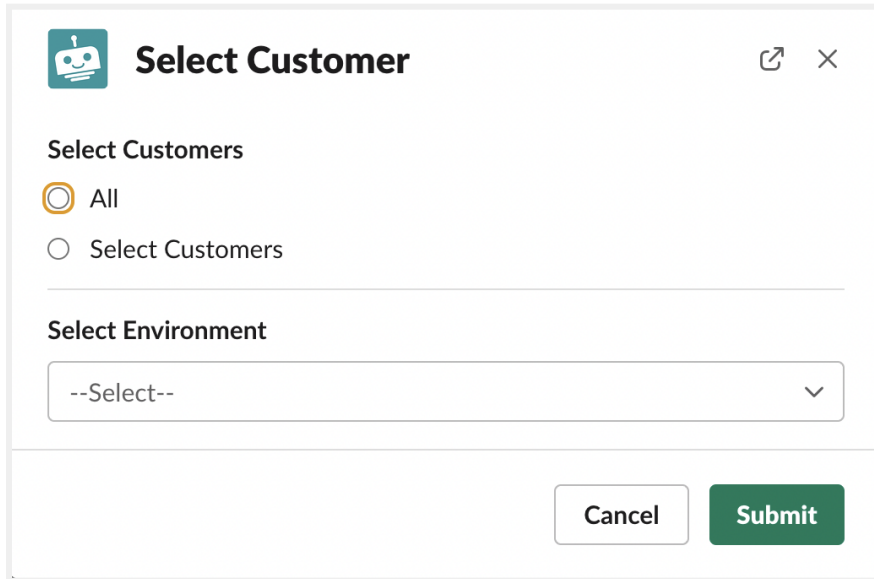

The 'Select Customer' dialog box features a header with a robot icon and a close button. It contains two sections: 'Select Customers' with radio buttons for 'All' (selected) and 'Select Customers', and 'Select Environment' with a dropdown menu showing '--Select--'. At the bottom are 'Cancel' and 'Submit' buttons.

Select Customer

Select Customers

☒ All


☐ Select Customers

Select Environment

--Select--

Cancel Submit

Then the screen will be displayed to provide connection details.

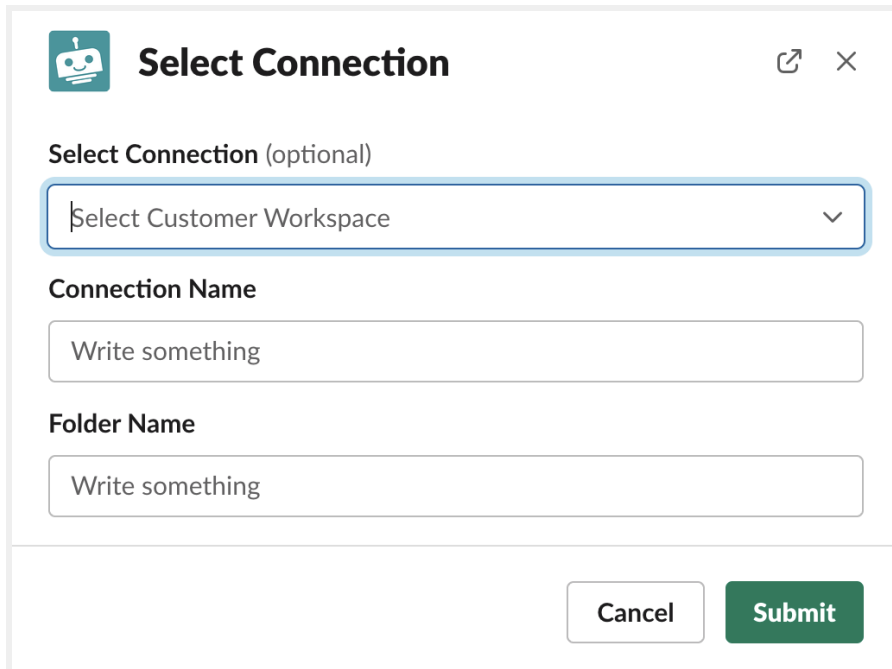

The 'Select Connection' dialog box has a header with a robot icon and a close button. It includes a dropdown for 'Select Connection (optional)' with the text 'Select Customer Workspace'. Below are text input fields for 'Connection Name' and 'Folder Name', both with placeholder text 'Write something'. At the bottom are 'Cancel' and 'Submit' buttons.

Select Connection

Select Connection (optional)

Select Customer Workspace

Connection Name

Write something

Folder Name

Write something

Cancel Submit

Select connection from drop-down and provide connection name and folder where it shall be created.

Approvals

Get Pending Requests

This action will fetch all the pending requests that are pending approval. Users can approve or reject deployment.

Release Id: 2022-09-30 06:35:29 -0700-9fff Environment: DEV Customer List: NA
Is Connection: false Date Requested: 2022-10-03T09:31:20.734-07:00
Approvers: dipakkumar.kachhadiya@workato.com

☒ Approve ☒ Reject

Release Id: 2022-09-30 06:35:29 -0700-9fff Environment: Customer-TEST-EU
Customer List: 500000134 Is Connection: false
Date Requested: 2022-10-13T10:52:33.931-07:00 Approvers: [#release-approvers](#)

☒ Approve ☒ Reject

Troubleshooting

Monitor errors

Monitor channel/email that you have configured in property `cicd.error.notification` for any errors in pipeline.

Error while connecting Slack

One of the following errors while connecting to Slack workspace:

Bot already installed to the team

Slack team accelerators-dev already has Workbot installed.

We do not support multiple Workbot connections to the same team. Try one of these solutions:

- If you connected to an incorrect Slack team by mistake, try connecting to a different Slack team.
- If you think you should own Workbot, ask the above user to remove it from accelerators-dev. Once they remove it, you will be able to install Workbot. Learn how to manage apps in Slack.

- You don't really have to use Workbot, you can also create a shining new bot for your Slack team. It's easy and you will be able to do exactly the same things.

Error when downloading package

You may get an error for downloading the package when Manifest is deleted. In such a scenario, it will be required to create a new manifest with the same details and a new release should be created. But in such a scenario, you will not be able to deploy old versions.

Feedback and Questions

If you have any feedback about this accelerator or any of the assets or documentation included with it, please contact the Accelerators team at accelerators.feedback@workato.com.