8 qubits, all starting in $|0\rangle$; angles $\theta = \pi\sigma(Wz + b)$ from the penultimate features z

CNOTs form an open chain $i \to i{+}1$ (no wrap-around)

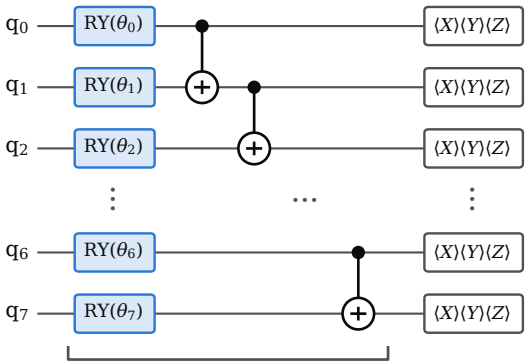

Bloch vector per qubit:
only single-qubit expectation values are read out

$\langle Y_q \rangle \equiv 0$ (RY and CNOT are real),
so 16 of the 24 coordinates are active

$K_{ij} = \exp(-\lambda \cdot \frac{1}{2}\|r(x_i) - r(x_j)\|^2)$

r = stacked Bloch vectors; $\lambda = 1$ or median heuristic