

GPU-Aware Autoscaling in Cloud Native AI Infrastructure: A Node-Level Telemetry Approach with KEDA and NVML

Pavan Madduri
Independent Researcher
<https://orcid.org/0009-0007-3795-7593>

September 2026

Abstract

Kubernetes treats GPUs as opaque, countable resources: a pod is either allocated a device or it is not, with no notion of utilization, memory pressure, or thermal state. This is acceptable for CPU-bound services but a poor fit for AI inference, where a pod can report single-digit CPU usage while its GPU is fully saturated. The Horizontal Pod Autoscaler, which reacts to CPU and memory, therefore cannot scale GPU workloads on the signal that actually matters. The common workaround chains an exporter, Prometheus, a query language, and an adapter, which adds operational complexity and tens of seconds of metric latency. We describe **keda-gpu-scaler**, an open-source KEDA external scaler that reads GPU metrics directly from the NVIDIA Management Library (NVML) on each node and serves them to Kubernetes autoscaling over gRPC, removing the intermediate metrics pipeline. We explain why GPU support must run as a DaemonSet rather than inside the KEDA operator, present the architecture and scaling profiles for inference engines such as vLLM and Triton, and show that metric age becomes a function of KEDA’s polling interval alone, rather than of the 15–30 s of scrape and adapter delay typical of the Prometheus pipeline, while still supporting scale-to-zero for idle GPU workloads.

1 Introduction

Running GPU workloads on Kubernetes exposes a gap in the platform’s autoscaling story. The Horizontal Pod Autoscaler (HPA) observes CPU and memory. A large language model (LLM) serving pod can be handling hundreds of concurrent requests with its GPU fully saturated while reporting under 10% CPU, and the HPA takes no action. The Vertical Pod Autoscaler does not address this either. KEDA [1] brings custom-metric scaling within reach, but the standard route to GPU metrics (an exporter feeding Prometheus, a PromQL query, and either a Prometheus adapter or KEDA’s Prometheus scaler) adds latency and several components to operate.

keda-gpu-scaler [2] takes a different approach: it reads GPU metrics directly from NVML [3] on each node and serves them to KEDA over gRPC, skipping the metrics pipeline. It runs as a DaemonSet that reads NVML on each request from KEDA and implements KEDA’s external scaler interface [5]. It ships scaling profiles for inference and training workloads and handles multi-GPU nodes with configurable aggregation. This paper describes the problem, why native integration into KEDA is not viable, the architecture, and an evaluation of metric latency and operational overhead.

2 The GPU Scaling Blind Spot

2.1 Current state

Kubernetes models GPUs as extended resources (e.g., nvidia.com/gpu). A workload requests a count and the scheduler assigns devices. There is no supported way for an autoscaler to ask how busy a GPU is or how much device memory remains. To the HPA, an idle GPU and a saturated GPU are indistinguishable.

2.2 The metrics pipeline problem

The conventional path to GPU-based scaling chains multiple components, for example DCGM Exporter $\rightarrow$ Prometheus $\rightarrow$ PromQL $\rightarrow$ Prometheus Adapter $\rightarrow$ HPA, or a KEDA variant ending in KEDA’s Prometheus scaler. This works but has drawbacks, summarized in Table 1.

Problem	Impact
Metric latency	15–30 s from GPU state change to scaling decision, from scrape intervals and aggregation
Operational complexity	Five components to deploy, configure, and maintain
PromQL fragility	Scaling logic encoded in query strings; no type safety, hard to test
Single point of failure	A Prometheus outage stops GPU scaling
Resource overhead	Prometheus retention, a per-node exporter, and an adapter deployment

Table 1: Drawbacks of the conventional metrics-pipeline approach.

2.3 Why this matters now

GPU workloads do not scale like CPU workloads. LLM inference has strict latency targets, so scaling late drops requests. Device memory, rather than compute, is often the bottleneck: engines such as vLLM [7] pre-allocate a key-value (KV) cache, so memory pressure is the leading signal of queue growth. GPUs are also expensive, so over-provisioning a handful of accelerators can cost more than over-provisioning many CPU cores. Finally, idle development and batch inference endpoints should release GPUs entirely, which standard HPA cannot do for device-backed pods.

3 Why Native Integration Fails

Embedding GPU support directly in the KEDA operator is not viable, for three reasons.

CGO constraint. NVIDIA’s Go bindings [4] call into `libnvidia-ml.so` through `cgo`. KEDA builds its operator with `CGO_ENABLED=0` to ship static binaries; introducing a `cgo` dependency would break that build and release model.

Node-level hardware access. NVML reads GPU state through device files (`/dev/nvidiactl`, `/dev/nvidia0..N`) that exist only on the physical GPU node. The KEDA operator runs as a single centralized Deployment and has no access to devices on worker nodes. A DaemonSet is the


appropriate pattern: each instance runs on a GPU node, mounts the device files, and reads metrics locally.

Independent release cycle. GPU tooling evolves quickly, with new architectures, new inference servers, and new metrics such as Multi-Instance GPU (MIG) partitions arriving every few months. KEDA releases coordinate across many scalers, so shipping GPU changes on that cadence would be slow. A standalone component can iterate independently. This design was discussed in the KEDA project [6].

4 Architecture

4.1 Overview

The scaler runs as a DaemonSet on each GPU node and serves KEDA over gRPC:

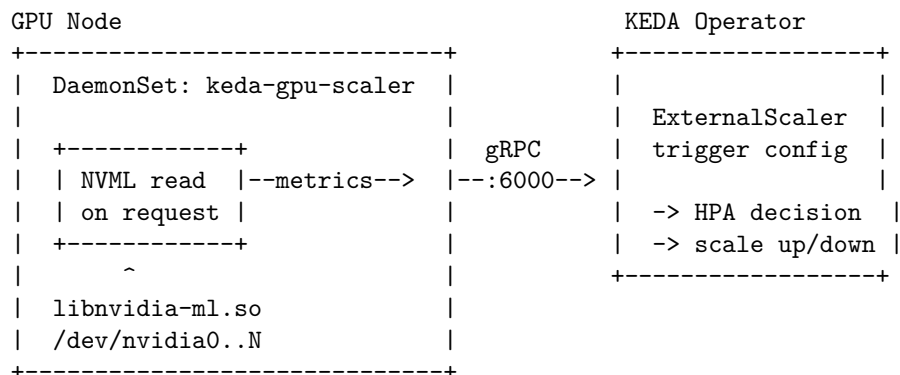

4.2 Data flow

When KEDA calls `GetMetrics` over gRPC, the scaler reads streaming-multiprocessor (SM) utilization, memory-controller utilization, device memory used and total, temperature, and power draw from NVML at that moment. Nothing is cached or written to disk; every request is a fresh read. The scaler returns the requested metric using the aggregation method named in the `ScaledObject`, and KEDA feeds the value to the HPA for a scale up, down, or to-zero decision. Metric age is therefore bounded by the `pollingInterval` set on the `ScaledObject`, plus a single NVML call that takes milliseconds. For activation, `StreamIsActive` pushes the active state every `pollIntervalSeconds` (10 s by default).

4.3 gRPC interface

The scaler implements four methods of KEDA’s external scaler contract: `IsActive` (true when the selected metric exceeds the activation threshold), `StreamIsActive` (a streaming form for push-based activation), `GetMetricSpec` (metric name and target for the HPA), and `GetMetrics` (the current value). Using gRPC and protobuf gives type safety, avoids PromQL string parsing, and keeps Prometheus out of the critical path.

Activation uses the same GPU or engine metric as scaling. That is sufficient for scaling *to* zero: an idle GPU drops below the activation threshold and KEDA removes the last replica. It is not sufficient on its own for scaling *from* zero, because with no replicas there is no serving engine to report a queue and the GPU reads idle. Scale-from-zero therefore needs a demand-side trigger

on the same `ScaledObject`, such as the KEDA HTTP add-on or a message-queue scaler, which activates the first replica; this scaler then takes over once the workload is running.

4.4 Security model

The `DaemonSet` needs only read-only access to NVIDIA device files and no cluster-wide RBAC. The gRPC port is exposed as a ClusterIP Service and is not reachable outside the cluster. The optional Prometheus endpoint can be disabled. No secrets are required, and all NVML calls are read-only.

GPU access is obtained in one of two ways. The default is the NVIDIA `RuntimeClass` provided by the GPU Operator, which injects the driver library and device nodes the same way it does for GPU workloads. Where no runtime class is available, the chart can instead mount `/dev/nvidiactl`, `/dev/nvidia-uvm` and `libnvidia-ml.so` from the host. In both cases the pod runs privileged, and in neither case does it request an `nvidia.com/gpu` resource, so it is invisible to the device plugin's allocation accounting and does not reduce the GPUs schedulable to workloads on the node.

5 Metric Selection

The scaler reads four device metrics from NVML on each request: streaming-multiprocessor (SM) utilization, device memory used and total, temperature, and power draw. It can also read engine-level signals where they are exposed: pending queue depth and KV-cache usage from vLLM, and queue statistics from Triton. Which of these drives scaling depends on the workload, and that choice matters more than the transport does.

SM utilization is the metric DCGM and most GPU dashboards report, and it is a weak scaling signal for batched inference. A vLLM server continuously batches requests, so SM utilization can sit at a moderate level while the server is near saturation; scaling on it reacts late.

Device memory read from NVML is also misleading for vLLM, for a different reason. vLLM reserves its KV-cache block pool up front, by default 90% of device memory (`gpu_memory_utilization=0.9`), so NVML reports near-constant memory use whether the server is idle or saturated. What varies with load is usage *within* that pool, which only the engine can see. vLLM exposes it as `gpu_cache_usage_perc`, together with the pending-request count `num_requests_waiting`; the scaler reads both from the engine's metrics endpoint and offers them as the `vllm_kv_cache_usage` and `vllm_queue_depth` metric types. Those are the right signals for vLLM. NVML memory remains a usable signal for engines that allocate device memory on demand rather than reserving it. Triton's queue wait and request rate are likewise engine-side demand signals. Training is the case where SM utilization is the right signal, since the devices are meant to run hot and evenly.

Temperature and power are collected for observability and guardrails, not as scaling inputs. They lag load and vary with cooling and hardware, so they make poor primary signals.

6 Scaling Profiles for AI Workloads

Rather than requiring operators to reason about what “80% GPU utilization” means for a given workload, the scaler provides profiles with sensible defaults (Table 2); any field can be overridden in the `ScaledObject`.

The `vllm-inference` profile scales on NVML memory, which under vLLM's default memory preallocation stays near 90% regardless of load and would keep the profile above both its target

Profile	Primary metric	Thr.	Act.	Rationale
<code>vllm-queue-depth</code>	Pending requests	5	1	Engine queue depth; unaffected by KV-cache preallocation
<code>vllm-inference</code>	VRAM utilization	80%	5%	Memory-based; see caveat below
<code>triton-inference</code>	SM utilization	75%	10%	SM saturation degrades throughput
<code>training</code>	SM utilization	90%	0%	Avoid killing checkpoints; no scale-to-zero
<code>batch</code>	VRAM utilization	70%	1%	Aggressive scale-down to release GPUs

Table 2: Default scaling profiles.

and its activation value. For vLLM, `vllm-queue-depth` or the `vllm_kv_cache_usage` metric type should be used instead; the memory-based profile is being revised accordingly.

7 Multi-GPU Aggregation

On nodes with four or eight GPUs, per-device metrics must be reduced to a single value for KEDA. The scaler supports `max` (default; scale when any GPU hits threshold, best for inference where one hot device signals a latency problem), `avg` (best for training where devices should load evenly), `min` (conservative), `sum` (capacity-based), and the `p95` and `p99` percentiles.

Aggregation is node-local. KEDA reaches the DaemonSet through a ClusterIP Service, so each poll is answered by one pod and describes the GPUs of that pod’s node only; the scaler does not currently combine readings across nodes. On a single-node GPU pool this is the whole picture. On a multi-node pool, a `ScaledObject` should be scoped to one node’s workload, for example through node selectors, or each GPU node should carry its own `ScaledObject`. Fleet-wide aggregation, so that one `ScaledObject` can scale a deployment spread across nodes from a cluster-level view of GPU load, is future work.

8 NUMA-Aware GPU Scheduling

The scaler decides *when* to add pods; where those pods land is a scheduling concern that affects performance. In a dual-socket server each GPU is wired to one NUMA node over PCIe. If a pod’s CPU is placed on one NUMA node and its GPU on another, memory accesses cross the inter-socket link, adding latency that accumulates during model loading and inference. Topology-aware placement, which we have proposed for the Volcano scheduler [8, 9], discovers GPU-to-NUMA mappings and co-locates CPU and GPU on the same NUMA node. Combining utilization-driven scaling from `keda-gpu-scaler` with topology-aware placement from Volcano addresses both scaling and placement.

9 Evaluation

9.1 Metric latency

Table 3 compares the end-to-end metric latency and component count of the pipeline approaches with the direct-NVML approach.

Approach	Metric latency	Components
DCGM $\rightarrow$ Prometheus $\rightarrow$ HPA	15–30 s	5
DCGM $\rightarrow$ Prometheus $\rightarrow$ KEDA	10–20 s	4
keda-gpu-scaler (direct NVML)	KEDA <code>pollingInterval</code> only	2

Table 3: Metric latency and component count.

9.2 What the numbers would need to include

This version reports no measured end-to-end scaling times, and the latency comparison above is structural rather than benchmarked. A meaningful measurement of the time from a load spike to a serving replica would have to account for several components in sequence: KEDA’s `pollingInterval` (30 s by default, commonly lowered to a few seconds for this scaler), the HPA sync period (15 s by default), pod scheduling and image pull, and model load into device memory, which for large models dominates everything else. The scaler removes the scrape and adapter delay from the first of those; it does not change the others. A controlled benchmark that separates these terms across model sizes is planned.

9.3 Design implications for inference workloads

The metric choice matters for vLLM in particular. Because vLLM batches requests, SM utilization can stay moderate under heavy load, and because it preallocates its KV-cache pool, NVML memory stays high regardless of load. The engine’s own KV-cache usage and pending-request count are the signals that move with demand, so vLLM workloads should scale on those rather than on device metrics. Scale-to-zero targets development and staging endpoints that sit idle for long stretches; bringing them back from zero needs a request-driven trigger alongside, as described in the gRPC interface section. KEDA’s polling interval determines how quickly a traffic burst becomes a scaling decision: with the Prometheus pipeline a burst can go unseen for 15–30 s of scrape and adapter delay before a new pod is scheduled, whereas direct NVML surfaces it on the next KEDA poll. The best aggregation strategy is workload-dependent, which is why it is a runtime parameter: `avg` suits tensor-parallel serving across the GPUs of a node, while `max` catches a hot device faster when several smaller models share a node. A controlled benchmark of these behaviours across model sizes and request patterns is future work.

9.4 Operational overhead

Compared with a DCGM-plus-Prometheus pipeline, the DaemonSet adds no cluster-wide components, keeps all state in memory rather than in a time-series database, and is configured through `ScaledObject` YAML rather than PromQL queries, scrape configs, and adapter rules.

10 Application: Agentic AI and Autonomous Networks

Beyond conventional inference serving, GPU scale-to-zero is valuable wherever demand is bursty and driven by discrete, high-severity events. Autonomous (“self-healing”) telecom networks are one such setting [11]. Agentic reasoning over a network failure requires loading multi-gigabyte foundation-model weights into device memory, which is prohibitively expensive to keep running continuously “just in case” an anomaly occurs. Two properties make standard HPA a poor fit here: reactive CPU thresholds incur a cold-start penalty that can breach sub-second service-level objectives, and hardware utilization is a misleading signal because a GPU can be busy on a trivial task while a critical event waits in the queue.

Coupling event-driven activation, for example the depth or severity of an anomaly queue drawn from the network data plane, with GPU scale-to-zero lets operators provision cognitive compute only during active reasoning and release it immediately afterward. This separates a lightweight, CPU-based observability control plane (the “watchers”) from a GPU-backed execution plane (the “thinkers”) that defaults to zero instances, and reduces both cost and the idle-power carbon footprint. In this architecture `keda-gpu-scaler` supplies the GPU-aware activation signal that lets the orchestrator scale cognitive workloads on hardware state rather than on coarse CPU metrics.

11 Related Work

DCGM Exporter exposes NVIDIA DCGM metrics to Prometheus but requires the full pipeline and offers no direct KEDA integration. GPU feature discovery labels nodes with static GPU properties but no runtime metrics. HAMi [10] focuses on GPU sharing and partitioning rather than autoscaling. Higher-level AI workload managers typically rely on standard HPA. Node autoscalers such as Karpenter scale nodes rather than pods and are not GPU-metric aware. Knative Serving and KServe provide request-driven scale-to-zero and scale-from-zero through an activator that buffers requests for a scaled-down service; they decide on HTTP concurrency, not on GPU state, and pair naturally with this scaler, which supplies the hardware-side signal they lack. `keda-gpu-scaler` is complementary: DCGM Exporter remains useful for dashboards, while the scaler moves the scaling *decision* off the monitoring pipeline and onto a direct hardware read.

12 Future Directions

Planned directions include AMD ROCm support using a `rocm-smi`-based collector behind the same interface, per-partition MIG metrics, NVLink topology-aware scaling, cross-node (fleet-wide) metric aggregation for cluster-level scaling decisions, a revised vLLM profile that defaults to the engine’s KV-cache and queue metrics, and a controlled benchmark of end-to-end scaling time across model sizes.

13 Conclusion

Kubernetes has no visibility into GPU state, and existing workarounds add latency and operational complexity. A DaemonSet that reads NVML directly and serves KEDA over gRPC respects the underlying constraints: NVML requires cgo, GPU devices are node-local, and GPU tooling evolves faster than the KEDA release cycle. It removes the scrape and adapter delay from the metric path while enabling GPU scale-to-zero. The software is open source and available at [2].

References

- [1] KEDA: Kubernetes Event-driven Autoscaling. <https://keda.sh>
- [2] P. Madduri. keda-gpu-scaler: GPU-aware autoscaling for Kubernetes from real hardware metrics. Zenodo, 2026. <https://doi.org/10.5281/zenodo.22866676>
- [3] NVIDIA Corporation. NVIDIA Management Library (NVML). <https://developer.nvidia.com/management-library-nvml>
- [4] NVIDIA Corporation. go-nvml: NVML bindings for Go. <https://github.com/NVIDIA/go-nvml>
- [5] KEDA External Scaler specification. <https://keda.sh/docs/latest/concepts/external-scalers/>
- [6] KEDA issue #7538: GPU scaler discussion. <https://github.com/kedacore/keda/issues/7538>
- [7] W. Kwon, Z. Li, S. Zhuang, Y. Sheng, L. Zheng, C. H. Yu, J. E. Gonzalez, H. Zhang, and I. Stoica. Efficient Memory Management for Large Language Model Serving with PagedAttention. In *Proc. 29th ACM Symposium on Operating Systems Principles (SOSP)*, 2023.
- [8] Volcano: Cloud-native batch scheduling system. <https://volcano.sh>
- [9] P. Madduri. GPU NUMA-aware scheduling. Volcano PR #5095. <https://github.com/volcano-sh/volcano/pull/5095>
- [10] HAMi: Heterogeneous AI Computing Virtualization Middleware. <https://github.com/Project-HAMi/HAMi>
- [11] P. Madduri and A. L. Thakur. The Financial Trap of Autonomous Networks: Scaling Agentic AI in the Telecom Core. IEEE ComSoc Technology Blog, March 2026. <https://techblog.comsoc.org/2026/03/30/the-financial-trap-of-autonomous-networks-scaling-agentic-ai-in-the-telecom-core/>