

```
(venv) [mckone52@cs456-166]~$ podman ps
CONTAINER ID   IMAGE                                     COMMAND                                     CREATED        STATUS        PORTS        NAMES
e0ef49b85d25   docker.io/tleemcjr/metasploitable2:latest  sh -c /bin/servic...  4 minutes ago   Up 2 minutes ago   0.0.0.0:2121->21/tcp   me
4117958471d6   docker.io/library/nginx:stable-alpine       nginx -g daemon o...  About a minute ago   Up 53 seconds ago   0.0.0.0:2431->80/tcp   de
75dcfd0e7941   docker.io/library/postgres:15              postgres              50 seconds ago    Up 36 seconds ago   0.0.0.0:3333->5432/tcp   de
```

CONTAINERS WORKING AFTER “podman ps”

```
(venv) [mckone52@cs456-166]~$ ftp localhost 2121
Trying (:::1):2121 ...
Connected to localhost.
220 (vsFTPD 2.3.4)
Name (localhost:mckone52): anonymous
331 Please specify the password.
Password:
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp>
```

VULNERABLE SERVICE CONNECTION TO HOST OS

```
(venv) [mckone52@cs456-166]~$ curl -i http://localhost:2431/
HTTP/1.1 200 OK
Server: nginx/1.28.0
Date: Mon, 03 Nov 2025 19:12:02 GMT
Content-Type: text/html
Content-Length: 615
Last-Modified: Wed, 23 Apr 2025 12:59:25 GMT
Connection: keep-alive
ETag: "6808e42d-267"
Accept-Ranges: bytes

<!DOCTYPE html>
<html>
<head>
<title>Welcome to nginx!</title>
<style>
html { color-scheme: light dark; }
body { width: 35em; margin: 0 auto;
font-family: Tahoma, Verdana, Arial, sans-serif; }
</style>
</head>
<body>
<h1>Welcome to nginx!</h1>
<p>If you see this page, the nginx web server is successfully installed and
working. Further configuration is required.</p>

<p>For online documentation and support please refer to
<a href="http://nginx.org/">nginx.org</a>.<br/>
Commercial support is available at
<a href="http://nginx.com/">nginx.com</a>.</p>


<p><em>Thank you for using nginx.</em></p>
</body>
</html>
```

DECOY 1 SERVICE CONNECTION TO HOST OS

```
(venv) [mckone52@cs456-166]~$ nc -vz localhost 3333
Connection to localhost (:::1) 3333 port [tcp/*] succeeded!
```

DECOY 2 SERVICE CONNECTION TO HOST OS

NETWORKPAULO - Refined Network Diagram (sprint 1)

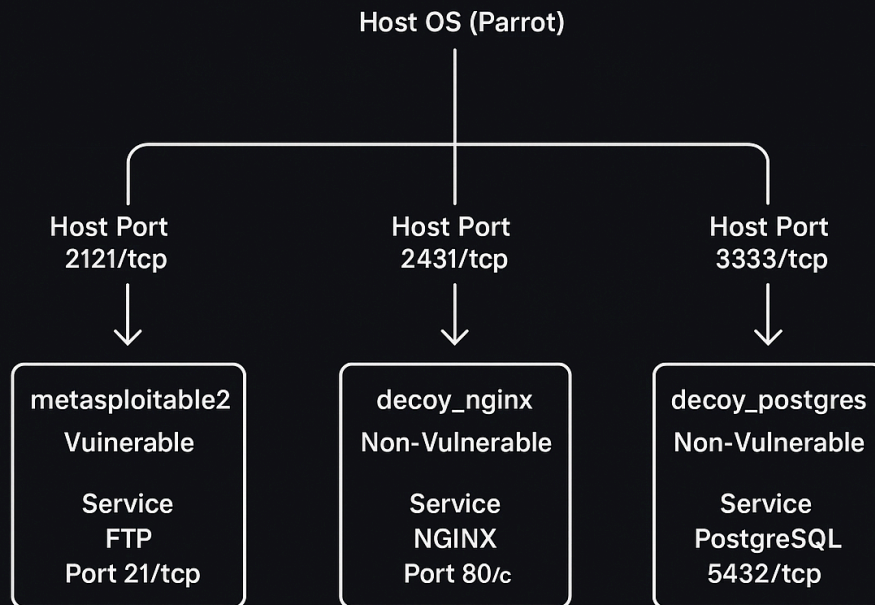

NETWORK DIAGRAM

DESCRIPTION

The environment that I have built in regards to blue team has gone according to my plan from the sprint 1 design. There wasn't any deviations from the sprint 1 design everything went according to plan. All ports are open for scanning allowing for red team to try and scan more any vulnerabilities that they may find. The environment that I have created encourages attackers to scan my open ports to try and find any vulnerabilities while having a deliberately vulnerable instance to try and throw off the scans. Mapping the containers to specific host ports may cause red team to funnel scans to endpoints that can be seen which can help increase the chance of capturing patterns and wasting Red Teams time.