
```
Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo
$ git init
Initialized empty Git repository in C:/Users/Alumno/Desktop/DPAW/ExGIT_Pablo/.git/

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (master)
$ git add .

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (master)
$ git commit -m "Estado inicial del proyecto"
[master (root-commit) 716cfdd] Estado inicial del proyecto
 4 files changed, 111 insertions(+)
 create mode 100644 imagenes/carpena.jpg
 create mode 100644 imagenes/logo.png
 create mode 100644 index.html
 create mode 100644 style.css

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (master)
$
```

Creamos el repositorio y guardamos el estado inicial del proyecto.

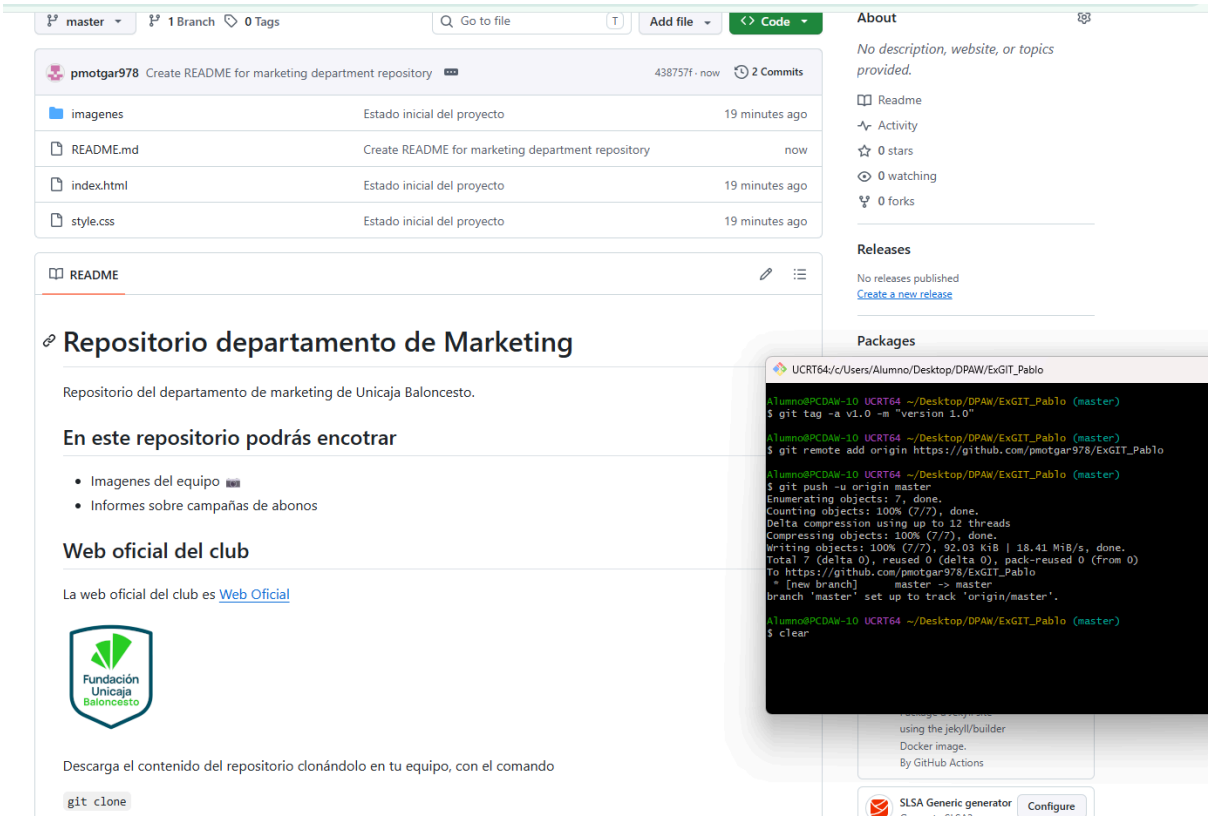

Añadimos el enlace remoto y subimos los cambios.

```
lumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (master)
 git branch develop

lumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (master)
 git checkout develop
witched to branch 'develop'

lumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (develop)
 git branch feature/v2.0

lumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (develop)
 git checkout feature/v2.0
witched to branch 'feature/v2.0'

lumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (feature/v2.0)
```

Creamos la rama develop donde vamos a trabajar y creamos el feature para añadir cosas nuevas al proyecto.

```
Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW
$ git clone https://github.com/emarfer786p/UnicajaMarketing.git
Cloning into 'UnicajaMarketing'...
remote: Enumerating objects: 10, done.
remote: Counting objects: 100% (10/10), done.
remote: Compressing objects: 100% (8/8), done.
remote: Total 10 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (10/10), 516.78 KiB | 3.36 MiB/s, done.

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW
$ mv UnicajaMarketing/
.git/              README.md          clasificacion.png  plantilla.jpg

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW
$ mv UnicajaMarketing/clasificacion.png Ex
ExGIT_Pablo/ ExamGIT2627/

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW
$ mv UnicajaMarketing/clasificacion.png ExGIT_Pablo/imagenes/

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW
$ mv UnicajaMarketing/plantilla.jpg ExGIT_Pablo/imagenes/

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW
$
```

Clonamos y copiamos todas las imagenes

```
Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (feature/v2.0)
$ nano index.html

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (feature/v2.0)
$ nano index.html

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (feature/v2.0)
$ git add .

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (feature/v2.0)
$ git commit -m "Cambio de imagen y de texto"
[feature/v2.0 468d36a] Cambio de imagen y de texto
 3 files changed, 3 insertions(+), 3 deletions(-)
 create mode 100644 imagenes/clasificacion.png
 create mode 100644 imagenes/plantilla.jpg

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (feature/v2.0)
$
```

Guardamos los cambios ya que vamos a arreglar el hotfix primero.

```
Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (feature/v2.0)
$ git checkout master
Switched to branch 'master'
Your branch is up to date with 'origin/master'.

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (master)
$ git branch hotfix/textos-urgentes

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (master)
$ git checkout hotfix/textos-urgentes
Switched to branch 'hotfix/textos-urgentes'

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (hotfix/textos-urgentes)
$ nano index.html

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (hotfix/textos-urgentes)
$ git add .

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (hotfix/textos-urgentes)
$ git commit -m "Corrección titulo"
[hotfix/textos-urgentes 0c5bf9b] Corrección titulo
 1 file changed, 2 insertions(+), 2 deletions(-)
```

Aqui solucionamos el hotfix creandolo desde la master (main).

```
Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (hotfix/textos-urgentes)
$ git checkout master
Switched to branch 'master'
Your branch is up to date with 'origin/master'.

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (master)
$ git merge hotfix/textos-urgentes
Updating 716cfdd..0c5bf9b
Fast-forward
 index.html | 4 ++--
 1 file changed, 2 insertions(+), 2 deletions(-)

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (master)
$ git checkout develop
Switched to branch 'develop'

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (develop)
$ git merge hotfix/textos-urgentes
Updating 716cfdd..0c5bf9b
Fast-forward
 index.html | 4 ++--
 1 file changed, 2 insertions(+), 2 deletions(-)

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (develop)
$ git tag -a v1.1 -m "version 1.1"
```


Hacemos todos los cabmios del hotfix y creamos la etiqueta. (Faltó subir el tag en la master, mala mía…)

```
Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (master)
$ git push --tags
Enumerating objects: 2, done.
Counting objects: 100% (2/2), done.
Delta compression using up to 12 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 286 bytes | 286.00 KiB/s, done.
Total 2 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/pmotgar978/ExGIT_Pablo
 * [new tag]         v1.0 -> v1.0
 * [new tag]         v1.1 -> v1.1


Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (master)
$
```

Se me olvidó hacerle captura al otro git push pero en principio todo funciona correctamente. Se suben todas las ramas.

Se me olvidó hacerle captura a lo otro pero básicamente es git push –all. Paso las ramas del repo.

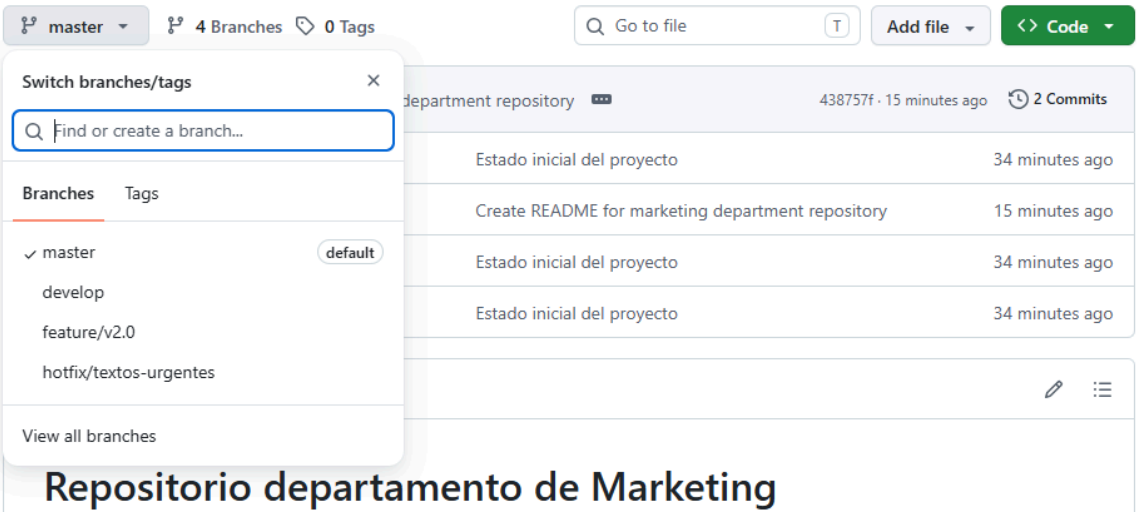

Adjunto foto de que se ha subido todo.

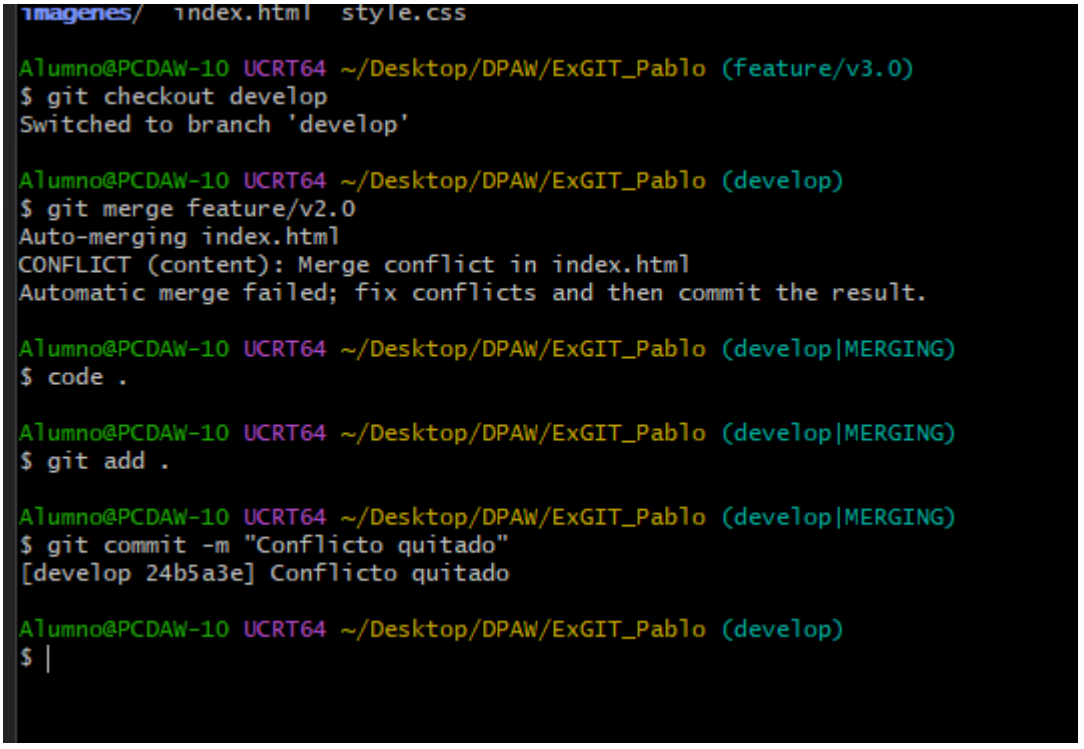

Ahora hacemos el merge del feature a la rama develop.

```
            <a href="#">Inicio</a>
Accept Current Change | Accept Incoming Change | Accept Both Changes | Compare Changes
<<<<<<< HEAD (Current Change)
            <a href="#">Clasificación ACB</a>
=======
            <a href="#">Clasificación Liga Endesa</a>
>>>>>>> feature/v2.0 (Incoming Change)
            <a href="#">Resultados</a>
            <a href="#">Primer equipo</a>
            <a href="#">Abonados</a>
        </div>
        <div class="column middle" >
            <p>Página oficial del Unicaja Baloncesto Málaga, equipo de Baloncesto profesional
            <img src="imagenes/plantilla.jpg">
        </div>
    </div>
```

Solucionamos el conflicto.

```
Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (develop)
$ git checkout feature/v3.0
Switched to branch 'feature/v3.0'

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (feature/v3.0)
$ cp index.html clasificacion.html

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (feature/v3.0)
$ nano index.html

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (feature/v3.0)
$ nano clasificacion.html

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (feature/v3.0)
$ git add .

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (feature/v3.0)
$ git commit -m "cambios de clasificacion"
[feature/v3.0 a3ce93b] cambios de clasificacion
 1 file changed, 33 insertions(+)
 create mode 100644 clasificacion.html

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (feature/v3.0)
$ git checkout develop
Switched to branch 'develop'

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (develop)
$ git merge feature/v3.0
Merge made by the 'ort' strategy.
 clasificacion.html | 33 +++++++++++++++++++++++++++++++++
 1 file changed, 33 insertions(+)
 create mode 100644 clasificacion.html

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (develop)
$
```

Creamos la feature/v3.0, realizamos los cambios, guardamos y le hacemos un merge en la rama develop.

```
Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (develop)
$ git branch release/2.0.0

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (develop)
$ git checkout release/2.0.0
Switched to branch 'release/2.0.0'

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (release/2.0.0)
$ tag -a v2.0.0 -m "version definitiva"
bash: tag: command not found
```

Creamos la rama release y hacemos la etiqueta. (Perdón le hice captura porque me faltaba el git pero la etiqueta si la hice más abajo)

```
Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (master)
$ git checkout develop
Switched to branch 'develop'

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (develop)
$ git merge release/2.0.0 -m "tag"
Already up to date.


Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (develop)
$ git checkout master
Switched to branch 'master'
Your branch is ahead of 'origin/master' by 10 commits.
  (use "git push" to publish your local commits)

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (master)
$ git push --all
Enumerating objects: 16, done.
Counting objects: 100% (16/16), done.
Delta compression using up to 12 threads
Compressing objects: 100% (12/12), done.
Writing objects: 100% (12/12), 1.29 KiB | 659.00 KiB/s, done.
Total 12 (delta 8), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (8/8), completed with 1 local object.
To https://github.com/pmotgar978/ExGIT_Pablo
   0c5bf9b..e33d3b8  develop -> develop
   468d36a..6de0c20  feature/v2.0 -> feature/v2.0
 * [new branch]      feature/v3.0 -> feature/v3.0
 * [new branch]      release/2.0.0 -> release/2.0.0
 ! [rejected]        master -> master (fetch first)
error: failed to push some refs to 'https://github.com/pmotgar978/ExGIT_Pablo'
hint: Updates were rejected because the remote contains work that you do not
hint: have locally. This is usually caused by another repository pushing to
hint: the same ref. If you want to integrate the remote changes, use
hint: 'git pull' before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help' for details.


Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (master)
$ git push --tags
Enumerating objects: 1, done.
Counting objects: 100% (1/1), done.
Writing objects: 100% (1/1), 163 bytes | 163.00 KiB/s, done.
Total 1 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/pmotgar978/ExGIT_Pablo
 * [new tag]         v2.0.0 -> v2.0.0

Alumno@PCDAW-10 UCRT64 ~/Desktop/DPAW/ExGIT_Pablo (master)
$
```

Esto me da error no se por que exactamente, porque en si, se sube todo pero me pide que le haga un pull request a mi propio repositorio.

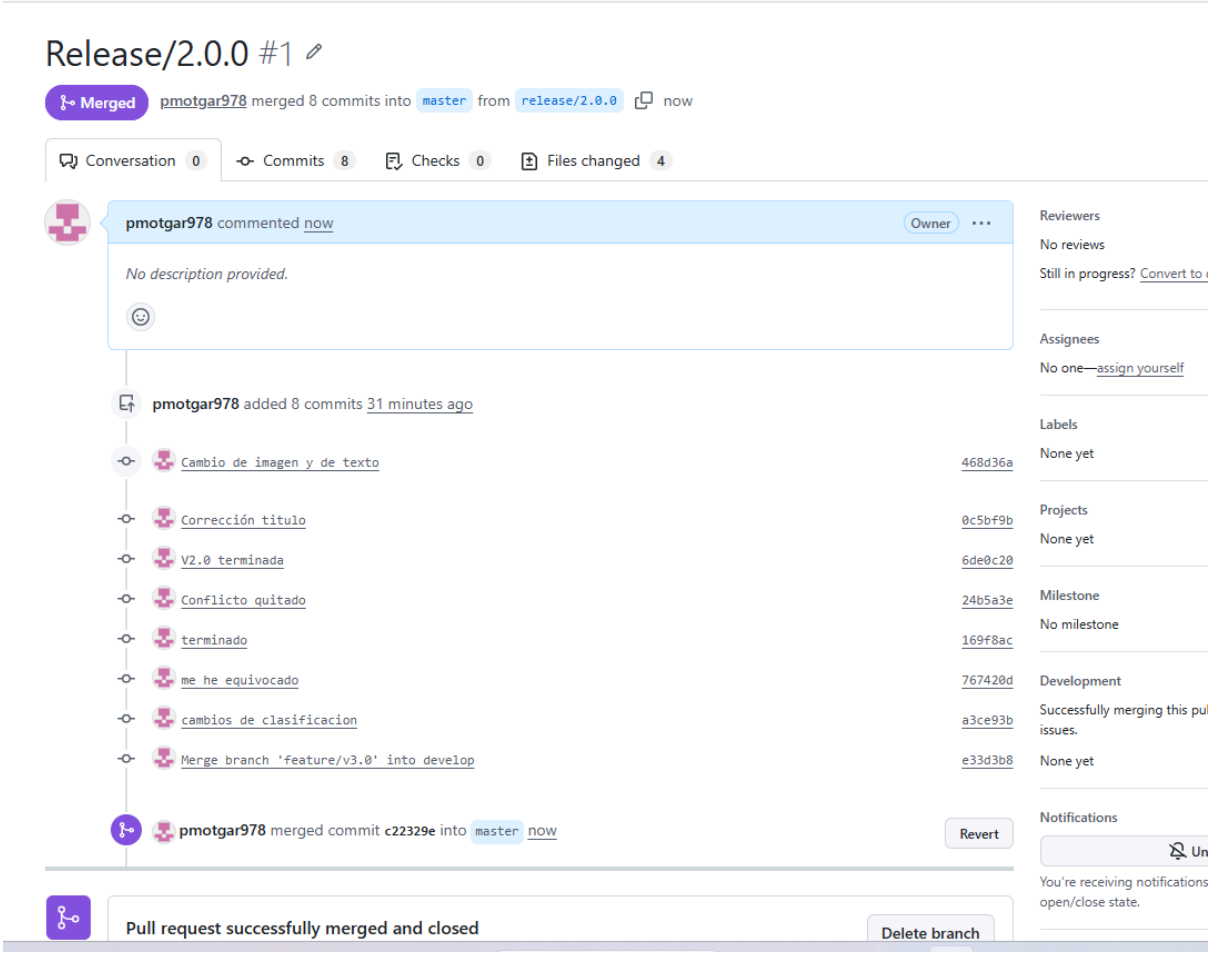


Aqui dejo el pull request de mi repositorio.

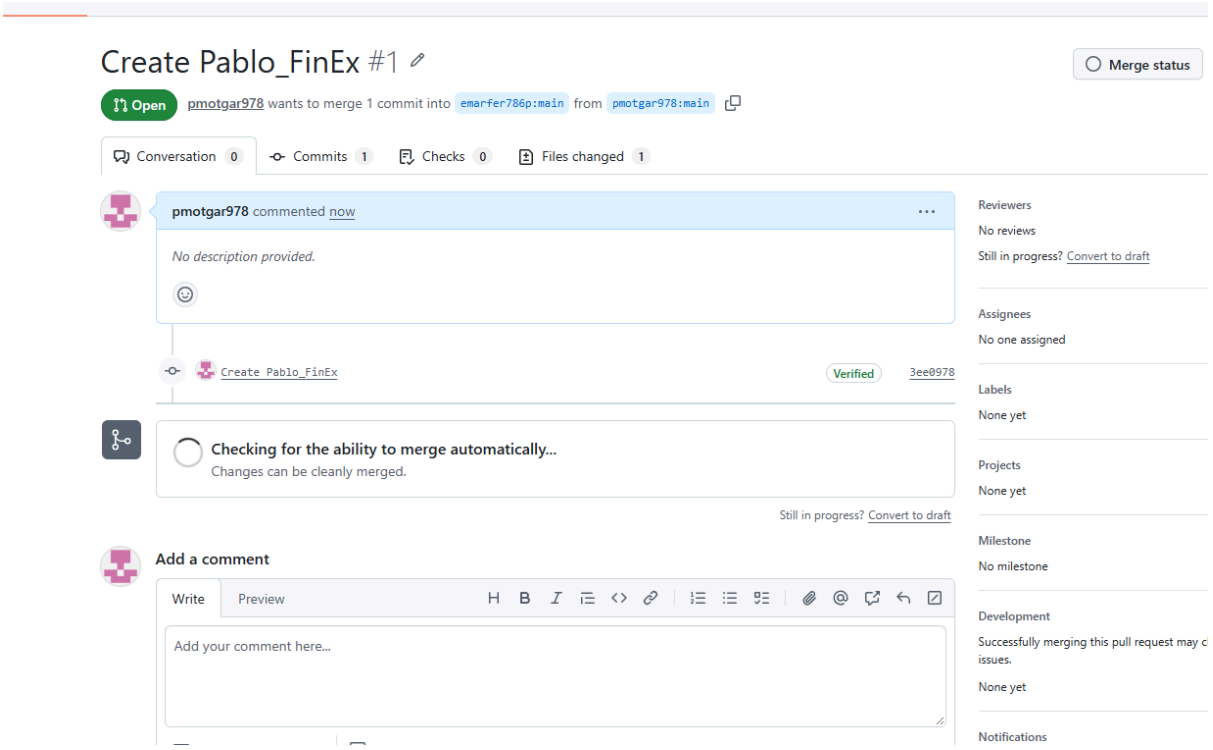


Y el pull request del repositorio del profesor.

RESULTADOS

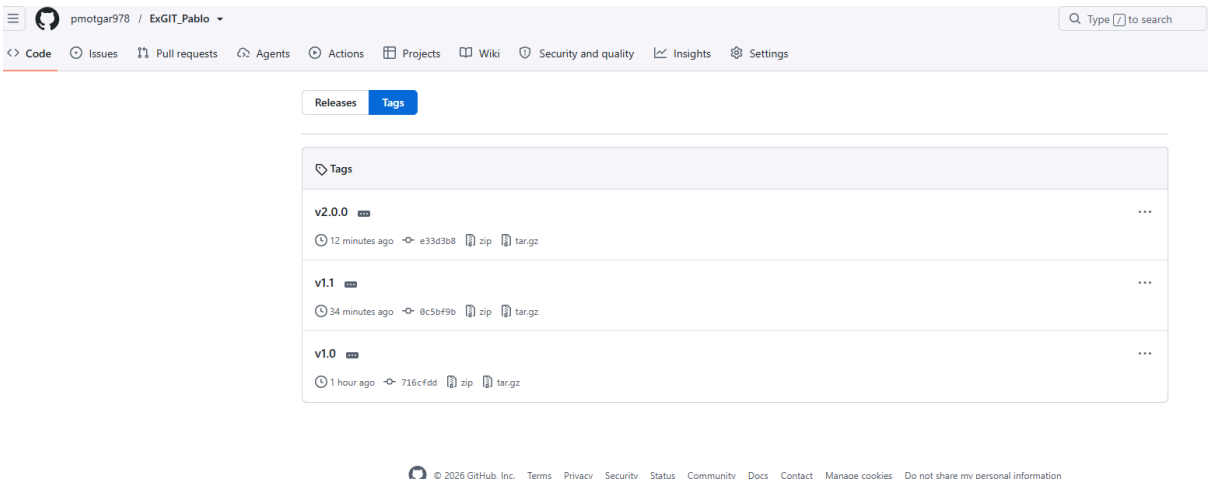

Las etiquetas.

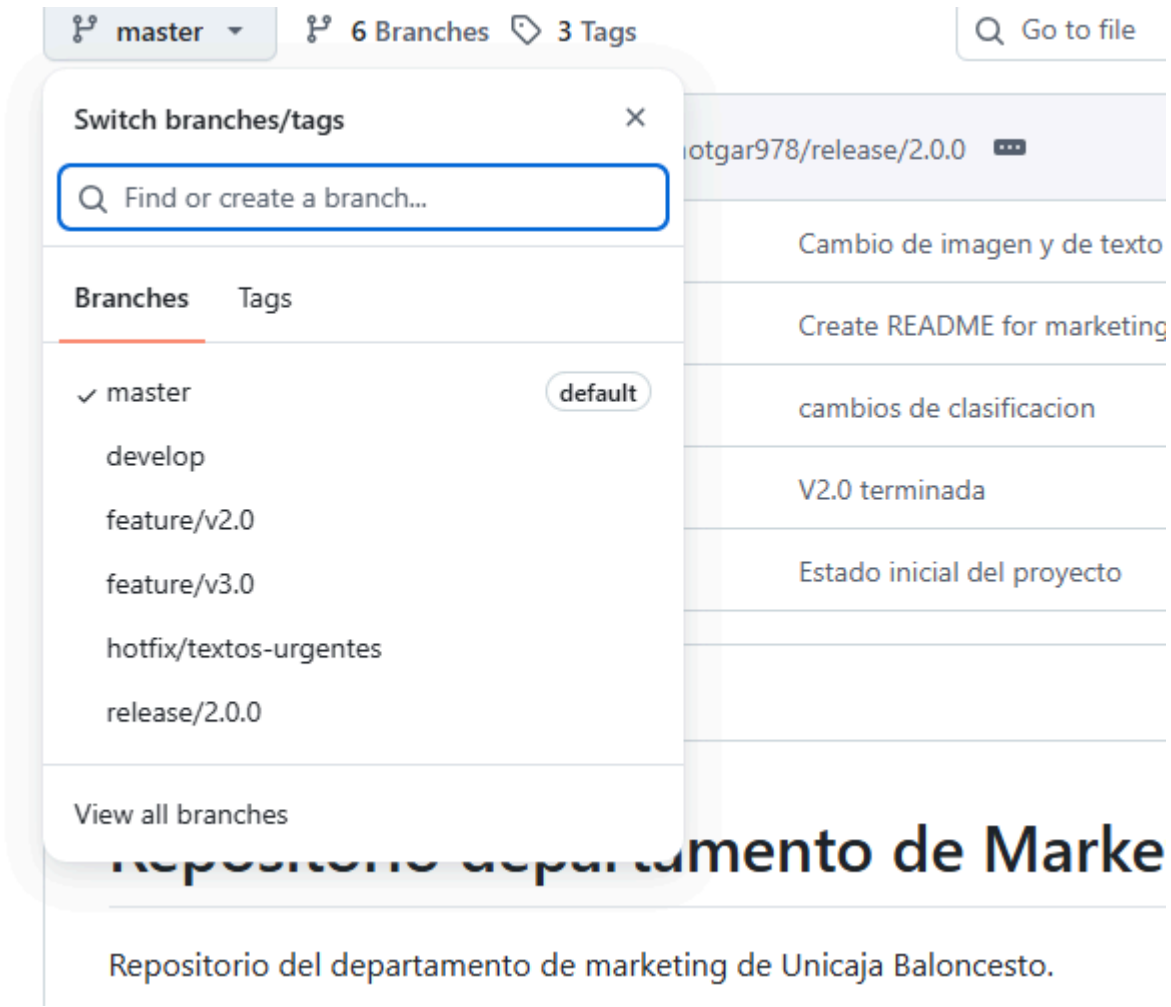

Las ramas sin borrar. Se deberían de borrar todas menos la master y la develop.
[Enlace]