

# Security Lab Solution Document

## Automation and Infrastructure as Code (IaC)



Created By: Paul Leone  
March 19, 2026

# Contents

---

|                                                                |    |
|----------------------------------------------------------------|----|
| Automation and Infrastructure as Code (IaC).....               | 3  |
| Infrastructure Provisioning with Terraform.....                | 4  |
| Configuration Management with Ansible.....                     | 11 |
| Architecture Overview .....                                    | 11 |
| Setup Overview .....                                           | 12 |
| Inventory and Variable Structure.....                          | 12 |
| Core Playbooks - Detailed Overview .....                       | 15 |
| Version Control and GitOps .....                               | 22 |
| Workflow Automation with n8n.....                              | 23 |
| Platform Overview .....                                        | 23 |
| Workflow 1: Lab Infrastructure Audit .....                     | 23 |
| Workflow 2: Threat Intelligence Aggregation .....              | 28 |
| Workflow 3: Weekly Package Manager Updates with Alerting ..... | 32 |
| Workflow 4: Monthly Automated Ansible Token Rotation.....      | 37 |
| Best Practices and Lessons Learned.....                        | 37 |
| Scripting for Advanced Automation .....                        | 38 |
| Language .....                                                 | 39 |
| Use Cases.....                                                 | 39 |
| Advantages.....                                                | 39 |
| Bash.....                                                      | 39 |
| Linux system administration; cron jobs .....                   | 39 |
| Native; fast; no dependencies .....                            | 39 |
| PowerShell.....                                                | 39 |
| Windows management; AD operations.....                         | 39 |
| Deep Windows integration; objects.....                         | 39 |
| Python.....                                                    | 39 |
| API integration; data processing; ML .....                     | 39 |
| Rich libraries; cross-platform .....                           | 39 |
| PowerShell & Bash Scripting.....                               | 39 |
| Cron Job Scheduling Strategy .....                             | 46 |
| Python Scripting for Advanced Automation.....                  | 46 |
| Script Integration & Orchestration .....                       | 47 |
| Automation Security Controls .....                             | 48 |
| Operational Resilience & Disaster Recovery .....               | 49 |
| Infrastructure Rebuild Capability: .....                       | 49 |
| Practical Use Cases and Workflows .....                        | 50 |

|                                                    |    |
|----------------------------------------------------|----|
| Scenario 1: New VM Provisioning.....               | 50 |
| Scenario 2: Weekly Security Update Cycle.....      | 50 |
| Scenario 3: Rapid Disaster Recovery.....           | 50 |
| Scenario 4: Threat Intelligence Distribution ..... | 51 |
| Scenario 5: Configuration Drift Detection .....    | 51 |

# Automation and Infrastructure as Code (IaC)

## Architecture Overview

The lab implements a comprehensive automation strategy using infrastructure as code principles, configuration management, and workflow orchestration. This approach provides repeatable deployments, consistent configurations, and automated operations across the entire infrastructure stack.

### Security Impact


- Configuration drift eliminated through code-driven enforcement
- Human error reduced via automated validation
- Credential exposure prevented through integrated secret management
- Unauthorized changes blocked through Git-based approval workflows
- Disaster recovery enabled through fully reproducible infrastructure
- Audit compliance maintained via immutable version history

### Deployment Rationale:

Infrastructure as Code eliminates manual configuration drift, reduces human error, and enables rapid disaster recovery. The automation stack transforms a complex 40+ host lab environment into a reproducible, documented system that can be rebuilt from code within hours instead of weeks. This mirrors enterprise DevOps practices and demonstrates proficiency with industry-standard automation tools (Terraform, Ansible, CI/CD pipelines). Enterprise environments leverage IaC to manage hundreds or thousands of servers with consistent security baselines—manual approaches become impossible at scale. This implementation demonstrates understanding of GitOps principles where infrastructure state is declared in version control, changes are peer-reviewed via pull requests, and deployments are automated through CI/CD pipelines.

## Architecture Principles Alignment

- **Defense in Depth:** Infrastructure changes peer-reviewed before deployment; Terraform plan reviewed for security impact; Ansible playbooks enforce CIS Benchmarks; automated testing validates security controls before production
- **Secure by Design:** Least-privilege service accounts for automation tools; secrets stored in Ansible Vault/Vaultwarden; SSH keys rotated via automated playbooks; no hardcoded credentials in version control
- **Zero Trust:** Every infrastructure change logged to Git with committer identity; Terraform state files encrypted; API tokens short-lived and rotated; automation execution audited via SIEM

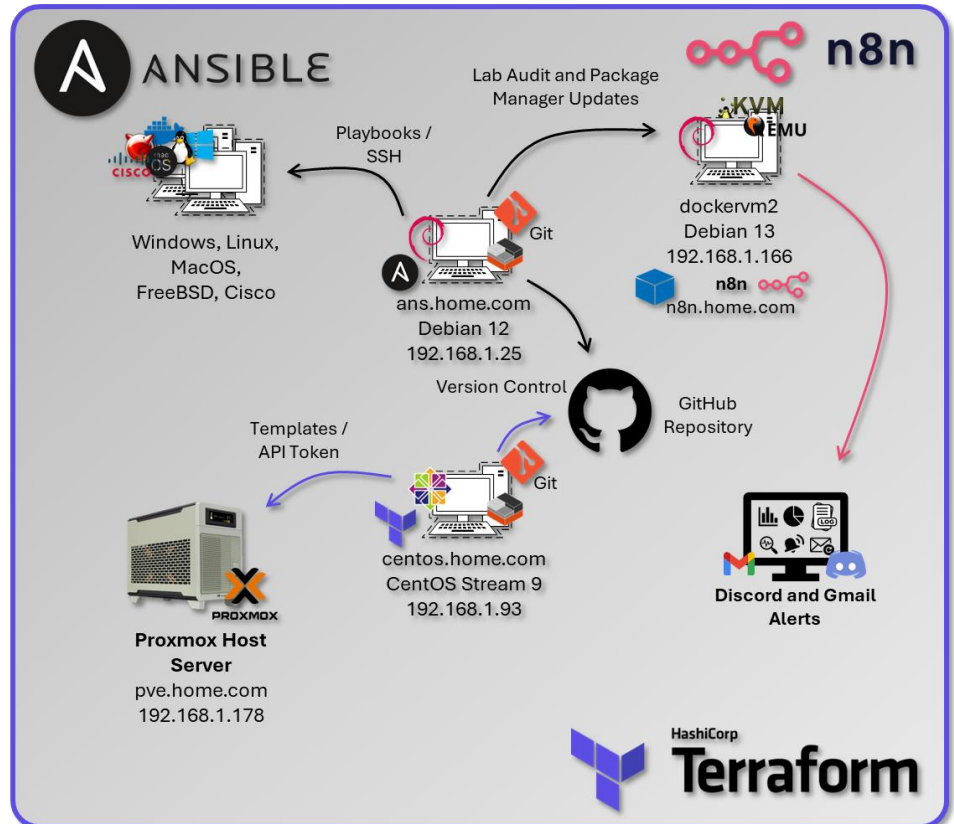

# Strategic Value

- **Reduced provisioning time:** VM deployment from 30 minutes (manual) to <5 minutes (Terraform automation)
- **Configuration consistency:** Ansible ensures identical baselines across all hosts (100% CIS Benchmark compliance)
- **Audit trail:** Git commits provide full history of infrastructure changes (who, what, when, why)
- **Disaster recovery:** Entire lab can be rebuilt from GitHub repository (<2 hours full recovery)
- **Learning platform:** Hands-on experience with tools used in production environments (transferable to enterprise roles)
- **Compliance automation:** Security controls codified and version-controlled (auditable evidence of control implementation)

## Infrastructure Provisioning with Terraform

### Architecture Overview



Terraform manages the complete lifecycle of Proxmox virtual machines and LXC containers using declarative configuration files. The infrastructure is defined as code, version-controlled, and applied through a dedicated automation controller VM running Ubuntu Server.

#### Security Impact

- Least-privilege automation enforced through Proxmox API tokens
- Infrastructure changes tracked and auditable via Git commit history
- Unauthorized modifications prevented through Terraform's stateful resource management
- Disaster recovery enabled through declarative rebuilds directly from code
- Credential exposure eliminated through encrypted Terraform variables
- Change validation performed prior to execution using terraform plan

**Deployment Rationale:** Manual VM creation is time-consuming, error-prone, and undocumented—scaling to 40+ VMs/containers requires automation. Terraform demonstrates infrastructure-as-code where VM specifications (CPU, RAM, storage, network) are declared in HCL configuration files, version-controlled, and applied idempotently. This mirrors enterprise infrastructure management (AWS CloudFormation, Azure Resource Manager) where infrastructure is treated as software with code review, testing, and CI/CD deployment. The approach enables rapid environment replication (dev/staging/production), consistent resource configurations, and automated disaster recovery.

### Architecture Principles Alignment

- **Defense in Depth:** Terraform state stored remotely with access controls; API tokens scoped to minimal permissions; plan review catches misconfigurations before apply; resource tagging enables compliance auditing
- **Secure by Design:** Proxmox API tokens instead of passwords; Terraform variables encrypted; no secrets in Git repositories; automated validation via pre-commit hooks
- **Zero Trust:** Every Terraform execution logged; state file modifications tracked; API calls authenticated via tokens; infrastructure changes require explicit approval

Deployment Architecture:

| Component | Technology | Purpose |
|-----------|------------|---------|
|-----------|------------|---------|

|                             |                               |                                    |
|-----------------------------|-------------------------------|------------------------------------|
| <b>Terraform Controller</b> | CentOS LXC (192.168.x.x)      | Isolated automation host           |
| <b>Terraform Version</b>    | v1.6.x                        | Infrastructure provisioning engine |
| <b>Provider</b>             | Telmate/proxmox v2.9.x        | Proxmox VE API integration         |
| <b>State Backend</b>        | Local file, Cloudflare R2     | State persistence and locking      |
| <b>Secrets Management</b>   | terraform.tfvars (gitignored) | API tokens and credentials         |

#### Authentication & Authorization:

- Proxmox Service Account:
- Username: terraform@pve
- Authentication: API token (non-password, scoped)
- Token ID: terraform-token
- Permission Group: TerraformProvisioners
- Granted Privileges:
  - VM.Allocate (create VMs)
  - VM.Config.\* (modify VM settings)
  - VM.PowerMgmt (start/stop/shutdown)
  - Datastore.AllocateSpace (provision storage)
  - SDN.Use (network assignment)
- Principle: Least privilege - cannot modify Proxmox cluster config or other users


#### Security Controls:

- Secrets management: Promox API token stored in env variable.
- State File Protection: Contains sensitive data, stored with restrictive permissions (0600)
- TLS Verification: pm\_tls\_insecure = false enforces valid certificate checks
- Separate Workspaces: VM and LXC builds isolated to prevent cross-contamination
- Gitignore Enforcement: terraform.tfvars, \*.tfstate excluded from version control

## Project Structure:

terraform/

```
├── vm/
│   ├── main.tf          # VM resource definitions
│   ├── variables.tf     # Input variable declarations
│   ├── terraform.tfvars # Sensitive values (gitignored)
│   ├── outputs.tf       # Return values (IP, VMID)
│   └── .terraform.lock.hcl # Provider version lock
├── lxc/
│   ├── main.tf          # LXC resource definitions
│   ├── variables.tf     # Input variable declarations
│   ├── terraform.tfvars # Sensitive values (gitignored)
│   └── outputs.tf       # Return values
└── modules/
    └── common/          # Reusable module components
```

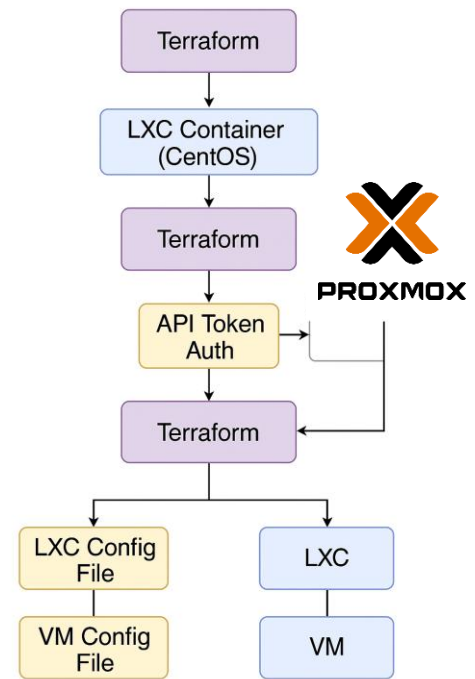

## Terraform Configuration Deep Dive

LXC Container Provisioning (main.tf)

**Purpose:** Deploy unprivileged Debian 12 containers with security isolation and resource limits suitable for containerized workloads.

### Key sections:

- **Provider declaration** → Uses Terraform-for-Proxmox/proxmox provider
- **Authentication variables** → API token ID & secret, plus root password for the container
- **Proxmox provider block** → Points to the PVE API over HTTPS with certificate validation (pm\_tls\_insecure = false)
- **LXC resource** (proxmox\_lxc):
  - Hostname & VMID variable arguments provided in the

terraform plan command.

- Template source (ostemplate) from Proxmox storage
- Unprivileged mode for added security isolation
- Resource limits: 2 CPU cores, 512 MB RAM + swap
- Disk allocation: 8 GB on local-lvm storage
- Networking: virt-bridge to vmbr0 via DHCP
- Features: nesting enabled (allowing Docker/Kubernetes inside the LXC)
- Boot & start flags so it powers up with the node

```
proxmox_lxc.tf M x proxmox_vmv3.tf M
Terraform Configs > proxmox_lxc.tf > resource "proxmox_lxc" "testct" > # cores
You, 3 hours ago | 1 author (You)
1 terraform {
2   You, 3 hours ago | 1 author (You)
3   required_providers {
4     You, 3 hours ago | 1 author (You)
5     proxmox = {
6       source = "Terraform-for-Proxmox/proxmox"
7     }
8   }
9   You, 3 hours ago | 1 author (You)
10  variable "pm_api_token_id" {
11    description = "Proxmox API token ID"
12    type        = string
13  }
14  You, 3 hours ago | 1 author (You)
15  variable "pm_api_token_secret" {
16    description = "Proxmox API token secret"
17    type        = string
18    sensitive   = true
19  }
20  You, 3 hours ago | 1 author (You)
21  variable "rootpassword" {
22    description = "Cloud-init password for this VM"
23    type        = string
24    sensitive   = true
25  }
26  You, 4 minutes ago | 1 author (You)
27  variable "lxc_name" {
28    description = "Hostname of the LXC container"
29    type        = string
30    default     = "debian-lxc"
31  }
32  You, 4 minutes ago | 1 author (You)
33  variable "lxc_id" {
34    description = "VMID for the LXC container"
35    type        = number
36  }
37  You, 3 hours ago | 1 author (You)
38  provider "proxmox" {
39    pm_api_url      = "https://pve.home.com:8006/api2/json"
40    pm_api_token_id = var.pm_api_token_id
41    pm_api_token_secret = var.pm_api_token_secret
42    pm_tls_insecure = false
43  }
44  You, 4 minutes ago | 2 authors (You and one other)
45  resource "proxmox_lxc" "testct" {
46    hostname = var.lxc_name
47    target_node = "pve"
48    vmid = var.lxc_id
49    ostemplate = "Media4TBnvm:vztmpl/debian-12-standard_12.7-1_amd64.tar.zst"
50    password = var.rootpassword
51    unprivileged = true
52    cores = 2
53    memory = 512
54    swap = 512
55    onboot = true
56    start = true
57  }
```

```
centos proxmox-lxc]# terraform apply -var="lxc_name=test_debianlxc" -var="lxc_id=223"
```

#### Resource Allocation Strategy:

- CPU: 2 cores (sufficient for most containerized apps)
- Memory: 512MB + 512MB swap (low footprint for density)
- Disk: 8GB (expandable, allocated on local-lvm for performance)
- Network: DHCP with VLAN tagging support via bridge

#### Security Features:

- Unprivileged Containers: UID/GID mapping prevents root escalation to host
- Nesting Enabled: Allows Docker-in-LXC for lab flexibility
- AppArmor Profile: Default Proxmox profile applied
- Resource Limits: Prevent resource exhaustion attacks

#### **VM Provisioning (main.tf - QEMU)**

Purpose: Clone cloud-init ready Ubuntu VMs with optimized storage and network configuration for performance and manageability.

## Key sections:


- **Provider declaration** → Same Terraform-for-Proxmox provider as above
- **Authentication variables** → API token ID & secret; cloud-init user and password
- **Proxmox provider block** → HTTPS API endpoint with TLS verification
- **VM resource** (proxmox\_vm\_qemu):
  - Clones from ubuntu-cloud template (must be cloud-init ready)
  - full\_clone = true → independent disk image
  - OS type set to l26 → Linux kernel 2.6+ (optimized for modern distros)
  - Hostname & VMID variable arguments provided in the terraform plan command.
  - Boot settings:
    - Boot from scsi0 (OS disk) before ide2 (cloud-init)
    - Force virtio-scsi-single controller for best Linux I/O performance
  - CPU/memory: 2 vCPUs, 2 GB RAM, 1 socket
  - QEMU guest agent enabled for status reporting & IP detection
  - Networking: virtio NIC on vmbus with firewall disabled in guest config
  - Cloud-init parameters for provisioning user and password
  - clone\_wait = 0 → Terraform doesn't block on post-clone boot readiness

## Cloud-Init Integration:

- User Creation: Provisions non-root user via ciuser parameter
- SSH Keys: Injects public keys for passwordless authentication
- Network Config: Configures DHCP or static IP via ipconfig parameters
- Package Updates: Can specify packages to install on first boot

## Performance Optimizations:

- VirtIO-SCSI-Single: Modern SCSI controller with single queue (reduces overhead)
- IOThread: Dedicated I/O thread improves disk throughput

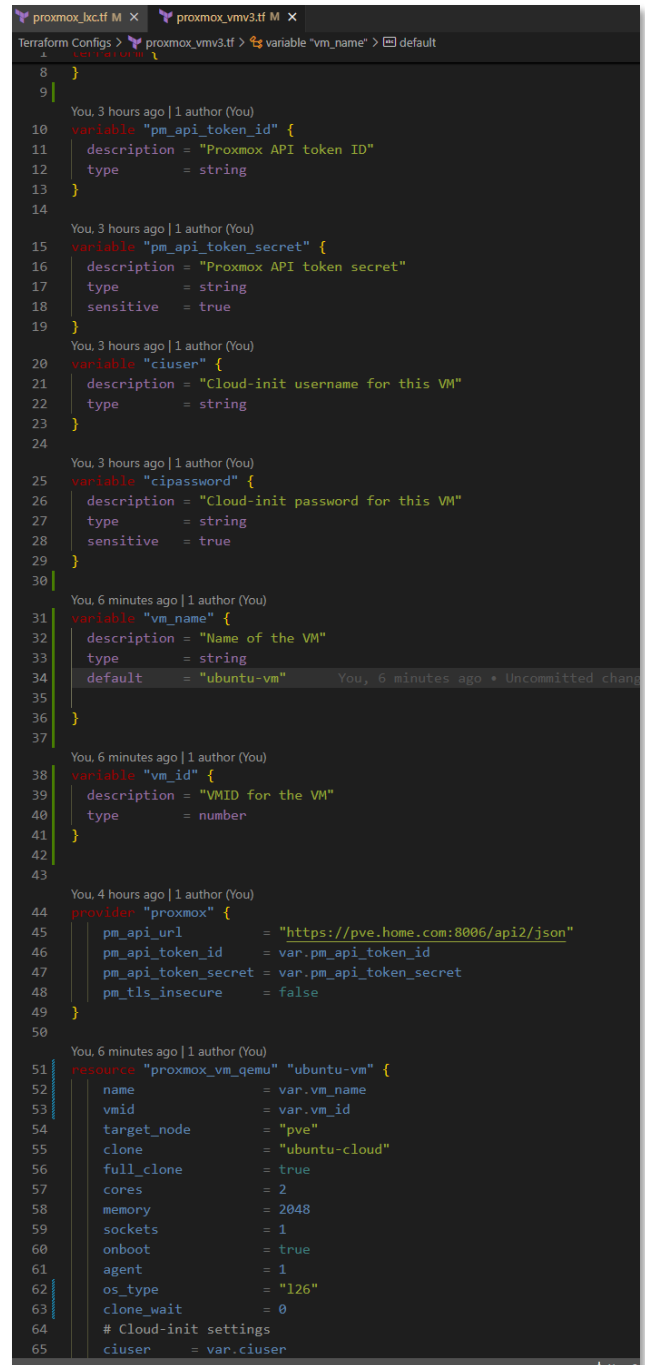

```
proxmox_hc.tf M X proxmox_vmv3.tf M X
Terraform Configs > proxmox_vmv3.tf > variable "vm_name" > default
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
You, 3 hours ago | 1 author (You)
variable "pm_api_token_id" {
  description = "Proxmox API token ID"
  type        = string
}
You, 3 hours ago | 1 author (You)
variable "pm_api_token_secret" {
  description = "Proxmox API token secret"
  type        = string
  sensitive   = true
}
You, 3 hours ago | 1 author (You)
variable "ciuser" {
  description = "Cloud-init username for this VM"
  type        = string
}
You, 3 hours ago | 1 author (You)
variable "cipassword" {
  description = "Cloud-init password for this VM"
  type        = string
  sensitive   = true
}
You, 6 minutes ago | 1 author (You)
variable "vm_name" {
  description = "Name of the VM"
  type        = string
  default     = "ubuntu-vm"
}
You, 6 minutes ago | 1 author (You)
variable "vm_id" {
  description = "VMID for the VM"
  type        = number
}
You, 4 hours ago | 1 author (You)
provider "proxmox" {
  pm_api_url      = "https://pve.home.com:8006/api2/json"
  pm_api_token_id = var.pm_api_token_id
  pm_api_token_secret = var.pm_api_token_secret
  pm_tls_insecure = false
}
You, 6 minutes ago | 1 author (You)
resource "proxmox_vm_qemu" "ubuntu-vm" {
  name       = var.vm_name
  vmid       = var.vm_id
  target_node = "pve"
  clone      = "ubuntu-cloud"
  full_clone = true
  cores      = 2
  memory     = 2048
  sockets    = 1
  onboot     = true
  agent      = 1
  os_type    = "l26"
  clone_wait = 0
  # Cloud-init settings
  ciuser     = var.ciuser
}
```

- SSD Flag: Enables TRIM for better SSD performance
- VirtIO NIC: Para-virtualized network driver (near-native performance)

## Terraform Plan Output

```
[root@centos proxmox-lxc]# terraform apply

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
+ create

Terraform will perform the following actions:

# proxmox_lxc.testct will be created
+ resource "proxmox_lxc" "testct" {
  + arch      = "amd64"
  + cmode     = "tty"
  + console   = true
  + cores     = 2
  + cpulimit  = 0
  + cpuunits  = 1024
  + hostname  = "tf-demo-ct"
  + id        = (known after apply)
  + memory    = 512
  + onboot    = true
  + osetemplate = "Media4TBnvme:vztmpl/debian-12-standard_12.7-1_amd64.tar.zst"
  + ostype    = (known after apply)
  + password   = (sensitive value)
  + protection = false
  + start      = true
  + swap       = 512
  + target_node = "pve"
  + tty        = 2
  + unprivileged = true
  + unused     = (known after apply)
  + vmid       = 223

  + features {
    + fuse      = false
    + keyctl    = false
    + mknod     = false
    + nesting   = true
    # (1 unchanged attribute hidden)
  }

  + network {
    + bridge = "vbr0"
    + hwaddr = (known after apply)
    + id      = (known after apply)
    + ip      = "dhcp"
    + name    = "eth0"
    + tag     = (known after apply)
    + trunks  = (known after apply)
    + type    = (known after apply)
  }

  + rootfs {
    + size      = "8G"
    + storage   = "local-lvm"
    + volume    = (known after apply)
  }
}

Plan: 1 to add, 0 to change, 0 to destroy.

Do you want to perform these actions?
Terraform will perform the actions described above.
Only 'yes' will be accepted to approve.

Enter a value: yes

proxmox_lxc.testct: Creating...
proxmox_lxc.testct: Creation complete after 2s [id=pve/lxc/223]

Apply complete! Resources: 1 added, 0 changed, 0 destroyed.
[root@centos proxmox-lxc]#
```

## Terraform Workflow:

| Step       | Command                                           | Purpose                     |
|------------|---------------------------------------------------|-----------------------------|
| Initialize | "terraform init"                                  | "Download provider plugins" |
| Validate   | "terraform validate"                              | "Check syntax errors"       |
| Plan       | "terraform plan -<br>var=""hostname=test01"" ..." | "Preview changes"           |

|                      |                                                    |                           |
|----------------------|----------------------------------------------------|---------------------------|
| <b>Apply</b>         | "terraform apply -<br>var=""hostname=test01"" ..." | "Execute provisioning"    |
| <b>Destroy</b>       | "terraform destroy -<br>var=""vmid=200"""          | "Delete resources"        |
| <b>Show State</b>    | "terraform show"                                   | "View current state"      |
| <b>Refresh State</b> | "terraform refresh"                                | "Sync state with reality" |

Example Provisioning Command:

```
terraform apply \
  -var="hostname=docker-vm-01" \
  -var="vmid=201" \
  -auto-approve
```

Output: IP address, VMID, MAC address assigned

State Management Strategy:

Current Implementation:

- State File: Local terraform.tfstate in working directory
- Locking: None (single operator environment)
- Backup: Automated weekly backups to Proxmox Backup Server and Synology NAS

## Configuration Management with Ansible

### Architecture Overview



Ansible provides agentless configuration management through SSH-based automation, enforcing consistent baselines across all managed hosts (Linux, Windows, Cisco, VMware, FreeBSD), managing secrets securely via Ansible Vault, and orchestrating complex multi-host operations using declarative playbooks and Galaxy roles

#### Security Impact

- Configuration drift eliminated through automated enforcement across 40+ hosts
- SSH hardening applied consistently via dedicated playbooks (PermitRootLogin no, key-only auth)
- Credential exposure prevented through Ansible Vault encryption (AES-256) and vault\_\* variable pattern
- Audit trail established via Git-based version control
- Manual errors eliminated through playbooks and connectivity pre-tasks
- Multi-platform coverage: Linux, Windows, Cisco IOS, VMware ESXi, FreeBSD (pfSense/OPNsense)

**Deployment Rationale:** In enterprise environments with 40+ mixed-platform hosts, manual configuration becomes error-prone and time-consuming. This approach reduces configuration time from hours to minutes while ensuring 100% consistency across systems. The lab implementation covers Linux (Debian/RHEL families), Windows Server, Cisco IOS devices, VMware ESXi, and FreeBSD firewalls, demonstrating cross-platform automation capabilities.

### Architecture Principles Alignment

- **Defense in Depth:** SSH hardening playbooks disable weak ciphers and enforce key-based auth; firewall rules (UFW/firewalld) deployed uniformly; fail2ban configured consistently; kernel hardening via sysctl parameters; multi-platform audit playbooks provide visibility across the entire infrastructure stack

- **Secure by Design:** Ansible Vault encrypts sensitive variables (vault\_ansible\_password, vault\_root\_password); no plaintext credentials in playbooks; SSH keys distributed securely via cloud-init; vault.yml encrypted with AES-256
- **Zero Trust:** Every configuration change logged to Git; playbooks verify current configuration before making changes; connectivity pre-tasks skip unreachable hosts gracefully; password rotation workflow requires explicit vault updates

## Setup Overview

### Control plane: Ansible running in a Proxmox LXC

- Deployed from a Proxmox Debian-based LXC ("ansible"), using a Python virtual environment.
- SSH auth is key-based via an "ansible" user.
- Handles initial configuration management to achieve a standard template across all hosts.
  - Standard base packages, DNS, PKI and SSH configurations plus user accounts and permissions.

Control Plane Configuration:

| Component                   | Details                              |
|-----------------------------|--------------------------------------|
| <b>Ansible Controller</b>   | Debian 12 LXC (192.168.x.x)          |
| <b>Ansible Version</b>      | 2.16.x (core)                        |
| <b>Python Environment</b>   | venv isolated (Python 3.11)          |
| <b>Authentication</b>       | SSH key-based (ed25519)              |
| <b>Privilege Escalation</b> | sudo (passwordless for ansible user) |
| <b>Inventory</b>            | Dynamic (Proxmox API) + static YAML  |
| <b>Vault Encryption</b>     | ansible-vault with AES-256           |

## Inventory and Variable Structure

### Inventory Design Principles

The inventory uses a hierarchical group structure with NO host duplication. Each host appears exactly once in a platform-specific group, then aggregated via [group:children] declarations for flexible targeting.

- Host Type Groups: [lxc], [vm], [new]
- OS Family Groups: [debian\_lxc], [debian\_vm], [redhat\_lxc], [redhat\_vm]
- OS Aggregate Groups: [debian], [redhat] (children of lxc+vm OS groups)
- Platform Groups: [windows], [cisco], [vmware], [freebsd], [fortigate]
- Function Groups: [monitoring], [dns], [proxy], [pki], [docker], [k3s]
- Meta Groups: [linux] (all managed Linux hosts – excludes [new])

## Inventory Code Snippets (hosts.ini)

```
#####  
# DEBIAN LXC HOSTS  
#####  
[debian_lxc]  
192.168.1.108    # webserver      web.home.com  
192.168.1.136    # Plex          plex.home.com  
192.168.1.250    # Pi-hole       pihole.home.com  (Docker)  
192.168.1.219    # Wazuh manager wazuh.home.com  
  
[debian_lxc:vars]  
ansible_user=ansible  
ansible_password="{{ vault_ansible_password }}"  
is_lxc=true  
  
#####  
# WINDOWS HOSTS  
#####  
[windows]  
192.168.1.152    # WinServer 2022 / DC  dc01.home.com  
192.168.1.142    # WinServer 2025 / DC  dc02.home.com  
  
[windows:vars]  
ansible_connection=winrm  
ansible_winrm_transport=ntlm  
ansible_port=5985  
ansible_password="{{ vault_ansible_windows_password }}"  
  
#####  
# OS AGGREGATE GROUPS – children only  
#####  
[debian:children]  
debian_lxc  
debian_vm  
  
[linux:children]  
debian  
redhat  
  
#####  
# FUNCTION GROUPS  
#####  
[monitoring]  
192.168.1.181    # Uptime Kuma  
192.168.1.219    # Wazuh  
192.168.1.246    # Grafana
```

## Targeting Examples

```
ansible-playbook playbook.yml --limit linux      # All Linux hosts
ansible-playbook playbook.yml --limit lxc        # All LXC's
ansible-playbook playbook.yml --limit debian     # All Debian (LXC + VM)
ansible-playbook playbook.yml --limit debian_lxc # Debian LXC's only
ansible-playbook playbook.yml --limit lxc --skip-tags reboot # Skip reboot on LXC's
```

## Variable Structure

Variables follow a strict hierarchy: group\_vars/all.yml (global defaults) → group\_vars/vault.yml (encrypted secrets) → group-specific vars → host\_vars/ (host-specific overrides).

Global Variables (group\_vars/all.yml)

```
# Ansible connection
ansible_python_interpreter: auto_silent
ansible_user: ansible
ansible_password: "{{ vault_ansible_password }}"
ansible_become: true
ansible_become_method: sudo
ansible_become_password: "{{ vault_ansible_password }}"
```

```
# SSH public keys
ansible_ssh_pubkey: "ssh-ed25519 AAAAC3..."
officepc_ssh_pubkey: "ssh-ed25519 AAAAC3..."
```

```
# Wazuh agent configuration
wazuh_manager_ip: "192.168.1.219"
wazuh_manager_port: 1514
wazuh_version: "4.14.2-1"
```

```
# CheckMK agent configuration
checkmk_server: "http://192.168.1.126:5000"
checkmk_site: "cmk"
checkmk_version: "2.4.0p20-1"
```

## Vault Structure (group\_vars/vault.yml - Encrypted)

```
vault_ansible_password: "<32-char-random-token>"
vault_root_password: "<complex-password>"
vault_paul_password: "<user-password>"
vault_ansible_windows_password: "<windows-password>"
vault_user_paul_password: "<cisco-password>"
vault_enable_password: "<cisco-enable-password>"
```

## Galaxy Roles and Collections

Ansible Galaxy provides pre-built roles and collections for common tasks. The lab uses officially maintained roles for Wazuh, CheckMK agent deployment Plus support for Windows, VMware, Cisco hosts.

## Core Playbooks - Detailed Overview

### Playbook 1: Multi-Platform System Audit (sys\_audit\_n8n.yml)

Purpose: Comprehensive infrastructure audit across Linux, Windows, and FreeBSD hosts with JSON output for n8n workflow processing

#### Key Features

- Single-play design for all platforms (Linux/Windows/FreeBSD)
- Connectivity pre-checks skip unreachable hosts gracefully
- Platform-specific data collection with conditional blocks
- Consolidated JSON output to /tmp/audit\_report.json
- Integration with n8n for HTML report generation and alerting

#### Data Collected

- System: CPU cores, memory, disk usage %, memory usage %, uptime
- Network: Default gateway, nameservers, listening ports count
- Security: SSH keys count, Windows Defender status, running services
- Software: Kernel version, available updates count

#### Code Snippet - Connectivity Pre-Tasks

```
pre_tasks:
  - name: Check if host is reachable
    ansible.builtin.wait_for_connection:
      timeout: 5
      ignore_unreachable: true
      ignore_errors: true
      register: connection_check

  - name: Gather facts only for reachable hosts
    ansible.builtin.setup:
      when: connection_check is success

  - name: Skip unreachable host
    ansible.builtin.meta: end_host
    when: connection_check is failed or connection_check is unreachable
```

Code Snippet -  
Linux Data  
Collection

```
- name: Collect disk usage (Linux)
  shell: df -h / | tail -n 1 | awk '{print $5}' | sed 's/%//'
  register: disk_usage_pct
  changed_when: false

- name: Collect memory usage (Linux)
  shell: free | grep Mem | awk '{printf "%.0f", ($3/$2) * 100}'
  register: mem_usage_pct
  changed_when: false

- name: Collect package updates (Linux)
  shell: |
    if command -v apt &> /dev/null; then
      apt list --upgradable 2>/dev/null | grep -c upgradable | | echo "0"
    elif command -v dnf &> /dev/null; then
      dnf check-update -q 2>/dev/null | grep -v "^$" | wc -l | | echo "0"
    fi
  register: updates_available
  changed_when: false
```

Code Snippet -  
Windows Data  
Collection

```
- name: Collect disk usage (Windows)
  win_shell: |
    $disk = Get-PSDrive C | Select-Object Used,Free
    [math]::Round(($disk.Used / ($disk.Used + $disk.Free)) * 100, 0)
  register: win_disk_usage

- name: Collect Windows Defender status
  win_shell: (Get-MpComputerStatus).AntivirusEnabled
  register: win_defender_status
  ignore_errors: true
```

Code Snippet -  
JSON  
Consolidation

```
- name: Write consolidated JSON report
  copy:
    content: |
      {
        "report_generated": "{{ ansible_date_time.iso8601 }}",
        "report_date": "{{ ansible_date_time.date }}",
        "total_hosts": {{ collected_audit_data | length }},
        "hosts": {{ collected_audit_data | to_nice_json }}
      }
    dest: "/tmp/audit_report.json"
  delegate_to: localhost
  run_once: true
```

## Use Cases

- Weekly infrastructure audits via n8n automation
- Pre-maintenance compliance checks
- Capacity planning via disk/memory trending
- Security baseline validation (SSH keys, services, updates)

## Playbook 2: User Management (User\_mgmt.yml)

Purpose: Centralized user account and credential management across all Linux hosts with Ansible Vault integration

### Key Features

- Sets ansible user password from vault\_ansible\_password
- Sets root password from vault\_root\_password
- Manages paul user with sudo access (password-based)
- Deploys SSH keys for authorized users
- Verifies ansible key-based auth after password rotation

Code Snippet - Ansible  
User Password  
Management

```
- name: Set ansible user password from vault
  tags: ansible_user
  ansible.builtin.user:
    name: ansible
    password: "{{ vault_ansible_password | password_hash('sha512') }}"
    update_password: always

- name: Verify ansible SSH key is still present
  tags: ansible_user, verify
  ansible.posix.authorized_key:
    user: ansible
    key: "{{ ansible_ssh_pubkey }}"
    state: present
```

## Code Snippet - Paul User with Sudo Configuration

```
- name: Ensure paul user exists
ansible.builtin.user:
  name: paul
  shell: /bin/bash
  groups: "{{ 'sudo' if ansible_os_family == 'Debian' else 'wheel' }}"
  append: true
  password: "{{ vault_paul_password | password_hash('sha512') }}"

- name: Deploy sudoers file for paul
ansible.builtin.copy:
  content: |
    Defaults:paul rootpw
    paul ALL=(ALL) ALL, !/usr/bin/su
  dest: /etc/sudoers.d/paul
  owner: root
  group: root
  mode: '0440'
  validate: '/usr/sbin/visudo -cf %s'
```

## Password Rotation Workflow

- Generate 32-char token: openssl rand -base64 24
- Update vault\_ansible\_password in vault.yml: ansible-vault edit group\_vars/vault.yml
- Run playbook: ansible-playbook user\_mgmt.yml --tags ansible\_user
- Test connectivity: ansible linux -m ping

## Use Cases

- Quarterly credential rotation (automated via n8n)
- Emergency password resets
- New host bootstrap user provisioning
- SSH key distribution after key rotation

## Playbook 3: Linux Package Updates (update\_linux\_hosts.yml)

Purpose: Update all Linux hosts with dist-upgrade/dnf update and reboot detection

### Key Features

- Debian: apt dist-upgrade with autoremove/autoclean
- RedHat: dnf update with latest packages
- Reboot detection for kernel updates
- Free strategy for parallel execution
- Update summary with reboot status

Code Snippet - Debian Package Updates & Reboot Detection.

```
- name: Update all packages (Debian)
  tags: packages, update
  apt:
    upgrade: dist
    update_cache: true
    cache_valid_time: 3600
    autoremove: true
    autoclean: true
  when: ansible_os_family == "Debian"
  register: apt_update

- name: Check if reboot required (Debian)
  tags: reboot
  stat:
    path: /var/run/reboot-required
  register: reboot_deb
  when: ansible_os_family == "Debian"
```

### Use Cases

- Weekly package updates (n8n automation)
- Security patch deployment
- Post-vulnerability scanning remediation
- Compliance maintenance (keep systems current)

## Playbook 4: Linux Hardening (linux\_hardening.yml)

Purpose: Docker-aware SSH and system hardening with automatic Docker detection

### Key Features

- SSH hardening: disable root login, enforce key-only auth
- TCP/Agent forwarding enabled for Docker/DevOps workflows
- Automatic Docker detection preserves IP forwarding
- Safe kernel parameters (sysctl hardening)
- Login banner deployment

## Code Snippet - Docker Detection

```
- name: Detect if Docker is installed
  stat:
    path: /usr/bin/docker
    register: docker_check

- name: Set Docker presence fact
  set_fact:
    has_docker: "{{ docker_check.stat.exists }}"

- name: Configure sysctl for Docker hosts
  sysctl:
    name: net.ipv4.ip_forward
    value: '1'
    state: present
    sysctl_set: true
    when: has_docker | bool
```

## Code Snippet - SSH Hardening

```
- name: Configure SSH hardening options
  lineinfile:
    path: /etc/ssh/sshd_config
    regexp: '^#?{{ item.key }}\s'
    line: '{{ item.key }} {{ item.value }}'
    state: present
  loop:
    - { key: 'PermitRootLogin', value: 'no' }
    - { key: 'PasswordAuthentication', value: 'no' }
    - { key: 'PubkeyAuthentication', value: 'yes' }
    - { key: 'AllowAgentForwarding', value: 'yes' }
    - { key: 'AllowTcpForwarding', value: 'yes' }
  notify: restart sshd
```

## Use Cases

- New host security baseline
- Docker host specialized hardening
- Compliance enforcement (CIS benchmarks)
- Post-compromise hardening

## Playbook 5: New Install Baseline (new\_install\_baseline\_roles.yml)

Purpose: Bootstrap new hosts with baseline configuration using Galaxy roles

## Roles Used

- wazuh.wazuh\_agent (version: 4.14.2)
- Custom bootstrap tasks (user creation, SSH, sudo)

## Key Features

- Creates ansible service account with passwordless sudo
- Deploys SSH keys for ansible and paul users
- Configures sudoers with validation
- Installs Wazuh agent and registers with manager
- Installs utility packages (curl, nano, dig, traceroute)
- Enables qemu-guest-agent for Proxmox integration

#### Code Snippet - User Creation

```
- name: Create ansible user
ansible.builtin.user:
  name: ansible
  shell: /bin/bash
  password: "{{ vault_ansible_password | password_hash('sha512') }}"
  comment: "Ansible Automation Service Account"

- name: Ensure .ssh directory exists
file:
  path: /home/ansible/.ssh
  state: directory
  owner: ansible
  group: ansible
  mode: '0700'

- name: Add SSH key for ansible user
ansible.posix.authorized_key:
  user: ansible
  key: "{{ ansible_ssh_pubkey }}"
  state: present

- name: Deploy sudoers file for ansible user (passwordless)
ansible.builtin.copy:
  content: "ansible ALL=(ALL) NOPASSWD:ALL\n"
  dest: /etc/sudoers.d/ansible
  mode: '0440'
  validate: '/usr/sbin/visudo -cf %s'
```

#### Use Cases




- Fresh install bootstrap (first playbook to run)
- Wazuh agent deployment across new hosts
- Monitoring stack integration
- Standardized user/SSH configuration

# Version Control and GitOps

## Version Control Strategy

All infrastructure-as-code assets for this solution — including Ansible playbooks, Terraform configurations, and related modules — are stored in a dedicated GitHub repository using Git on the local host.

This [central repository](#) provides:

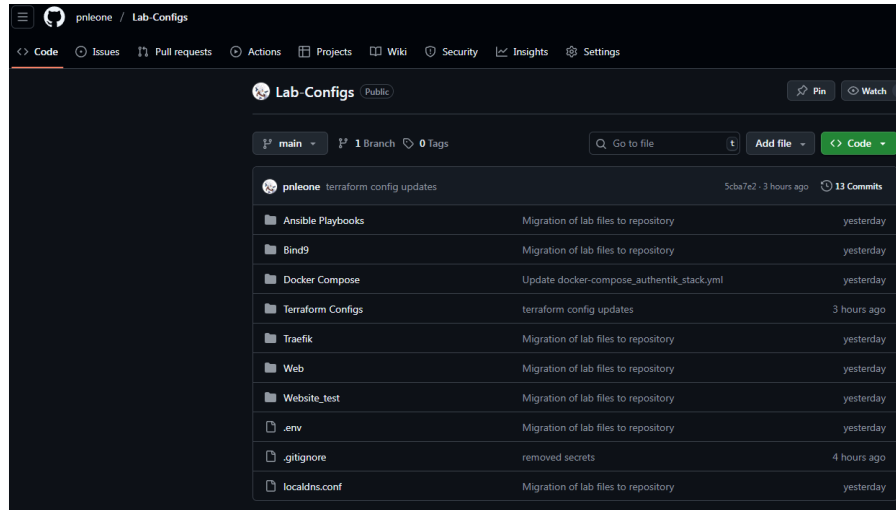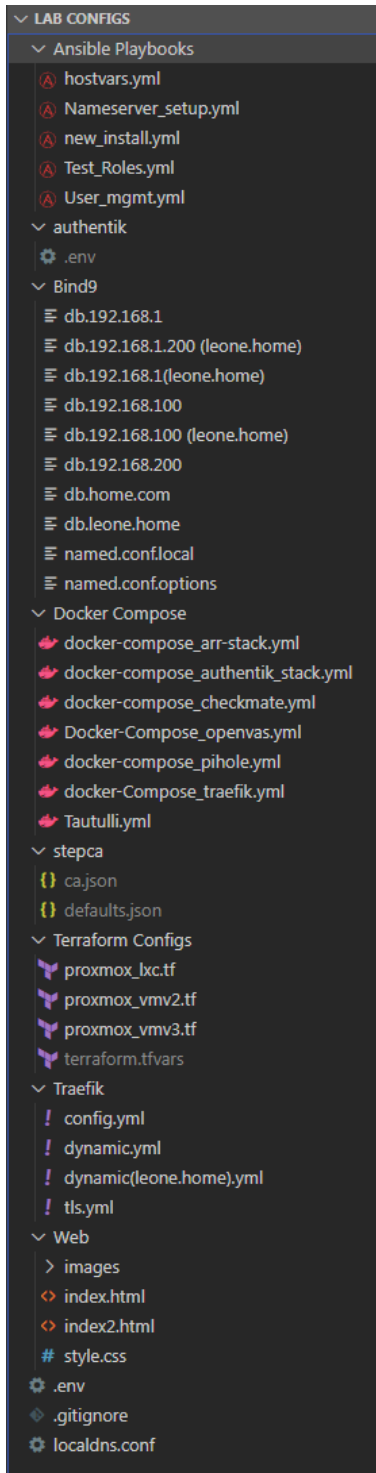

- **Version history** – Every change is committed with a message on what changed, enabling full audit trails for infrastructure modifications.
- **Consistency across environments** – Ansible roles and Terraform modules are version-locked so the same codebase can be applied to multiple hosts.
- **Rollback capability** – Previous commits can be checked out to restore infrastructure to a known good state quickly in case of issues.

Configuration files for hosted and platform services — including YAML, JSON, HTML, CSS, Python, and PowerShell scripts — are stored in a separate repository. This repository is fully integrated with Visual Studio Code, allowing seamless local and remote (via SSH) integration editing.

By keeping both provisioning (Terraform) and configuration management (Ansible) in one repository, and separating hosted/platform service configs into another, the architecture ensures that each layer of the stack is versioned, auditable, and maintainable.

# Workflow Automation with n8n

## Platform Overview



n8n is a self-hosted, low-code workflow automation platform enabling visual workflow design with conditional logic, error handling, loops, and data transformation. Deployed as a containerized service behind Traefik reverse proxy with Authentik SSO.

### Security Impact

- Security operations accelerated through automated SOAR workflows
- Manual triage eliminated via automated alert enrichment
- MTTR reduced through auto-generated remediation playbooks
- Alert fatigue minimized through intelligent deduplication and correlation
- Compliance audit trails automatically documented throughout the incident lifecycle

**Deployment Rationale:** Security operations generate thousands of events daily, manual triage is unsustainable. n8n demonstrates Security Orchestration, Automation and Response (SOAR) capabilities where vulnerability scans trigger automated ticket creation, threat intelligence enrichment queries multiple APIs, and incident response playbooks execute without human intervention. This mirrors enterprise SOAR platforms (Splunk SOAR, Palo Alto Cortex XSOAR) where analyst efficiency is multiplied through automation.

### Architecture Principles Alignment

- **Defense in Depth:** Automated vulnerability remediation workflows execute Ansible playbooks; firewall rule changes logged and reviewed; failed automation triggers manual fallback procedures
- **Secure by Design:** Credentials stored in n8n credential vault (encrypted at rest); webhook endpoints authenticated via Authentik tokens; workflow execution logs forwarded to SIEM
- **Zero Trust:** Every automation action logged with timestamp/user; no hardcoded credentials; API tokens expire and rotate automatically

### n8n Configuration:

- Version: n8n v2.7.5 (latest stable)
- Execution Mode: Main process (not queue mode for simplicity)
- Webhook URL: <https://n8n.home.com>
- TLS Certificate: Step-CA issued, auto-renewed
- Authentication: SSO via Authentik (no local passwords)
- Monitoring: Uptime Kuma
- Notifications: Discord webhooks, smtp relay

### Security Controls:

- Credential Encryption: All API tokens encrypted at rest, Ansible automated (ansible-vault)
- Webhook Security: HMAC signature validation on inbound webhooks
- Audit Trail: All workflow executions logged with timestamp and user


## Workflow 1: Lab Infrastructure Audit

**Purpose:** Automated weekly configuration audit and system updates across lab infrastructure with HTML reporting and dual alerting (Discord + Email)

This workflow runs weekly on Sunday at 2am, executes the Ansible `sys_audit_n8n.yml` playbook, transforms the JSON output into a styled HTML report, deploys it to the Apache webserver, and sends notifications via Discord and email.

## Workflow Summary

- Scheduled Execution: Triggered weekly via n8n's Cron node (Sunday 2 AM)
- Ansible Playbook: Executes sys\_audit\_n8n.yml via SSH to collect system metrics
- Data Transformation: Parses JSON and generates HTML report with CSS styling
- Apache Upload: Deploys HTML to /var/www/html/ and updates index page
- Discord Alert: Sends formatted notification with report link and summary stats
- Email Alert: Sends HTML email template with audit summary

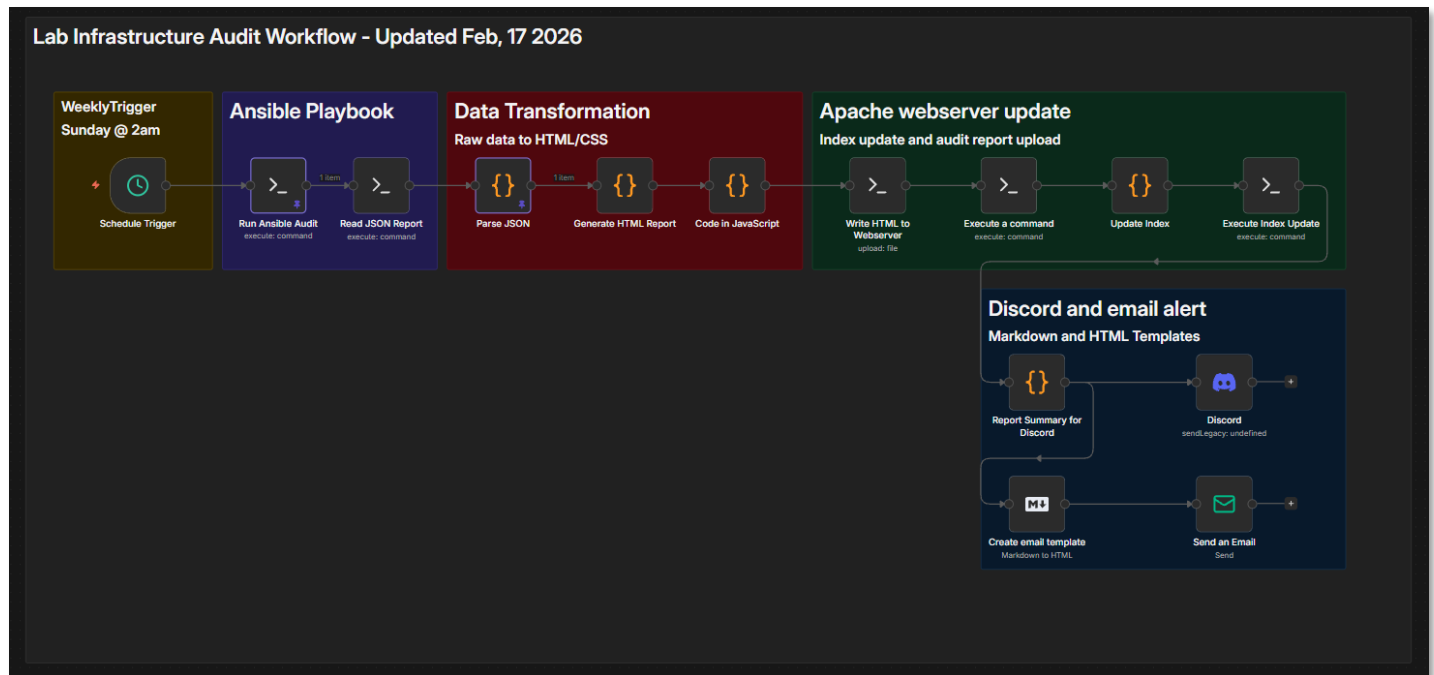

## Workflow Nodes

| Node Type        | Configuration                         | Purpose                   |
|------------------|---------------------------------------|---------------------------|
| Schedule Trigger | Cron: 0 2 * * 0 (Sunday 2 AM)         | Weekly execution          |
| SSH Node 1       | ansible-playbook<br>sys_audit_n8n.yml | Run audit playbook        |
| SSH Node 2       | cat<br>/tmp/audit_report.json         | Read JSON output          |
| Code Node 1      | Parse JSON from stdout                | Extract audit data        |
| Code Node 2      | Generate HTML with CSS                | Create styled report      |
| SSH Node 3       | Write HTML to webserver               | Deploy to Apache          |
| SSH Node 4       | Update index.html                     | Add report to index       |
| Code Node 3      | Generate Discord<br>markdown          | Format alert message      |
| Discord Webhook  | POST to webhook URL                   | Send Discord notification |
| Code Node 4      | Generate email HTML                   | Format email template     |
| Email Node       | SMTP send                             | Send email notification   |

## HTML Report Features

- Responsive grid layout with host cards
- Platform-specific color coding (Linux/Windows FreeBSD)
- Visual metrics with progress bars for disk/memory usage

- Warning/critical thresholds highlighted (>75% yellow, >90% red)
- Summary statistics cards (total hosts, high disk/memory usage counts)
- Timestamp and audit metadata in footer

Apache webserver landing page:

# Lab Infrastructure Audit Archive

Automated System Audits - Historical Records

## About This Archive

This archive contains automated infrastructure audits generated by Ansible playbooks and processed through n8n workflows. Each audit provides a comprehensive snapshot of all lab hosts including Linux servers, Windows machines, network devices, hypervisors, and FreeBSD firewalls. Audits are generated weekly at 2:00 AM on Saturdays.

9  
TOTAL REPORTS

2026-03-15  
LATEST AUDIT

Weekly  
SCHEDULE


All Platforms  
COVERAGE

### Available Audit Reports

| REPORT DATE | GENERATED TIMESTAMP | TOTAL HOSTS | ACTIONS                     |
|-------------|---------------------|-------------|-----------------------------|
| 2026-03-15  | 2026-03-15 05:02:09 | 28 hosts    | <a href="#">View Report</a> |
| 2026-03-08  | 2026-03-08 07:02:18 | 23 hosts    | <a href="#">View Report</a> |
| 2026-03-02  | 2026-03-02 23:14:32 | 30 hosts    | <a href="#">View Report</a> |
| 2026-02-25  | 2026-02-25 07:26:53 | 34 hosts    | <a href="#">View Report</a> |
| 2026-02-17  | 2026-02-17 10:02:43 | 34 hosts    | <a href="#">View Report</a> |
| 2026-02-17  | 2026-02-17 10:02:43 | 34 hosts    | <a href="#">View Report</a> |
| 2026-02-16  | 2026-02-16 14:16:48 | 34 hosts    | <a href="#">View Report</a> |
| 2026-02-16  | 2026-02-16 08:28:33 | 3 hosts     | <a href="#">View Report</a> |
| 2026-02-16  | 2026-02-16 07:53:50 | 31 hosts    | <a href="#">View Report</a> |

Automated Infrastructure Audit System | Powered by Ansible + n8n | Lab Network - Authorized Access Only

Example Audit Report:

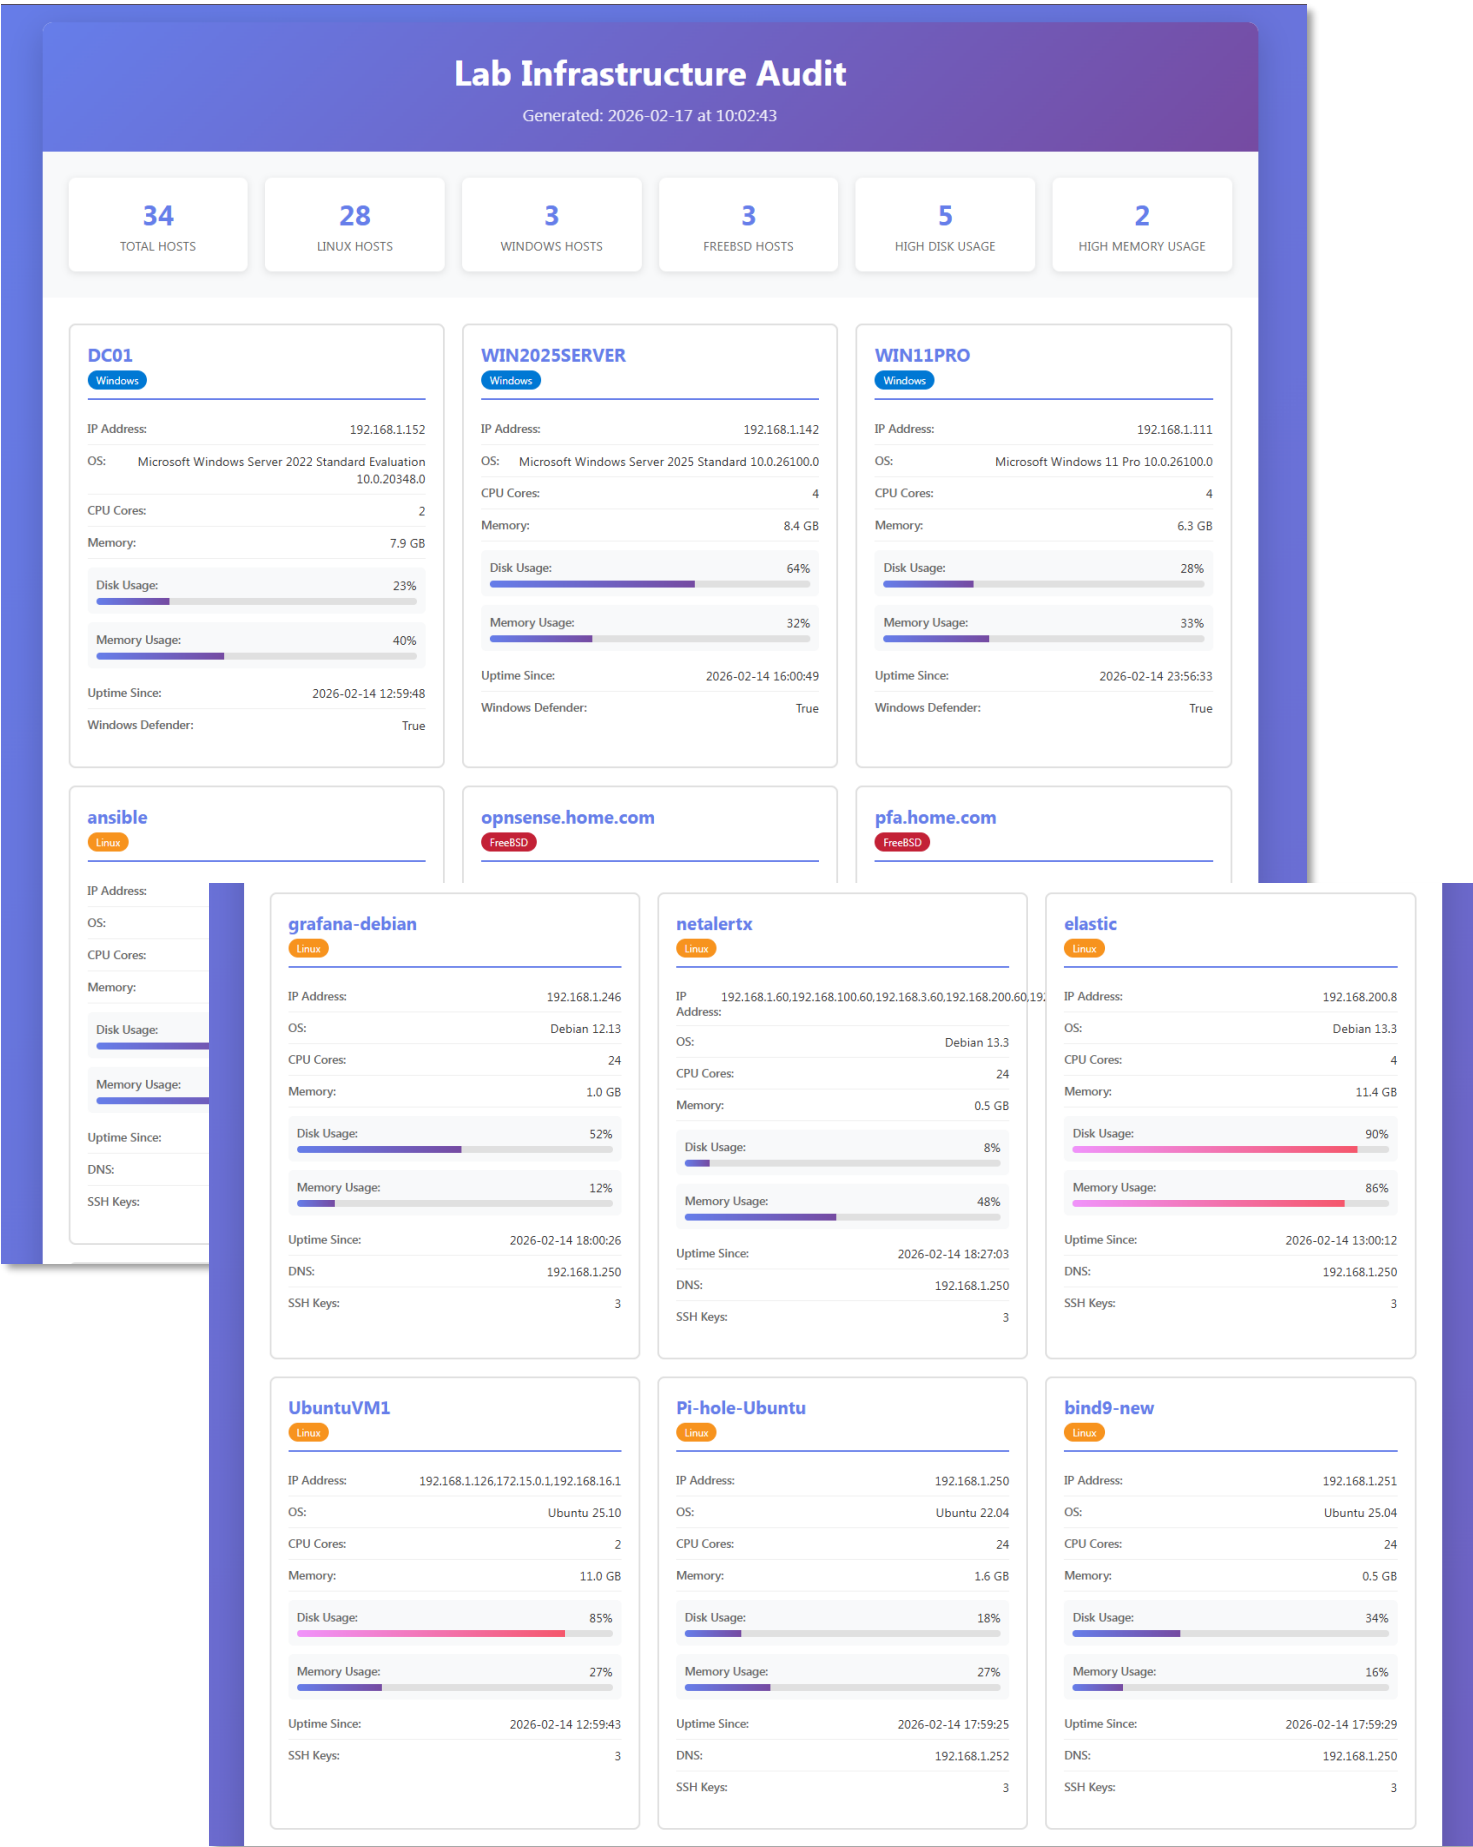

Example Email and Discord Alerts:

n8n Automated System Audit Alert

Delete

Archive

Report

Move to

Reply

Zoom

Quick steps

Read / Unread

Categorize

Flag / Unflag

Print

n8n Automated System Audit Alert

p

pnleone17@gmail.com

To: soc@shadowitlab.com

Security Operations Center Alert

From: n8n Automated System Audits

To: Security Team

Subject: audit\_2026-02-17T12-04-26.html uploaded to Apache webserver

Summary

Lab Infrastructure Audit Workflow Completed, Apache webserver updated, audit\_2026-02-17T12-04-26.html uploaded to the internal [Web Portal](#).

Details

Timestamp: 2026-02-17 @ 10:02:43

Total Hosts: 34

Summary by OS Family


- Windows: 3 hosts
- Debian: 24 hosts
- FreeBSD: 3 hosts
- RedHat: 4 hosts

Summary by OS Distribution

- Microsoft Windows Server 2022 Standard Evaluation 10.0.20348.0: 1 host
- Microsoft Windows Server 2025 Standard 10.0.26100.0: 1 host
- Microsoft Windows 11 Pro 10.0.26100.0: 1 host
- Debian 18.0-bookworm-amd64: 1 host
- FreeBSD 14.3: 1 host
- FreeBSD 15.0: 2 hosts
- Debian 12.13: 10 hosts
- Debian 13.3: 5 hosts
- Ubuntu 25.10: 3 hosts
- Ubuntu 22.04: 3 hosts
- Ubuntu 25.04: 2 hosts
- RedHat 10.1: 2 hosts
- Fedora 43: 1 host
- CentOS 9: 1 host

-- End of report --

SECURITY  
OPERATIONS  
CENTER



-- End of message --

This email was sent automatically with [n8n](#)

ansible

APP

7:39 AM

Lab Infrastructure Audit Workflow Completed

Apache webserver updated, audit\_2026-02-17T12-04-26.html uploaded to the internal [portal](#). Report completed 2026-02-17.

Total Hosts: 34

Summary by OS Family

- Windows: 3 hosts
- Debian: 24 hosts
- FreeBSD: 3 hosts
- RedHat: 4 hosts

---

Summary by OS Distribution

- Microsoft Windows Server 2022 Standard Evaluation 10.0.20348.0: 1 host
- Microsoft Windows Server 2025 Standard 10.0.26100.0: 1 host
- Microsoft Windows 11 Pro 10.0.26100.0: 1 host
- Debian 18.0-bookworm-amd64: 1 host
- FreeBSD 14.3: 1 host
- FreeBSD 15.0: 2 hosts
- Debian 12.13: 10 hosts
- Debian 13.3: 5 hosts
- Ubuntu 25.10: 3 hosts
- Ubuntu 22.04: 3 hosts
- Ubuntu 25.04: 2 hosts
- RedHat 10.1: 2 hosts
- Fedora 43: 1 host
- CentOS 9: 1 host


## Workflow 2: Threat Intelligence Aggregation

**Purpose:** Daily ingestion and distribution of curated cybersecurity threat intelligence with AI-powered summarization

This workflow runs daily at 8am to ingest and distribute curated threat intelligence from multiple cybersecurity RSS feeds. It supports situational awareness and IOC enrichment across the lab environment.

### Workflow Summary

- Scheduled Execution: Triggered daily via n8n's Cron node (6 AM)
- RSS Feed Polling: Pulls entries from curated list of cybersecurity sources
- Feed Limiting: Filters each feed to articles added in the last 24 hours to reduce noise
- ChatGPT Integration: NIST feed summarized via OpenAI API
- Discord Notification: Formatted aggregated feed summary to #threat-intel channel

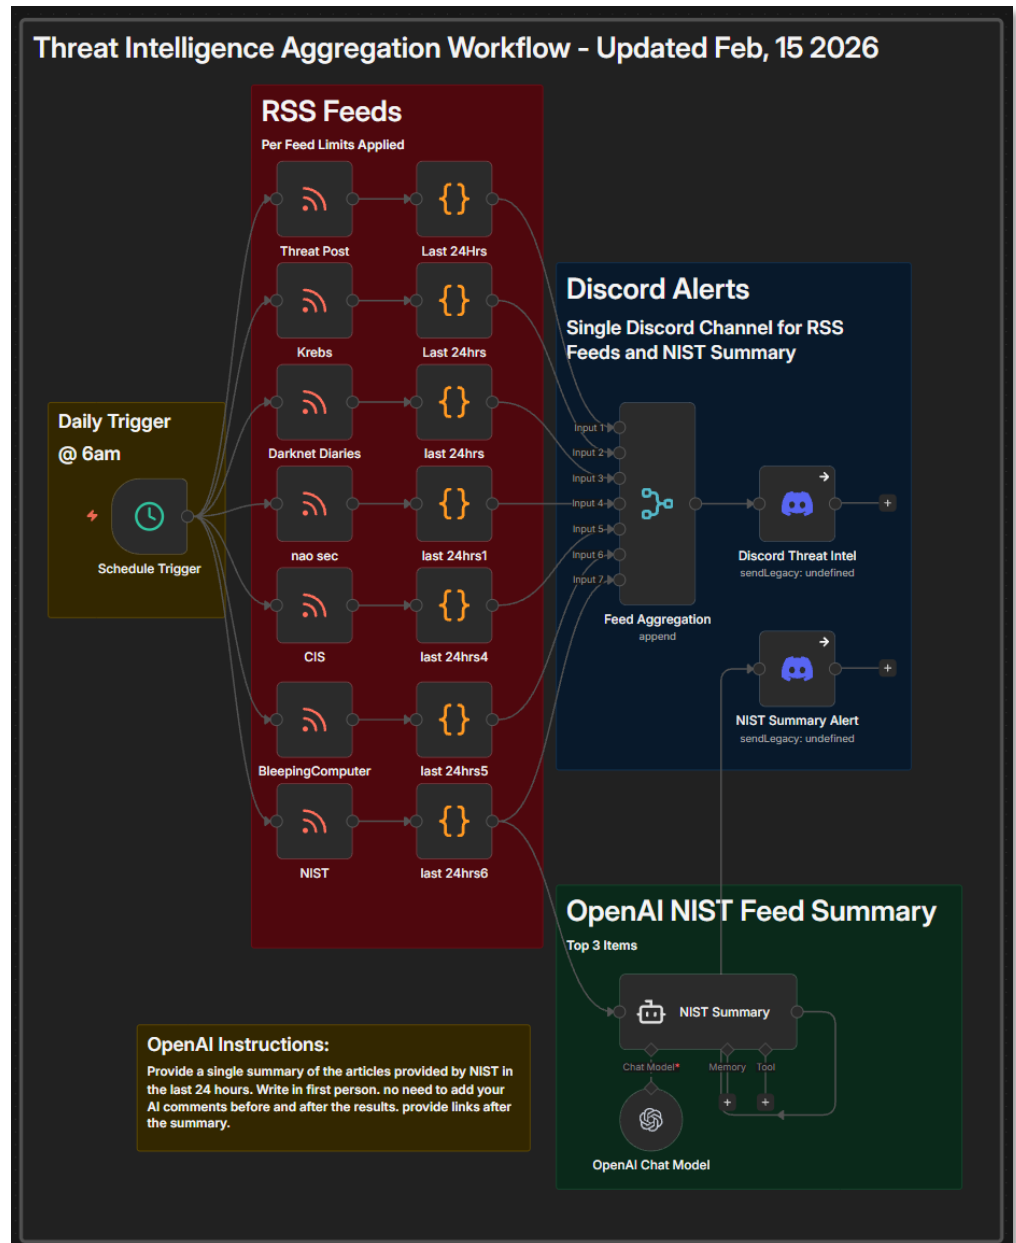

### RSS Feeds

- Darknet Diaries (<https://podcast.darknetdiaries.com/>)
- NIST (<https://www.nist.gov/blogs/cybersecurity-insights/rss.xml>)
- Krebs on Security (<https://krebsonsecurity.com/feed/>)
- Threat Post (<https://threatpost.com/feed/>)
- BleepingComputer (<https://www.bleepingcomputer.com/feed/>)
- CIS (<https://www.cisecurity.org/feed/advisories>)
- NAO SEC (<https://nao-sec.org/feed>)

### Workflow Nodes

| Node Type               | Configuration                                             | Purpose             |
|-------------------------|-----------------------------------------------------------|---------------------|
| <b>Schedule Trigger</b> | Cron: 0 8 * * * (Daily 6 AM)                              | Daily execution     |
| <b>RSS Feed Reader</b>  | URLs: CIS, NIST, Krebs, ThreatPost, BleepingComputer, etc | Ingest threat intel |
| <b>Filter Node</b>      | Limit each feed to the last 24 hours                      | Reduce noise        |
| <b>Merge Node</b>       | Combine all feeds                                         | Aggregate data      |
| <b>OpenAI Node</b>      | Summarize NIST feed with ChatGPT                          | AI-powered summary  |
| <b>Format Node</b>      | Create Discord embed message                              | Visual formatting   |
| <b>Discord Webhook</b>  | POST to #threat-intel channel                             | Distribute to team  |

#### Workflow Benefits

- Centralized threat intelligence (7 sources → 1 channel)
- AI-powered summarization reduces information overload
- Daily cadence ensures timely awareness of emerging threats
- Supports incident response and vulnerability management

## NIST Summary Alert:



threatfeed APP 8:21 AM

With the new year underway, we at NIST remain deeply committed to strengthening cybersecurity through ongoing collaboration with our international partners. Over the past few months, we have actively engaged in conversations worldwide regarding the update to the NIST Cybersecurity Framework (CSF) 2.0. We shared the draft version publicly, inviting comments until November 2023, and we expect to release the final version soon. Our international efforts also continue through support for the Department of State and other U.S. government initiatives, reinforcing our commitment to promoting global cybersecurity resilience and cooperation.

### Links:

- NIST Cybersecurity Framework (CSF) 2.0 Draft: <https://www.nist.gov/cyberframework>
- NIST International Cybersecurity Engagement: <https://www.nist.gov/topics/cybersecurity>
- Department of State Cybersecurity Initiatives: <https://www.state.gov/cybersecurity/>

NIST

### Cybersecurity Framework

Helping organizations to better understand and improve their management of cybersecurity risk



NIST

### Cybersecurity and privacy

NIST develops cybersecurity and privacy standards, guidelines, best practices, and resources to meet the needs of U.S.



It's been four years since we released The NIST Privacy Framework: A Tool for Improving Privacy Through Enterprise Risk Management, Version 1.0, and we've been thrilled to see how many organizations have found it valuable in building or enhancing their privacy programs. Over this time, we've also developed a range of supportive resources to help with its implementation, reflecting our commitment to continuous improvement. But we know the landscape is always evolving; as Bob Dylan wisely sang, "the times they are a-changin'." This past year, for example, we introduced the NIST AI Risk Management Framework to address the emerging challenges in artificial intelligence, complementing and expanding our efforts around risk-based approaches to privacy and security. Our work continues as we focus on adapting to new technologies and evolving risks to better serve organizations in managing privacy and risk comprehensively.

### Links:

- NIST Privacy Framework: <https://www.nist.gov/privacy-framework>
- NIST AI Risk Management Framework: <https://www.nist.gov/ai-risk-management-framework>

## Example Discord Alerts:



threatfeed [APP] 12:47 PM

Tue, 17 Feb 2026 10:37:45 -0500

Microsoft Teams outage affects users in United States, Europe

<https://www.bleepingcomputer.com/news/microsoft/microsoft-teams-outage-affects-users-in-us-europe/>

Creator: Sergiu Gatlan

BleepingComputer

### Microsoft Teams outage affects users in United States, Europe

Microsoft is working to resolve an ongoing outage affecting Microsoft Teams users, causing delays and preventing some from accessing the service.



Tue, 17 Feb 2026 09:40:49 -0500

What 5 Million Apps Revealed About Secrets in JavaScript

<https://www.bleepingcomputer.com/news/security/what-5-million-apps-revealed-about-secrets-in-javascript/>

Creator: Sponsored by Intruder

BleepingComputer

### What 5 Million Apps Revealed About Secrets in JavaScript

Leaked API keys are nothing new, but the scale of the problem in front-end code has been largely a mystery - until now. Intruder's research team built a new secrets detection method and scanned 5 million applications specifically looking for secrets hidden in JavaScript bundles. Here's what we learned.



Tue, 17 Feb 2026 09:05:25 -0500

New Keenadu backdoor found in Android firmware, Google Play apps

<https://www.bleepingcomputer.com/news/security/new-keenadu-backdoor-found-in-android-firmware-google-play-apps/>

The Washington Hotel brand in Japan has announced that its servers were compromised in a ransomware attack, exposing various business data.



Mon, 16 Feb 2026 14:19:09 -0500

Eurail says stolen traveler data now up for sale on dark web

<https://www.bleepingcomputer.com/news/security/eurail-says-stolen-traveler-data-now-up-for-sale-on-dark-web/>

Creator: Bill Toulas

BleepingComputer

### Eurail says stolen traveler data now up for sale on dark web

Eurail B.V., the operator that provides access to 250,000 kilometers of European railways, confirmed that data stolen in a breach earlier this year is being offered for sale on the dark web.



Mon, 16 Feb 2026 14:13:39 -0500

Man arrested for demanding reward after accidental police data leak

<https://www.bleepingcomputer.com/news/security/man-arrested-for-demanding-reward-after-police-data-leak/>

Creator: Sergiu Gatlan

BleepingComputer

### Man arrested for demanding reward after accidental police data leak


Dutch authorities arrested a 40-year-old man after he downloaded confidential documents that had been mistakenly shared by the police and refused to delete them unless he received "something in return."



### Workflow 3: Weekly Package Manager Updates with Alerting

**Purpose:** Automated weekly package manager updates across all Linux hosts with Discord and email alerting

This workflow runs weekly on Friday at 3am, executes the update\_linux\_hosts.yml Ansible playbook, parses the output to categorize update results, and sends formatted notifications via Discord and email.

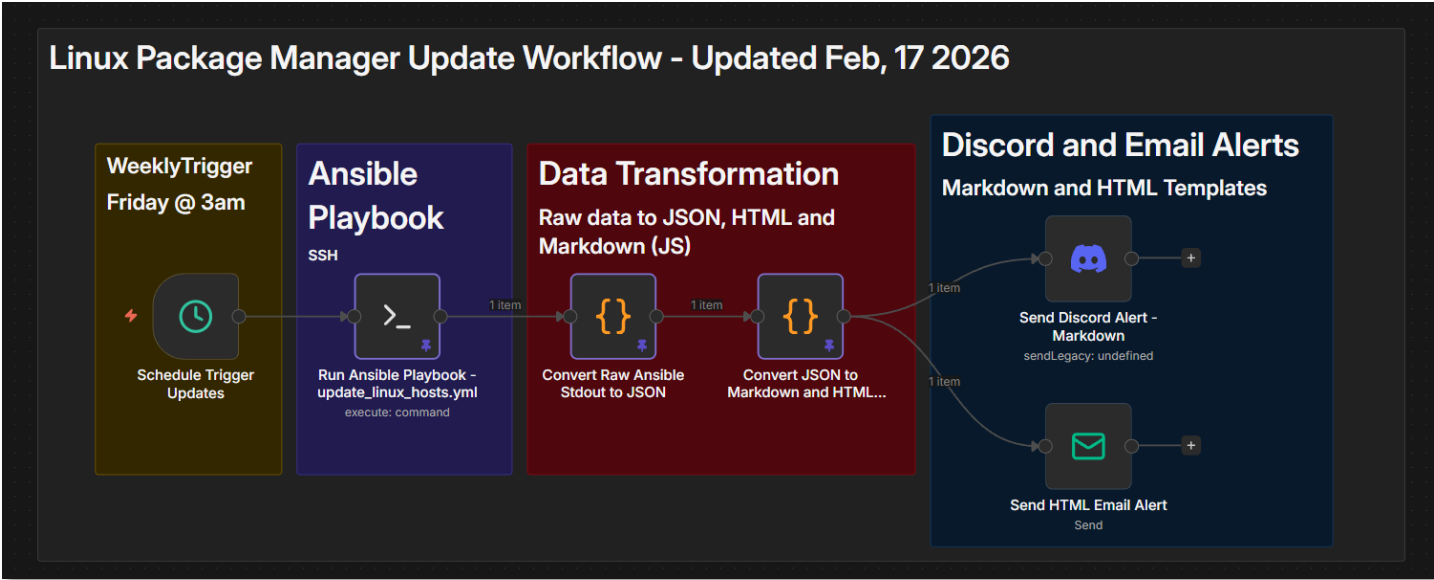

#### Workflow Summary

- Scheduled Execution: Weekly trigger (Friday 3 AM)
- Ansible Playbook: Executes update\_linux\_hosts.yml for apt/dnf updates
- Data Parsing: Converts raw Ansible stdout to structured JSON
- Update Categorization: Hosts grouped by status (no updates, updated, reboot required, errors)
- Markdown Generation: Creates formatted summary for Discord
- HTML Generation: Creates formatted report for email
- Discord Alert: Sends markdown summary with status counts
- Email Alert: Sends HTML email with detailed update report

#### Workflow Nodes

| Node Type        | Configuration                                                             | Purpose                       |
|------------------|---------------------------------------------------------------------------|-------------------------------|
| Schedule Trigger | Cron: 0 3 * * 5 (Friday 3 AM)                                             | Weekly execution              |
| SSH Node         | ansible-playbook<br>update_linux_hosts.yml                                | Run package updates           |
| Code Node 1      | Parse stdout: extract<br>reachable/unreachable<br>hosts, summaries, recap | Convert to structured<br>JSON |
| Code Node 2      | Generate markdown and<br>HTML summaries with<br>categorization            | Format alert content          |
| Discord Node     | POST markdown summary                                                     | Send Discord notification     |
| Email Node       | SMTP send HTML report                                                     | Send email notification       |

#### Data Flow and Parsing Logic

The workflow parses Ansible's stdout output to extract comprehensive update information:

- Reachable Hosts: Extracted from 'ok: [hostname]' lines
- Unreachable Hosts: Extracted from 'fatal: [hostname]' lines
- Update Summaries: Parsed from 'msg' fields containing platform, packages updated, reboot status
- Play Recap: Structured data showing ok/changed/failed/skipped counts per host

### **Host Categorization**

Hosts are automatically categorized based on update results:

- No Updates Required: Hosts with packages\_updated = False
- Updates Applied: Hosts with packages\_updated = True and reboot\_required = False
- Reboot Required: Hosts with reboot\_required = True
- Errors Detected: Hosts with empty/null platform, packages\_updated, reboot\_required
- Unreachable: Hosts that failed connectivity checks

## Code Snippet - Stdout to JSON Parsing

```
// Parse Ansible stdout into structured data
const stdout = $input.first().json.stdout;
const lines = stdout.split('\n');

// Extract reachable and unreachable hosts
let reachable = [];
let unreachable = [];

for (const line of lines) {
  const okMatch = line.match(/^ok:\s+\[(.*?)\]/);
  if (okMatch) reachable.push(okMatch[1]);

  const fatalMatch = line.match(/^fatal:\s+\[(.*?)\]/);
  if (fatalMatch) unreachable.push(fatalMatch[1]);
}

// Parse update summaries from msg fields
let summaries = [];
let currentHost = null;

for (const line of lines) {
  const hostMatch = line.match(/^ok:\s+\[(.*?)\]\s+=>/);
  if (hostMatch) currentHost = hostMatch[1];

  if (line.includes('"msg":')) {
    const msg = line.replace(/.*"msg":\s+"|",?$/g, "");
    const platform = (msg.match(/Platform:\s+(.*)/) || []).pop();
    const updated = (msg.match(/Packages updated:\s+(.*)/) || []).pop();
    const reboot = (msg.match(/Reboot required:\s+(.*)/) || []).pop();

    summaries.push({
      host: currentHost,
      platform,
      packages_updated: updated,
      reboot_required: reboot
    });
  }
}

return [{ json: { total_hosts, reachable_hosts, unreachable_hosts,
update_summaries, recap } }];
```

## Code Snippet - Categorization and Formatting

### Workflow Benefits

- Automated weekly package updates reduce manual maintenance
- Categorized results prioritize attention (errors and reboots first)
- Dual alerting ensures visibility across communication channels
- Structured parsing enables trend analysis over time
- Unreachable host detection prevents silent failures

### Use Cases

- Weekly security patch deployment
- Compliance maintenance (systems up-to-date)
- Post-vulnerability scanning remediation
- Reboot planning based on kernel updates
- Infrastructure health monitoring

```
// Categorize hosts by update status
const noUpdates = [];
const updatesApplied = [];
const rebootRequired = [];
const errorsDetected = [];

for (const s of normalized) {
  if (s.error) {
    errorsDetected.push(s.host);
  } else if (s.reboot) {
    rebootRequired.push(s.host);
  } else if (s.updated) {
    updatesApplied.push(s.host);
  } else {
    noUpdates.push(s.host);
  }
}

// Generate markdown for Discord
const md = `
## Linux Update Summary

**Total Hosts:** ${total}
**Reachable:** ${reachable.length}
**Unreachable:** ${unreachable.length}

🟢 No Updates Required (${noUpdates.length})
${noUpdates.map(h => \`${h}\`).join("\n")}

🟡 Updates Applied (${updatesApplied.length})
${updatesApplied.map(h => \`${h}\`).join("\n")}

🔴 Reboot Required (${rebootRequired.length})
${rebootRequired.map(h => \`${h}\`).join("\n")}

🔴 Errors Detected (${errorsDetected.length})
${errorsDetected.map(h => \`${h}\`).join("\n")}
`;

return [{ json: { markdown: md, html: html } }];
```

Discord and Email Alert Example:

Linux Package Manager Update Workflow Completed

Linux Update Summary

Total Hosts: 32  
Reachable: 27  
Unreachable: 5

Reachable Hosts Summary

No Updates Required (23)

192.168.1.108

192.168.1.136

192.168.1.250

192.168.1.251

192.168.1.252

192.168.1.181

192.168.1.4

192.168.1.219

192.168.100.51

192.168.1.247

192.168.100.15

192.168.1.33

192.168.2.5

192.168.100.4

192.168.200.7

192.168.1.60

192.168.2.12

192.168.3.5

192.168.1.126

192.168.1.166

192.168.200.8

192.168.1.89

192.168.200.21

Updates Applied (0)

None

Reboot Required (2)

192.168.1.93

192.168.100.5

Errors Detected (1)

192.168.200.22

Unreachable Hosts (5)

192.168.1.109

192.168.1.100

192.168.1.246

10.20.0.1

192.168.100.16

n8n Automated System Audit Alert

DeleteArchiveReportMove toReplyZoomLinkShareCalendarPrintMore

n8n Automated System Audit Alert

To: soc@shadowitlab.com

Security Operations Center Alert

From: n8n Automated System Updates

To: Security Team

Subject: Linux Package Manager Update Workflow Completed @ February 17th 2026, 11:15:46 am

Summary

Linux Infrastructure Update Workflow Completed

Workflow Start Time: February 17th 2026, 11:15:46 am

Workflow End Time: 2026-02-17T11:25:09.056-05:00

Details

Linux Update Summary

Total Hosts: 32

Reachable: 27

Unreachable: 5

Reachable Hosts Summary

No Updates Required (23)

192.168.1.108

192.168.1.136

192.168.1.250

192.168.1.251

192.168.1.252

192.168.1.181

192.168.1.4

192.168.1.219

192.168.100.51

192.168.1.247

192.168.100.15

192.168.1.33

192.168.2.5

192.168.100.4

192.168.200.7

192.168.1.60

192.168.2.12

192.168.3.5

192.168.1.126

192.168.1.166

192.168.200.8

192.168.1.89

192.168.200.21

Updates Applied (0)

None

Reboot Required (2)

192.168.1.93

192.168.100.5

Errors Detected (1)

192.168.200.22

Unreachable Hosts (5)

192.168.1.109

192.168.1.100

192.168.1.246

10.20.0.1

## Workflow 4: Monthly Automated Ansible Token Rotation

### [PLACEHOLDER - Implementation Pending]

Purpose: Automated monthly credential rotation for Ansible vault with random token generation, vault file update, user management playbook execution, and dual alerting

#### Planned Workflow Summary

- Scheduled Execution: Monthly trigger (1st of month at 4 AM)
- Token Generation: Create cryptographically random 32-char token (base64)
- Vault Update: SSH to Ansible controller and update vault\_ansible\_password in vault.yml
- Playbook Execution: Run user\_mgmt.yml --tags ansible\_user to propagate new password
- Connectivity Test: Verify Ansible can still connect to all hosts via ping
- Discord Alert: Send success/failure notification with rotation summary
- Email Alert: Send HTML email confirming rotation and test results

#### Planned Workflow Nodes

| Node Type               | Configuration                                                | Purpose                     |
|-------------------------|--------------------------------------------------------------|-----------------------------|
| <b>Schedule Trigger</b> | Cron: 0 4 1 * * (1st of month 4 AM)                          | Monthly execution           |
| <b>Code Node 1</b>      | Generate token:<br>crypto.randomBytes(24).toString('base64') | Create new password         |
| <b>SSH Node 1</b>       | Backup current vault.yml                                     | Create vault backup         |
| <b>SSH Node 2</b>       | ansible-vault edit vault.yml (update vault_ansible_password) | Update vault variable       |
| <b>SSH Node 3</b>       | ansible-playbook user_mgmt.yml --tags ansible_user           | Propagate new password      |
| <b>SSH Node 4</b>       | ansible linux -m ping                                        | Test connectivity           |
| <b>Code Node 2</b>      | Parse ping results for success count                         | Verify all hosts accessible |
| <b>IF Node</b>          | Check if ping success == total hosts                         | Route to success/failure    |
| <b>Code Node 3</b>      | Generate Discord success message                             | Format success alert        |
| <b>Discord Webhook</b>  | POST rotation success to Discord                             | Send Discord notification   |
| <b>Code Node 4</b>      | Generate HTML email template                                 | Format email report         |
| <b>Email Node</b>       | SMTP send with rotation details                              | Send email notification     |
| <b>Error Handler</b>    | Rollback vault.yml and alert on failure                      | Handle rotation errors      |

#### Security Considerations for Token Rotation

- Token generation uses crypto.randomBytes (cryptographically secure)
- Vault backup created before each rotation for rollback capability
- Connectivity test verifies all hosts accessible before confirming rotation
- Error handler automatically reverts to backup vault on failure
- Credentials never logged or displayed in workflow execution history
- n8n credential vault stores vault password with AES-256 encryption

#### Expected Alert Content

- Rotation timestamp
- Token generation success
- Vault update status
- User management playbook execution result
- Connectivity test results (hosts reachable/unreachable)
- Rollback status (if applicable)

## Best Practices and Lessons Learned

### Error Handling and Resilience

- All SSH nodes include timeout settings (30-60 seconds)
- Workflow execution logs retained for 30 days in n8n database

#### Credential Management

- All credentials stored in n8n vault (never hardcoded)
- SSH credentials use key-based auth where possible
- Webhook URLs stored as environment variables
- SMTP credentials encrypted with AES-256 at rest

#### Notification Design

- Discord: Concise markdown with key metrics and report links
- Email: Detailed HTML templates with embedded CSS for compatibility
- Critical alerts include @ mentions for immediate attention
- All notifications include timestamp and workflow execution ID

#### Integration Patterns

- Ansible workflows use SSH node for remote execution
- JSON output from playbooks parsed in Code nodes
- HTML and Markdown generation via JavaScript templates
- Apache webserver deployment via SSH file write operations
- Multi-platform support handled through conditional Ansible blocks

## Scripting for Advanced Automation

#### Script Development Strategy

Custom scripts supplement configuration management tools for tasks requiring complex logic, performance optimization, or specialized functionality. All scripts are version-controlled in Git, documented with inline comments, and integrated into broader automation workflows.

#### Security Impact

- Complex security operations automated where configuration-management tools lack native functionality
- Performance-critical tasks (log parsing, threat-intelligence queries) optimized beyond built-in tool capabilities
- Security tool APIs integrated through custom automation wrappers for expanded functionality
- Rapid prototyping enables validation of security concepts before production-grade implementation

**Deployment Rationale:** While Ansible/Terraform handle declarative configuration, procedural logic (API rate-limiting, stateful workflows, real-time processing) requires traditional scripting. Enterprise environments use scripts for custom integrations, API gateways, and performance-critical operations. This demonstrates ability to select appropriate automation tools—declarative vs. imperative—based on task requirements.

#### Architecture Principles Alignment

- **Defense in Depth:** Scripts validate input parameters; error handling prevents cascading failures; execution logs audited for anomalies
- **Secure by Design:** No hardcoded credentials (environment variables or secret managers); input sanitization prevents injection attacks; least-privilege execution (non-root where possible)
- **Zero Trust:** Every script execution logged with user/timestamp; API calls authenticated via short-lived tokens; output validation before downstream processing

Script Language Selection Criteria:

| Language   | Use Cases                              | Advantages                        |
|------------|----------------------------------------|-----------------------------------|
| Bash       | Linux system administration; cron jobs | Native; fast; no dependencies     |
| PowerShell | Windows management; AD operations      | Deep Windows integration; objects |
| Python     | API integration; data processing; ML   | Rich libraries; cross-platform    |

PowerShell & Bash Scripting



Custom automation scripts are developed in both PowerShell (for Windows systems) and Bash (for Linux systems) to handle repetitive administrative tasks, enforce configuration standards, and respond to system events. These scripts automate activities such as user account provisioning, log rotation, backup verification, certificate renewal checks, and security baseline enforcement. PowerShell scripts leverage native Windows management frameworks like Active Directory modules and WMI, while Bash scripts utilize standard Unix utilities and interact with system APIs. Scripts are version-controlled in GitHub alongside infrastructure code, enabling rollback capability and documentation of automation logic.

Bash Script Example: Backup Automation

This Bash script is designed to perform a backup using rsync, with versioned backups stored by date. It validates input, checks for dependencies, and logs the simulated operation.

```
Bash > $ backup.sh > ...
1  #!/bin/bash
2
3  # check to make sure the user has entered exactly two arguments.
4  if [ $# -ne 2 ]
5  then
6      /usr/bin/echo "Usage: backup.sh <source_directory> <target_directory>"
7      /usr/bin/echo "Please try again."
8      exit 1
9  fi
10
11 #check to see if rsync is installed
12 if ! command -v rsync > /dev/null 2>&1
13 then
14     /usr/bin/echo "This script requires rsync to be installed."
15     /usr/bin/echo "Please install the package and run the script again."
16     exit 2
17 fi
18
19 # Capture the current date, and store it in the format YYYY-MM-DD
20 current_date=$(date +%Y-%m-%d)
21
22 rsync_options="-avb --backup-dir $2/$current_date --delete --dry-run" #tested with dry-run prior to adding into production,
23
24 $(which rsync) $rsync_options $1 $2/current >> /var/log/backup_$current_date.log
25
```

Script: /usr/local/bin/backup\_web.sh

Purpose: Incremental rsync backup with versioning and logging

| Line(s)          | Purpose            | Explanation                                                  |
|------------------|--------------------|--------------------------------------------------------------|
| #!/bin/bash      | Script interpreter | Ensures the script runs using Bash.                          |
| if [ \$# -ne 2 ] | Argument check     | Verifies that exactly two arguments are provided.            |
| echo "Usage:..." | Usage message      | Informs the user of correct syntax if arguments are missing. |

|                                                          |                            |                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------------------------------|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>exit 1</b>                                            | Exit on error              | Terminates with exit code 1 for incorrect usage.                                                                                                                                                                                                                                                                                                                                                                        |
| <b>command -v rsync</b>                                  | Dependency check           | Verifies that rsync is installed and available in \$PATH.                                                                                                                                                                                                                                                                                                                                                               |
| <b>exit 2</b>                                            | Exit on missing dependency | Terminates with exit code 2 if rsync is not found.                                                                                                                                                                                                                                                                                                                                                                      |
| <b>current_date=\$(date +%Y-%m-%d)</b>                   | Timestamp                  | Captures the current date in YYYY-MM-DD format for versioning.                                                                                                                                                                                                                                                                                                                                                          |
| <b>rsync_options=...</b>                                 | Backup options             | Sets rsync flags: <ul style="list-style-type: none"> <li>• -a: archive mode (preserves permissions, timestamps, etc.)</li> <li>• -v: verbose</li> <li>• -b: backup files before overwriting</li> <li>• --backup-dir: stores backups in a dated subdirectory</li> <li>• --delete: removes files in target that no longer exist in source</li> <li>• --dry-run: simulates the operation without making changes</li> </ul> |
| <b>\$(which rsync) ...</b>                               | Execute rsync              | Runs rsync with the defined options, syncing from \$1 (source) to \$2/current (target).                                                                                                                                                                                                                                                                                                                                 |
| <b>&gt;&gt;<br/>/var/log/backup_\$(current_date).log</b> | Logging                    | Appends output to a date-stamped log file for auditability.                                                                                                                                                                                                                                                                                                                                                             |

## Linux Upgrade Script Overview

This Bash script performs a distribution-aware system upgrade, logging all output and errors to dedicated log files. It supports Debian/Ubuntu, Fedora, CentOS, and RHEL, and includes error checking after each upgrade step

A terminal window with a dark background and light-colored text. The prompt is 'Bash > \$ UpgradeScript.sh > ...'. The script content is displayed line by line, starting with a shebang and logging paths. It includes conditional logic for different Linux distributions: Debian/Ubuntu (using apt), Fedora (using dnf), and CentOS/RHEL (using yum). Each distribution section includes an echo statement, the upgrade command, and a call to a check\_exit\_status function. The script ends with a completion message and another log entry. A small icon of a terminal window with a green checkmark is visible in the top right corner of the terminal area.

```
Bash > $ UpgradeScript.sh > ...
1  #!/bin/bash
2
3  logfile=/var/log/update_script.log
4  errorlog=/var/log/update_script_errors.log
5
6  /usr/bin/echo "-----START SCRIPT-----" 1>>$logfile 2>>$errorlog
7  check_exit_status() {
8      if [ $? -ne 0 ]
9      then
10         /usr/bin/echo "An error occurred, please check the $errorlog file."
11      fi
12  }
13
14  if [ -d /etc/apt ]; then
15      # Debian or Ubuntu
16      /usr/bin/echo "Detected Debian/Ubuntu system"
17      /usr/bin/sudo apt update 1>>$logfile 2>>$errorlog
18      check_exit_status
19      /usr/bin/sudo apt dist-upgrade -y 1>>$logfile 2>>$errorlog
20      check_exit_status
21  elif [ -f /etc/redhat-release ]; then
22      distro=$(cat /etc/redhat-release)
23
24      if [[ "$distro" == *"Fedora"* ]]; then
25          /usr/bin/echo "Detected Fedora system"
26          /usr/bin/sudo dnf upgrade --refresh -y #!/bin/bash
27
28  logfile=/var/log/update_script.log
29  errorlog=/var/log/update_script_errors.log
30
31
32  check_exit_status() {
33      if [ $? -ne 0 ]
34      then
35          /usr/bin/echo "An error occurred, please check the $errorlog file."
36      fi
37  }
38
39  if [ -d /etc/apt ]; then
40      # Debian or Ubuntu
41      /usr/bin/echo "Detected Debian/Ubuntu system"
42      /usr/bin/sudo apt update 1>>$logfile 2>>$errorlog
43      check_exit_status
44      /usr/bin/sudo apt dist-upgrade -y 1>>$logfile 2>>$errorlog
45      check_exit_status
46  elif [ -f /etc/redhat-release ]; then
47      distro=$(cat /etc/redhat-release)
48
49      if [[ "$distro" == *"Fedora"* ]]; then
50          /usr/bin/echo "Detected Fedora system"
51          /usr/bin/sudo dnf upgrade --refresh -y 1>>$logfile 2>>$errorlog
52          check_exit_status
53      elif [[ "$distro" == *"CentOS"* ]] || [[ "$distro" == *"Red Hat"* ]]; then
54          /usr/bin/echo "Detected CentOS or RHEL system"
55          /usr/bin/sudo yum update -y 1>>$logfile 2>>$errorlog
56          check_exit_status
57      else
58          /usr/bin/echo "Detected unknown Red Hat-based system"
59          /usr/bin/sudo yum update -y 1>>$logfile 2>>$errorlog
60          check_exit_status
61      fi
62  else
63      /usr/bin/echo "Unsupported or unknown Linux distribution"
64  fi
65
66  /usr/bin/echo "The script completed at: $(/usr/bin/date)" 1>>$logfile 2>>$errorlog
67  /usr/bin/echo "-----END SCRIPT-----" 1>>$logfile 2>>$errorlog
68
69  /usr/bin/echo "The script completed at: $(/usr/bin/date)" 1>>$logfile 2>>$errorlog
70  /usr/bin/echo "-----END SCRIPT-----" 1>>$logfile 2>>$errorlog
71
72  /usr/bin/echo "The script completed at: $(/usr/bin/date)" 1>>$logfile 2>>$errorlog
73  /usr/bin/echo "-----END SCRIPT-----" 1>>$logfile 2>>$errorlog
74
75  /usr/bin/echo "The script completed at: $(/usr/bin/date)" 1>>$logfile 2>>$errorlog
76  /usr/bin/echo "-----END SCRIPT-----" 1>>$logfile 2>>$errorlog
77
78  /usr/bin/echo "The script completed at: $(/usr/bin/date)" 1>>$logfile 2>>$errorlog
79  /usr/bin/echo "-----END SCRIPT-----" 1>>$logfile 2>>$errorlog
80
81  /usr/bin/echo "The script completed at: $(/usr/bin/date)" 1>>$logfile 2>>$errorlog
82  /usr/bin/echo "-----END SCRIPT-----" 1>>$logfile 2>>$errorlog
83
```

| Line(s)     | Purpose                 | Explanation                        |
|-------------|-------------------------|------------------------------------|
| #!/bin/bash | Interpreter declaration | Ensures the script runs with Bash. |

|                                                   |                         |                                                                                            |
|---------------------------------------------------|-------------------------|--------------------------------------------------------------------------------------------|
| <b>logfile=/var/log/update_script.log</b>         | Log file setup          | Defines paths for standard output and error logs.                                          |
| <b>errorlog=/var/log/update_script_errors.log</b> |                         |                                                                                            |
| <b>echo "START SCRIPT"</b>                        | Start marker            | Logs the beginning of the script execution.                                                |
| <b>check_exit_status()</b>                        | Error handler           | Function that checks the last command's exit code and prints an error message if non-zero. |
| <b>if [ -d /etc/apt ]; then</b>                   | Distro detection        | Checks for Debian/Ubuntu by presence of APT directory.                                     |
| <b>apt update</b>                                 | Debian/Ubuntu upgrade   | Runs update and full upgrade, logs output and errors.                                      |
| <b>apt dist-upgrade -y</b>                        |                         |                                                                                            |
| <b>elif [ -f /etc/redhat-release ]; then</b>      | Red Hat-based detection | Checks for Fedora, CentOS, or RHEL using release file.                                     |
| <b>cat /etc/redhat-release</b>                    | Distro name             | Reads the release file to identify the specific variant.                                   |
| <b>dnf upgrade --refresh -y</b>                   | Fedora upgrade          | Refreshes metadata and upgrades packages.                                                  |
| <b>yum update -y</b>                              | CentOS/RHEL upgrade     | Performs system update using yum.                                                          |
| <b>echo "Unsupported distro"</b>                  | Fallback                | Handles unknown or unsupported systems.                                                    |
| <b>echo "Script completed at: \$(date)"</b>       | Completion timestamp    | Logs the end time of the script.                                                           |
| <b>echo "END SCRIPT"</b>                          | End marker              | Logs the conclusion of the script execution.                                               |

# PowerShell Script Example: Windows Update Automation

This script performs a comprehensive update sweep across a Windows system, covering:

- Windows Store apps
- Chocolatey packages
- Winget packages
- Windows OS updates

All output is captured to a transcript file with timestamps for auditability and runtime tracking. The script handles missing tools gracefully (skip vs fail), fixes the EventLog 32,766-char limit, silently pre-installs NuGet, and sends a Discord webhook summary on completion.

Script: C:\Scripts\Update-System.ps1

Purpose: Comprehensive Windows update across multiple package managers

```
> windows_updates_feb2026.ps1 U X
PowerShell > > windows_updates_feb2026.ps1 > ...
15 #>
16
17 [CmdletBinding()]
18 param(
19     [switch]$SkipReboot,
20     [string]$WebhookUrl = "https://discord.com/api/webhooks/1435986566647644201/S1lb6UFEbS_cLzGK9d170WZpifZpbT
21 )
22
23 $ErrorActionPreference = "Continue"
24 $LogPath = "C:\Logs\Windows-Updates"
25 $LogFile = Join-Path $LogPath "update_$(Get-Date -Format 'yyyy-MM-dd').log"
26 $MaxEventLogMsgLength = 30000
27 $FailureCount = 0
28
29 if (-not (Test-Path $LogPath)) {
30     New-Item -ItemType Directory -Path $LogPath -Force | Out-Null
31     Write-Host "[BOOTSTRAP] Created log directory: $LogPath"
32 } else {
33     Write-Host "[BOOTSTRAP] Log directory exists: $LogPath"
34 }
35
36 Start-Transcript -Path $LogFile -Append
37 Write-Host "[BOOTSTRAP] Transcript started: $LogFile"
38
39 Write-Host "[BOOTSTRAP] Checking NuGet provider..."
40 $nuget = Get-PackageProvider -Name NuGet -ErrorAction SilentlyContinue
41 if (-not $nuget -or $nuget.Version -lt [Version]"2.8.5.201") {
42     Write-Host "[BOOTSTRAP] Installing NuGet provider..."
43     Install-PackageProvider -Name NuGet -MinimumVersion 2.8.5.201 -Force -Scope AllUsers | Out-Null
44     Write-Host "[BOOTSTRAP] NuGet provider installed."
45 } else {
46     Write-Host "[BOOTSTRAP] NuGet provider OK (version $($nuget.Version))."
47 }
48
49 74 references
50 function Write-Log {
51     param(
52         [string]$Message,
53         [string]$Level = "INFO"
54     )
55     $Timestamp = Get-Date -Format "yyyy-MM-dd HH:mm:ss"
56     Write-Output "[Timestamp] [$Level] $Message"
57
58     $EventMessage = if ($Message.Length -gt $MaxEventLogMsgLength) {
59         $Message.Substring(0, $MaxEventLogMsgLength) + "`n[TRUNCATED - see log file]"
60     } else {
61         $Message
62     }
63     $EventId = switch ($Level) { "ERROR" { 3 } "WARNING" { 2 } default { 1 } }
64     Write-EventLog -LogName Application -Source "WindowsUpdate" `
65         -EntryType Information -EventId $EventId -Message $EventMessage `
66         -ErrorAction SilentlyContinue
67 }
68
69 3 references
70 function Update-WindowsStoreApps {
71     BEGIN: Windows Store App Updates ---
72     1
73
74     'Opening CIM session...'
75     $NewCimSession = New-CimSession
76     'Querying MDM AppManagement class...'
77     $GetCimInstance = Get-CimInstance -Namespace "root\cimv2\mdm\dmmap" `
78         -Name "MDM_EnterpriseModernAppManagement_AppManagement01"
79     'Invoking Store update scan...'
80 }
```

 winupdate APP 8:50 AM

Windows Update Report: OFFICEPC2023

Status: SUCCESS

Failures: 0

User: pnleo

Log File

C:\Logs\Windows-Updates\update\_2026-02-20.log

Reboot Skipped

False

Today at 8:50 AM

| Line / Block                         | Purpose        | Explanation                                                                                         |
|--------------------------------------|----------------|-----------------------------------------------------------------------------------------------------|
| \$ErrorActionPreference = "Continue" | Error handling | Script continues if a command fails. Individual function returns false to increment \$FailureCount. |
| \$LogFile = Join-Path ...            | Log file path  | Defines daily-named log file under C:\Logs\Windows-Updates\.                                        |

|                                               |                      |                                                                                                                                    |
|-----------------------------------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <b>Start-Transcript / Stop-Transcript</b>     | Full session capture | Records all console output to the log file including command output and errors.                                                    |
| <b>function Write-Log { ... }</b>             | Timestamped logging  | Prefixes every message with timestamp and level tag. Truncates to 30,000 chars before writing to EventLog (hard limit: 32,766).    |
| <b>Get-PackageProvider (NuGet)</b>            | NuGet bootstrap      | Pre-installs NuGet silently before PSWindowsUpdate install. Prevents interactive Y/N prompt that blocks automated runs.            |
| <b>function Update-WindowsStoreApps { }</b>   | Store updates        | Uses CIM to call UpdateScanMethod on the MDM_EnterpriseModernAppManagement class. Triggers background Store refresh.               |
| <b>function Update-ChocolateyPackages { }</b> | Chocolatey updates   | Checks for choco in PATH. If found, runs 'choco upgrade all -y' and logs full output. Returns true on exit 0.                      |
| <b>function Update-WingetPackages { }</b>     | Winget updates       | Checks for winget in PATH. Runs upgrade --all with agreements accepted. Non-zero exit logs WARNING but does not fail.              |
| <b>function Update-WindowsOS { }</b>          | OS patch management  | Installs PSWindowsUpdate if missing. Lists each KB/title/size before installing. Respects -SkipReboot flag.                        |
| <b>function Send-DiscordNotification { }</b>  | Webhook alert        | Builds Discord embed payload. Uses ConvertTo-Json -Depth 10 -Compress to fix nested hashtable serialization (Discord error 50109). |
| <b>if (\$FailureCount -eq 0) { exit 0 }</b>   | Exit codes           | 0 = all passed. 1 = 1-2 failures (partial). 2 = 3+ failures (mostly failed). Used by schedulers to detect failure.                 |

### Code and Output Examples

#### Write-Log - Timestamped Logging with EventLog Truncation

```
function Write-Log {
    param([string]$Message, [string]$Level = "INFO")

    $Timestamp = Get-Date -Format "yyyy-MM-dd HH:mm:ss"
    Write-Output "[$Timestamp] [$Level] $Message"

    # Truncate to 30,000 chars - EventLog hard limit is 32,766
    $EventMsg = if ($Message.Length -gt $MaxEventLogMsgLength) {
        $Message.Substring(0, $MaxEventLogMsgLength) + "`n[TRUNCATED - see log file]"
    } else { $Message }

    $EventId = switch ($Level) { "ERROR" { 3 } "WARNING" { 2 } default { 1 } }
    Write-EventLog -LogName Application -Source "WindowsUpdate" \
        -EntryType Information -EventId $EventId -Message $EventMsg \
        -ErrorAction SilentlyContinue
}
```

#### Sample Output:

```
[2026-02-20 07:33:08] [INFO] =====  
[2026-02-20 07:33:08] [INFO] ===== Windows Update Script Started =====  
[2026-02-20 07:33:08] [INFO] Computer : OFFICEPC2023  
[2026-02-20 07:33:08] [INFO] User : pnleo  
[2026-02-20 07:33:08] [INFO] OS : Windows 11 Pro  
[2026-02-20 07:33:08] [INFO] PS Version: 5.1.26100.7705
```

## Update-WindowsOS - PSWindowsUpdate Module

```
function Update-WindowsOS {  
    Write-Log "--- BEGIN: Windows OS Updates ---"  
    if (-not (Get-Module -ListAvailable -Name PSWindowsUpdate)) {  
        Write-Log "PSWindowsUpdate not found - installing..."  
        Install-Module -Name PSWindowsUpdate -Force -Scope AllUsers -Confirm:$false  
    }  
    try {  
        Import-Module PSWindowsUpdate -ErrorAction Stop  
        Write-Log "Checking for available updates..."  
        $Updates = Get-WindowsUpdate -MicrosoftUpdate -AcceptAll  
        if ($Updates -and $Updates.Count -gt 0) {  
            Write-Log "Found $($Updates.Count) update(s):"  
            foreach ($u in $Updates) {  
                Write-Log " KB$($u.KBArticleIDs) | $($u.Title) |  
                $([math]::Round($u.Size/1MB,2)) MB"  
            }  
            Install-WindowsUpdate -MicrosoftUpdate -AcceptAll -AutoReboot:(-not  
$SkipReboot)  
            Write-Log "--- END: Windows OS Updates [SUCCESS] ---"  
        } else {  
            Write-Log "No updates available - system is current."  
        }  
        return $true  
    }  
    catch {  
        Write-Log $_.Exception.Message -Level "ERROR"  
        return $false  
    }  
}
```

Sample Output:

```
[2026-02-20 07:34:56] [INFO] Step 4 of 4: Windows OS Updates
[2026-02-20 07:34:56] [INFO] --- BEGIN: Windows OS Updates ---
[2026-02-20 07:34:56] [INFO] PSWindowsUpdate already installed (version 2.2.1.4).
[2026-02-20 07:34:56] [INFO] Importing PSWindowsUpdate...
[2026-02-20 07:34:58] [INFO] Checking for available updates...
[2026-02-20 07:36:10] [INFO] Found 2 update(s):
[2026-02-20 07:36:10] [INFO] KB5034441 | 2026-02 Cumulative Update for Windows 11 | 312.45 MB
[2026-02-20 07:36:10] [INFO] KB890830 | Windows Malicious Software Removal Tool | 4.12 MB
[2026-02-20 07:36:10] [INFO] Installing (AutoReboot: False)...
[2026-02-20 08:11:32] [INFO] --- END: Windows OS Updates [SUCCESS] ---
```

Cron Job Scheduling Strategy



Cron is used extensively across Linux systems to schedule automated tasks at defined intervals, ensuring that maintenance activities, monitoring checks, and data collection occur reliably without manual intervention. Typical cron jobs include nightly backup verification scripts, hourly certificate expiration checks, daily vulnerability scan initiation, periodic log archival and rotation, and regular system health assessments. Cron jobs are documented with inline comments explaining purpose, frequency, and dependencies, and critical jobs send success/failure notifications to the centralized Discord alerting system to ensure failures are promptly identified and addressed.

Webserver Crontab

| Minute | Hour | Day | Month | Weekday | Command                                           | Description                 | Last Run Timestamp        |
|--------|------|-----|-------|---------|---------------------------------------------------|-----------------------------|---------------------------|
| 0      | 2    | *   | *     | 5       | /usr/local/bin/upgrade.sh                         | Weekly system upgrade       | Fri, Nov 1, 2025 02:00 AM |
| 30     | 1    | *   | *     | 6       | /usr/local/bin/backup_web.sh /var/www/lab /backup | Weekly web backup via rsync | Sat, Nov 2, 2025 01:30 AM |

- The first job runs every Friday at 2:00 AM and executes upgrade.sh with no arguments.
- The second job runs every Saturday at 1:30 AM and executes backup\_web.sh with two arguments: /var/www/lab(Source directory) and /backup(Target directory).

Python Scripting for Advanced Automation



Python scripts are deployed where more complex logic, data processing, or API interaction is required. Python's extensive library ecosystem makes it ideal for tasks like parsing and correlating log data, interacting with REST APIs for service configuration, processing vulnerability scan results, generating custom reports from multiple data sources, and implementing custom security tools. Python's cross-platform nature allows scripts to run consistently across Windows and Linux systems, and virtual environments ensure dependency isolation and reproducibility.

## Python Script Example: Network Scanner

A custom Python-based network scanner has been developed to provide tailored reconnaissance capabilities specific to the lab environment. The scanner performs several functions:

- Host Reachability Testing — Pings target hosts before attempting port scans to verify they are online, reducing wasted scan time and providing quick network inventory validation.
- Port Scanning — Uses multi-threaded socket connections to rapidly identify open TCP ports across the full port range (1-65535) or targeted subsets based on scan objectives.
- Service Identification — Labels discovered open ports using a custom service flag mapping file (common\_ports.txt) that includes both standard services (SSH, HTTP, HTTPS) and lab-specific applications (Proxmox, Traefik, Authentik). This makes scan results immediately actionable by identifying what application is likely running on each open port.

```
Python> TCM > new_network_scanner.py > main
1 import sys
2 import socket
3 from datetime import datetime
4 import threading
5 import platform
6 import subprocess
7
8 # Load common ports from external file
9 def load_common_ports(filename='common_ports.txt'):
10     """
11     Load port mappings from a text file
12     Format: port:service_name (one per line)
13     """
14     ports = {}
15     try:
16         with open(filename, 'r') as f:
17             for line in f:
18                 line = line.strip()
19                 if line and not line.startswith('#'): # Skip empty lines and comments
20                     try:
21                         port, service = line.split(':', 1)
22                         # Strip whitespace and remove quotes/commas
23                         service = service.strip().strip('"').strip("'").rstrip(',')
24                         ports[int(port)] = service
25                     except ValueError:
26                         print(f'Warning: Skipping malformed line: {line}')
27     except FileNotFoundError:
28         print(f'Warning: {filename} not found. Using empty port dictionary.')
29     return {}
30
31 except Exception as e:
32     print(f'Error loading port file: {e}')
33     return {}
34
35 # Load the common ports dictionary
36 COMMON_PORTS = load_common_ports()
37
38 # Global verbose flag
39 verbose = False
40
41 def ping_host(target_ip):
42     """
43     Ping the host to check if it's reachable before scanning
44     """
45     param = '-n' if platform.system().lower() == 'windows' else '-c'
46     command = ['ping', param, '1', target_ip]
47
48     try:
49         result = subprocess.run(command, stdout=subprocess.PIPE, stderr=subprocess.PIPE, timeout=5)
50         return result.returncode == 0
51     except Exception as e:
52         print(f'Ping test failed: {e}')
53         return False
54
55 def scan_port(target, port):
56     """
57     Function to scan a single port
58     """
59     try:
60         if verbose:
61             print(f'Scanning port {port}...')
62
63         s = socket.socket(socket.AF_INET, socket.SOCK_STREAM)
64         s.settimeout(1)
65         result = s.connect_ex((target, port))
```

```
Python> TCM > new_network_scanner.py > main
77 def main():
78     print("Invalid number of arguments.")
79     print("Usage: python network_scanner.py <target>")
80     sys.exit(1)
81
82 target = args[0]
83
84 # Check for verbose flag
85 if len(args) == 2 and args[1] in ['-v', '--verbose']:
86     verbose = True
87     print("Verbose mode enabled")
88
89 # Resolve the target hostname to an IP address
90 try:
91     target_ip = socket.gethostbyname(target)
92 except socket.gaierror:
93     print(f'Error: Unable to resolve hostname {target}')
94     sys.exit(1)
95
96 # Ping test before scanning
97 print("-" * 50)
98 print(f'Running ping test on {target_ip}...')
99 if ping_host(target_ip):
100     print(f'Host {target_ip} is reachable!')
101 else:
102     print(f'Warning: Host {target_ip} may be unreachable or blocking ICMP')
103     response = input('Continue with scan anyway? (y/n): ')
104     if response.lower() != 'y':
105         print("Scan cancelled.")
106         sys.exit(0)
107
108 # Add a banner
109 print("-" * 50)
110 print(f'Scanning target {target_ip}')
111 print(f'Time started: {datetime.now()}')
112 print("-" * 50)
113
114 try:
115     # Use multithreading to scan ports concurrently
116     threads = []
117     for port in range(1, 65536):
118         thread = threading.Thread(target=scan_port, args=(target_ip, port))
119         threads.append(thread)
120         thread.start()
121
122 # Wait for threads to complete
123 for thread in threads:
124     thread.join()
125
126 except KeyboardInterrupt:
127     print("\nExiting program.")
128     sys.exit(0)
129
130 except socket.error as e:
131     print(f'Socket error: {e}')
132     sys.exit(1)
133
134 print("\nScan completed!")
135 print(f'Time finished: {datetime.now()}')
136
137 if __name__ == "__main__":
138     main()
139
140
141
142
143
144
```

## Script Integration &

broader workflows through  
Some scripts are triggered

## Orchestration

Scripts are integrated into  
several mechanisms.  
directly by cron jobs for

time-based execution. Others are called by monitoring systems in response to alerts or threshold violations (for example, a Grafana alert triggering a remediation script). Ansible playbooks orchestrate multi-step automation by calling shell scripts and Python utilities in sequence, passing parameters and handling error conditions. This layered approach combines the flexibility of custom scripts with the orchestration capabilities of configuration management tools, enabling sophisticated automation scenarios while maintaining maintainability and reusability.

## Automation Security Controls

Control Framework:

| Control Domain               | Implementation                            | Coverage                   |
|------------------------------|-------------------------------------------|----------------------------|
| <b>Secrets Management</b>    | Ansible Vault + Vaultwarden               | All credentials encrypted  |
| <b>Access Control</b>        | SSH keys only; sudo with NOPASSWD         | Ansible service account    |
| <b>Code Integrity</b>        | Git version control with commit signing   | All IaC assets             |
| <b>Privilege Escalation</b>  | Least privilege Proxmox service account   | Terraform API access       |
| <b>Input Validation</b>      | Regex validation in scripts               | Prevents injection attacks |
| <b>Audit Logging</b>         | Syslog + Git commits + n8n execution logs | Full audit trail           |
| <b>Change Management</b>     | Git                                       | Controlled deployments     |
| <b>Backup &amp; Recovery</b> | GitHub + NAS + PBS                        | Multiple restore points    |

Authentication & Authorization:

| Technology       | Authentication Method            | Authorization Scope             |
|------------------|----------------------------------|---------------------------------|
| <b>Terraform</b> | Proxmox API token (non-password) | VM/LXC provisioning only        |
| <b>Ansible</b>   | SSH key (ed25519; passphrase)    | sudo NOPASSWD on managed hosts  |
| <b>n8n</b>       | Authentik SSO (OAuth2)           | Workflow admin access           |
| <b>GitHub</b>    | Personal access token (PAT)      | Repository push/pull            |
| <b>Scripts</b>   | User context (ansible/root)      | File system and service control |

Secrets Protection:

| Secret Type                 | Storage Location              | Encryption Method            |
|-----------------------------|-------------------------------|------------------------------|
| <b>Terraform API tokens</b> | terraform.tfvars (gitignored) | File permissions 0600        |
| <b>Ansible passwords</b>    | ansible-vault encrypted files | AES-256 with master key      |
| <b>n8n credentials</b>      | Vaultwarden database          | Application-level encryption |
| <b>SSH private keys</b>     | ~/.ssh/ with 0600 perms       | Passphrase-protected         |
| <b>Script API tokens</b>    | Environment variables         | Not persisted to disk        |

Audit Trail Components:

| Event Type                     | Logging Mechanism                | Retention  |
|--------------------------------|----------------------------------|------------|
| <b>Git Commits</b>             | "GitHub repository"              | Indefinite |
| <b>Terraform Apply</b>         | "Local state file + stdout log"  | "90 days"  |
| <b>Ansible Playbook Runs</b>   | "Ansible log + syslog"           | "90 days"  |
| <b>n8n Workflow Executions</b> | "PostgreSQL + execution history" | "30 days"  |
| <b>Script Executions</b>       | "Syslog + individual log files"  | "30 days"  |

|               |                                     |           |
|---------------|-------------------------------------|-----------|
| Cron Job Runs | "/var/log/cron + job-specific logs" | "30 days" |
|---------------|-------------------------------------|-----------|

## Operational Resilience & Disaster Recovery

Infrastructure Rebuild Capability:  
The entire lab infrastructure can be rebuilt from code repositories in the event of catastrophic failure.  
Recovery process follows these phases:

### Phase 1: Bootstrap Proxmox Host (Manual)

Duration: ~30 minutes

Steps:

- 1. Install Proxmox VE on bare metal
- 2. Configure network interfaces and storage
- 3. Deploy Terraform controller LXC (manual creation)
- 4. Clone GitHub repositories

### Phase 2: Provision Core Infrastructure (Automated)

Duration: ~45 minutes

Steps:

- 5. Terraform provisions all VMs and LXCs
- 6. Ansible bootstrap playbook configures SSH access
- 7. Ansible hardening playbook applies security baseline
- 8. Ansible service playbooks deploy applications

### Phase 3: Restore Data and Configurations (Semi-Automated)

Duration: ~60 minutes

Steps:

- 9. Restore database backups from PBS/NAS
- 10. Restore application configs from GitHub
- 11. Restore secrets from Vaultwarden backup
- 12. Regenerate certificates from Step-CA

Total Recovery Time: <3 hours (vs. weeks for manual rebuild)

Backup Strategy for Automation Assets:

| Asset Type          | Backup Method            | Frequency     | Location       |
|---------------------|--------------------------|---------------|----------------|
| Git Repositories    | GitHub remote            | On every push | Cloud (GitHub) |
| Terraform State     | rsync to NAS             | Daily         | NAS + USB      |
| Ansible Inventory   | Git versioned            | On change     | GitHub         |
| n8n Workflows       | PostgreSQL dump          | Daily         | NAS            |
| Custom Scripts      | Git versioned            | On change     | GitHub         |
| Cron Configurations | Ansible playbook managed | On change     | GitHub         |

## Monitoring and Alerting:

| Metric Monitored          | Tool        | Alert Threshold   | Notification |
|---------------------------|-------------|-------------------|--------------|
| Terraform apply failures  | Exit code   | Non-zero exit     | Discord      |
| Ansible playbook failures | Return code | Any task failure  | Discord      |
| n8n workflow errors       | Built-in    | Execution failure | Discord      |
| Cron job failures         | Syslog      | Exit code != 0    | Discord      |
| Script execution time     | Custom      | >2x baseline      | Discord      |

## Practical Use Cases and Workflows

### Scenario 1: New VM Provisioning

Objective: Deploy new Docker host in <5 minutes

Workflow:

- Developer updates Terraform variables:
  - hostname: docker-vm-03
  - vmid: 203
- Run Terraform:
  - cd terraform/vm
  - terraform apply -var="hostname=docker-vm-03" -var="vmid=203" -auto-approve
- Terraform clones ubuntu-cloud template, provisions VM
- Output displays IP address: 192.168.100.203
- Run Ansible bootstrap:
  - ansible-playbook -i hosts.yml new\_install.yml --limit docker-vm-03.home.com
- Ansible configures SSH, creates ansible user, installs packages
- VM ready for application deployment

Result: Consistent, reproducible VM provisioning with full audit trail

### Scenario 2: Weekly Security Update Cycle

Objective: Keep all systems patched without manual intervention

Workflow:

- Saturday 2 AM: n8n workflow triggers
- n8n executes SSH command on Ansible controller
- Ansible playbook runs across all Linux hosts:
- Debian/Ubuntu: apt update && apt upgrade -y
- RHEL/Fedora: dnf update -y
- Playbook output converted to JSON
- JSON uploaded to GitHub (audit trail)
  - Discord notification sent with summary:
  - 23/25 hosts updated successfully
- 2 hosts require reboot
- Admin reviews notification and schedules reboots if needed

Result: Automated patch management with centralized reporting and alerting

### Scenario 3: Rapid Disaster Recovery

Objective: Rebuild compromised VM from code

Workflow:

- Incident detected: VM compromised via vulnerability

- Admin destroys compromised VM:
  - terraform destroy -var="vmid=205"
- Review Git history to find last known-good configuration:
  - git log terraform/vm/main.tf
- Checkout previous commit if needed:
  - git checkout abc123def terraform/vm/main.tf
- Rebuild VM with Terraform:
  - terraform apply -var="hostname=web-vm-01" -var="vmid=205"
- Re-run Ansible playbooks to restore configuration:
  - ansible-playbook -i hosts.yml site.yml --limit web-vm-01.home.com
- Restore application data from NAS backup
- VM back online with clean configuration

Result: Complete rebuild in <30 minutes vs. hours of manual work

## Scenario 4: Threat Intelligence Distribution

Objective: Daily security awareness for lab operations

Workflow:

- Daily 8 AM: n8n workflow executes
- RSS feeds polled from multiple cybersecurity sources
- Each feed limited to 5 most recent entries
- NIST feed sent to ChatGPT for AI summarization
- Aggregated digest posted to Discord #threat-intel channel

Result: Consolidated threat intelligence reduces information overload

## Scenario 5: Configuration Drift Detection

Objective: Ensure compliance with security baseline

Workflow:

- Weekly: n8n triggers Ansible audit playbook
- Playbook gathers configuration from all hosts:
  - SSH config settings
  - Firewall rules
  - Installed packages
  - User accounts
  - DNS configuration
- Output compared against baseline in Git
- Drift detected on 2 hosts (unauthorized package installed)
- Discord alert sent with details

Result: Proactive detection of configuration drift and unauthorized changes