

TASKCARD

A/C TYPE	Effectivity	DESCRIPTION	WORK ORDER NO.	
		A320 FAMILY - DAILY CHECK		
A/C REG.	A/C MSN.	ACCESS	TASKCARD NO.	
			A32-052000-99-2-IDN	
A/C TSN.	A/C CSN.		THRESHOLD	INTERVAL
:			0	0
OPERATOR	PLACE	ZONE	TASK	REVISION
			DET	09
START DATE	FINISH DATE	NOTE	ATA	SKILL
		☐ ETOPS ☐ RVSM ☐ RNP10 ☐ RII ☐ CDCCL	05-20	

REFERENCE			
Doc No.	Doc Description	Doc No.	Doc Description
AMM 21-26-00-710-001-A	Operational Check of the Avionics Equipment Ventilation-System via MCDU	AMM 27-96-00-740-001-A	OPERATIONAL CHECK OF EFCS BY BITE (GROUND SCANNING))
AMM 32-12-00-410-001-A	Close the Main Gear Doors after Access	AMM 52-10-00-210-004-A	Check Pressure of Emergency Cylinder/ Accumulator of the Passenger/Crew Doors
AMM 71-00-00-700-805-A	Dry-Motoring Check (ref. A320NEO-EI-71-004 to perform SB LEAP-1A 73-0038)	AMM AMM 24-41-00-740-002-B	OPERATIONAL CHECK OF THE GAPCU VIA THE CFDS
AMM 33-51-00-710-007-A	OPERATIONAL TEST OF THE EMERGENCY LIGHTING IN THE CABIN WITH THE 'LIGHT EMER' PUSHBUTTON SWITCH		

TOOLS REQUIRED		
PART NUMBER	DESCRIPTION	QUANTITY
460005833	SLEEVE-GROUND LOCK	2
98A10001005000	COVER – PROBE, PITOT (AIRBUS)	3
98A10001013000	COVER-TOTAL TEMP SENSOR	2
98A10001500000	COVER - SLIP-ON, AOA SENSOR	2
98A28101000000	DRAIN TL	1
98D10003002000	COVER - INLET COWL ENGINE	2
98D10007512000	COVER-EXHAUST DUCT,APU	1
98D10007513000	COVER-OILCOOLER OUTLET,APU	1
98D10103500001	COVER-STATIC PROBE	3
98D28104000000	DRAIN TL	1
D23080000	PIN-GROUND LOCK,NLG	1
HIX6002	HALF PLUG, RIGHT-THRUST REVERSE	1
HIX6003	HALF PLUG, LEFT-THRUST REVERSER	1
RSE1132	COVER - COMMON NOZZLE	2

MATERIAL REQUIRED		
PART NUMBER	DESCRIPTION	QUANTITY
SKYDROL PE-5	FLUID - HYDRAULIC, EROSION ARRESTING, FIRE RESISTANT	1
MOBIL JET II	OIL	1

BARCODE:  A32-052000-99-2-IDN

TASKCARD

WORK ORDER NO.	A/C REG.	A/C MSN.	A/C Effectivity	OPERATOR	TASK CARD NO.
					A32-052000-99-2-IDN

ACCOMPLISHMENT			
NO.	INSTRUCTION	PERFORMED BY	INSPECTED BY
1	GENERAL Certification of this check is Done, Refer to the Daily Check Sheet Task Card No. A32-052000-99-2-DCS-IDN NOTE: - Please fill [.....] with check mark - If any steps on the forms are found to be inapplicable or not applicable, please give clear statement, for example For instance, "this method not used" or "N/A", "equipment not fitted to this aircraft" would be acceptable and the column of task shall be sign and stamp by certifying personnel		
2	ARRIVAL - [.....] Installed Wheel Chocks. - [.....] Installed LG Pin-Ground Lock - [.....] Review Aircraft Technical Log - [.....] Energize the aircraft electrical network if necessary - [.....] Check Status on Upper and Lower ECAM DU - [.....] Analyze PFR	A/P	
3	EXTERNAL WALK AROUND - [.....] Forward Fuselage - [.....] Nose Landing Gear and Doors - [.....] Center Fuselage - [.....] Right/Left Wing Leading Edge - [.....] Right/Left Powerplant And Pylon 0 Visual Inspection of Outer Guide Vanes (OGV) ENG #1 Result : ENG #2 Result : - [.....] Engines Inspection Check ENG #1 oil quantity and service as required Check ENG #2 oil quantity and service as required. O FULL O ADD _____ Quarts O FULL O ADD _____ Quarts	A/P	

BARCODE:

A32-052000-99-2-IDN

TASKCARD

WORK ORDER NO.	A/C REG.	A/C MSN.	A/C Effectivity	OPERATOR	TASK CARD NO.
					A32-052000-99-2-IDN

ACCOMPLISHMENT																																			
NO.	INSTRUCTION	PERFORMED BY	INSPECTED BY																																
	Check IDG #1 oil quantity and service required. Check IDG #2 oil quantity and service as required. O FULL O ADD _____ Quarts O FULL O ADD _____ Quarts - [.....] APU Inspection Check APU oil quantity and service as required. A/C Reg. : _____ APU SN : _____ APU Hour : _____ APU Cycle : _____ Oil Added : _____ (Qrt) - [.....] Right/Left Wing Tip and Trailing Edge - [.....] Right/Left Maib Landing Gear and Doors - [.....] Main Landing Gear Brakes (MP TASK 324227-01-1) - [.....] Wheels (MP TASK 324100-01-1) RECORD TIRE PRESSURE AND BRAKE WEAR READING NLG <table border="0" style="margin-left: auto; margin-right: auto;"> <tr> <td>Before</td> <td>LH</td> <td><table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table></td> <td>RH</td> </tr> <tr> <td>After</td> <td>LH</td> <td><table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table></td> <td>RH</td> </tr> </table> <table border="0" style="width: 100%;"> <tr> <td style="width: 50%; text-align: center;"> MLG </td> <td style="width: 50%; text-align: center;"> MLG </td> </tr> <tr> <td> Before LH <table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table> RH </td> <td> Before LH <table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table> RH </td> </tr> <tr> <td> After LH <table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table> RH </td> <td> After LH <table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table> RH </td> </tr> <tr> <td> Brake Wear <table border="1" style="display: inline-table;"><tr><td>mm</td><td>mm</td></tr></table> </td> <td> Brake Wear <table border="1" style="display: inline-table;"><tr><td>mm</td><td>mm</td></tr></table> </td> </tr> </table>	Before	LH	<table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table>	PSI	PSI	RH	After	LH	<table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table>	PSI	PSI	RH	MLG	MLG	Before LH <table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table> RH	PSI	PSI	Before LH <table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table> RH	PSI	PSI	After LH <table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table> RH	PSI	PSI	After LH <table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table> RH	PSI	PSI	Brake Wear <table border="1" style="display: inline-table;"><tr><td>mm</td><td>mm</td></tr></table>	mm	mm	Brake Wear <table border="1" style="display: inline-table;"><tr><td>mm</td><td>mm</td></tr></table>	mm	mm		
Before	LH	<table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table>	PSI	PSI	RH																														
PSI	PSI																																		
After	LH	<table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table>	PSI	PSI	RH																														
PSI	PSI																																		
MLG	MLG																																		
Before LH <table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table> RH	PSI	PSI	Before LH <table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table> RH	PSI	PSI																														
PSI	PSI																																		
PSI	PSI																																		
After LH <table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table> RH	PSI	PSI	After LH <table border="1" style="display: inline-table;"><tr><td>PSI</td><td>PSI</td></tr></table> RH	PSI	PSI																														
PSI	PSI																																		
PSI	PSI																																		
Brake Wear <table border="1" style="display: inline-table;"><tr><td>mm</td><td>mm</td></tr></table>	mm	mm	Brake Wear <table border="1" style="display: inline-table;"><tr><td>mm</td><td>mm</td></tr></table>	mm	mm																														
mm	mm																																		
mm	mm																																		

BARCODE:

A32-052000-99-2-IDN

TASKCARD

WORK ORDER NO.	A/C REG.	A/C MSN.	A/C Effectivity	OPERATOR	TASK CARD NO.
					A32-052000-99-2-IDN

ACCOMPLISHMENT			
NO.	INSTRUCTION	PERFORMED BY	INSPECTED BY
	RECORD TIME (UTC) PRESSURE CHECK CARRIED OUT : _____ ; RECORD SERIAL NO. OF TYRE PRESSURE GAGE USED : _____ - [.....] Aft Fuselage - [.....] Stabilizers and Cone/Rear Fuselage - [.....] Do a fluid level check of the Green, Blue and Yellow hydraulic reservoirs (On ECAM LOWER DISPLAY, HYD page).		
4	WASTE/WATER SERVICING - [.....] Service the potable water system as required (15). - [.....] Service the toilet waste tanks as required (12). In freezing conditions, obey the cold weather maintenance. (pos# 12, 15 see diagram at appendix).	A/P	
5	FLIGHT COMPARTMENT - [....] Cockpit Seat - [.....] Crew Oxygen System - [.....] External Lights - [.....] Cockpit Lights, Check Spare Bulb / Fuses, replace as necessary. - [.....] Check Emergency Equipment - [.....] Check Windshield and the side windows for damage and cleanliness - [.....] Operational test of the DFDR and CVR - [.....] Perform Dry-Motoring Check for two minutes within 30 minutes after engine shutdown (for Engine LEAP-1A , Ref to EI No. A320NEO-EI-71-004) - [.....] Operational Check of the Avionics Equipment Ventilation System via MCDU (MP TASK: 2 12600-01-1)	A/P	

BARCODE:

A32-052000-99-2-IDN

TASKCARD

WORK ORDER NO.	A/C REG.	A/C MSN.	A/C Effectivity	OPERATOR	TASK CARD NO.
					A32-052000-99-2-IDN

ACCOMPLISHMENT			
NO.	INSTRUCTION	PERFORMED BY	INSPECTED BY
	- [.....] Operational Check of the GAPCU via the CFDS (MP TASK: 242000-01-1) - [.....] Operational Check of EFCS by BITE (Ground Scanning) - [.....] Check ACARS/DATA indication - [.....] Check flight compartment and windows - [.....] Operational Test of the Emergency Lighting in the Cabin with the 'LIGHT EMER'		
6	PASSENGER COMPARTMENT - [.....] Check passenger compartment, Galleys, Lavatories for condition and cleanliness. - [.....] Check the closing flap of the waste bins for correct operation - [.....] Do a check of the emergency equipment for presence, correct stowage, condition, proper pressure, safeties, security and validity date. a) DOOR - Escape Slide / Raft. Result : b) PASSENGER CABIN : - Halon / Water Fire extinguisher Result : - PBE Result : - Oxygen Bottle Result : - First Aid Kit Result : c) LAVATORY - Fire extinguisher Result : - [.....] Examine the hermetic seal of the first aid Kits for condition. - [.....] Do a general visual check of the left and right wing upper surface and control through cabin windows. - [.....] PASSENGER/CREW DOOR (MP TASK 521000-01-1) Check emergency cylinder/accumulator pressure FWD: R/H _____ PSI, L/H _____ PSI AFT: R/H _____ PSI, L/H _____ PSI	A/P	
7	WINGS - TANKS (MP TASK 281100-01-2) Drain water from wing tanks and center tank at water drain valves	A/P	

BARCODE:

A32-052000-99-2-IDN

TASKCARD

WORK ORDER NO.	A/C REG.	A/C MSN.	A/C Effectivity	OPERATOR	TASK CARD NO.
					A32-052000-99-2-IDN

ACCOMPLISHMENT																																																			
NO.	INSTRUCTION	PERFORMED BY	INSPECTED BY																																																
8	FINAL ITEM - [.....] Review AFML, CML, DMI, NSRDIL, DBC, Deferred Item. (from. Phase check or C Check). - [.....] Check the aircraft document for completeness and validity <table><tr><th>Item</th><th>Description</th><th>Valid until</th></tr><tr><td>a</td><td>Certificate of Airworthiness (C of A).</td><td></td></tr><tr><td>b</td><td>Certificate of Registration (C of R).</td><td></td></tr><tr><td>c</td><td>Insurance Certificate</td><td></td></tr><tr><td>d</td><td>Weight and Balance.</td><td></td></tr><tr><td></td><td></td><td>Date Issued</td></tr><tr><td>e</td><td>Swing Compass</td><td></td></tr><tr><td>f</td><td>Radio Permit & AASL</td><td></td></tr><tr><td>g</td><td>Required Navigation Performance (RNP).</td><td></td></tr><tr><td>h</td><td>Reduced Vertical Separate Minimal (RVSM).</td><td></td></tr><tr><td>i</td><td>Noise Certificate</td><td></td></tr><tr><td>j</td><td>Minimum Equipment List</td><td></td></tr><tr><td></td><td></td><td>Last Revision Date</td></tr><tr><td>k</td><td>Operation Specifications (OPSPEC).</td><td></td></tr><tr><td></td><td></td><td>Yes / No</td></tr><tr><td>l</td><td>Dent Buckle & Chart (Check any due date of Temp. repair repetitive inspection or Permanent repair if required)</td><td></td></tr></table> - [.....] Check corrective actions in the aircraft technical log, and record each corrected or carried forward item. Record the DAILY check in the aircraft technical log. - [.....] De-energize the aircraft electrical network. Make sure that the cockpit sliding windows are closed. - [.....] Make sure that all passenger/crew doors, cargo compartment doors and service panel doors are correct closed and secured.	Item	Description	Valid until	a	Certificate of Airworthiness (C of A).		b	Certificate of Registration (C of R).		c	Insurance Certificate		d	Weight and Balance.				Date Issued	e	Swing Compass		f	Radio Permit & AASL		g	Required Navigation Performance (RNP).		h	Reduced Vertical Separate Minimal (RVSM).		i	Noise Certificate		j	Minimum Equipment List				Last Revision Date	k	Operation Specifications (OPSPEC).				Yes / No	l	Dent Buckle & Chart (Check any due date of Temp. repair repetitive inspection or Permanent repair if required)		A/P	
Item	Description	Valid until																																																	
a	Certificate of Airworthiness (C of A).																																																		
b	Certificate of Registration (C of R).																																																		
c	Insurance Certificate																																																		
d	Weight and Balance.																																																		
		Date Issued																																																	
e	Swing Compass																																																		
f	Radio Permit & AASL																																																		
g	Required Navigation Performance (RNP).																																																		
h	Reduced Vertical Separate Minimal (RVSM).																																																		
i	Noise Certificate																																																		
j	Minimum Equipment List																																																		
		Last Revision Date																																																	
k	Operation Specifications (OPSPEC).																																																		
		Yes / No																																																	
l	Dent Buckle & Chart (Check any due date of Temp. repair repetitive inspection or Permanent repair if required)																																																		
9	AIRCRAFT COVERING Installation of the Aircraft Protection Equipment - [.....] Protection of the 2 total temperature sensor in position	A/P																																																	

BARCODE:

A32-052000-99-2-IDN

TASKCARD

WORK ORDER NO.	A/C REG.	A/C MSN.	A/C Effectivity	OPERATOR	TASK CARD NO.
					A32-052000-99-2-IDN

ACCOMPLISHMENT			
NO.	INSTRUCTION	PERFORMED BY	INSPECTED BY
	- [.....] Protection of the 3 pitot probes in position - [.....] Protection of the 3 angle-of-attack sensors in position - [.....] Protection of the 6 static probes in position Installation of the Protection Devices on the Engines - [.....] Protection of the engine air intakes in position - [.....] Protection of the engine exhaust nozzles in position - [.....] Protection of the thrust reverser opening in position Installation of the Protection Devices on the APU Area - [.....] Protection of the APU exhaust duct - [.....] Protection of the outlet duct of the APU oil cooler - [.....] Install the protective covers on the aircraft as necessary. Make sure that an unauthorized person releases the aircraft		
10	THE END OF THE TASK		

START TIME(UTC)	FINISH TIME(UTC)	TOTAL MAN HOUR		DEFECT FOUND M.D.R.R. No:	Y	N
		EST.	ACTUAL			
		0.00				

TASK CARD RELEASE

DATE (UTC) : TIME (UTC) : SIGNATURE : AUTHORIZATION NO. :

BARCODE:



A32-052000-99-2-IDN


TASKCARD

WORK ORDER NO.	A/C REG.	A/C MSN.	A/C Effectivity	OPERATOR	TASK CARD NO.
					A32-052000-99-2-IDN

APPENDIX

GRAPHIC
PICTURE.JPG

EXTERNAL WALK AROUND DIAGRAM

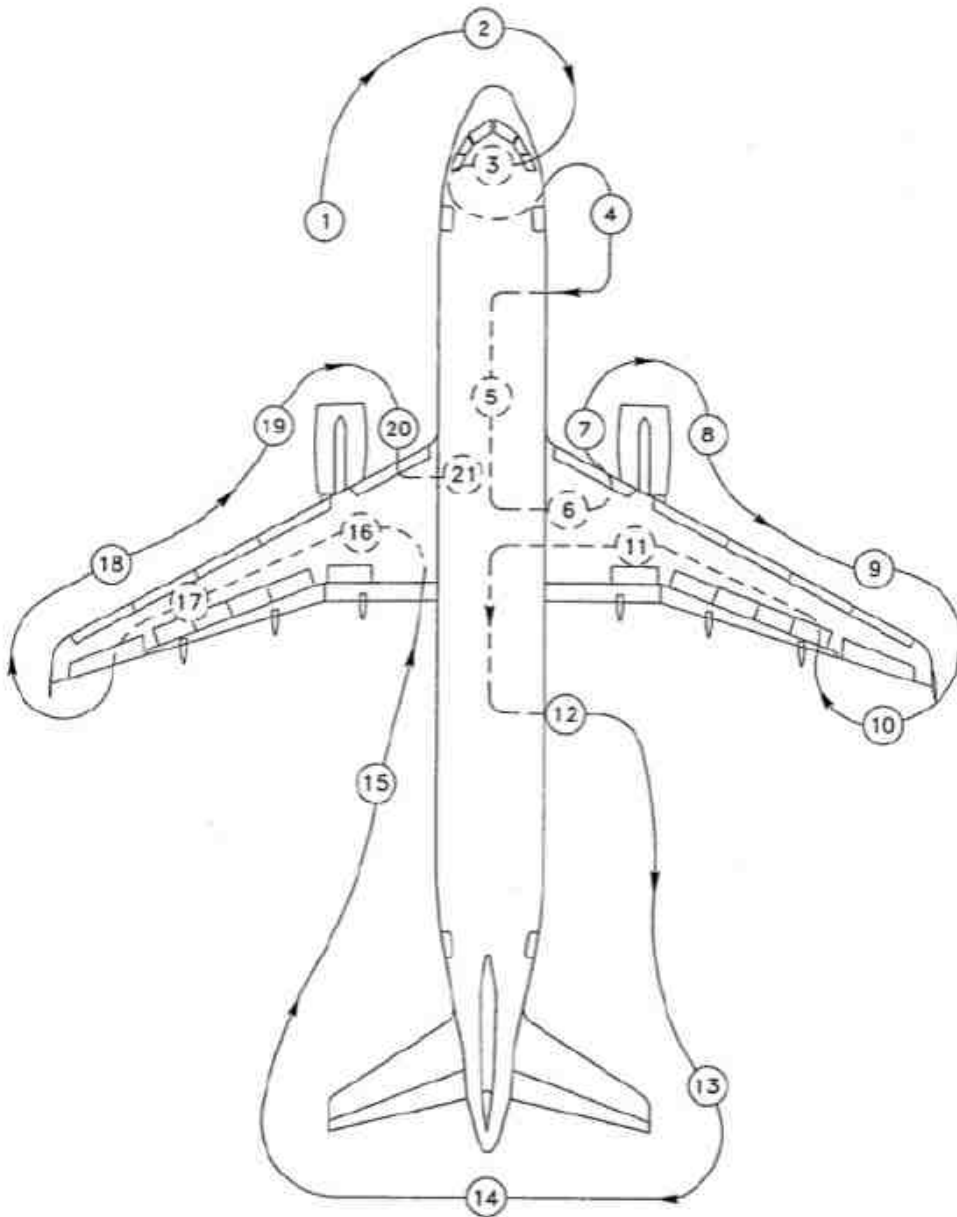

GRAPHIC
Figure_2_2.jpg

BARCODE:



A32-052000-99-2-IDN


TASKCARD

WORK ORDER NO.	A/C REG.	A/C MSN.	A/C Effectivity	OPERATOR	TASK CARD NO.
					A32-052000-99-2-IDN

APPENDIX

FIGURE 2 OGV Limitations.

INSPECT / CHECK	MAXIMUM SERVICEABLE LIMITS	REMARKS
Outlet Guide Vanes (OGV) for		
H. Metal leading edge missing	Up to 0.78 in. (19.81 mm) height and 0.39 in. (9.91 mm) wide	100-cycle extension allowed if missing material is over the maximum serviceable limits. (Speed tape) usage is recommended when missing metal on leading edge to preserve repair possibility, avoiding any damage on composite material Ref. AMM TASK 72-23-00-300-812
K. Nicks and/or dents, on the leading edge (metallic leading edge)	Any amount of damage less than 0.12 in. (3.05 mm) deep and metal not torn: SERVICEABLE. If damage less than 0.12 in. (3.05 mm) deep and metal torn, refer to paragraph G (Remove the unbonding area).	A maximum service extension of 100 cycles is allowed if damage is between 0.12 in. (3.05 mm) and 0.19 in. (4.83 mm) deep.
L. Nicks and/or dents, on the trailing edge	No limited number if less than 0.01 in. (0.25 mm) depth.	Replace the vane doublet Ref. AMM TASK 72-23-00-000-008 and Ref. AMM TASK 72-23-00-400-008.
M. Nicks and/or dents on the concave or convex side	No limited number if less than 0.02 in. (0.51 mm) depth.	Replace the vane doublet Ref. AMM TASK 72-23-00-000-008 and Ref. AMM TASK 72-23-00-400-008.
N. Nicks and/or dents on the inner or outer platform	No limited number if less than 0.02 in. (0.51 mm) depth.	Replace the vane doublet Ref. AMM TASK 72-23-00-000-008 and Ref. AMM TASK 72-23-00-400-008.

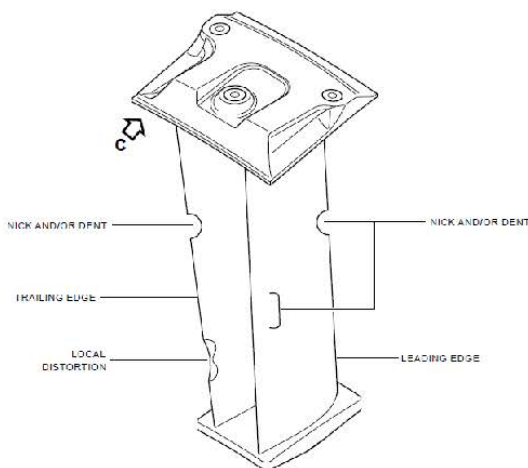

GRAPHIC
Figure_3_3.jpg

BARCODE:



A32-052000-99-2-IDN

TASKCARD

WORK ORDER NO.	A/C REG.	A/C MSN.	A/C Effectivity	OPERATOR	TASK CARD NO.
					A32-052000-99-2-IDN

APPENDIX

FIGURE 3 OGV Listing Inspection

NO	A/C REG	POS	ENG (Silahkan tambah Table bila finding lebih)					DATE OF CHECK	REMARK
			OGV POSITION (mm)	OGV POSITION (mm)	OGV POSITION (mm)	OGV POSITION (mm)	OGV POSITION (mm)		
1			POS:	POS:	POS:	POS:	POS:		
			mm	mm	mm	mm	mm		
2			POS:	POS:	POS:	POS:	POS:		
			mm	mm	mm	mm	mm		
3			POS:	POS:	POS:	POS:	POS:		
			mm	mm	mm	mm	mm		
4			POS:	POS:	POS:	POS:	POS:		
			mm	mm	mm	mm	mm		
5			POS:	POS:	POS:	POS:	POS:		
			mm	mm	mm	mm	mm		

GRAPHIC
Figure_4_4.jpg

BARCODE:




A32-052000-99-2-IDN

TASKCARD

WORK ORDER NO.	A/C REG.	A/C MSN.	A/C Effectivity	OPERATOR	TASK CARD NO.
					A32-052000-99-2-IDN

APPENDIX

Figure 4 OGV Location

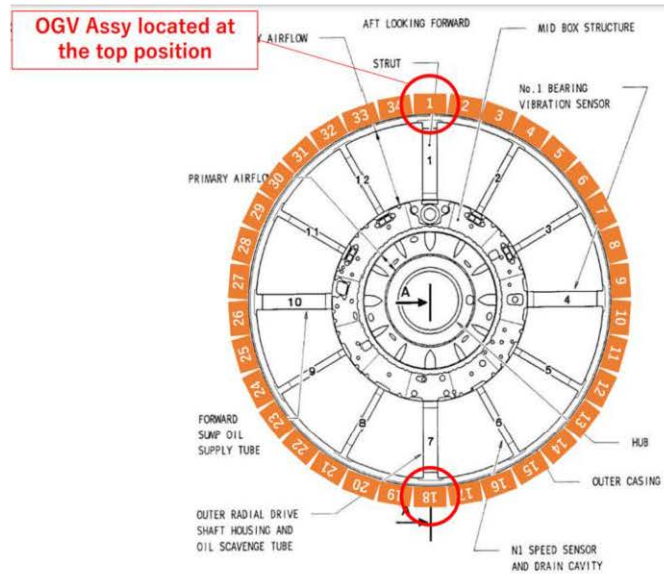

BARCODE:



A32-052000-99-2-IDN