

AI ASSISTED CODING

SUMANTH POLAM

2303A51121

BATCH – 03

24 – 03 – 2026

ASSINGMENT – 17.2

LAB – 17 : AI for Data Processing : Data Cleaning and Preprocessing Scripts.

Task – 01 : Student Academic Data Cleaning.

Prompt : Generate a Python script using Pandas to clean student academic data by handling missing values, removing duplicates, standardizing text fields, and encoding categorical variables.

Code :

```
colab.research.google.com/drive/10FWZXqhsVqEgr78MOogmBI3_JSaEyrvt#scrollTo=BURD0I3F3Wwp

AIAC_1121_LAB_17_2.ipynb
File Edit View Insert Runtime Tools Help
Q Commands + Code + Text ▶ Run all
RAM Disk

TASK 01

import pandas as pd
from sklearn.preprocessing import LabelEncoder

data = pd.read_csv("student_data.csv")

num_cols = data.select_dtypes(include=['int64', 'float64']).columns
data[num_cols] = data[num_cols].fillna(data[num_cols].mean())

cat_cols = data.select_dtypes(include=['object']).columns
for col in cat_cols:
    data[col].fillna(data[col].mode()[0], inplace=True)
    data.drop_duplicates(inplace=True)
for col in cat_cols:
    data[col] = data[col].str.lower().str.strip()
    le = LabelEncoder()
    for col in cat_cols:
        data[col] = le.fit_transform(data[col])

data['marks'] = (data['G1'] + data['G2'] + data['G3']) / 3
data['attendance'] = 100 - data['absences']
print("\nCleaned Data:\n", data.head())
```

Output :

```
...
Cleaned Data:
```

	school	sex	age	address	famsize	Pstatus	Medu	Fedu	Mjob	Fjob	...	\
0	0	0	18	1	0	0	4	4	0	4	...	
1	0	0	17	1	0	1	1	1	0	2	...	
2	0	0	15	1	1	1	1	1	0	2	...	
3	0	0	15	1	0	1	4	2	1	3	...	
4	0	0	16	1	0	1	3	3	2	2	...	

	goout	Dalc	Walc	health	absences	G1	G2	G3	marks	attendance
0	4	1	1	3	6	5	6	6	5.666667	94
1	3	1	1	3	4	5	5	6	5.333333	96
2	2	2	3	3	10	7	8	10	8.333333	90
3	2	1	1	5	2	15	14	15	14.666667	98
4	2	1	2	5	4	6	10	10	8.666667	96


Data Set Used : Student_data[Kaggle].

Explanation : This dataset contains multiple academic and personal features, so missing values are handled using mean and mode. Duplicate rows are removed and text fields are standardized. All categorical columns are encoded using Label encoder. New features like marks are created. The final dataset is clean and ready for analysis or ML models.

Task – 02 : Financial Transaction Data Preprocessing.

Prompt : Generate Python code to preprocess financial transaction data by converting dates, extracting time features, normalizing amounts, and handling outliers.

Code :

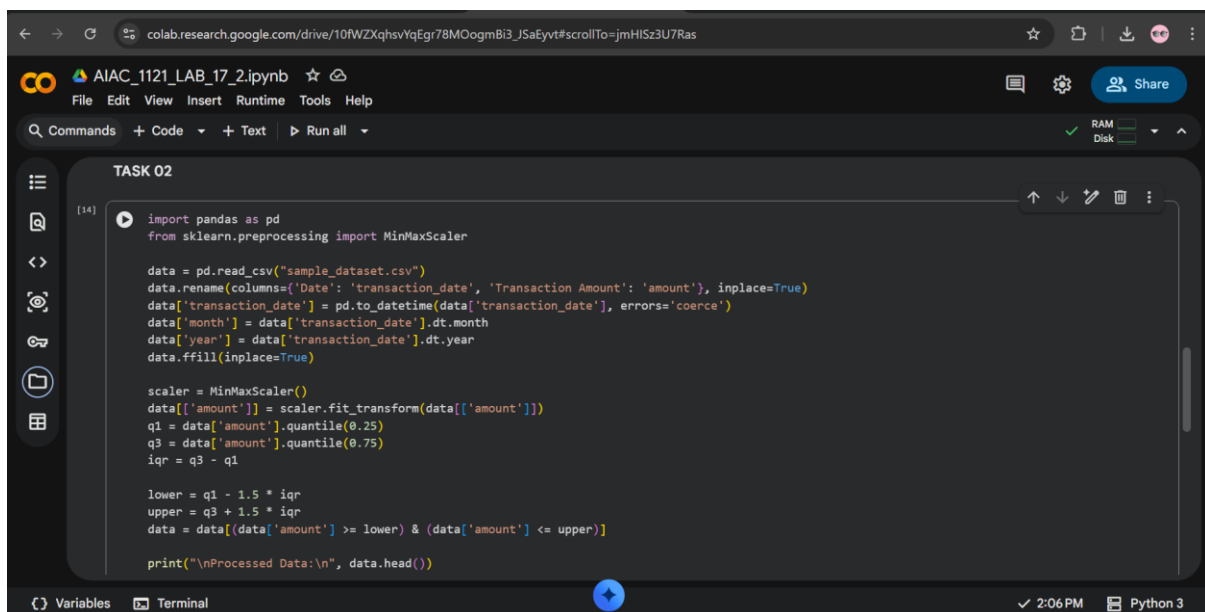

```
[14]: import pandas as pd
from sklearn.preprocessing import MinMaxScaler

data = pd.read_csv("sample_dataset.csv")
data.rename(columns={'Date': 'transaction_date', 'Transaction Amount': 'amount'}, inplace=True)
data['transaction_date'] = pd.to_datetime(data['transaction_date'], errors='coerce')
data['month'] = data['transaction_date'].dt.month
data['year'] = data['transaction_date'].dt.year
data.ffill(inplace=True)

scaler = MinMaxScaler()
data[['amount']] = scaler.fit_transform(data[['amount']])
q1 = data['amount'].quantile(0.25)
q3 = data['amount'].quantile(0.75)
iqr = q3 - q1

lower = q1 - 1.5 * iqr
upper = q3 + 1.5 * iqr
data = data[(data['amount'] >= lower) & (data['amount'] <= upper)]

print("\nProcessed Data:\n", data.head())
```

Output :

Processed Data:

...	Customer ID	Name	Surname	Gender	Birthdate	amount	\
0	752858	Sean	Rodriguez	F	2002-10-20	0.010171	
2	305449	Jacob	Williams	M	1981-10-25	0.037050	
3	988259	Nathan	Snyder	M	1977-10-26	0.002104	
4	764762	Crystal	Knapp	F	1951-11-02	0.019099	
5	576539	Monica	Bartlett	F	2001-10-20	0.031430	

	transaction_date	Merchant Name	Category	month	year
0	2023-04-03	Smith-Russell	Cosmetic	4	2023
2	2023-09-20	Steele Inc	Clothing	9	2023
3	2023-01-11	Wilson, Wilson and Russell	Cosmetic	1	2023
4	2023-06-13	Palmer-Hinton	Electronics	6	2023
5	2023-08-24	Tran, Torres and Joyce	Cosmetic	8	2023


Data Set Used : Sample_data[Kaggle].

Explanation : The dataset is first loaded and the transaction date column is converted into datetime format for easier time-based analysis. New features like month and year are extracted from the date to enhance insights. Missing values are handled using forward fill to maintain data continuity. The transaction amount is normalized using MinMaxScaler to bring values into a common range. Finally, outliers are removed using the IQR method to improve data quality and model performance.

Task – 03 : Environmental Sensor Data Preparation.

Prompt : Write Python code to clean sensor data, handle missing values, scale numerical features, encode categorical variables, and split the dataset.

Code :

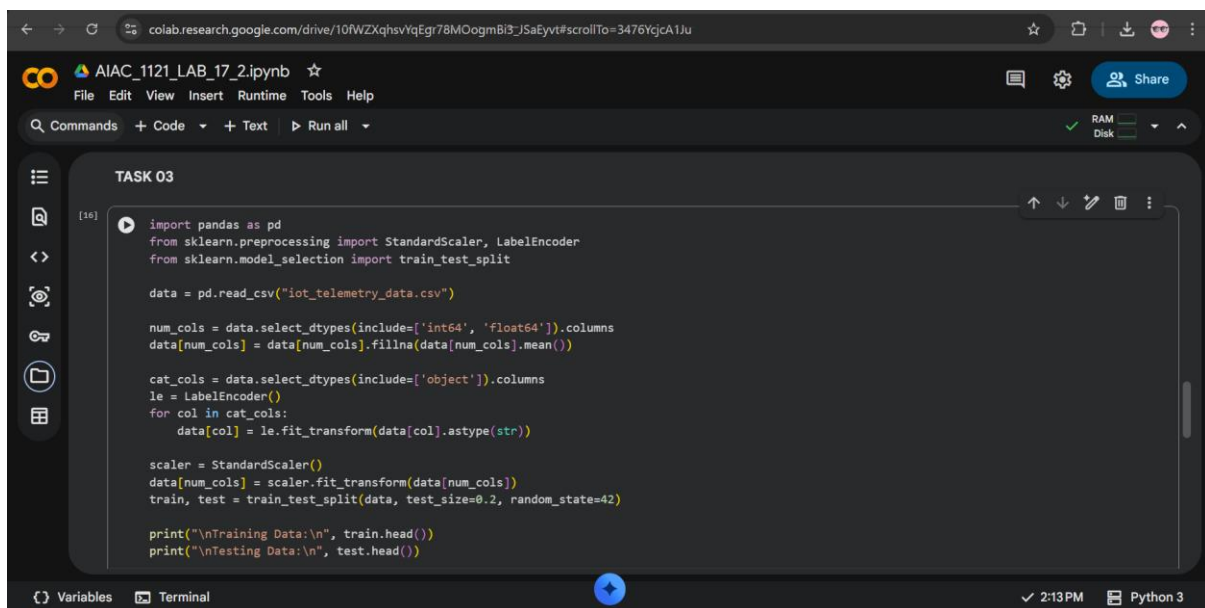A screenshot of a Google Colab notebook interface. The notebook is titled "TASK 03" and contains a single code cell. The code imports pandas as pd, StandardScaler and LabelEncoder from sklearn.preprocessing, and train_test_split from sklearn.model_selection. It then loads a CSV file named "iot_telemetry_data.csv". The code identifies numerical columns (int64, float64) and fills missing values with the mean. It also identifies categorical columns (object) and encodes them using LabelEncoder. Finally, it standardizes the numerical features using StandardScaler and splits the data into training and testing sets (80% train, 20% test) using train_test_split with random_state=42. The code prints the head of both training and testing datasets. The Colab interface shows the file "AIAC_1121_LAB_17_2.ipynb" and various toolbar options like File, Edit, View, Insert, Runtime, Tools, and Help. The status bar at the bottom indicates "Variables", "Terminal", "2:13 PM", and "Python 3".

```
[16] import pandas as pd
from sklearn.preprocessing import StandardScaler, LabelEncoder
from sklearn.model_selection import train_test_split

data = pd.read_csv("iot_telemetry_data.csv")

num_cols = data.select_dtypes(include=['int64', 'float64']).columns
data[num_cols] = data[num_cols].fillna(data[num_cols].mean())

cat_cols = data.select_dtypes(include=['object']).columns
le = LabelEncoder()
for col in cat_cols:
    data[col] = le.fit_transform(data[col].astype(str))

scaler = StandardScaler()
data[num_cols] = scaler.fit_transform(data[num_cols])
train, test = train_test_split(data, test_size=0.2, random_state=42)

print("\nTraining Data:\n", train.head())
print("\nTesting Data:\n", test.head())
```

Data Set Used : Iot_Telemetry_Data[Kaggle].

Explanation :

The dataset is loaded and missing numerical values are filled using the mean to ensure completeness. Categorical columns are encoded into numerical form using LabelEncoder. All numerical features are standardized using StandardScaler to improve model performance. The dataset is then split into training and testing sets for machine learning tasks. This preprocessing makes the data clean, consistent, and ready for predictive modeling.

Output :

```
Training Data:
...  ts  device  co  humidity  light  lpg  motion  \
403743  1.718761  2  1.049533 -0.977585 False  1.036094 False
89477  -0.965176  0  0.191110  1.239461 False  0.225863 False
285682  0.709553  1 -0.503622  0.808369 True -0.466690 False
45954  -1.339768  2  0.531880 -0.775235 False  0.552874 False
389117  1.593869  0 -1.937926  1.371428 False -2.051467 False

smoke  temp
403743  1.039346 -0.353546
89477  0.219849 -1.242980
285682 -0.473833  1.277084
45954  0.549630 -0.131187
389117 -2.032107 -1.168861

Testing Data:
ts  device  co  humidity  light  lpg  motion  \
362352  1.370019  1 -0.237835 -0.440919 True -0.197264 False
382697  1.540262  2  0.843570 -0.766438 False  0.845664 False
386329  1.570416  1 -0.345070  0.438861 True -0.305255 False
141680 -0.517428  0 -1.438976  1.652958 False -1.469927 False
212318  0.081979  2  0.595091 -1.162339 False  0.612720 False

smoke  temp
362352 -0.204768  2.351818
382697  0.846025 -0.242366
```

Task – 04 : Real Time Application : Smart City Traffic Data Cleaning.

Prompt : Generate Python code to clean traffic data by standardizing text, filling missing values, removing duplicates, normalizing features, and comparing dataset quality.

Code :

```
AIAC_1121_LAB_17_2.ipynb
File Edit View Insert Runtime Tools Help
Q Commands + Code + Text Run all
RAM Disk

TASK 04
[19]
✓ 0s
import pandas as pd
from sklearn.preprocessing import MinMaxScaler

data = pd.read_csv("smart_city_traffic_stress_dataset.csv")

num_cols = data.select_dtypes(include=['int64', 'float64']).columns
cat_cols = data.select_dtypes(include=['object']).columns

for col in cat_cols:
    data[col] = data[col].str.lower().str.strip()

for col in num_cols:
    data[col].fillna(data[col].mean(), inplace=True)

data.drop_duplicates(inplace=True)

scaler = MinMaxScaler()
data[num_cols] = scaler.fit_transform(data[num_cols])

print("\nAfter Cleaning:\n", data.describe())
```

Data Set Used : Smart_city_traffic_stress_dataset[Kaggle].

Output :

After Cleaning:					
...	count	traffic_density	horn_events_per_min	avg_speed	signal_wait_time \
	count	50000.000000	50000.000000	50000.000000	50000.000000
	mean	0.499267	0.354817	0.530562	0.463345
	std	0.291048	0.176126	0.179240	0.232271
	min	0.000000	0.000000	0.000000	0.000000
	25%	0.247706	0.222848	0.386131	0.264173
	50%	0.495413	0.350563	0.530470	0.464173
	75%	0.752294	0.479083	0.675335	0.660144
	max	1.000000	1.000000	1.000000	1.000000
	count	road_quality_score	stress_index		
	count	50000.000000	50000.000000		
	mean	0.660046	0.444023		
	std	0.209512	0.163516		
	min	0.000000	0.000000		
	25%	0.516667	0.316200		
	50%	0.666667	0.436700		
	75%	0.816667	0.562700		
	max	1.000000	1.000000		

Explanation :

The dataset is cleaned by standardizing text fields to ensure consistency across categorical data. Missing numerical values are filled using the mean to avoid data loss. Duplicate records are removed to improve data accuracy. Numerical features are normalized using MinMaxScaler for better comparability. The dataset summary before and after cleaning highlights improvements in data quality.

Task – 05 : Social Media Text Data Cleaning and Feature Extraction.

Prompt : Write Python code to clean social media text data by removing duplicates, cleaning text, tokenizing, removing stopwords, and extracting features.

Code :

```
TASK 05
import pandas as pd
import re
from nltk.corpus import stopwords
from nltk.stem import PorterStemmer
import nltk

data = pd.read_csv("mental_health_social_media_dataset.csv")

data.drop_duplicates(inplace=True)
text_col = data.select_dtypes(include=['object']).columns[0]
data.dropna(subset=[text_col], inplace=True)

def clean_text(text):
    text = re.sub(r"http[s]*", "", str(text))
    text = re.sub(r"[^a-zA-Z]", "", text)
    text = text.lower()
    return text

data['clean_text'] = data[text_col].apply(clean_text)
nltk.download('stopwords') # Download the stopwords corpus
stop_words = set(stopwords.words('english'))
ps = PorterStemmer()
data['tokens'] = data['clean_text'].apply(lambda x: [ps.stem(word) for word in x.split() if word not in stop_words])

data['word_count'] = data['tokens'].apply(len)
print("\nProcessed Data:\n", data.head())
```

Output :

```
Processed Data:
...
  person_name  age  date  gender  platform  daily_screen_time_min \
0  Reyansh Ghosh  35  1/1/2024  Male  Instagram  320
1    Neha Patel  24  1/12/2024  Female  Instagram  453
2  Ananya Naidu  26  1/6/2024  Male  Snapchat  357
3    Neha Das  66  1/17/2024  Female  Snapchat  190
4  Reyansh Banerjee  31  1/28/2024  Male  Snapchat  383

  social_media_time_min  negative_interactions_count \
0  160  1
1  226  1
2  196  1
3  105  0
4  211  1

  positive_interactions_count  sleep_hours  physical_activity_min \
0  2  7.4  28
1  3  6.7  15
2  2  7.2  24
3  1  8.0  41
4  2  7.1  22

  anxiety_level  stress_level  mood_level  mental_state  clean_text \
0  2  7  6  Stressed  reyansh ghosh
1  3  8  5  Stressed  neha patel
2  3  7  6  Stressed  ananya naidu
3  2  6  6  Stressed  neha das
4  3  7  6  Stressed  reyansh banerjee
```

Data Set Used : Mental_health_social_media_dataset[Kaggle].

Explanation :

The dataset is cleaned by removing duplicate and missing text entries. Text data is processed by eliminating URLs, special characters, and converting everything to lowercase. Stopwords are removed and stemming is applied to simplify words. The cleaned text is tokenized into meaningful words. Additional features like word count are generated to support sentiment analysis tasks.