

DEVOPS AND FULL STACK DEVELOPMENT

ASSIGNMENT

SUMANTH POLAM

2303A51121

BATCH – 03

19 – 01 – 2026

1. Implementing CRUD Operations

You implement Create, Read, Update, and Delete operations by calling specific methods on your Sequelize model objects within your controller logic.

- **Create:** Use the `.create()` method to insert a new row into the database.
- **Read:** Use `.findAll()` to retrieve all records or `.findByPk(id)` to find a specific entry by its primary key.
- **Update:** Use the `.update()` method, which requires a where clause to specify which record to modify.
- **Delete:** Use the `.destroy()` method with a where clause to remove records from the database.

2. Data Validation and Constraints

Sequelize handles data integrity at both the application level and the database level:

- **Model Validation:** These are defined in the model schema (e.g., `isEmail: true, len: [2, 20]`) and are checked before the query is sent to the database.
- **Constraints:** These are database-level rules such as `allowNull: false`, `unique: true`, or foreign key restrictions that prevent invalid data from being stored.

3. Defining Relationships

Relationships are defined in your model configuration files to link different tables together.

- One-to-Many: For a platform where one course has many enrollments, you use `Course.hasMany(Enrollment)` and `Enrollment.belongsTo(Course)`.
- Many-to-Many: If a student can join many courses and a course has many students, you use `User.belongsToMany(Course, { through: 'Enrollments' })`.

4. Role of Sequelize Methods

These built-in methods act as an abstraction layer, translating JavaScript code into SQL queries:

Method	Role	SQL Equivalent
<code>create</code>	Inserts a new record.	<code>INSERT INTO</code>


Method	Role	SQL Equivalent
<code>findAll</code>	Retrieves all records.	<code>SELECT *</code>
<code>findByPk</code>	Retrieves one record	<code>SELECT ... WHERE id = x</code>
<code>update</code>	Modifies existing rec	<code>UPDATE ... SET</code>
<code>destroy</code>	Removes records.	<code>DELETE FROM</code>

5. Handling Database Errors Gracefully

To prevent your server from crashing during database issues, you should use a structured error-handling approach:

- Async/Await: Use try/catch blocks or an asyncHandler middleware (as seen in your app.js) to catch rejected promises.
- Middleware: Pass errors to a global errorHandler (like the one imported in your app.js) to send a clean JSON response back to the client.
- Specific Errors: Check for specific Sequelize error types, such as SequelizeValidationError or SequelizeUniqueConstraintError, to provide helpful feedback to the user.

Images

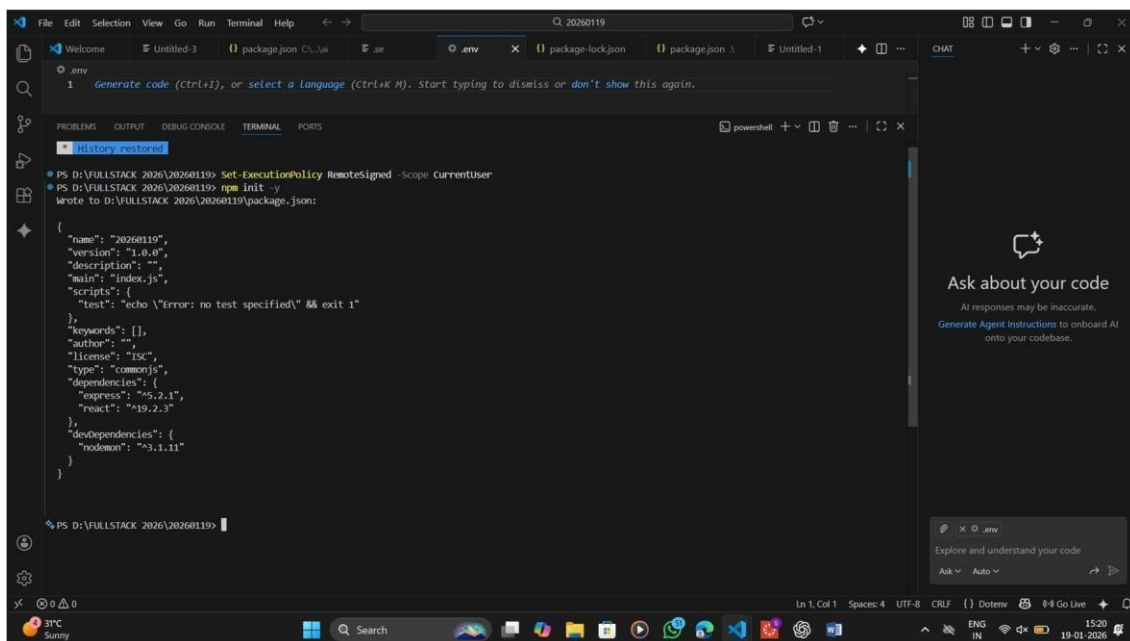

The image shows a screenshot of a Visual Studio Code editor window. The main editor area displays a file named `package.json` with the following JSON content:

```
{
  "name": "20260119",
  "version": "1.0.0",
  "description": "",
  "main": "index.js",
  "scripts": {
    "test": "echo \\error: no test specified\\ && exit 1"
  },
  "keywords": [],
  "author": "",
  "license": "ISC",
  "type": "commonjs",
  "dependencies": {
    "express": "^5.2.1",
    "react": "^19.2.3"
  },
  "devDependencies": {
    "nodemon": "^3.1.11"
  }
}
```

The terminal window at the bottom shows the following PowerShell commands and output:

```
PS D:\FULLSTACK 2026\20260119> Set-ExecutionPolicy RemoteSigned -Scope CurrentUser
PS D:\FULLSTACK 2026\20260119> npm init -y
Write to D:\FULLSTACK 2026\20260119\package.json:
```

The chat panel on the right side of the editor displays the message: "Ask about your code". Below this, it says "AI responses may be inaccurate." and "Generate Agent Instructions to onboard AI onto your codebase." There is also a button labeled "Ask" and a dropdown menu labeled "Auto".

```

C:\Users\91939\OneDrive\Desktop\Fullstack2026>npm init express
Need to install the following packages:
create-express@1.0.4
Ok to proceed? (y) y

npm warn deprecated source-map-url@0.4.1: See https://github.com/lydell/source-map-url#deprecated
npm warn deprecated urix@0.1.0: Please see https://github.com/lydell/urix#deprecated
npm warn deprecated resolve-url@0.2.1: https://github.com/lydell/resolve-url#deprecated
npm warn deprecated source-map-resolve@0.5.3: See https://github.com/lydell/source-map-resolve#deprec
ated
npm warn deprecated inflight@1.0.6: This module is not supported, and leaks memory. Do not use it. Ch
eck out lru-cache if you want a good and tested way to coalesce async requests by a key value, which
is much more comprehensive and powerful.
npm warn deprecated formidable@1.2.6: Please upgrade to latest, formidable@v2 or formidable@v3! Check
these notes: https://bit.ly/2ZEQiaU
npm warn deprecated babel-preset-es2015@6.24.1: 🚨 Thanks for using Babel: we recommend using babel-
preset-env now: please read https://babeljs.io/env to update!
npm warn deprecated glob@7.2.3: Glob versions prior to v9 are no longer supported
npm warn deprecated superagent@2.3.0: Please upgrade to superagent v10.2.2+, see release notes at htt
ps://github.com/forwardemail/superagent/releases/tag/v10.2.2 - maintenance is supported by Forward Em
ail @ https://forwardemail.net
npm warn deprecated core-js@2.6.12: core-js@<3.23.3 is no longer maintained and not recommended for u
sage due to the number of issues. Because of the V8 engine whims, feature detection in old core-js ve
rsions could cause a slowdown up to 100x even if nothing is polyfilled. Some versions have web compat
ibility issues. Please, upgrade your dependencies to the actual version of core-js.

> fullstack2026@1.0.0 npx
> create-express

C:\Users\91939\OneDrive\Desktop\Fullstack2026>

```

```

> fullstack2026@1.0.0 npx
> create-express

C:\Users\91939\OneDrive\Desktop\Fullstack2026>npm install express

added 65 packages, and audited 66 packages in 4s

22 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities

C:\Users\91939\OneDrive\Desktop\Fullstack2026>

```

```

run `npm fund` for details

found 0 vulnerabilities

C:\Users\91939\OneDrive\Desktop\Fullstack2026>npm i -D nodemon

added 27 packages, and audited 93 packages in 2s

26 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities



C:\Users\91939\OneDrive\Desktop\Fullstack2026>



```


```

PS D:\FULLSTACK 2026\20260119> {
>>   "name": "John",
>>   "email": "john@gmail.com"
>> }

```

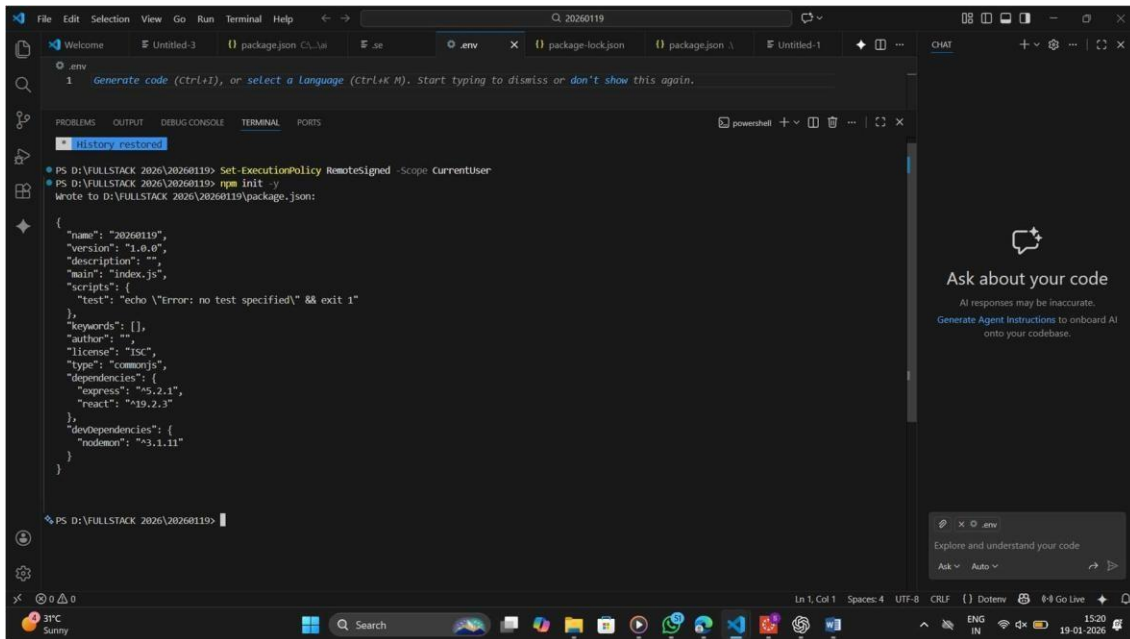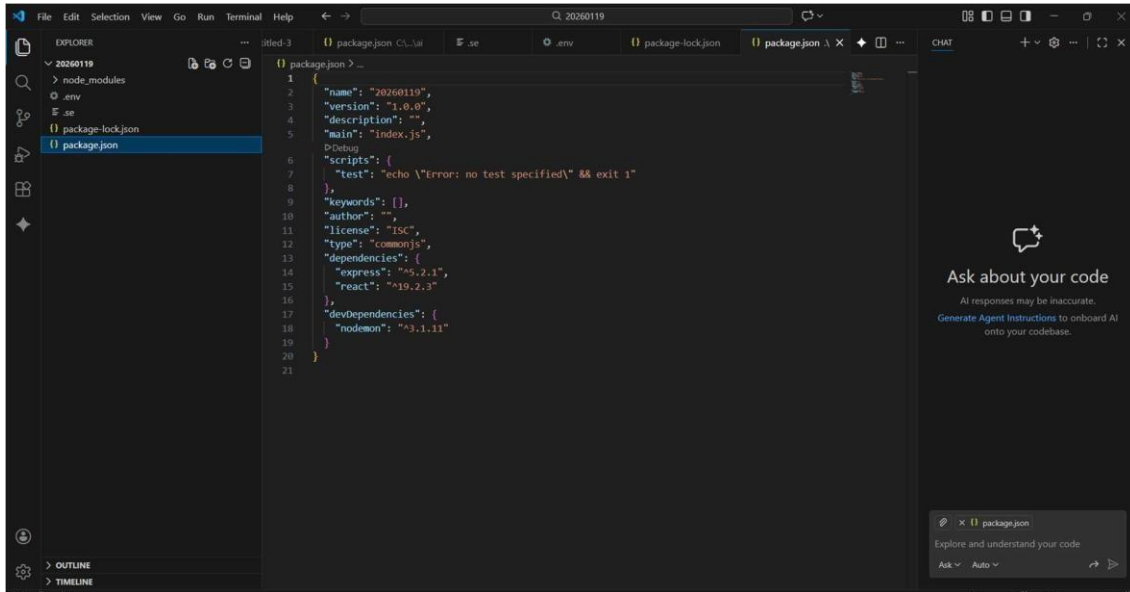

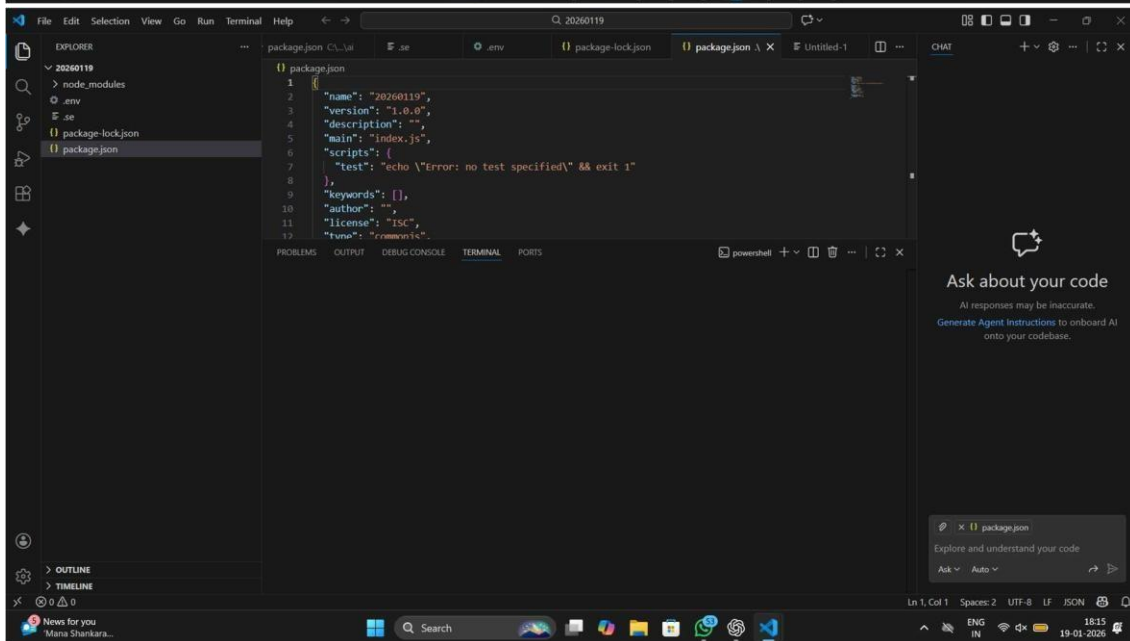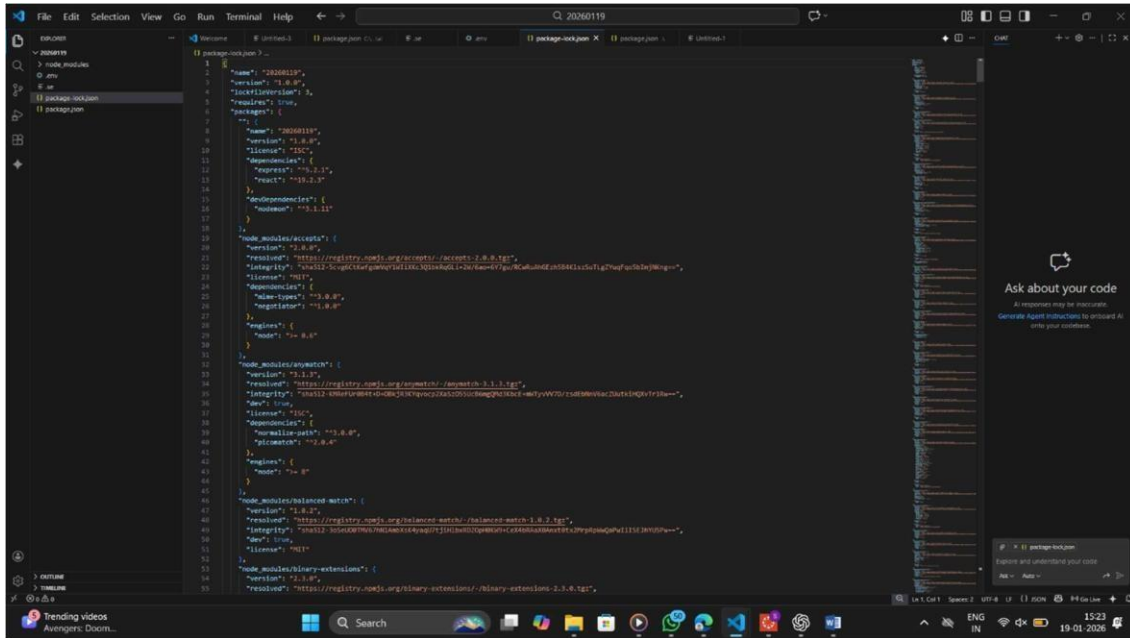

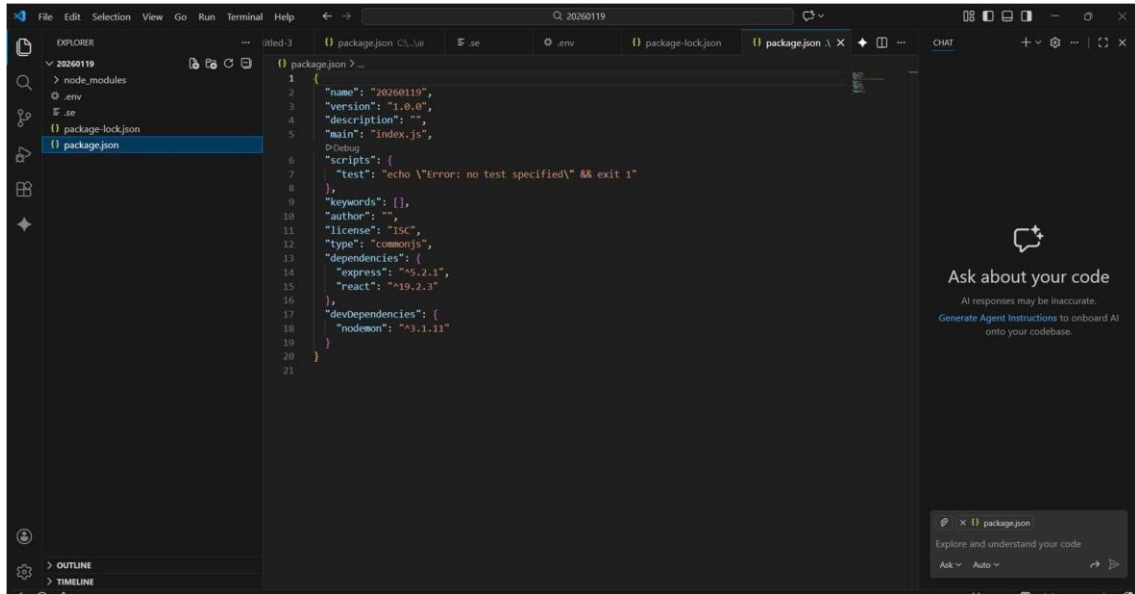THANK YOU!!