

The Title

by

M.E Bugge

A thesis
submitted to the Victoria University of Wellington
in fulfilment of the
requirements for the degree of
Undergraduate Research Project
in Data Science.

Victoria University of Wellington
2024

Abstract

An abstract of fewer than 500 words must be included.

Contents

1	Introduction	1
1.1	Ordinal Patterns	1
1.2	Reproducibility	4
2	Comparison of two time series	5
3	Applications	8

Chapter 1

Introduction

Ordinal Patterns have been around for twenty years. They have been used in applications in several domains. Many of these applications involve comparing time series, signals and images thorough features extracted from their OPs. Since results about the distribution of such features are recent, our initial interest was comparing existing conclusions with those supported by the new statistical tests. While approaching this research avenue, we found indications of reproducibility crisis in this field, mostly related to data availability. We then moved into the application of these new tests to already published results, and found evidence of other type of reproducibility crises: diverging results depending on the type of library employed. MAGNUS; then, we decided to study...

We are interested in verifying the reproducibility of results of Ordinal Patterns in the scientific literature. Initially, we wanted to check how many of the 3000

1.1 Ordinal Patterns

History Bandt and Pompe first paper about ordinal patterns is from 2002. In it they introduced the concept of turning time series data into patterns. They furthermore used Shannon entropy on the pattern distribution [5].

Shannon Entropy was developed in 1948 by C.E.Shannon [19].

The 1995 paper "A statistical measure of complexity" by López-Ruiz, R. and Mancini, H. L. and Calbet, X introduces the concept of a statistical measure of complexity [13]. This idea was introduced into ordinal patterns in 2003 [14] and in 2004 the version of it using Jensen-Shannon divergence were published [10], which is the version being used in this paper.

Definition Given a time series $X = (X_1, X_2, \dots, X_{n+D-1})$. D is chosen, and recommend by Bandt and Pompe to be set between 3 and 7. D is the length of the subsequence each pattern represents. n is the number of patterns. A tuple of data points is transformed into a pattern by ranking them by numerical order. The lowest observation gets assigned the number 0 and the highest observation gets the number $D-1$. The pattern can then be written as a string of these numbers. A tuple $(1, 3, 2)$ will have pattern 021.

The exact order of each pattern becomes redundant, when calculating the entropy later, so it can be easier to think of the patterns simply as $\pi^1, \pi^2, \dots, \pi^{D!}$. Tuples that have the same ordering gets the same pattern, is the main point. There is $D!$ different patterns. Equal values are ignored and can be offset by adding small random perturbations. The frequency of each pattern is defined as

$$p(\pi) = \frac{\#\{t | t \leq T - n, (x_{t+1}, \dots, x_{t+n}) \text{ has type } \pi\}}{T - n + 1}$$

[5]

In the above section the delay time, τ , between each observation in each subsequence, has been 1, however this can be set to any reasonable value that still produces enough patterns. In this paper only $\tau = 1$ will be used.

From the pattern distribution entropies can be calculated. In this paper only Shannon entropy will be used.

$$h(n) = - \sum p(\pi) \log(p(\pi))$$

Normalized version

$$H(n) = -\frac{\sum p(\pi) \ln(p(\pi))}{\ln(D!)}$$

There is several statistical complexity measures that can be used. They are all a product between the used entropy and a distance measure. In this paper Martin-Plastino-Rosso intensive Statistical Complexity Measure is used, where the distance measure is Jensen-Shannon divergence and it is measured between the pattern distribution and the uniform distribution. The Q_0 is normalizing term. It is defined as

$$C[\mathcal{P}] = H[\mathcal{P}] \cdot Q_J[\mathcal{P}, \mathcal{P}_e]$$

$$Q_J[\mathcal{P}, \mathcal{P}_e] = Q_0 \cdot \mathcal{J}[\mathcal{P}, \mathcal{P}_e]$$

$$\mathcal{J}[\mathcal{P}, \mathcal{P}_e] = S\left[\frac{\mathcal{P} + \mathcal{P}_e}{2}\right] - S\left[\frac{\mathcal{P}}{2}\right] - S\left[\frac{\mathcal{P}_e}{2}\right]$$

$$\mathcal{P}_e = \{p_j = \frac{1}{W}; j = 1, \dots, W\}$$

$$Q_0 = -2\left(\frac{W+1}{W} \ln(W+1) - 2\ln(2W) + \ln(W)\right)^{-1}$$

[4]

Applications Going to the original Bandt and Pompe paper [5] on Semantic Scholar and getting the ten most recent citations, gives a good picture of how broadly this methodology is being used.

The topic varies from: "Walnut crack detection..." [28], Schizophrenia [26], Analysis of Smart Drilling [23], Epileptic Seizure detection [3], mind wandering during video-based learning [24] and Random Numbers generated based on dual-channel chaotic light [12]. The rest that was found [7, 8, 22, 11]

1.2 Reproducibility

Reproducibility crisis In data science, data from many different scientific fields are analysed, as shown in the application section of ordinal patterns above. It therefore increases the difficulty of reproducing the data collection stage, as most cases requires an interdisciplinary study involving multiple people. In some cases it is impossible e.g. if the equipment needed is unavailable or a time series of weather data cannot be recollected, since it is impossible to go back in time. The point of science is to eliminate trust, when sharing knowledge, however the above observations highlights the need for some degree of trust, in cases, where data cannot be reproduced. Only data that is random numbers generated in a script, will be reproduced in this paper.

The COVID pandemic gave birth to the following quote. "We warn against the potential misuse or misleading interpretation of public data of variable quality" [21]. Data from different governments does not have the same quality. This necessities good source criticism. In this paper data from peer reviewed studies will be trusted, which have often either produced the data themselves or gotten it from reputable organisations as NASA or NOAA.

In this paper the focus will be on direct computational reproduction.

"Computational reproducibility is most often direct (reproducing particular analysis outcomes from the same data set using the same code and software), but it can also be conceptual (analysing the same raw data set with alternative approaches, different models or statistical frameworks)" [9]

Chapter 2

Comparison of two time series

Examples of how comparisons are done in the literature Ordinal Patterns have been used in astrophysics to analyse geomagnetic auroras. Two articles were found to do this. They both compare the plotted points in the HxC plane to fractional Brownian motion time series. "Many of the points are on or very near the fractional Brownian motion curve, but a single point from the Helios data lies above the fractional Brownian motion curve." [27]. A small amount of calculation is done in this paper to rate the statistical likelihood of a point being displaced from the fractional Brownian motion (fBm), but no method is presented to evaluate, if a point is displaced. "Figure 4 indicates that complexity-entropy values of AL overlap the fBm values for all subsampling parameters τ " [15]. Same problem in this article, where no method is presented to systematically rate if a point is overlapping or not with fBm values. Ordinal patterns are often used in climate research to detect changes in the dynamics of a weather system over time. This is done in this paper [17], by splitting the dataset into windows and calculating the entropy for each window. No method is presented to evaluate if a change in entropy is significant. It is assumed that a change in entropy means a change in the dynamics of the system, without considering the possibility that it might be caused by stochastic randomness of sampling.

Statistical Test and Confidence Intervals Confidence intervals describes the range within a sampling of a distribution has a certain percentage of being in. Statistical Test can be used to reject a wide range of hypotheses. P value is used as rejection criteria, where the lower the p values is the lower is the chance of making a type 1 error, which is rejecting a true hypothesis.[20]

Confidence Interval of an Ordinal Pattern Distribution Entropy By assuming that $\mathbf{X}_n = (X_{1,n}, X_{2,n}, \dots, X_{K,n})$ with $n \in \mathbb{N}$ is a sequence of independent and identically distributed K-variate vectors of random variables. Furthermore assuming as n tends to infinity,

$$\sqrt{n}(X_{1,n} - \theta_1, X_{2,n} - \theta_2, \dots, X_{K,n} - \theta_K)$$

converges in distribution to the multivariate normal law $\mathcal{N}(\mathbf{0}, S_X)$, where S_X is the covariance matrix. The following terms are defined: m is the embedding dimension. $\mathbf{q} = (q_1, q_2, \dots, q_{m!})$, where q_i is the probability of observing the ordinal pattern π_i . $\mathbf{D}_q = \text{Diag}(q_1, q_2, \dots, q_{m!})$ Diagonal matrix. $\mathbf{Q}^{(\ell)}$, which is the transition matrix with elements $q_{ij}^{(\ell)} = \text{Pr}(\psi = \pi_i \wedge \psi_{t+\ell} = \pi_j)$ for $\ell = 1, 2, \dots, m-1$

From this starting point it is derived that

$$\begin{aligned} \sqrt{n}[S(\hat{\mathbf{q}}) - S(\mathbf{q})] &\xrightarrow[n \rightarrow \infty]{\mathcal{D}} \mathcal{N}(0, \sigma_{\mathbf{q}}^2) \\ \sigma_{\mathbf{q}}^2 &= \sum_{i=1}^{m!} (\Sigma_{\mathbf{q}})_{ii} + 2 \sum_{i=1}^{m!-1} \sum_{j=i+1}^{m!} (\Sigma_{\mathbf{q}})_{ij} \\ (\Sigma_{\mathbf{q}})_{ij} &= \begin{cases} (\ln(q_i) + 1)^2 \Sigma_{ii} & \text{if } i = j \\ (\ln(q_i) + 1)(\ln(q_j) + 1) \Sigma_{ij} & \text{if } i \neq j \end{cases} \\ \Sigma &= \mathbf{D}_q - (2m-1)\mathbf{q}\mathbf{q}^T + \sum_{\ell=1}^{m-1} (\mathbf{Q}^{(\ell)} + \mathbf{Q}^{(\ell)T}) \end{aligned}$$

[16]It is the variance that is of interest, as it will be used for statistical tests. The test goes as follows. Let $x = (x_1, x_2, \dots, x_{n_x})$ and $y = (y_1, y_2, \dots, y_{n_y})$ be

two independent time series of length $n_x = T_x + D_x - 1$ and $n_y = T_y + D_y - 1$. p_x and p_y is the ordinal distributions of the time series. $H(\hat{p}_x)$ and $H(\hat{p}_y)$ is their entropies. A new distribution W is constructed. $W \xrightarrow{D} \mathcal{N}(\mu_W, \sigma_W^2)$, with $\mu_W = \mu_{n_x, p_x} - \mu_{n_y, p_y}$ and $\sigma_W^2 = \sigma_{n_x, p_x}^2 + \sigma_{n_y, p_y}^2$. The p value ends up being $2(1 - \Phi(\xi))$, where $\xi = \frac{H(\hat{p}_x) - H(\hat{p}_y)}{\sigma_W}$. [6]

Implementation The three main libraries that will be used specific to the field of ordinal patterns are: statcomp[2], pdc[1] and StatOrdPattHxC, which is a library developed by the supervisor of this project. Slight modifications are made to StatOrdPattHxC. As will be shown later these three libraries perform quite differently in a lot of cases. Solutions for this is proposed. StatOrdPattHxC has the variance and statistical test implemented, which statcomp and pdc do not. A wide range of standard R libraries is utilized as well.

Chapter 3

Applications

Power-law noise The statistical test mentioned in the previously chapter is tested on computer generated power-law noise series.[25] the β term in the formula $\frac{1}{f^\beta}$ will be referenced as k for the rest of the paper. Three values of k is chosen: $k_1 = (1, 3, 5)$. For each k_1 value another set of k values is generated using the formula $k_2 = (k_1 - e^0, k_1 - e^{-1}, k_1 - e^{-2}, k_1 - e^{-3}, k_1 + 0, k_1 + e^0, k_1 + e^{-1}, k_1 + e^{-2}, k_1 + e^{-3})$. The statistical test is used on every possible pair of a value from k_1 and a value from k_2 . Two power-law series is generated using each value in the pair. The series have 1,000 elements. The hypothesis will be rejected if the p values is less then 0.05. 10 iterations is done for each pair. A plot will be made for each k_1 value of the rejection rate of the statistical test. A NaN plot is include for each plot, that shows the rate, at which the statistical test produces NaN values. A k value difference of 1 leads in most cases to high rejection rate, with 0-1 being the only exception. Only for $k_1 = 5$ does NaN values occur. Power-law series with $k = 5$ and 1,000 values has an entropy around 0.4. The datasets that will be examined in the rest of the paper has entropy above 0.9, so no NaN values is expected to occur.

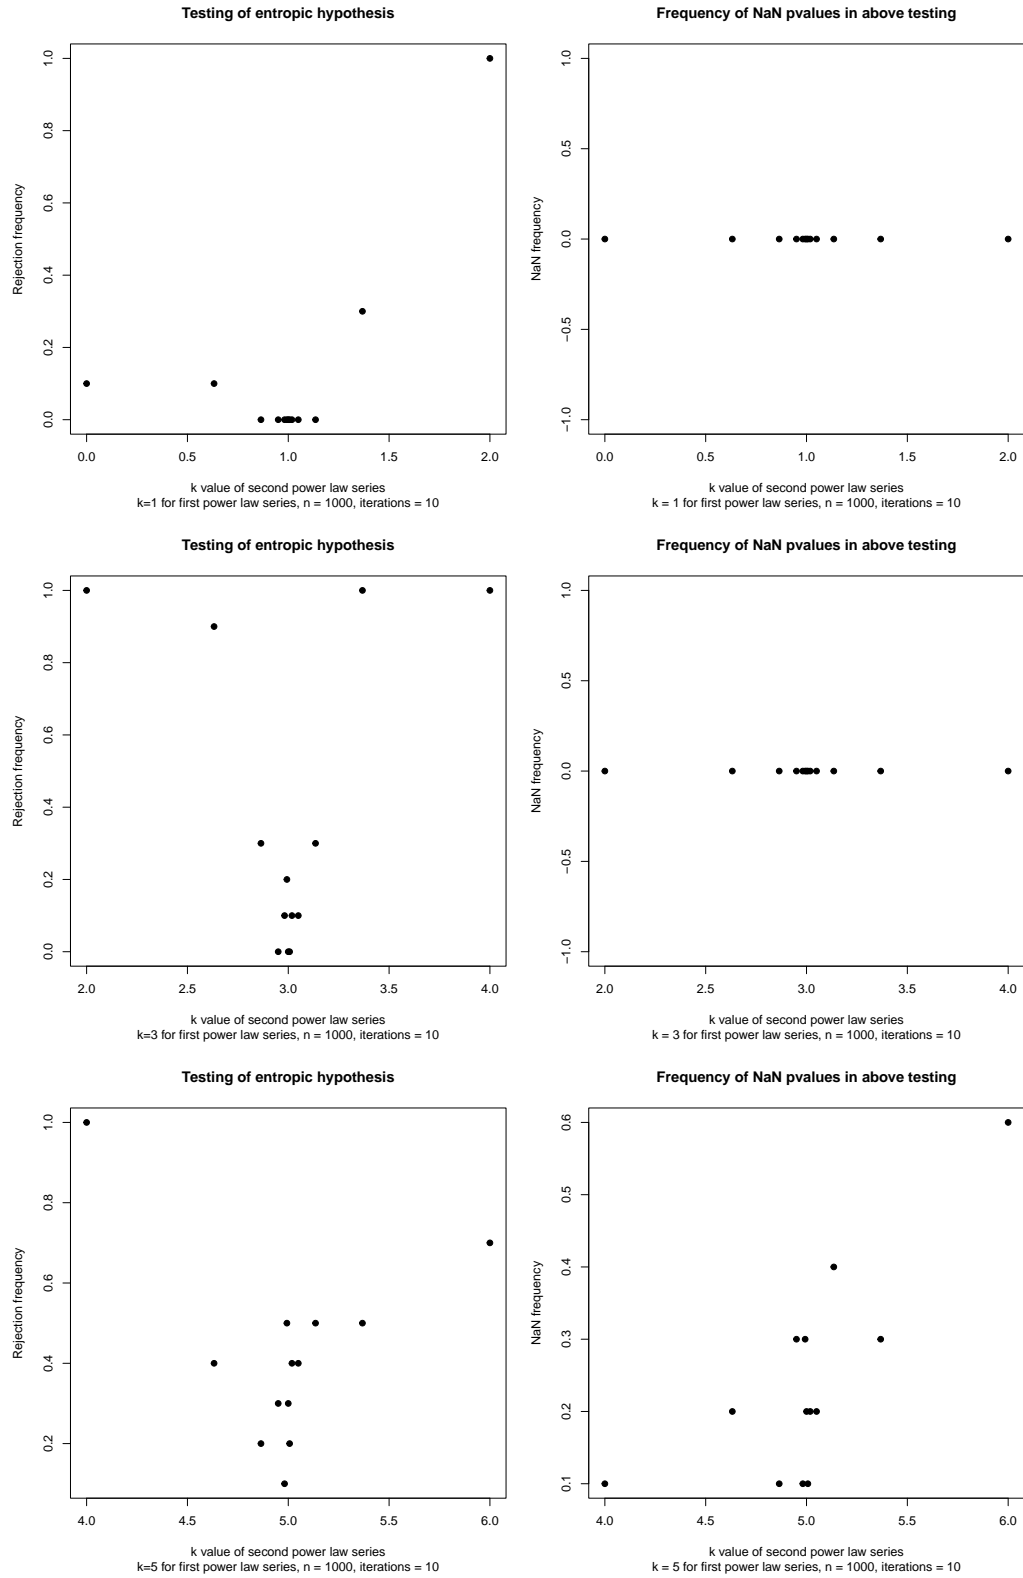


Figure 3.1: Power-law experiment

Idea behind new tie breaking In the next section a new way to break ties will be implemented and used. The idea behind it is, when having a tie, instead of either randomly assigning it to any of the possible patterns, which was proposed by bandt and pompe in their original paper [5], or always assigning a type of tie to a given pattern, which is done in the article being used in the next section [6]. The new idea is to assign an equally large weight to all the possible patterns in case of a tie. In a tie, with k possible patterns, that it could be, each of these k patterns gets a weight of $\frac{1}{k}$. The amount of possible patterns is the product of the occurrence of each unique value. In case of a non-tie the pattern gets weight 1. To calculate the ordinal pattern distribution simply sum up all the weights for each pattern and divide by total amount of weight to get frequency. Ordinal patterns is often used in fields that does science on real world phenomena. In cases where the measuring equipment has a low precision ties will often occur e.g. a weight measurement. It is commonly known that objects have an atomic weight, since all everyday objects is made of particles that have an atomic weight. $1\mu = 1.66.. \cdot 10^{-27}kg$, so the theoretical weight of an object has a lot of decimals, which could theoretical be measured, however putting a person on a normal household weight will only give a result in kilograms with one decimal. A person measuring themselves on a weight at different and weighing the same does not mean they had the same atomic weight at both times. Their data would result in a tie, but based on the above argumentation it is fair to assume that in reality the weight has either gone up or down, however it is impossible with the given instruments to measure, which it is, so the only fair assumption is that both cases is equally likely. This can almost be seen as superposition[18] of the change of weight. The weight has gone both up and down, until a more precise measurement is made, but until that it is only fair to think both cases possible and in this case equally possible. This type of tie breaking should work, where it can be argued that a theoretical measurement has a higher precision than the actual measure-

ment. It does however not make sense to use in when the measured value can be argued to be of the same precision of a theoretical measurement e.g. "how many cows are out on the field at a certain type?". This implementation will briefly be referenced "My implementation", but mostly as "Theoretical Split". Note that the theoretical split method does not need noise added. Adding noise removes all ties, which means it should perform identical to "article implementation", which is the implementation made in the article[6], since it is built upon that code. The theoretical split and the second tie breaking solution is deterministic, where the bandt and pompe solution is stochastic.

Temperature Data [6] Will be partly reproduced and additional plots and tables will be made. Only the maximum temperature part of the climate data in section 6 of the article will be used. As can be seen in figure 3.2 the percentage of ties in this dataset is extremely high. It is therefore quite important, how ties is handled, since they make up a bulk of the dataset.

The libraries mentioned earlier all handle ties differently as can be seen in figure 3.3. The first three columns is the setting of each experiment. The start date column is included, because the paper, where the data is from, accidentally started their data at 1992-08-14, instead of 1992-08-08 as they said the data started from, it does however not make a big difference, which can be seen between the top three rows and bottom three rows. If all the values in a row is identically that means the libraries perform identically. The only setting, where this happens is when noise is added

location	d=3	d=4	d=5	d=6
Miami	0.4187488	0.6157306	0.7590446	0.8546872
Edinburgh	0.2715292	0.4514085	0.6139839	0.7450704
Dublin	0.2650767	0.4454717	0.6106325	0.7477411

Figure 3.2: Table of ties in percentage

noiseAdded	naOmitted	StartDate	location	statcomp	pdc	article implementation	Stat OrdPatHxC	my implementation
FALSE	FALSE	1992-08-14	Miami	0.97187	0.91806	0.91806		0.97768
			Edinburgh	0.98067	0.97145	0.97159		0.98565
			Dublin	0.98298	0.95095	0.96755		0.98432
TRUE	TRUE	1992-08-08	Miami	0.97847	0.97847	0.97847	0.97847	0.97847
			Edinburgh	0.98690	0.98690	0.98690	0.98690	0.98690
			Dublin	0.98625	0.98625	0.98625	0.98625	0.98625
TRUE	FALSE	1992-08-08	Miami	0.97811	0.97811	0.97811		0.97811
			Edinburgh	0.98719	0.98607	0.98611		0.98611
			Dublin	0.98540	0.97312	0.98396		0.98396
FALSE	TRUE	1992-08-08	Miami	0.97195	0.91804	0.91804	0.91804	0.97769
			Edinburgh	0.98068	0.97339	0.97339	0.97339	0.98676
			Dublin	0.98313	0.97007	0.97007	0.97007	0.98596
FALSE	FALSE	1992-08-08	Miami	0.97195	0.91804	0.91804		0.97769
			Edinburgh	0.98069	0.97148	0.97162		0.98567
			Dublin	0.98295	0.95106	0.96764		0.98435

Figure 3.3: Entropy table of libraries performs on different preprocessing

and Na values is omitted. Na omit removes Na values and the dataset is pushed together, where the Na values have been removed. In the rest of the experiment this setting will be used.

A more in depth analysis of the Theoretical Split vs adding noise is made. The statcomp library is the comparison library, but it does not matter, which library is chosen, since they perform identical in this case. As it can be seen in figure 3.5 the theoretical value is very close to both the mean and median of the entropy of a 1,000 iterations. Figure 3.4 clearly shows the problem of adding a random sample of white noise, since the value might easily end up 0.001 off either the mean, median or theoretical value, which all seems to quite precise values of the entropy, since the theoretical value is calculated quite differently then the mean and median, but they still end up much closer, then a random sample do.

The above experiment is repeated, but where the theoretical split is fed a constant dataset. The constant values here represent very imprecise measurements, where the true values of the observed phenomenon is assumed to be different. E.g. trying to measure white noise, with a bad instrument. It is important to note that, if a dataset contained just a single constant value, where the measurement is precise. The entropy would naturally be 0, since there is full predictability e.g. "how many cows are on the field at a given time". The iterations is calculated on random numbers, which ideally should be white noise. Figure 3.6 rarely has the entropy of ideal white noise, which is 1, where the theoretical split is able to correctly calculate

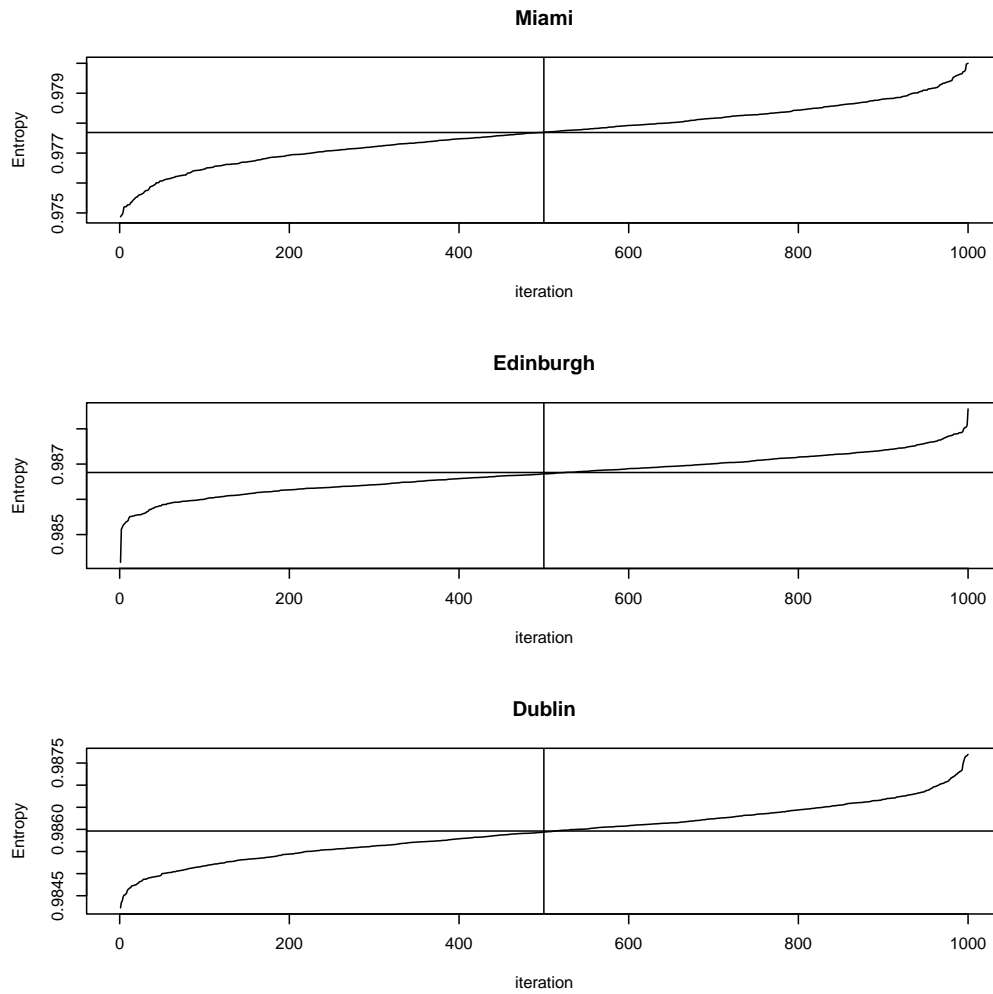


Figure 3.4: Iterations of adding noise vs theoretical split in sorted order, vertical line is median and horizontal is theoretical split value.

location	meanRandom	medianRandom	Theoretical Split
Miami	0.9776571	0.9776953	0.9776874
Edinburgh	0.9867158	0.9867235	0.9867614
Dublin	0.9859386	0.9859376	0.9859631

Figure 3.5: Table of: mean and median of adding noise and theoretical split. Temperature dataset

that the poorly measured white noise has entropy 1. Figure 3.7 shows that the median measurement is closer than the mean to the theoretical split, so it might be a better measurement. In figure 3.5 the median is generally also closer to the theoretical split. The median has another benefit over the mean, in the fact that it might not always be mathematically true to take the mean of an approximation, where the median is an entropy generated by an actual time series.

Figure 3.8 is a plot of the theoretical split values as entropy of the three locations on the HxC plane with confidence intervals on the entropy. In this case, the confidence intervals sticks out of the boundaries of the HxC plane. Between the boundaries is the only area where it is possible for a time series to be plotted. In this case the confidence interval do not offer new information, however it would be interesting to plot it, when the entropy is around 0.5, since the boundaries is much further apart.

P values is calculated. 10 iterations is done on adding noise for breaking ties and compared with the p value of the theoretical split. The p values of the theoretical split is in between the two median values, for Edinburgh-Dublin, which is good. For Miami-Edinburgh it is the second largest value, which is worse, however still in the interval of the iterations. For Miami-Dublin three iterations gets larger p values than the theoretical, which is ok. The theoretical split method produces p values that are reasonable close to the iterations of adding noise. Adding noise has a couple of problems in the sense that it is much more computer intense to calculate just 10 iterations compared with the theoretical value once. '

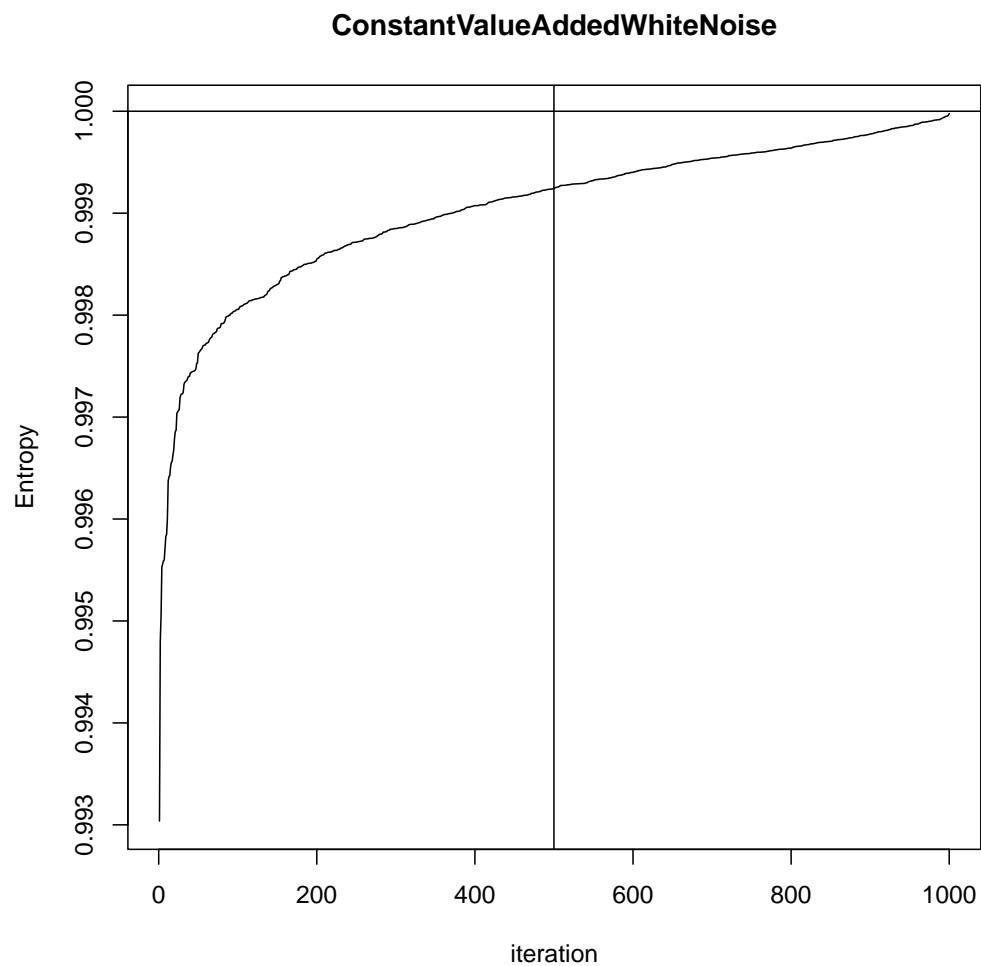


Figure 3.6: Constant dataset

meanRandom	medianRandom	Theoretical Split
0.99904	0.9992463	1

Figure 3.7: Mean and median of adding noise and theoretical split, constant dataset.

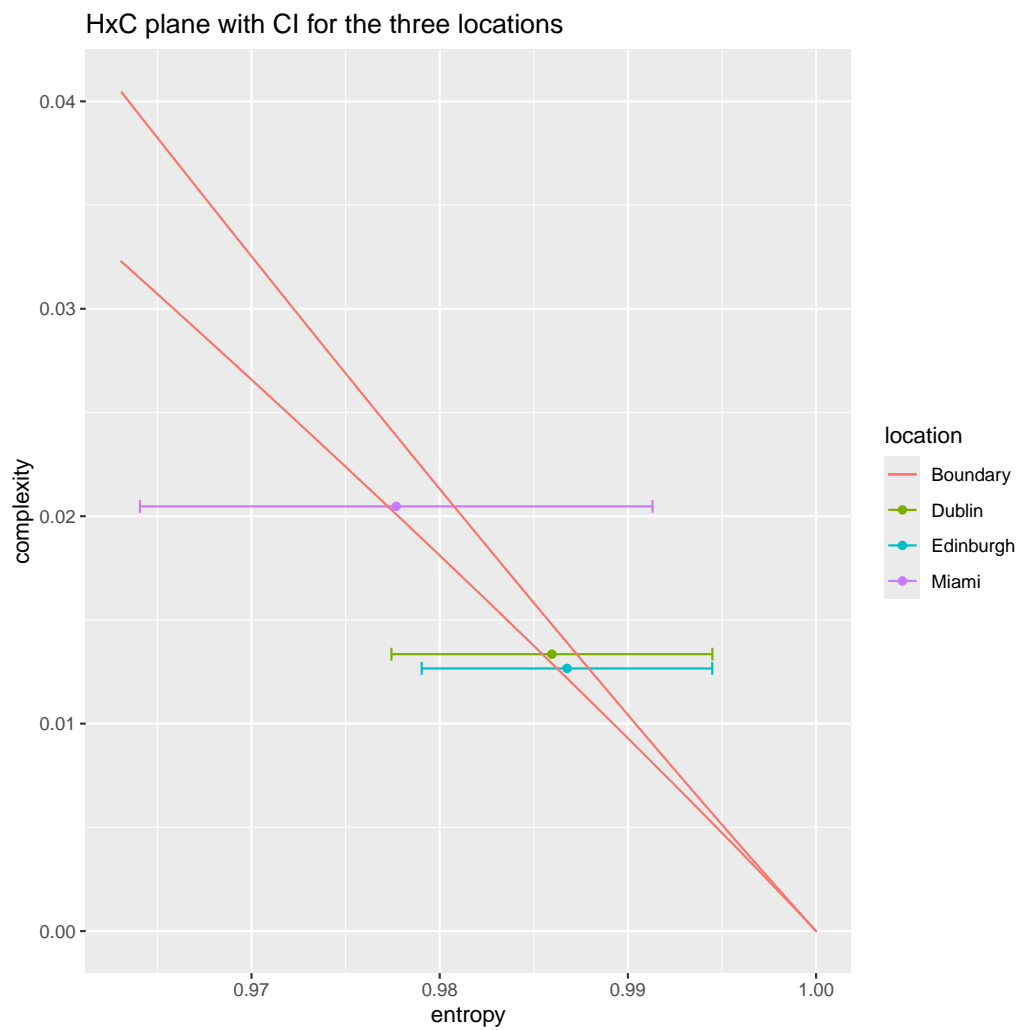


Figure 3.8: HxC plane of locations with confidence interval

Iteration	Miami-Edinburgh	Miami-Dublin	Edinburgh-Dublin
5	0.0013274374	0.0239569279	0.3638758
10	0.0003244188	0.0069446469	0.3927209
7	0.0036630440	0.0363118439	0.4463358
9	0.0022075899	0.0117689594	0.6680660
6	0.0029797057	0.0013769505	0.7810984
1	0.0048836351	0.0127590321	0.8032568
2	0.0065975420	0.0162918041	0.8188427
4	0.0018596130	0.0039581132	0.8870523
8	0.0020127362	0.0040575392	0.8873406
3	0.0008503533	0.0009603385	0.9572742

Figure 3.9: Noise added, 10 iterations, sorted by column "Edinburgh-Dublin"

Iteration	Miami-Edinburgh	Miami-Dublin	Edinburgh-Dublin
StatComplexity.R	0.006167	0.015274	0.787922

Figure 3.10: p value, when using theoretical split

Bibliography

- [1] pdc: Permutation Distribution Clustering, Sept. 2015.
- [2] statcomp: Statistical Complexity and Information Measures for Time Series analysis, Oct. 2019.
- [3] ABHISHEK PARIKH. EEG Sensor-Based Frequency Domain Analysis for Epileptic Seizure Detection. *Journal of Electrical Systems* 20, 5s (Apr. 2024), 1033–1040.
- [4] AMIGÓ, J. M., AND ROSSO, O. A. Ordinal methods: Concepts, applications, new developments, and challenges—In memory of Karsten Keller (1961–2022). *Chaos: An Interdisciplinary Journal of Nonlinear Science* 33, 8 (Aug. 2023), 080401.
- [5] BANDT, C., AND POMPE, B. Permutation Entropy: A Natural Complexity Measure for Time Series. *Physical Review Letters* 88, 17 (Apr. 2002), 174102–1–174102–4.
- [6] CHAGAS, E. T. C., FRERY, A. C., GAMBINI, J., LUCINI, M. M., RAMOS, H. S., AND REY, A. A. Statistical properties of the entropy from ordinal patterns. *Chaos: An Interdisciplinary Journal of Nonlinear Science* 32, 11 (Nov. 2022), 113118.
- [7] DEMIREL, , GOTT, J., APPEL, K., LÜTH, K., FISCHER, C., RAFFAELLI, C., WESTNER, B., ZAVECZ, Z., STEIGER, A., MOTA-ROLIM,

- S., RIBEIRO, S., ZEISING, M., ADELHÖFER, N., AND DRESLER, M. Electrophysiological correlates of lucid dreaming.
- [8] DU, Z., YANG, L., HAO, Y., WANG, J., LI, Y., CHEN, S., AND ZHOU, C. Randomness of scalar and vector random distributed soliton bunch in mode-locked fiber lasers. *Optical Fiber Technology* 84 (May 2024), 103782.
- [9] FIDLER, F., AND WILCOX, J. Reproducibility of Scientific Results. In *The Stanford Encyclopedia of Philosophy*, E. N. Zalta, Ed., winter 2018 ed. Metaphysics Research Lab, Stanford University, 2018.
- [10] LAMBERTI, P. W., MARTIN, M. T., PLASTINO, A., AND ROSSO, O. A. Intensive entropic non-triviality measure. *Physica A: Statistical Mechanics and its Applications* 334, 1 (Mar. 2004), 119–131.
- [11] LI, M.-J., ZHOU, X.-F., WANG, F., BI, M.-H., YANG, G.-W., XU, M.-M., HU, M., AND LI, H.-Z. Research on chaotic secure optical communication system based on dispersion keying with time delay signatures concealment. *Chaos, Solitons & Fractals* 182 (May 2024), 114720.
- [12] LIU, G., MU, P., WANG, K., GUO, G., LIU, X., AND HE, P. Random Numbers Generated Based on Dual-Channel Chaotic Light. *Electronics* 13, 9 (Apr. 2024), 1603.
- [13] LÓPEZ-RUIZ, R., MANCINI, H. L., AND CALBET, X. A statistical measure of complexity. *Physics Letters A* 209, 5 (Dec. 1995), 321–326.
- [14] MARTIN, M. T., PLASTINO, A., AND ROSSO, O. A. Statistical complexity and disequilibrium. *Physics Letters A* 311, 2 (May 2003), 126–132.
- [15] OSMANE, A., DIMMOCK, A. P., AND PULKKINEN, T. Jensen-Shannon Complexity and Permutation Entropy Analysis of Geomag-

- netic Auroral Currents. *JOURNAL OF GEOPHYSICAL RESEARCH-SPACE PHYSICS* 124, 4 (Apr. 2019), 2546–2547. Web of Science ID: WOS:000477707800013.
- [16] REY, A. A., FRERY, A. C., GAMBINI, J., AND LUCINI, M. M. The asymptotic distribution of the permutation entropy. *Chaos: An Interdisciplinary Journal of Nonlinear Science* 33, 11 (Nov. 2023), 113108.
- [17] SACO, P. M., CARPI, L. C., FIGLIOLA, A., SERRANO, E., AND ROSSO, O. A. Entropy analysis of the dynamics of El Nino/Southern Oscillation during the Holocene. *PHYSICA A-STATISTICAL MECHANICS AND ITS APPLICATIONS* 389, 21 (Nov. 2010), 5026. Web of Science ID: WOS:000282241600058.
- [18] SCHRÖDINGER, E. An Undulatory Theory of the Mechanics of Atoms and Molecules. *Physical Review* 28, 6 (Dec. 1926), 1049–1070.
- [19] SHANNON, C. E. A mathematical theory of communication. *The Bell System Technical Journal* 27, 3 (July 1948), 379–423.
- [20] SMITHSON, M. *Confidence Intervals*. SAGE Publications, Inc., 2003.
- [21] STRUELENS, M. J., AND VINEIS, P. COVID-19 Research: Challenges to Interpret Numbers and Propose Solutions. *Frontiers in Public Health* 9 (Apr. 2021), 651089.
- [22] SUN, Y.-C., NI, C.-Y., YING, K.-N., XIONG, A.-H., SHUAI, T., AND SHEN, Z.-H. Laser ultrasonic spatially resolved acoustic spectroscopy for grain size study based on Improved Variational Mode Decomposition (IVMD). *NDT & E International* 144 (June 2024), 103090.
- [23] SZWAJKA, K., ZIELIŃSKA-SZWAJKA, J., AND TRZEPICIEŃSKI, T. Experimental Analysis of Smart Drilling for the Furniture Industry in the Era of Industry 4.0. *Materials* 17, 9 (Apr. 2024), 2033.

- [24] TANG, S., AND LI, Z. EEG complexity measures for detecting mind wandering during video-based learning. *Scientific Reports* 14, 1 (Apr. 2024), 8209.
- [25] TIMMER, J., AND KÖNIG, M. On generating power law noise. *Astronomy and Astrophysics* 300 (Aug. 1995), 707. ADS Bibcode: 1995A&A...300..707T.
- [26] WANG, Q., YANG, X., YAN, W., YU, J., AND WANG, J. Networked information interactions in schizophrenia magnetoencephalograms based on permutation transfer entropy. *Biomedical Signal Processing and Control* 91 (May 2024), 105977.
- [27] WEYGAND, J. M., AND KIVELSON, M. G. Jensen-Shannon Complexity Measurements in Solar Wind Magnetic Field Fluctuations. *ASTROPHYSICAL JOURNAL* 872, 1 (Feb. 2019), 7–8. Web of Science ID: WOS:000458369900006.
- [28] ZHANG, H., ZHANG, F., JIA, X., JIAO, Q., ZHAN, Z., AND LI, L. Walnut crack detection based on EEMD and acoustic feature optimization. *Postharvest Biology and Technology* 212 (June 2024), 112874.