



Chinese University of Hong Kong, Shenzhen

???

adapted from KTH ACM Contest Template Library

CUHK-SZ

Contest (1)

base.hpp

Description: Somehow type this up before you do anything

<bits/stdc++.h> 18 lines

```
template <class T> using V = vector<T>;
template <class T> using VV = V<V<T>>;
```

```
using ll = int64_t;
```

```
template <class F> struct ycr { // hash-cpp-1
    F f;
    template <class T> explicit ycr(T&& f_) : f(forward<T>(f_
        ↪)) {}
```

```
    template <class... A> decltype(auto) operator()(A&&... as
        ↪) {
        return f(ref(*this), forward<A>(as)...);
    }
};
template <class F> decltype(auto) yc(F&& f) {
    return ycr<decay_t<F>>(forward<F>(f));
} // hash-cpp-1 = 9344860c946665f163f1e784f1305c28
```

```
static mt19937_64 mt(chrono::steady_clock::now().
    ↪time_since_epoch().count());
```

extra.hpp

#pragma once 19 lines

#include "contest/base.hpp"

```
using i64 = int64_t;
using u32 = uint32_t;
using u64 = uint64_t;
using i128 = __int128_t;
using u128 = __uint128_t;
```

```
namespace internal {
```

```
inline int next_pow2(int n) {
    int k = 0;
    while ((uint32_t(1) << k) < uint32_t(n)) k++;
    return k;
}
```

```
} // namespace internal
```

bashrc

5 lines

```
setxkbmap -option caps:escape
alias e='vim'
alias cls='clear -x'
alias mv='mv -i'
alias cp='cp -i'
```

Makefile

3 lines

```
CXXFLAGS = -O2 -std=gnu++20 -Wall -Wextra -Wno-unused-
    ↪result -pedantic -Wshadow -Wformat=2 -Wfloat-equal -
    ↪Wconversion -Wlogical-op -Wshift-overflow=2 -
    ↪Wduplicated-cond -Wcast-qual -Wcast-align
DEBUGFLAGS = -D_GLIBCXX_DEBUG -D_GLIBCXX_DEBUG_PEDANTIC -
    ↪fsanitize=address -fsanitize=undefined -fno-sanitize-
    ↪recover=all -fstack-protector -D_FORTIFY_SOURCE=2
CXXFLAGS += $(DEBUGFLAGS) # flags with speed penalty
```

vimrc

9 lines

```
set ncp ai bs=2 hls ic is lbr ls=2 mouse=a nu ru sc scs
    ↪smd so=3 sw=4 ts=4
filetype plugin indent on
syn on
map gA m'ggVG"+y''

set cindent cino=jl,(0,ws,Ws

com -range=% -nargs=1 P exe "<linel>,<line2>!".<q-args> |y|
    ↪sil u|echom @"
au FileType cpp com! -buffer -range=% Hash <linel>,<line2>P
    ↪cpp -dD -P -fpreprocessed | tr -d '[:space:]' |
    ↪md5sum
```

hash-cpp.sh

1 lines

```
cpp -dD -P -fpreprocessed | tr -d '[:space:]' | md5sum
```

fast-input.hpp

Description: Fast scanner implementation based on fread

55 lines

```
namespace fast_input {
```

```
struct Scanner {
    FILE* f;
    Scanner(FILE* f_) : f(f_) {}
```

```
    void read() {} // hash-cpp-1
    template <class H, class... T> void read(H& h, T&... t) {
        read_single(h);
        read(t...);
    } // hash-cpp-1 = 1be9d87558b4e70f056af5e4bc8df866
```

```
    char buf[1 << 16]; // hash-cpp-2
    size_t s = 0, e = 0;
    char get() {
        if (s >= e) {
            buf[0] = 0;
            s = 0;
            e = fread(buf, 1, sizeof(buf), f);
        }
        return buf[s++];
    } // hash-cpp-2 = 836ba7888edb5fec27c4231ad0b7d2a
```

```
    template <class T> void read_single(T& r) { // hash-cpp-3
        char c;
        while ((c = get()) <= ' ') {}
        bool neg = false;
        if (c == '-' ) {
            neg = true;
            c = get();
        }
        r = 0;
        do {
            r = 10 * r + (c & 0x0f);
        } while ((c = get()) >= '0');
        if (neg) r = -r;
    } // hash-cpp-3 = 2a45bc9b396bdcf75005cca881c4efd9
```

```
    void read_single(string& r) { // hash-cpp-4
        char c;
        while ((c = get()) <= ' ') {}
        r = "";
        do {
            r += c;
```

```
        } while ((c = get()) > ' ');
    } // hash-cpp-4 = 7b45a9f3c88601371ddc5e8e9795e764

    void read_single(double& r) { // hash-cpp-5
        string z;
        read_single(z);
        r = stod(z);
    } // hash-cpp-5 = 32d080eb6e36c0c1cedce9030bbb31fa1
    };
} // namespace fast_input
```

Data Structure (2)

hash-map.hpp

Description: Faster and safer hash map.

<ext/pb_ds/assoc.container.hpp> 13 lines

```
struct CustomHash { // hash-cpp-1
    size_t operator()(uint64_t x) const {
        static const uint64_t z = chrono::steady_clock::now().
            ↪time_since_epoch().count(),
            c = uint64_t(4e18*acos(0))+71;
        return __builtin_bswap64((x^z)*c);
    }
}; // hash-cpp-1 = 6c7374790fb23e010426cdcd0361a13
```

```
template <class K, class V, class Hash = CustomHash> //
    ↪hash-cpp-2
using HashMap = __gnu_pbds::gp_hash_table<K, V, Hash>; //
    ↪hash-cpp-2 = 4fe2baba5ae354ac6dd53d37ad221011
```

```
template <class K, class Hash = CustomHash> // hash-cpp-3
using HashSet = HashMap<K, __gnu_pbds::null_type, Hash>; //
    ↪hash-cpp-3 = 1d899df3bf29329f777189feb8d1944c
```

binary-indexed-tree.hpp

Description: Supports computing partial sum $a_0 + \dots + a_{i-1}$ and incrementing some a_i by v **Time:** Both operations are $\mathcal{O}(\log N)$

44 lines

```
template <class T> struct BIT {
    V<T> x;
    int s;
    BIT(int n) { build(n); }
    BIT(const V<T>& a) { build(a); }
```

```
    void build(int n) { // hash-cpp-1
        x.clear();
        x.resize(s = n);
    } // hash-cpp-1 = 47107bdc695b2cbc062915efca897e56
```

```
    void build(const V<T>& a) { // hash-cpp-2
        build(int(a.size()));
        copy(a.begin(), a.end(), x.begin());
        for (int i = 0; i < s; i++) {
            int j = i | (i+1);
            if (j < s) x[j] += x[i];
        }
    } // hash-cpp-2 = ce95cbd55bea652fb39765d7f422ee70
```

```
    void add(int i, T v) { // hash-cpp-3
        for (; i < s; i |= i+1) x[i] += v;
    }
    T sum(int i) {
        T res = 0;
```

```

    for (; i; i &= i-1) res += x[i-1];
    return res;
} // hash-cpp-3 = e7fbe70df2a7ecfa13485bb1c017438a

// Slightly tested; requires s >= 1
int kth(T k) { // hash-cpp-4
    int cur = 0;
    for (int i = 31 - __builtin_clz(s); i >= 0; i--) {
        int nxt = cur + (1 << i);
        if (nxt <= s && x[nxt-1] <= k) {
            k -= x[nxt-1];
            cur = nxt;
        }
    }
    return cur;
} // hash-cpp-4 = c6bf486c9c36a50aae1d2e8d61e4fa7c

int kth_helper(T k, int i = 0) { return kth(k + sum(i));
    ↪ }
};

```

lazy-segtree.hpp

Description: Lazy segtree abstraction

"contest/extra.hpp" 195 lines

```

template <class M> struct LazySegtree {
    using S = typename M::S;
    using F = typename M::F;
    M m;
    V<S> d;
    V<pair<F, bool>> lz;
    int n, h, sz;
    LazySegtree(M m_) : m(m_), n(0), h(0), sz(0) {}
    LazySegtree(int n_, M m_) : m(m_) {
        build(n_);
    }
    LazySegtree(const V<S>& a, M m_) : m(m_) {
        build(a);
    }
    template <class A> LazySegtree(int n_, A a, M m_) : m(m_)
        ↪ {
        build(n_, a);
    }

    void build(int n_) {
        build(n_, [&](int) -> S { return m.e(); });
    }
    void build(const V<S>& a) {
        build(int(a.size()), [&](int i) -> S { return a[i]; });
    }
    template <class A> void build(int n_, A a) { // hash-cpp
        ↪ -1
        n = n_;
        h = internal::next_pow2(n);
        sz = 1 << h;
        d.resize(2*sz);
        lz.assign(sz, {m.id(), false});
        for (int i = 0; i < n; i++) d[sz+i] = a(i);
        for (int i = n; i < sz; i++) d[sz+i] = m.e();
        for (int i = sz-1; i >= 1; i--) update(i);
    } // hash-cpp-1 = 06957046bf06d00d65c94fdd0a7e88b3

    void update(int i) { // hash-cpp-2
        d[i] = m.op(d[2*i], d[2*i+1]);
    } // hash-cpp-2 = 353f7580bfd321bdccddd446692b7f8b

    void apply(int i, F f) { // hash-cpp-3
        d[i] = m.mapping(f, d[i]);
    }

```

```

    if (i < sz) {
        auto& t = lz[i];
        t = {m.composition(t.first, f), true};
    }
} // hash-cpp-3 = a036140a94424cf32a0162eb0a7e5e68

void downdate(int i) { // hash-cpp-4
    auto& t = lz[i];
    if (t.second) {
        apply(2*i, t.first);
        apply(2*i+1, t.first);
        t = {m.id(), false};
    }
} // hash-cpp-4 = d13d977bc38c8c82f0d9884168ffe50e

S prod(int l, int r) { // hash-cpp-5
    assert(0 <= l && l <= r && r <= n);
    if (l == r) return m.e();
    l += sz, r += sz;
    for (int i = h; i >= 1; i--) {
        if (((l >> i) << i) != l) downdate(l >> i);
        if (((r >> i) << i) != r) downdate((r-1) >> i);
    }
    S sl = m.e(), sr = m.e();
    for (int a = l, b = r; a < b; a /= 2, b /= 2) {
        if (a & 1) sl = m.op(sl, d[a++]);
        if (b & 1) sr = m.op(d[--b], sr);
    }
    return m.op(sl, sr);
} // hash-cpp-5 = a504d2443c711f3f0c6c6cff19888763

void apply(int l, int r, F f) { // hash-cpp-6
    assert(0 <= l && l <= r && r <= n);
    if (l == r) return;
    l += sz, r += sz;
    for (int i = h; i >= 1; i--) {
        if (((l >> i) << i) != l) downdate(l >> i);
        if (((r >> i) << i) != r) downdate((r-1) >> i);
    }
    for (int a = l, b = r; a < b; a /= 2, b /= 2) {
        if (a & 1) apply(a++, f);
        if (b & 1) apply(--b, f);
    }
    for (int i = 1; i <= h; i++) {
        if (((l >> i) << i) != l) update(l >> i);
        if (((r >> i) << i) != r) update((r-1) >> i);
    }
} // hash-cpp-6 = 9e7d200713bd70e406704966f5dd5620

// You can use this to query stuff,
// which is sometimes more efficient than using prod
template <class G> void enumerate(int l, int r, G g) { //
    ↪ hash-cpp-7
    assert(0 <= l && l <= r && r <= n);
    if (l == r) return;
    l += sz, r += sz;
    for (int i = h; i >= 1; i--) {
        if (((l >> i) << i) != l) downdate(l >> i);
        if (((r >> i) << i) != r) downdate((r-1) >> i);
    }
    for (int a = l, b = r; a < b; a /= 2, b /= 2) {
        if (a & 1) g(d[a++]);
        if (b & 1) g(d[--b]);
    }
} // hash-cpp-7 = 2aa9740832a569608c4b23e49cda1f123

// Enumerating in some sequential order
template <bool l_to_r = true, class G>

```

```

void enumerate_in_order(int l, int r, G g) {
    assert(0 <= l && l <= r && r <= n);
    if (l == r) return; // hash-cpp-8
    l += sz, r += sz;
    for (int i = h; i >= 1; i--) {
        if (((l >> i) << i) != l) downdate(l >> i);
        if (((r >> i) << i) != r) downdate((r-1) >> i);
    }
    static V<int> ls, rs;
    ls.clear(), rs.clear();
    for (int a = l, b = r; a < b; a /= 2, b /= 2) {
        if (a & 1) ls.push_back(a++);
        if (b & 1) rs.push_back(--b);
    } // hash-cpp-8 = 878707973dba373dc64f03d4104a16ea
    if constexpr (l_to_r) {
        for (int i : ls) g(d[i]);
        for (int z = int(rs.size())-1; z >= 0; z--) g(d[rs[z]
            ↪ ]]);
    } else {
        for (int i : rs) g(d[i]);
        for (int z = int(ls.size())-1; z >= 0; z--) g(d[ls[z]
            ↪ ]]);
    }
}

const S& all_prod() const { return d[1]; }

template <class P> pair<int, S> max_right(int l, P p) {
    ↪ // hash-cpp-9
    assert(0 <= l && l <= n);
    if (l == n) return {n, m.e()};
    l += sz;
    for (int i = h; i >= 1; i--) downdate(l >> i);
    S s = m.e();
    assert(p(s));
    do {
        while (l % 2 == 0) l /= 2;
        if (!p(m.op(s, d[l]))) {
            while (l < sz) {
                downdate(l);
                l = 2 * l;
                S t = m.op(s, d[l]);
                if (p(t)) {
                    s = t;
                    l++;
                }
            }
            return {l-sz, s};
        }
        s = m.op(s, d[l]);
        l++;
    } while ((l & -1) != 1);
    return {n, s};
} // hash-cpp-9 = 659b16e053dcfd226edd2f7354d3c75c

template <class P> pair<int, S> min_left(int r, P p) { //
    ↪ hash-cpp-10
    assert(0 <= r && r <= n);
    if (r == 0) return {0, m.e()};
    r += sz;
    for (int i = h; i >= 1; i--) downdate((r-1) >> i);
    S s = m.e();
    assert(p(s));
    do {
        r--;
        while (r > 1 && r % 2) r /= 2;
        if (!p(m.op(d[r], s))) {
            while (r < sz) {

```

```

        downdate(r);
        r = 2 * r + 1;
        S t = m.op(d[r], s);
        if (p(t)) {
            s = t;
            r--;
        }
    }
    return {r+1-sz, s};
}
s = m.op(d[r], s);
} while ((r & -r) != r);
return {0, s};
} // hash-cpp-10 = 679cc146eea81abf054b473f1e991349

void set(int p, S s) { // hash-cpp-11
    assert(0 <= p && p < n);
    p += sz;
    for (int i = h; i >= 1; i--) downdate(p >> i);
    d[p] = s;
    for (int i = 1; i <= h; i++) update(p >> i);
} // hash-cpp-11 = eee80c946397620fdc779230722e1655
};

```

static-range.hpp

Description: Static range composition. You need to specify a composition function f and an identity element e

Time: $\mathcal{O}(N \log N)$ building and $\mathcal{O}(1)$ querying

```

template <class T, class F> struct StaticRange {
    VV<T> d; // hash-cpp-1
    const F f;
    const T e;
    StaticRange(const V<T>& a, F f_, T e_) : f(f_), e(e_) {
        int n = int(a.size());
        int h = 0;
        while ((2 << h) < n) h++;
        d.resize(h+1);
        d[0] = a;
        for (int k = 0; k < h; k++) {
            d[k+1].resize(n, e);
            int s = 1 << (k+1);
            for (int i = s; i < n; i += 2*s) {
                T x = e;
                for (int j = i-1; j >= i-s; j--) {
                    d[k+1][j] = x = f(a[j], x);
                }
                x = e;
                for (int j = i; j < i+s && j < n; j++) {
                    d[k+1][j] = x = f(x, a[j]);
                }
            }
        }
    } // hash-cpp-1 = 2e3ea8128d01a499906df5c7e8758889

    T operator ()(int l, int r) const { // hash-cpp-2
        if (l >= r) return e;
        r--;
        if (l == r) return d[0][l];
        int k = __lg(l^r);
        return f(d[k][l], d[k][r]);
    } // hash-cpp-2 = e599b1dcf6ad8f51cef0410a05e23290
};

```

treap.hpp

Description: Randomized Treap with split/merge support. `nodes.size() < nodes.capacity()` must be maintained. One strategy to save space is to refactor everything when the size of nodes is approximating its capacity

Time: $\mathcal{O}(\log N)$ per operation

```

203 lines
template <class M, bool persistent = false> struct
    ↪TreapManager {
    using S = typename M::S;
    using F = typename M::F;

    TreapManager(M m_, int alloc = 0) : m(m_) {
        if (alloc > 0) {
            nodes.reserve(alloc);
        } else {
            // make sure to understand what you're doing
            assert(!persistent);
        }

        for (int z = 0; z < 2; z++) {
            states[z] = uint32_t(mt());
        }
    }

    using Tree = int;

    Tree make_empty() { return Tree(nullptr); }

    Tree make_single(S s) { // hash-cpp-1
        int i = int(nodes.size());
        nodes.push_back(Node{nullptr, nullptr, 1, false, false, s, s,
            ↪ m.id()});
        return i;
    } // hash-cpp-1 = 6c4d20b86ebfc6f60d88165b76573a67

    Tree make_copy(Tree o) { return _make_copy(o); }

    int size(const Tree t) { return _size(t); }
    int reverse(Tree t) { return _reverse(t); }
    int apply(Tree t, F f) { return _apply(t, f); }
    S prod(const Tree& t) { return _prod(t); }

    Tree split_k(Tree& t, int k) { // hash-cpp-2
        Tree o;
        tie(t, o) = _split_k(t, k);
        return o;
    } // hash-cpp-2 = c70f87700806d15a4c4ec662572f17ff

    Tree merge(Tree a, Tree b) { return _merge(a, b); }

    Tree build(const V<S>& a) { // hash-cpp-3
        if (a.empty()) return make_empty();
        return _build(a, 0, int(a.size()));
    } // hash-cpp-3 = 8df775a114f42165c31f42bf4a67d6c7

    V<S> to_array(const Tree& t) { // hash-cpp-4
        V<S> buf;
        buf.reserve(size(t));
        _to_array(t, buf);
        return buf;
    } // hash-cpp-4 = 6addc521e35d79f542267016dc1b5165

private:
    static constexpr int null = -42;
    M m;

```

```

struct Node { // hash-cpp-5
    int li, ri, sz;
    bool rev, app;
    S a, s;
    F f;
};
V<Node> nodes;
Node& node(int i) { return nodes[i]; }
int _size(int i) { return i == null ? 0 : node(i).sz; }
    ↪// hash-cpp-5 = c1168dbc9a00419db6a93774a5b0b603

int _make_copy(int o) { // hash-cpp-6
    if constexpr (!persistent) return o;

    if (o == null) return null;
    assert(nodes.size() < nodes.capacity());
    int i = int(nodes.size());
    nodes.push_back(node(o));
    return i;
} // hash-cpp-6 = 26a70edec35d6f656b6f85d49ceb2fbc6

int _build(const V<S>& a, int l, int r) { // hash-cpp-7
    if (r - l == 1) {
        return make_single(a[l]);
    }
    int md = (l + r) / 2;
    return _merge(_build(a, l, md), _build(a, md, r));
} // hash-cpp-7 = 6020135dd6f1feb9bee1dc613c54dc2d

void _update(int i) { // hash-cpp-8
    auto& n = node(i);
    n.s = m.op(_prod(n.li), m.op(n.a, _prod(n.ri)));
    n.sz = size(n.li) + size(n.ri) + 1;
} // hash-cpp-8 = c5fb7048740c35c2a720845684e4ff19

int _reverse(int i) { // hash-cpp-9
    if (i == null) return i;
    i = _make_copy(i);
    auto& n = node(i);
    n.rev = !n.rev;
    swap(n.li, n.ri);
    return i;
} // hash-cpp-9 = 266d7203b1c04371492ea0bd85cb281d

S _prod(int i) { return i == null ? m.e() : node(i).s; }

int _apply(int i, F f) { // hash-cpp-10
    if (i == null) return i;
    i = _make_copy(i);
    auto& n = node(i);
    n.s = m.mapping_sz(f, n.s, n.sz);
    n.a = m.mapping_sz(f, n.a, 1);
    n.f = m.composition(f, n.f);
    n.app = true;
    return i;
} // hash-cpp-10 = c1044aa4c9dbe3605f7e255c9ef1131b

int downdate(int i) { // hash-cpp-11
    assert(i != null);
    i = _make_copy(i);
    auto& n = node(i);
    if (n.rev) {
        n.li = _reverse(n.li);
        n.ri = _reverse(n.ri);
        n.rev = false;
    }
    if (n.app) {
        n.li = _apply(n.li, n.f);

```

```

    n.ri = _apply(n.ri, n.f);
    n.f = m.id();
    n.app = false;
}
return i;
} // hash-cpp-11 = de62225a6441397fe26f3bdae0f19423

template <class F> pair<int, int> _split(int i, F go_left
    ↪) { // hash-cpp-12
    if (i == null) return {null, null};
    i = downdate(i);
    auto& n = node(i);
    int li = n.li, ri = n.ri;
    int x, y;
    if (go_left(li, ri)) {
        y = i;
        tie(x, n.li) = _split(n.li, go_left);
    } else {
        x = i;
        tie(n.ri, y) = _split(n.ri, go_left);
    }
    _update(i);
    return {x, y};
} // hash-cpp-12 = 3162351f3f2db4155104ab28b68b8e49

pair<int, int> _split_k(int i, int k) { // hash-cpp-13
    return _split(i, [&](int li, int) -> bool {
        int lsz = size(li);
        if (k <= lsz) {
            return true;
        } else {
            k -= lsz + 1;
            return false;
        }
    });
} // hash-cpp-13 = 21661461b27eeb90e1e770dacc49c006

// Use std::mt19937_64 if performance is not an issue
// https://prng.di.unimi.it/xoroshiro64star.c
inline uint32_t rotl(const uint32_t x, int k) { // hash-
    ↪cpp-14
    return (x << k) | (x >> (32 - k));
}

uint32_t states[2];
uint32_t rng() {
    const uint32_t s0 = states[0];
    uint32_t s1 = states[1];
    const uint32_t res = s0 * 0x9E3779BB;
    s1 ^= s0;
    states[0] = rotl(s0, 26) ^ s1 ^ (s1 << 9);
    states[1] = rotl(s1, 13);
    return res;
} // hash-cpp-14 = 31b4c34fabff6176394fc53b9ec44499

int _merge(int a, int b) { // hash-cpp-15
    if (a == null) return b;
    if (b == null) return a;
    int r;
    uint32_t sa = size(a), sb = size(b);
    if (rng() % (sa + sb) < sa) {
        r = downdate(a);
        node(r).ri = _merge(node(r).ri, b);
    } else {
        r = downdate(b);
        node(r).li = _merge(a, node(r).li);
    }
    _update(r);
    return r;
}

```

```

} // hash-cpp-15 = d2175413493f2a811c2e26771feabcd8

void _to_array(int i, V<S>& buf) { // hash-cpp-16
    if (i == null) return;
    downdate(i);
    auto& n = node(i);
    _to_array(n.li, buf);
    buf.push_back(n.a);
    _to_array(n.ri, buf);
} // hash-cpp-16 = d330cf42ee4c55689bcc44e8d63a6333
};

```

queue-aggregation.hpp

Description: A queue that supports querying the composition of all elements

45 lines

```

template <class T, class F> struct QueueAggregation {
    const F f; // hash-cpp-1
    const T e;
    V<T> as, bs, ae, be;
    T vs, ve;
    QueueAggregation(F f_, T e_) : f(f_), e(e_), vs(e), ve(e)
        ↪ {} // hash-cpp-1 = e0f918d3b739972ea1a01a1c8960f816

    void push_s(const T& x) { // hash-cpp-2
        as.push_back(x), bs.push_back(vs = f(x, vs));
    }
    void push_e(const T& x) {
        ae.push_back(x), be.push_back(ve = f(ve, x));
    }
    void reduce() {
        while (!ae.empty()) {
            push_s(ae.back()), ae.pop_back();
        }
        while (!be.empty()) be.pop_back();
        ve = e;
    } // hash-cpp-2 = 6d2c0367633d89637a8235162683cf9e

    bool empty() const { // hash-cpp-3
        return as.empty() && ae.empty();
    }
    int size() const {
        return int(as.size() + ae.size());
    } // hash-cpp-3 = b5166973f8a1e060551da48002d67335

    void push(const T& x) { // hash-cpp-4
        if (as.empty()) {
            push_s(x), reduce();
        } else {
            push_e(x);
        }
    }
    void pop() {
        assert(!empty());
        if (as.empty()) reduce();
        as.pop_back(), bs.pop_back();
        vs = (bs.empty() ? e : bs.back());
    }
    T prod() const {
        return f(vs, ve);
    } // hash-cpp-4 = 0b46cd5fba53f4c166094224da58ee1c
};

```

line-container.hpp

Description: Container where you can add lines of the form $y = kx + m$, and query maximum values at given points. Useful for dynamic programming (“convex hull trick”)

Time: $O(\log N)$ with a large constant factor

39 lines

```

namespace line_container {

struct Line { // hash-cpp-1
    mutable ll k, m, p;
    bool operator < (const Line& o) const { return k < o.k; }
    bool operator < (ll x) const { return p < x; }
}; // hash-cpp-1 = 7e3ecf95828aa19c1006717961ebf6c7

struct LineContainer : multiset<Line, less<>> {
    using I = iterator; // hash-cpp-2
    // (for doubles, use inf = 1/.0, div(a,b) = a/b)
    static const ll inf = numeric_limits<ll>::max();
    static ll div(ll a, ll b) {
        return a / b - ((a ^ b) < 0 && a % b);
    } // hash-cpp-2 = cc33661adfbf09f701ba00fae3589d48
    bool isect(I x, I y) { // hash-cpp-3
        if (y == end()) return x->p = inf, 0;
        if (x->k == y->k) x->p = x->m > y->m ? inf : -inf;
        else x->p = div(y->m - x->m, x->k - y->k);
        return x->p >= y->p;
    } // hash-cpp-3 = 2b98c40c29f240ca9a861a8267ad00e5
    void add(ll k, ll m) { // hash-cpp-4
        auto z = insert({k, m, 0}), y = z++, x = y;
        while (!isect(y, z)) z = erase(z);
        if (x != begin() && isect(--x, y)) {
            isect(x, y = erase(y));
        }
        while ((y = x) != begin() && (--x)->p >= y->p) {
            isect(x, erase(y));
        }
    } // hash-cpp-4 = 2810198878e0dfc44ef39381376b7731
    ll query(ll x) { // hash-cpp-5
        assert(!empty());
        auto l = *lower_bound(x);
        return l.k * x + l.m;
    } // hash-cpp-5 = d21e2fde3c73a41bd894e185d7d18dle
};

} // namespace line_container

```

persistent-array.hpp

Description: Persistent array based on persistent segtrees

69 lines

```

template <class D> struct PersistentArray {
    union N { // hash-cpp-1
        D v;
        array<int, 2> c;
        N(const D& a) : v(a) {}
        N(int a, int b) : c{a, b} {}
    };
    V<N> x;
    int s, h;
    // Modify this so that it can reserve memory for x
    PersistentArray() {} // hash-cpp-1 = 521
        ↪ fef167012ec972f1c84f879a34735

    // All arrays share the same layout (length)
    int build(int n) { // hash-cpp-2
        x.clear();
        s = 1, h = 0;
        while (s < n) {
            s *= 2;
        }
    }
}

```

```

    h++;
}
int rt = make_leaf(D());
for (int l = 0; l < h; l++) {
    rt = make_node(rt, rt);
}
return rt;
} // hash-cpp-2 = 07caee6062571a915772221c203141f3

int make_leaf(const D& a) { // hash-cpp-3
    x.emplace_back(a);
    return int(x.size())-1;
}
int make_node(int a, int b) {
    x.emplace_back(a, b);
    return int(x.size())-1;
} // hash-cpp-3 = 1fee63ccaf8114c5295fe73f218cc786

int set(int rt, int i, const D& a) { // hash-cpp-4
    static int buf[40];
    for (int l = 0; l < h; l++) {
        buf[l] = rt;
        if ((i >> (h-1-l)) & 1) {
            rt = x[rt].c[l];
        } else {
            rt = x[rt].c[0];
        }
    }
    int res = make_leaf(a);
    for (int l = h-1; l >= 0; l--) {
        int j = buf[l];
        if ((i >> (h-1-l)) & 1) {
            res = make_node(x[j].c[0], res);
        } else {
            res = make_node(res, x[j].c[l]);
        }
    }
    return res;
} // hash-cpp-4 = ce571ab8758dbbaf6d393f0545a71302

D get(int rt, int i) { // hash-cpp-5
    for (int l = h-1; l >= 0; l--) {
        if (i & (1 << l)) {
            rt = x[rt].c[l];
        } else {
            rt = x[rt].c[0];
        }
    }
    return x[rt].v;
} // hash-cpp-5 = 3a880dd33ae85a7becf12470a5ee22d6
};

```

fast-set.hpp

Description: A set for insertion, removal and querying the predecessor/successor of some element

83 lines

```

struct FastSet {
    using U = uint64_t; // hash-cpp-1
    int n, h;
    VV<U> x;
    FastSet(int n_ = 0) : n(n_) {
        int m = (n ? n : 1);
        do {
            x.push_back(V<U>((m + 63) >> 6));
            m = (m + 63) >> 6;
        } while (m > 1);
        h = int(x.size());
    }
};

```

```

} // hash-cpp-1 = e00a026f56355ee04eb312a72ab65ae0

bool empty() const { // hash-cpp-2
    return !x[h-1][0];
}
bool operator [] (int i) const {
    return (x[0][i >> 6] >> (i & 63)) & 1;
} // hash-cpp-2 = e7139f9a9d939bcdadea656a0e3dcb204

```

```

void set(int i) { // hash-cpp-3
    for (int d = 0; d < h; d++) {
        int q = i >> 6, r = i & 63;
        x[d][q] |= U(1) << r;
        i = q;
    }
} // hash-cpp-3 = 3319dfe2dcef21686104393ed36b8705

```

```

void reset(int i) { // hash-cpp-4
    for (int d = 0; d < h; d++) {
        int q = i >> 6, r = i & 63;
        if ((x[d][q] &= ~(U(1) << r))) break;
        i = q;
    }
} // hash-cpp-4 = 1f4723e2daf4308e36bca9899dfea88c

```

```

// min active j s.t. j >= i
int next(int i) const { // hash-cpp-5
    if (i >= n) return n;
    i = max(i, 0);
    for (int d = 0; d < h; d++) {
        int q = i >> 6, r = i & 63;
        if (q >= int(x[d].size())) break;
        U up = x[d][q] >> r;
        if (up) {
            i += __builtin_ctzll(up);
            for (int e = d-1; e >= 0; e--) {
                i = i << 6 | __builtin_ctzll(x[e][i]);
            }
            return i;
        }
        i = q+1;
    }
    return n;
} // hash-cpp-5 = 2a01cef716336e62e563b5d73eaaaf40

```

```

// max active j s.t. j <= i
int prev(int i) const { // hash-cpp-6
    if (i < 0) return -1;
    i = min(i, n-1);
    for (int d = 0; d < h; d++) {
        if (i < 0) break;
        int q = i >> 6, r = i & 63;
        U lo = x[d][q] << (63-r);
        if (lo) {
            i -= __builtin_clzll(lo);
            for (int e = d-1; e >= 0; e--) {
                i = i << 6 | (63 - __builtin_clzll(x[e][i]));
            }
            return i;
        }
        i = q-1;
    }
    return -1;
} // hash-cpp-6 = f8f01973030c47d09562f7ad1e93b4cc

```

```

// not tested
template <class F> void enumerate(int l, int r, F f) {
    for (int p = next(l); p < r; p = next(p+1)) {

```

```

        f(p);
    }
};

```

Ad Hoc (3)

tree-dp.hpp

Description: “Solving for all roots” abstraction. This seems to bear some huge constant factor, so try out ad-hoc implementations if you get TLs

44 lines

```

template <class D, class E> struct TreeDP {
    using S = typename D::S;
    const VV<E>& g;
    int n;
    V<S> dp, dp2, res;
    V<E> par;

    TreeDP(D d, const VV<E>& g_) : g(g_), n(int(g.size())),
        dp(n), dp2(n), res(n), par(n) {
        assert(n >= 1);
        V<S> up(n), pref(n);

        yc([&](auto self, int v, int p) -> void { // hash-cpp-1
            up[v] = d.make(v);
            for (auto& e : g[v]) {
                if (e != p) {
                    self(e, v);
                    pref[e] = up[v];
                    up[v] = d.op(up[v], up[e]);
                } else {
                    par[v] = e;
                }
            }
            dp[v] = up[v];
            if (p != -1) {
                up[v] = d.up(up[v], par[v]);
            }
        })(0, -1); // hash-cpp-1 =
        ↪aa0d20033a045bc0718a9e3f3544a0fb

        yc([&](auto self, int v, int p, S f) -> void { // hash-
            ↪cpp-2
            for (int j = int(g[v].size())-1; j >= 0; j--) {
                auto& e = g[v][j];
                if (e == p) continue;
                dp2[e] = d.op(f, pref[e]);
                self(e, v, d.up(dp2[e], e));
                f = d.op(f, up[e]);
            }
            res[v] = f;
        })(0, -1, d.make(0)); // hash-cpp-2 = 605
        ↪a3d440cbc2fdd18703cae2d61373e

        const S& operator [] (int i) const {
            return res[i];
        }
    };
};

```

monotone-minima.hpp

Description: Given an $N \times M$ matrix A , returns $m_i = \operatorname{argmin}_j A_{i,j}$ given that m_0, \dots, m_{N-1} is non-decreasing

16 lines

CUHK-SZ

```
// f(i, j, k) := [A_{i, j} <= A_{i, k}], given j < k
template <class F> V<int> monotone_minima(int n, int m, F f
    ↪) {
    V<int> res(n);
    yc([&](auto self, int s, int e, int l, int r) -> void {
        if (s == e) return;
        int i = (s+e)/2;
        int b = l;
        for (int k = l+1; k < r; k++) {
            if (!f(i, b, k)) b = k;
        }
        res[i] = b;
        self(s, i, l, b+1);
        self(i+1, e, b, r);
    })(0, n, 0, m);
    return res;
} // hash-cpp-all = b68cfb2b91d32e7fe615c192a9e42207
```

min-plus-convex.hpp

Description: Given a_0, \dots, a_{N-1} and a_0, \dots, a_{M-1} such that $a_{i+1} - a_i \leq a_{i+2} - a_{i+1}$, returns $c_0, \dots, c_{(N-1)+(M-1)}$ such that $c_k = \min_{i+j=k} a_i + b_j$

```
"monotone-minima.hpp" 17 lines
// a convex and b arbitrary
template <class T> V<T> min_plus_convex(const V<T>& a,
    ↪const V<T>& b) {
    int n = int(a.size());
    int m = int(b.size());
    if (!n || !m) return {};
    auto x = monotone_minima(n+m-1, m, [&](int i, int j, int
        ↪k) -> bool {
        if (i < k) return true;
        if (i-j >= n) return false;
        return a[i-j] + b[j] <= a[i-k] + b[k];
    });
    V<T> res(n+m-1);
    for (int i = 0; i < n+m-1; i++) {
        int j = x[i];
        res[i] = a[i-j] + b[j];
    }
    return res;
} // hash-cpp-all = 159ba36d66ee6a803173143ca4bd9e1d
```

floor-ceil-range.hpp

Description: TODO

```
28 lines
inline void floor_range(ll n, function<void(ll, ll, ll)> f)
    ↪ {
    int rt = int(sqrtl(n)); // hash-cpp-1
    int num = (rt * rt + rt <= n ? rt : rt - 1);
    ll prv = n + 1;
    for (int q = 1; q <= num; q++) {
        ll x = ll(double(n) / (q + 1)) + 1;
        f(q, x, prv);
        prv = x;
    }
    for (int l = rt; l >= 1; l--) {
        f(ll(double(n) / l), l, l+1);
    } // hash-cpp-1 = c69e74e7c069a0d06122a6a63965f401
}

inline void ceil_range(ll n, function<void(ll, ll, ll)> f)
    ↪ {
    int rt = int(sqrtl(n)); // hash-cpp-2
    ll prv = numeric_limits<ll>::max();
    for (int q = 1; q <= rt; ++q) {
```

```
ll x = ll(double(n + q - 1) / q);
f(q, x, prv);
prv = x;
}
int num = (n <= rt * rt + rt ? rt : rt + 1);
if (n == rt * rt) --num;
for (int l = num; l >= 1; --l) {
    f(ll(double(n + l - 1) / l), l, l+1);
} // hash-cpp-2 = 30b46f7614a037477901bd82f7a3055d
}
```

palindromic-decomp-dp.hpp

Description: CF932G DP

```
"string/eertree.hpp" 56 lines
// dp[j] := sum_{i s.t. [i, j] is palindromic} {dp[i] * x}
template <class S, int sigma, bool even = false>
V<S> palindromic_decomp_dp(const V<int>& a,
    function<S(S, S)> add, S add_e,
    function<S(S)> mul_x, S mul_e) {
    int n = int(a.size()); // hash-cpp-1
    V<int> locs(n);
    Eertree<sigma> et(n);
    for (int i = 0; i < n; i++) {
        assert(0 <= a[i] && a[i] < sigma);
        locs[i] = et.append(a[i]);
    } // hash-cpp-1 = 86aa49dc74a7c758bf25b91980da41e1

    int nnodes = et.size();
    V<int> nxt(nnodes);
    nxt[0] = -1;
    if constexpr (even) {
        assert(n % 2 == 0);
        for (int v = 1; v < nnodes; v++) {
            nxt[v] = (et[v].len() % 2 == 0 ? v : nxt[et[v].fail])
                ↪;
        }
    } else {
        iota(nxt.begin()+1, nxt.end(), 1);
    }

    V<int> diff(nnodes, 1e9); // hash-cpp-2
    V<pair<int, int>> top(nnodes);
    for (int v = 2; v < nnodes; v++) {
        int w = nxt[et[v].fail];
        int d = et[v].len() - et[w].len();
        diff[v] = d;
        top[v] = (diff[v] == diff[w] ? top[w] : pair<int, int>(<
            ↪w, 0));
        top[v].second++;
    } // hash-cpp-2 = b5ac0ab709517fecf2e6bec5fc8ceeeef
```

```
V<S> dp(n+1, add_e), gdp = dp; // hash-cpp-3
dp[0] = mul_e;
for (int j = 0; j < n; j++) {
    int v = nxt[locs[j]];
    int i = (j+1) - et[v].len();
    while (v >= 2) {
        int d = diff[v];
        auto [p, s] = top[v];
        if (s == 1) {
            gdp[i] = dp[i];
        } else {
            gdp[i] = add(gdp[i], dp[i + d * (s-1)]);
        }
        dp[j+1] = add(dp[j+1], mul_x(gdp[i]));
        i += d * s;
        v = p;
    }
```

```
    }
    // hash-cpp-3 = 2c842efa6722d1a05670a98723570137

    return dp;
}
```

Algebra (4)

modint.hpp

Description: Frees you from writing %mod stuff. This only works with prime modulo numbers that are determined during compile-time

```
47 lines
template <class T> T pow(T a, ll b) {
    assert(b >= 0);
    T r = 1;
    while (b) {
        if (b & 1) r *= a;
        a *= a;
        b >>= 1;
    }
    return r;
}

template <uint32_t mod> struct mint {
    using U = uint32_t;

    static constexpr U m = mod; // hash-cpp-1
    U v;
    constexpr mint() : v(0) {}
    constexpr mint(ll a) { s(U(a % m + m)); }
    constexpr mint& s(U a) { v = a < m ? a : a-m; return *
        ↪this; }
    friend mint inv(const mint& n) { return pow(n, m-2); } //
        ↪ hash-cpp-1 = 7ae46e1707847d7dc77452080ea79898

    mint operator- () const { // hash-cpp-2
        mint res;
        res.v = v ? m-v : 0;
        return res;
    } // hash-cpp-2 = 682e0bd616a7a1b4efedf0025fd9946a

    friend bool operator == (const mint& a, const mint& b) {
        ↪return a.v == b.v; } // hash-cpp-3
    friend bool operator != (const mint& a, const mint& b) {
        ↪return !(a == b); } // hash-cpp-3 = 747
        ↪ b64cd3779b0e594a5a9027b3c39d1

    mint& operator += (const mint& o) { return s(v + o.v); }
        ↪ // hash-cpp-4
    mint& operator -= (const mint& o) { return s(v + m - o.v)
        ↪; }
    mint& operator *= (const mint& o) { v = U(uint64_t(v) * o
        ↪.v % m); return *this; }
    mint& operator /= (const mint& o) { return *this *= inv(o
        ↪); } // hash-cpp-4 =
        ↪ d2801243cd92c4bf423b4d808c532236

    friend mint operator + (const mint& a, const mint& b) {
        ↪return mint(a) += b; } // hash-cpp-5
    friend mint operator - (const mint& a, const mint& b) {
        ↪return mint(a) -= b; }
    friend mint operator * (const mint& a, const mint& b) {
        ↪return mint(a) * b; }
    friend mint operator / (const mint& a, const mint& b) {
        ↪return mint(a) /= b; } // hash-cpp-5 = 0
        ↪ d3449609c465ca434b9110ef55a1bbb
```



```
static constexpr U get_mod() { return m; }
static constexpr mint get_root() {
    if (m == 998244353) return 3;
    if (m == 1053818881) return 2789;
    assert(false);
}
};
```

nft.hpp

Description: NTT; mostly the same with fft.hpp?

"contest/extra.hpp" 58 lines

```
template <class T> void nft(V<T>& a, int n) {
    static V<int> rev = {0, 1}; // hash-cpp-1
    static V<T> rt(2, 1);
    if (int(rt.size()) < n) {
        rev.resize(n);
        for (int i = 0; i < n; i++) {
            rev[i] = (rev[i]>>1) | ((i&1)*n) >> 1;
        }
        rt.reserve(n);
        for (int k = int(rt.size()); k < n; k *= 2) {
            rt.resize(2*k);
            T z = pow(T::get_root(), (T::get_mod()-1) / (2*k));
            for (int i = k/2; i < k; i++) {
                rt[2*i] = rt[i];
                rt[2*i+1] = rt[i] * z;
            }
        } // hash-cpp-1 = 0317970f6407858d30d9ac8d7c912632
        int s = __builtin_ctz(int(rev.size()) / n); // hash-cpp-2
        for (int i = 0; i < n; i++) {
            int j = rev[i] >> s;
            if (i < j) swap(a[i], a[j]);
        }
        for (int k = 1; k < n; k *= 2) {
            for (int i = 0; i < n; i += 2*k) {
                auto it1 = a.begin() + i;
                auto it2 = it1 + k;
                for (int j = 0; j < k; j++, ++it1, ++it2) {
                    T t = rt[j+k] * *it2;
                    *it2 = *it1 - t;
                    *it1 += t;
                }
            }
        } // hash-cpp-2 = f44c0c7afb36c49ec3de1f45f36c18fb
    }
}
```

```
template <class T> void inft(V<T>& a, int n) { // hash-cpp
    ↪-3
    T d = inv(T(n));
    for (int i = 0; i < n; i++) a[i] *= d;
    reverse(a.begin()+1, a.begin()+n);
    nft(a, n);
} // hash-cpp-3 = 70f478c2abbc15c2d18bdf1b0781f931
```

```
template <class T> V<T> multiply(V<T> a, V<T> b) { // hash-
    ↪cpp-4
    int n = int(a.size()), m = int(b.size());
    if (!n || !m) return {};
    int s = 1 << internal::next_pow2(n + m - 1);
    a.resize(s), nft(a, s);
    b.resize(s), nft(b, s);
    T is = inv(T(s));
    for (int i = 0; i < s; i++) {
        a[i] *= b[i] * is;
    }
}
```

```
reverse(a.begin() + 1, a.end());
nft(a, s);
a.resize(n + m - 1);
return a;
} // hash-cpp-4 = ebb669e117a71af44f842cf79631bd1d
```

matrix.hpp

Description: Gaussian elimination and stuff. solve_lineareq returns the pair (some particular solution, a basis of the null space).

"algebra/modint.hpp" 116 lines

```
namespace matrix {

template <class T>
using F_better = function<bool(T, T)>;
```

```
template <class T>
using F_zero = function<bool(T)>;
```

```
template <bool rref = false, class T>
pair<int, T> sweep(VV<T>& a,
    F_better<T> fb, F_zero<T> fz,
    int c = -1) {
    int h = int(a.size());
    if (!h) return {0, 0};
    int w = int(a[0].size());
```

```
    if (c == -1) c = w; // hash-cpp-1
    int r = 0;
    T det = 1;
    for (int j = 0; j < c; j++) {
        int p = -1;
        for (int i = r; i < h; i++) {
            if (p == -1 || fb(a[i][j], a[p][j])) p = i;
        }
        if (p == -1 || fz(a[p][j])) {
            det = 0;
            continue;
        }
        if (r != p) {
            det = -det;
            swap(a[r], a[p]);
        }
        auto& ar = a[r];
        det *= ar[j]; // hash-cpp-1 = 68409
        ↪b9e970dd293b0fbdda0e682d0c9
    }
    int is; // hash-cpp-2
    T d = T(1) / ar[j];
    if constexpr(rref) {
        for (int k = j; k < w; k++) {
            ar[k] *= d;
        }
        d = 1;
        is = 0;
    } else {
        is = r+1;
    } // hash-cpp-2 = 2e7107ced9297d66963c63feb0f864a8
```

```
    for (int i = is; i < h; i++) { // hash-cpp-3
        if (i == r) continue;
        auto& ai = a[i];
        if (!fz(ai[j])) {
            T e = ai[j] * d;
            for (int k = j; k < w; k++) {
                ai[k] -= ar[k] * e;
            }
        }
    }
}
```

```
    }
    r++;
} // hash-cpp-3 = bf314b34183f0c8f2f977a8def861fab
return {r, det};
}
```

```
template <class T>
pair<V<T>, VV<T>> solve_lineareq(VV<T> a, V<T> b,
    F_better<T> fb, F_zero<T> fz) {
    int h = int(a.size());
    assert(h);
    int w = int(a[0].size());
    for (int i = 0; i < h; i++) a[i].push_back(b[i]); // hash
    ↪-cpp-4
    int r = sweep<true>(a, fb, fz, w).first;
    for (int i = r; i < h; i++) {
        if (!fz(a[i][w])) return {};
    }
    V<T> x(w);
    V<int> pivot(w, -1);
    int z = 0;
    for (int i = 0; i < r; i++) {
        while (fz(a[i][z])) z++;
        x[z] = a[i][w], pivot[z] = i;
    } // hash-cpp-4 = fed9f2cf91f51c7f7f691143a21b1d45
    VV<T> ker; // hash-cpp-5
    for (int j = 0; j < w; j++) {
        if (pivot[j] == -1) {
            V<T> v(w);
            v[j] = 1;
            for (int k = 0; k < j; k++) {
                if (pivot[k] != -1) v[k] = -a[pivot[k]][j];
            }
            ker.push_back(v);
        }
    } // hash-cpp-5 = d82658f1eb1a359e4c0319403ac44cce
    return {x, ker};
}
```

```
template <class T> VV<T> mat_inv(VV<T> a,
    F_better<T> fb, F_zero<T> fz) { // hash-cpp-6
    int n = int(a.size());
    VV<T> m(n, V<T>(2*n));
    for (int i = 0; i < n; i++) {
        copy(begin(a[i]), end(a[i]), begin(m[i]));
        m[i][n+i] = 1;
    }
    if (sweep<true>(m, fb, fz, n).first != n) return {};
    VV<T> b(n);
    for (int i = 0; i < n; i++) {
        copy(begin(m[i]) + n, end(m[i]), back_inserter(b[i]));
    }
    return b;
} // hash-cpp-6 = 243823cb5b0f3f38377baef672f6d7276
```

```
template <class T> T mat_det(VV<T> a,
    F_better<T> fb, F_zero<T> fz) { // hash-cpp-7
    return sweep<false>(a, fb, fz).second;
} // hash-cpp-7 = fa5f2046eelbe299cee6c7f1f558ba9f

} // namespace matrix
```

Graph (5)

eulerian-trail.hpp

Description: Eulerian undirected/directed trail algorithm. Returns a list of (vertex, edge)'s in the trail with src at the start, or std::nullopt if there is no trail. Note that choosing the starting vertex can be somewhat ad-hoc :)

Time: $\mathcal{O}(V + E)$

84 lines

```
namespace eulerian_trail {

// (vertex, edge)
// For the returned list,
// edge is the preceding edge of that vertex
using E = pair<int, int>;
template <bool cyc_only = false>
optional<V<E>> go(int nv, const VV<E>& g, int ne, int src =
    ↪ 0) {
    assert(nv == int(g.size()));
    assert(0 <= src && src < nv);

    V<V<E>::const_iterator> its(nv); // hash-cpp-1
    for (int i = 0; i < nv; i++) its[i] = g[i].begin();
    V<int> state(nv);
    if constexpr (!cyc_only) state[src]++;
    V<bool> seen(ne);
    V<E> res, stk = {E(src, -1)}; // hash-cpp-1 = 1
    ↪ e5089ad863eb917ca8416c84758c980

    while (!stk.empty()) { // hash-cpp-2
        auto [i, p] = stk.back();
        auto& it = its[i];
        if (it == g[i].end()) {
            res.emplace_back(i, p);
            stk.pop_back();
            continue;
        }
        auto [j, e] = *(it++);
        if (!seen[e]) {
            state[i]--, state[j]++;
            stk.emplace_back(j, e);
            seen[e] = true;
        }
    }
    if (int(res.size()) != ne+1) return {};
    for (int s : state) if (s < 0) return {};
    return V<E>{res.rbegin(), res.rend()}; // hash-cpp-2 =
    ↪ ae20d810f8feef21197961bf6c241e0d
}

template <bool cyc_only = false>
optional<V<E>> trail_undirected(int nv, const V<pair<int,
    ↪ int>>& edges) {
    assert(nv > 0);

    VV<E> g(nv);
    int e = 0;
    for (auto [a, b] : edges) {
        g[a].emplace_back(b, e);
        g[b].emplace_back(a, e);
        e++;
    }

    int src = 0; // hash-cpp-3
    for (int i = 0; i < nv; i++) {
        if (!g[i].empty()) src = i;
    }
    for (int i = 0; i < nv; i++) {
        if (g[i].size() % 2 == 1) src = i;
    }

    } // namespace eulerian_trail
}
```

```
} // hash-cpp-3 = 8f0c0499edac02a8775d04f38f6b519e
return go<cyc_only>(nv, g, int(edges.size()), src);
}

template <bool cyc_only = false>
optional<V<E>> trail_directed(int nv, const V<pair<int, int
    ↪ >>& edges) {
    assert(nv > 0);

    VV<E> g(nv);
    V<int> indeg(nv);
    int e = 0;
    for (auto [a, b] : edges) {
        g[a].emplace_back(b, e);
        indeg[b]++;
        e++;
    }

    int src = 0; // hash-cpp-4
    for (int i = 0; i < nv; i++) {
        if (!g[i].empty()) src = i;
    }
    for (int i = 0; i < nv; i++) {
        if (indeg[i] < int(g[i].size())) src = i;
    } // hash-cpp-4 = 78a6497411685fe139d007ac0cce4a8b
    return go<cyc_only>(nv, g, int(edges.size()), src);
}

} // namespace eulerian_trail
```

bipartite.hpp

Description: Hopcroft-Karp algorithm that gives a maximum bipartite matching. edges should be a sequence of edges (a_i, b_i) such that $a_i \in [n_l]$ and $b_i \in [n_r]$

Time: $\mathcal{O}(E\sqrt{V})$

83 lines

```
struct Bipartite {
    int nl, nr;
    VV<int> g;
    V<int> mtl, mtr, lvl;
    V<bool> seen;
    Bipartite(int nl_, int nr_, const V<pair<int, int>>&
        ↪ edges)
        : nl(nl_), nr(nr_),
          g(nl), mtl(nl, -1), mtr(nr, -1), lvl(nl), seen(nr) {
        for (auto [i, j] : edges) {
            g[i].push_back(j);
        }
        V<int> q; q.reserve(nl);
        while (true) {
            q.clear(); // hash-cpp-1
            for (int i = 0; i < nl; i++) {
                if (mtl[i] == -1) {
                    lvl[i] = 0;
                    q.push_back(i);
                } else {
                    lvl[i] = -1;
                }
            }
            // If there is an alternating path that
            // leads to some unmatched left-side vertex
            bool f = false;
            for (int z = 0; z < int(q.size()); z++) {
                int i = q[z];
                for (int j : g[i]) {
                    int o = mtr[j];
                }
            }
        }
    }
}
```

```
if (o == -1) {
    f = true;
} else if (lvl[o] == -1) {
    lvl[o] = lvl[i] + 1;
    q.push_back(o);
}
}

if (!f) {
    for (int i : q) for (int j : g[i]) seen[j] = true;
    break;
} // hash-cpp-1 = 3c672de70b8adeba7d37b4685bbebca6

V<bool> done(nl); // hash-cpp-2
for (int s = 0; s < nl; s++) {
    if (mtl[s] != -1) continue;

    yc([&](auto self, int i) -> bool {
        if (done[i]) return false;
        done[i] = true;
        for (int j : g[i]) {
            int o = mtr[j];
            if (o == -1 || (lvl[i]+1 == lvl[o] && self(o)))
                ↪ {
                    mtl[i] = j, mtr[j] = i;
                    return true;
                }
        }
        return false;
    })(s);
} // hash-cpp-2 = 18358a31be7e4bd4afa0cafb536586d8
}

V<pair<int, int>> matching() { // hash-cpp-3
    V<pair<int, int>> res;
    for (int i = 0; i < nl; i++) {
        int j = mtl[i];
        if (j != -1) res.emplace_back(i, j);
    }
    return res;
} // hash-cpp-3 = 9f6badbc0263844183d9e375f20ae28e

pair<V<int>, V<int>> vertex_cover() { // hash-cpp-4
    V<int> lvs, rvs;
    for (int i = 0; i < nl; i++) {
        if (lvl[i] == -1) lvs.push_back(i);
    }
    for (int j = 0; j < nr; j++) {
        if (seen[j]) rvs.push_back(j);
    }
    return {lvs, rvs};
} // hash-cpp-4 = fcdd34794a59dc336b8edfabd350b490
};
```

hld.hpp

Description: Heavy-light decomposition with derived functionalities

179 lines

```
struct HLD {
    int n;
    V<int> ord, st, en, depth;
    V<pair<int, int>> heavy;
    HLD() {}
    HLD(const V<int>& par, int rt = -1) { build(par, rt); }

    void build(const V<int>& par, int rt = -1) {
        n = int(par.size()); // hash-cpp-1
    }
}
```

```

ord.resize(n);
st.resize(n);
en.resize(n);
depth.resize(n);
heavy.resize(n);
VV<int> ch(n);
for (int i = 0; i < n; i++) {
    if (par[i] != -1) ch[par[i]].push_back(i);
} // hash-cpp-1 = 8ae787897663a0b8ad2c988fae1184b0

int i = 0;
V<int> sub(n);
auto go = [&](int g) -> void {
    yc([&](auto self, int v, int d = 0) -> void { // hash
        ↪-cpp-2
        sub[v] = 1;
        depth[v] = d;
        for (int& w : ch[v]) {
            self(w, d+1);
            sub[v] += sub[w];
            if (sub[ch[v][0]] < sub[w]) swap(ch[v][0], w);
        }
    })(g); // hash-cpp-2 =
    ↪f85fc1f8fd7047a905e24720a59d1d8b

    yc([&](auto self, int v, bool r = true) -> void { //
        ↪hash-cpp-3
        ord[st[v] = i++] = v;
        if (r) {
            heavy[st[v]] = {par[v] == -1 ? -1 : st[par[v]],
                ↪1};
        } else {
            heavy[st[v]] = heavy[st[v]-1];
            heavy[st[v]].second++;
        }
        bool cr = false;
        for (int w : ch[v]) {
            self(w, cr);
            cr = true;
        }
        en[v] = i;
    })(g); // hash-cpp-3 =
    ↪f1d1da4b4153cfda08dc6ef0502deaf4
};

if (rt == -1) {
    // rooted forest
    for (int v = 0; v < n; v++) {
        if (par[v] == -1) go(v);
    }
} else {
    // rooted at rt
    assert(0 <= rt && rt < n);
    go(rt);
}

assert(i == n);
}

bool in_subtree(int a, int v) const {
    return st[a] <= st[v] && st[v] < en[a];
}

int get_ancestor(int a, int k) const { // hash-cpp-4
    assert(k >= 0);
    a = st[a];
    while (a != -1 && k) {
        if (k >= heavy[a].second) {

```

```

            k -= heavy[a].second;
            a = heavy[a].first;
        } else {
            a -= k;
            k = 0;
        }
    }
    if (a == -1) return -1;
    else return ord[a];
} // hash-cpp-4 = 38c66b004fd349c93647d7943f36251f

int lca(int a, int b) const { // hash-cpp-5
    a = st[a], b = st[b];
    while (true) {
        if (a > b) swap(a, b);
        if (a > b - heavy[b].second) {
            return ord[a];
        }
        b = heavy[b].first;
        if (b == -1) return -1;
    }
} // hash-cpp-5 = 9ee75bf6da246fa444c875c297d5c9a7

int jump(int s, int t, int d) const { // hash-cpp-6
    int w = lca(s, t);
    if (d <= depth[s] - depth[w]) {
        return get_ancestor(s, d);
    } else {
        d = (depth[s] + depth[t] - 2 * depth[w]) - d;
        return d >= 0 ? get_ancestor(t, d) : -1;
    }
} // hash-cpp-6 = 278341587908508d2f5cabb88ab56ed1

V<array<int, 2>> extract(int s, int t) { // hash-cpp-7
    static V<array<int, 2>> res;
    res.clear();
    s = st[s], t = st[t];
    while (true) {
        if (t > s - heavy[s].second) {
            res.push_back({s, t+1});
            break;
        }
        res.push_back({s, s - heavy[s].second + 1});
        s = heavy[s].first;
    }
    return res;
} // hash-cpp-7 = 273a0339e602dbb257c2354c8177ac96

template <bool vertex = true, class F> void apply(int s,
    ↪int t, F f) { // hash-cpp-8
    int a = lca(s, t);
    for (auto& [x, y] : extract(s, a)) {
        f(x+1, y);
    }
    if constexpr (vertex) {
        f(st[a], st[a]+1);
    }
    auto des = extract(t, a);
    reverse(des.begin(), des.end());
    for (auto& [x, y] : des) {
        f(y, x+1);
    }
} // hash-cpp-8 = c27280d29b591909807fe89e7034137c

// NOT TESTED
template <class F> int get_lowest(int a, F f) const { //
    ↪hash-cpp-9
    a = st[a];

```

```

while (a != -1) {
    int t = a - heavy[a].second + 1;
    if (!f(ord[t])) {
        a = heavy[a].first;
        continue;
    }
    int mi = t, ma = a+1;
    while (ma - mi > 1) {
        int md = (mi + ma) / 2;
        if (f(ord[md])) mi = md;
        else ma = md;
    }
    return ord[mi];
}
return -1;
} // hash-cpp-9 = b254f08e7b14254b490de927443e62ac

V<int> inds; // hash-cpp-10
pair<V<int>, V<int>> compress(V<int> vs) {
    inds.resize(n, -1);
    auto cmp = [&](int a, int b) -> bool {
        return st[a] < st[b];
    };
    sort(vs.begin(), vs.end(), cmp);
    vs.erase(unique(vs.begin(), vs.end()), vs.end());
    int num = int(vs.size());
    assert(num >= 1);
    for (int z = 1; z < num; z++) {
        vs.push_back(lca(vs[z-1], vs[z]));
    }
    sort(vs.begin(), vs.end(), cmp);
    vs.erase(unique(vs.begin(), vs.end()), vs.end());
    num = int(vs.size());
    for (int z = 0; z < num; z++) inds[vs[z]] = z;
    V<int> par(num, -1);
    for (int z = 1; z < num; z++) {
        par[z] = inds[lca(vs[z-1], vs[z])];
    }
    return {vs, par};
} // hash-cpp-10 = 28006d54abac0b3eaa7865ad2f55bb70
};

```

enumerate-triangles.hpp

Description: Enumerates all triangles (x, y, z) in an undirected graph
Time: TODO

23 lines

```

template <class F> void triangles(int n, const V<pair<int,
    ↪int>>& edges, F f) {
    V<int> deg(n); // hash-cpp-1
    for (auto& [a, b] : edges) {
        deg[a]++, deg[b]++;
    }
    VV<int> adj(n);
    for (auto [a, b] : edges) {
        if (tie(deg[a], a) > tie(deg[b], b)) swap(a, b);
        adj[a].push_back(b);
    } // hash-cpp-1 = 7f0b6720531a2a2c68c8619dadbfed31

    V<int> ind(n); // hash-cpp-2
    int i = 0;
    for (int x = 0; x < n; x++) {
        ++i;
        for (int y : adj[x]) ind[y] = i;
        for (int y : adj[x]) {
            for (int z : adj[y]) {
                if (ind[z] == i) f(x, y, z);
            }
        }
    }
}

```

```

    }
} // hash-cpp-2 = bfa178d26a11e8e8875f23e0a1275488
}

```

block-cut.hpp

```

47 lines
template <class E> VV<int> block_cut_tree(int n, const VV<E
    ↪>& g) {
    VV<int> tr(n); // hash-cpp-1
    auto add = [&](int b, int v) -> void {
        tr[b].push_back(v);
        tr[v].push_back(b);
    }; // hash-cpp-1 = d73420bf298cdd9bb0e5d25c188b4da1

    V<int> stk; stk.reserve(n);
    V<int> idx(n, -1);
    int t = 0;
    for (int s = 0; s < n; s++) {
        if (idx[s] != -1) continue;
        yc([&](auto self, int v, int p) -> int {
            stk.push_back(v); // hash-cpp-2
            idx[v] = t++;
            int low = idx[v] = t++;
            int c = 0;
            for (int w : g[v]) {
                if (w == p) continue;
                if (idx[w] == -1) {
                    c++;
                    auto z = stk.size();
                    int nlow = self(w, v);
                    low = min(low, nlow);
                    if ((p == -1 && c > 1) || (p != -1 && idx[v] <=
                        ↪nlow)) {
                        int b = int(tr.size());
                        tr.resize(b+1);
                        add(b, v);
                        while (z < stk.size()) {
                            add(b, stk.back());
                            stk.pop_back();
                        }
                    } else {
                        low = min(low, idx[w]);
                    }
                }
            }
            return low; // hash-cpp-2 = 7
            ↪cc064051424c44ab789d52113b58040
        })(s, -1);
        int b = int(tr.size()); // hash-cpp-3
        tr.resize(b+1);
        for (int v : stk) add(b, v);
        stk.clear(); // hash-cpp-3 = 98651
            ↪a8db6af759650d4c4be638030dd
    }

    return tr;
}

```

two-sat.hpp

Description: Calculates a valid assignment to boolean variables a, b, c,... to a 2-SAT problem, so that an expression of the type $(a \vee b) \wedge (\neg a \vee c) \wedge (d \vee \neg b) \wedge \dots$ becomes true, or reports that it is unsatisfiable. Negated variables are represented by bit-inversions ($\sim x$)

Usage: TwoSat ts(number of boolean variables);
 ts.either(0, ~3); // Var 0 is true or var 3 is false
 ts.set_value(2); // Var 2 is true
 ts.at_most_one({0, ~1, 2}); // ≤ 1 of vars 0, ~1 and 2 are true
 ts.solve(); // Returns true iff it is solvable
 ts.values[0..N-1] holds the assigned values to the vars
Time: $O(N + E)$

```

71 lines
struct TwoSat {
    int n;
    VV<int> g;
    TwoSat(int n_ = 0) : n(n_), g(2*n) {}

    int add_var() {
        g.emplace_back(), g.emplace_back();
        return n++;
    }

    void either(int a, int b) { // hash-cpp-1
        a = max(2*a, -1-2*a);
        b = max(2*b, -1-2*b);
        g[a^1].push_back(b);
        g[b^1].push_back(a);
    } // hash-cpp-1 = 16e68cfa6a6fc20d6b21bb1a940571f2

    void set_value(int x) {
        either(x, x);
    }

    void at_most_one(const V<int>& vs) { // hash-cpp-2
        int m = int(vs.size());
        if (m <= 1) return;
        int cur = ~vs[0];
        for (int i = 2; i < m; i++) {
            int nxt = add_var();
            either(cur, ~vs[i]);
            either(cur, nxt);
            either(~vs[i], nxt);
            cur = ~nxt;
        }
        either(cur, ~vs[1]);
    } // hash-cpp-2 = 5fb24984002f7bac35e6e8ef6c1b3ce5

    optional<V<bool>> solve() { // hash-cpp-3
        V<int> idx(2*n, -1), comp(2*n, -1), stk;
        int tm = 0;
        V<char> r(n, -1); // hash-cpp-3 = 572
            ↪ebd2509c5c93c519ae4ff99a396d0

        for (int s = 0; s < 2*n; s++) { // hash-cpp-4
            if (comp[s] != -1) continue;

            yc([&](auto self, int i) -> int {
                int low = idx[i] = tm++;
                stk.push_back(i);
                for (auto& j : g[i]) {
                    if (comp[j] != -1) continue;
                    low = min(low, idx[j] == -1 ? self(j) : idx[j]);
                }
                tm++;
                if (low == idx[i]) {
                    while (true) {
                        int z = stk.back(); stk.pop_back();
                        comp[z] = tm;
                        if (r[z>>1] == -1) r[z>>1] = !(z&1);
                        if (i == z) break;
                    }
                }
            });
        }
    }
}

```

```

    }
}
    return idx[i] = low;
})(s);
} // hash-cpp-4 = 2a4eba424a97524adeb7fdf28a595304

for (int i = 0; i < n; i++) { // hash-cpp-5
    if (comp[2*i] == comp[2*i+1]) return {};
}
V<bool> res(n);
for (int i = 0; i < n; i++) res[i] = bool(r[i]);
return res; // hash-cpp-5 = 46
    ↪f2074bbd0b6aeff35c156aabe39e19
}
};

```

Number Theory (6)

factor.hpp

Description: Returns prime factors in ascending order (e.g. 2299 -> {11, 11, 19})

Time: $O(n^{1/4})$

```

"contest/extra.hpp", <random>
89 lines
namespace factor {

template <class T> T pow_mod(T a, u64 b, T m) { // hash-cpp
    ↪-1
    T r = 1;
    while (b) {
        if (b & 1) r = r * a % m;
        a = a * a % m;
        b >>= 1;
    }
    return r;
} // hash-cpp-1 = 8153dd104c95c28bf40b51ccfa359c28

template <class T> bool is_prime(T n) { // hash-cpp-2
    if (n <= 1 || n % 2 == 0) return (n == 2);
    int s = __builtin_ctzll(n-1);
    T d = (n-1) >> s;
    for (ul28 a : {2, 325, 9375, 28178, 450775, 9780504,
        ↪1795265022}) {
        a %= n;
        if (a == 0) continue;
        a = pow_mod<ul28>(a, d, n);
        if (T(a) == 1 || T(a) == n-1) continue;
        for (int i = 0; i < s-1; i++) {
            a = a * a % n;
            if (T(a) == n-1) break;
        }
        if (T(a) != n-1) return false;
    }
    return true;
} // hash-cpp-2 = 91830792ecc62049005cfc63ebf602cb

// Fake pollard-rho, which does not guarantee
// to return a nontrivial divisor of n
template <class T> T pollard(T n) {
    assert(n >= 2);
    if (n % 2 == 0) return 2;
    T c = uniform_int_distribution<T>(1, n-1)(mt);
    T y = uniform_int_distribution<T>(1, n-1)(mt);
    auto f = [&](T a) -> T { // hash-cpp-3
        return T((ul28(a) * a + c) % n);
    };
}

```

```

for (int s = 1; ; s *= 2) {
    T x = y, d = 1;
    for (int i = 0; i < s; i++) y = f(y);
    static constexpr int block = 256;
    for (int i = 0; i < s; i += block) {
        T yb = y;
        for (int j = 0; j < block && j < s-i; j++) {
            y = f(y);
            d = T(ul28(d) * (y-x+n) % n);
        }
        d = __gcd(n, d);
        if (d == 1) continue;
        if (d == n) {
            for (d = 1, y = yb; d == 1; ) {
                y = f(y);
                d = __gcd(n, y-x+n);
            }
            return d;
        }
    }
} // hash-cpp-3 = af034d23976b39357fd911349e573172

// Returns prime factors in ascending order
template <class T> V<T> factorize(T n) { // hash-cpp-4
    if (n == 1) return {};
    if (is_prime(n)) return {n};
    T f = pollard(n);
    auto a = factorize(f), b = factorize(n / f);
    V<T> c(a.size() + b.size());
    merge(a.begin(), a.end(), b.begin(), b.end(), c.begin());
    return c;
} // hash-cpp-4 = 14092f0d69169ca846474fdcaf0c8fcf

template <class T> T primitive_root(T p) {
    assert(is_prime(p));
    auto f = factorize(p-1);
    while (true) {
        T c = uniform_int_distribution<T>(1, p-1)(mt);
        if ([&]() -> bool { // hash-cpp-5
            for (T d : f) {
                if (pow_mod<ul28>(c, (p-1) / d, p) == 1) return
                    ↪ false;
            }
            return true;
        }()) return c; // hash-cpp-5 = 5
        ↪ ecb7c7d20c0e216abf8992272cb47d9
    }
}

} // namespace factor

```

int-kth-root.hpp

Description: Computes $[a^{1/k}]$

18 lines

```

template <class I = uint64_t> I int_kth_root(I a, I k) {
    if (k == 1) return a;
    if (k >= 64) return (a == 0 ? 0 : 1);

    using T = __uint128_t;
    auto works = [&](T x) -> bool {
        T r = 1;
        for (int n = int(k); n; n >>= 1) {
            if (n & 1) r *= x;
            x *= x;
        }
        return r <= a;
    };

```

```

};
if (a == I(-1)) a--;
I rt = I(pow(a, nextafter(1 / double(k), 0)));
while (works(rt+1)) rt++;
return rt;
} // hash-cpp-a11 = 62ef9e78cc4292fd7c7b21aa1c80b9a3

```

eratosthenes.hpp

Description: Prime sieve for generating all primes up to a certain limit n

17 lines

```

inline V<int> prime_enumerate(int n) {
    V<bool> sieve(n/3+1, true); // hash-cpp-1
    int qe = int(sieve.size());
    int n2 = int(sqrt(n));
    for (int p = 5, d = 4, i = 1; p <= n2; p += d = 6-d, i++)
        ↪ {
            if (!sieve[i]) continue;
            for (int q = p * p / 3, r = d * p / 3 + (d * p % 3 ==
                ↪ 2), s = 2*p; q < qe; q += r = s-r) {
                sieve[q] = false;
            }
        } // hash-cpp-1 = 7a03caac557d3e6836e8cbcd82397b1e
    V<int> res{2, 3}; // hash-cpp-2
    for (int p = 5, d = 4, i = 1; p <= n; p += d = 6-d, i++)
        ↪ {
            if (sieve[i]) res.push_back(p);
        }
    while (!res.empty() && res.back() > n) res.pop_back();
    return res; // hash-cpp-2 = 9
        ↪ d7ac632394009547a94300c97b43d20
}

```

multiplicative-sum.hpp

Description: Blackbox sieve. Modify $f(v, p, c)$ to fit your wish

188 lines

```

namespace multiplicative_sum {

inline ll isqrt(ll n) {
    return ll(sqrt(n));
}

inline ll icbrt(ll n) {
    return ll(cbrt(n));
}

inline ll sq(ll a) {
    return a * a;
}

inline ll sump(int k, ll n) {
    if (k == 0) {
        return n;
    } else assert(false);
}

// Somehow precompute small primes and store them in ps[]
static V<int> ps;

template <class T, int K> struct counting_primes {
    using A = array<T, K>; // hash-cpp-1
    void add(A& a, const A& b) {
        for (int k = 0; k < K; k++) a[k] += b[k];
    }
    void sub(A& a, const A& b) {
        for (int k = 0; k < K; k++) a[k] -= b[k];
    }
    const ll n;

```

```

const int n2, n3, n6;
int s;
V<ll> vs;
V<A> sum, fw;
A pref; // hash-cpp-1 = 71768c8f1f85c90f2649977a31dbf3dd

```

```

A getpows(T p) { // hash-cpp-2
    A res;
    res[0] = 1;
    for (int k = 1; k < K; k++) {
        res[k] = res[k-1] * p;
    }
    return res;
} // hash-cpp-2 = 1282c5b86030aad73569a7ce5b1492b8

```

```

void trans(int i, int p) { // hash-cpp-3
    A w = getpows(p);
    int j = get_idx(vs[i] / p);
    for (int k = 0; k < K; k++) {
        sum[i][k] -= (sum[j][k] - pref[k]) * w[k];
    }
} // hash-cpp-3 = 1b75b45369ff775f2ea7ab66bf8c1726

```

```

void trans2(int i, int p) { // hash-cpp-4
    A w = getpows(p);
    int j = get_idx(vs[i] / p);
    A z = sum[j];
    if (j >= n3) {
        j -= n3;
        for (; j < int(fw.size()); j += (j+1) & (-j-1)) {
            add(z, fw[j]);
        }
    }
    for (int k = 0; k < K; k++) {
        sum[i][k] -= (z[k] - pref[k]) * w[k];
    }
} // hash-cpp-4 = 4f7b414359537414dc08ba63b39ad6ec

```

```

void upd(int i, ll cur, bool f) { // hash-cpp-5
    if (!f) {
        A w = getpows(cur);
        for (int j = get_idx(cur)-n3; j >= 0; j -= (j+1) & (-
            ↪ j-1)) {
            sub(fw[j], w);
        }
    }
    for (int j = i; cur * ps[j] <= vs[n3]; j++) {
        upd(j, cur * ps[j], false);
    }
} // hash-cpp-5 = a365852e657a6b32c13a96129cd8b444

```

```

counting_primes(ll n_) : n(n_), n2(int(isqrt(n))), n3(int
    ↪ icbrt(n)), n6(int(icbrt(n2))) { // hash-cpp-6
    {
        ll v = n;
        while (v) {
            vs.push_back(v);
            v = n / (n/v+1);
        }
    }
    s = int(vs.size());

    sum.resize(s);
    for (int i = 0; i < s; i++) {
        for (int k = 0; k < K; k++) {
            sum[i][k] = sump(k, vs[i]) - 1;
        }
    }
}

```

```

int idx = 0;
pref = {};
{
    while (ps[idx] <= n6) {
        for (int i = 0; i < s; i++) {
            if (sq(ps[idx]) > vs[i]) break;
            trans(i, ps[idx]);
        }
        add(pref, getpows(ps[idx]));
        idx++;
    }
}
{
    fw.resize(s-n3);
    while (ps[idx] <= n3) {
        for (int i = 0; i < n3; i++) {
            if (sq(ps[idx]) > vs[i]) break;
            trans2(i, ps[idx]);
        }
        upd(idx, ps[idx], true);
        add(pref, getpows(ps[idx]));
        idx++;
    }
    for (int i = s-n3-1; i >= 0; i--) {
        int j = i + ((i+1) & (-i-1));
        if (j < int(fw.size())) {
            add(fw[i], fw[j]);
        }
    }
    for (int i = 0; i < s-n3; i++) {
        add(sum[i+n3], fw[i]);
    }
}
{
    while (ps[idx] <= n2) {
        for (int i = 0; i < s; i++) {
            if (sq(ps[idx]) > vs[i]) break;
            trans(i, ps[idx]);
        }
        add(pref, getpows(ps[idx]));
        idx++;
    }
}
} // hash-cpp-6 = cc14950776f6082996b40e34cfcb9052

int get_idx(ll a) { // hash-cpp-7
    return int(a <= n2 ? s-a : n/a-1);
} // hash-cpp-7 = e71b9037098be21e53f8db6ea63d73c3

// f(v)=f(p^c), where p is some prime
// totient function as an example:
T f(ll, int p, int c) {
    T res = p-1;
    for (int z = 0; z < c-1; z++) {
        res *= p;
    }
    return res;
}

V<T> buf;
T multiplicative_sum() { // hash-cpp-8
    // sum of [p is prime] f(p)
    buf.resize(s);
    for (int i = 0; i < s; i++) {
        buf[i] = sum[i][1] - sum[i][0];
    }
}

```

```

T ans = 1 + buf[0];
auto dfs = yc([&](auto self, int i, int c, ll v, ll lim
    ↪, T cur) -> void {
    ans += cur * f(v+ps[i], ps[i], c+1);
    if (lim >= sq(ps[i])) {
        self(i, c+1, v * ps[i], lim/ps[i], cur);
    }
    cur *= f(v, ps[i], c);
    ans += cur * (buf[get_idx(lim)] - buf[get_idx(ps[i])
    ↪]);
    for (int j = i+1; sq(ps[j]) <= lim; j++) {
        self(j, 1, ps[j], lim/ps[j], cur);
    }
});
for (int i = 0; i < int(ps.size()); i++) {
    if (sq(ps[i]) <= n) {
        dfs(i, 1, ps[i], n/ps[i], 1);
    } else {
        break;
    }
}
return ans;
} // hash-cpp-8 = 11adf13473ccebe5d663835ad33e4b7d
};

```

} // namespace multiplicative_sum

String (7)

z-algorithm.hpp

Description: Returns r_0, \dots, r_N such that $s[0..r_i] = s[i..i + r_i]$. In particular, $r_0 = N$ and $r_N = 0$

Time: $\mathcal{O}(N)$

14 lines

```

template <class S> V<int> z_algo(const S& s) {
    int n = int(s.size());
    V<int> r(n+1);
    for (int i = 1, j = 0; i <= n; i++) {
        int& k = r[i];
        if (j + r[j] <= i) k = 0;
        else k = min(r[j]+j-i, r[i-j]);
        while (i+k < n && s[k] == s[i+k]) k++;
        if (j+r[j] < i+r[i]) j = i;
    }
    r[0] = n;
    return r;
}
// hash-cpp-all = 5f7ecea2b91f34f0c19bf6fd4dlace4e

```

manacher.hpp

Description: Returns maximum lengths of “palindromic” (whatever that means) substrings of S centered at each point

Time: $\mathcal{O}(N)$

29 lines

```

/*
 * eq(i, j): whether [i, j] (inclusive) is palindromic,
 * given that [i+1, j-1] is palindromic.
 * Properties:
 *   * res[i] == i (mod 2)
 *   * k + res[i-k] < res[i] => res[i+k] = res[i-k]
 *   * k + res[i-k] >= res[i] => res[i-k] >= res[i] - k
 *   * [i, j] being palindromic <=> j-i <= res[i+j]
 * In particular, res[2*i+1] = -1 states that [i, i] is not
 *   ↪ palindromic.
 */

```

```

template <class E> V<int> manacher(int n, E e) {
    V<int> res(2*n+1);
    int i = 0, a = 0, b = 0;
    while (i <= 2*n) {
        while (0 < a && b < n) {
            if (i-2*a >= -1 && !e(a-1, b)) break;
            a--, b++;
        }
        int j = b-a;
        res[i] = j;
        int k = 1;
        while (k < j && k + res[i-k] < j) {
            res[i+k] = res[i-k];
            k++;
        }
        i += k, a += k;
    }
    return res;
} // hash-cpp-all = 5c644e1a1f524017b35172cdd50cdee7

```

hashint.hpp

Description: Self-explanatory string hashing structure

38 lines

```

struct HashInt {
    using H = HashInt; // hash-cpp-1
    using T = unsigned long long;
    using L = __uint128_t;
    static constexpr T m = (T(1) << 61) - 1;
    static constexpr T m8 = m * 8;

    T v;
    HashInt() : v(0) {}
    HashInt(T a) : v(a % m * 8) {}
    T get() const { return v == m8 ? 0 : v; } // hash-cpp-1 =
    ↪ 441ee64fd18fdc7b1df56890de357f06

    H& operator += (const H& o) { // hash-cpp-2
        if (__builtin_uaddll_overflow(v, o.v, &v)) v -= m8;
        return *this;
    }
    H& operator -= (const H& o) {
        if (__builtin_usubll_overflow(v, o.v, &v)) v += m8;
        return *this;
    } // hash-cpp-2 = 03a79be35c3f8731c3c4e64a1799cc94

    H& operator *= (const H& o) { // hash-cpp-3
        L t = L(v) * o.v;
        T x = T(t >> 67 << 3);
        T y = T(t << 61 >> 64);
        if (__builtin_uaddll_overflow(x, y, &v)) v -= m8;
        return *this;
    } // hash-cpp-3 = c535ff913f601dd75b6c039556dda31a

    friend H operator + (const H& a, const H& b) { return H(a
    ↪) += b; } // hash-cpp-4
    friend H operator - (const H& a, const H& b) { return H(a
    ↪) -= b; }
    friend H operator * (const H& a, const H& b) { return H(a
    ↪) *= b; }
    friend bool operator == (const H& a, const H& b) { return
    ↪ a.get() == b.get(); } // hash-cpp-4 =
    ↪ b15740d449ec094c54eaf820a3f31571
};

```

```

inline HashInt rand_base() {
    return 2 * uniform_int_distribution<uint64_t>(4e10, 5e10)
    ↪ (mt) + 1;
}

```

```
}

suffix-array.hpp
Description: Builds the suffix array given a string
Time:  $\mathcal{O}(N)$  building
```

117 lines

// Work in progress

```
struct SuffixArray {
    int n;
    V<int> sa;
    V<int> isa;
    V<int> lcp;
    SuffixArray(int n_) : n(n_) {}

    template <class S> static SuffixArray construct(const S&
        ↪ s) {
        int n = int(s.size());
        SuffixArray sa(n);

        sa.build_sa_fast(s);

        sa.build_isa();
        sa.build_lcp(s);

        return sa;
    }

    template <class S> void build_sa_fast(S s) {
        sa.resize(n+1);
        // kinda weird
        int sigma = 0;
        for (auto v : s) {
            sigma = max(sigma, int(v));
            assert(int(v) > 0);
        }
        ++sigma;
        s.push_back(0);
        // what exactly should be these sizes?
        V<int> freq(2 * max(n+1, sigma)), lms(2 * (n+1));
        V<char> type(2 * (n+1));
        sais(n, s.data(), sa.data(), sigma, freq.data(), lms.
            ↪ data(), type.data());
    }

    template <class S> static void sais(int n, S* s, int* sa,
        ↪ int sigma,
        int* freq, int* lms, char* which) {
        int n2 = -1; // hash-cpp-1
        which[n] = 1;
        for (int i = n-1; i >= 0; i--) {
            which[i] = (s[i] == s[i+1] ? which[i+1] : s[i] < s[i+1]);
            ↪ +1));
            if (which[i] == 0 && which[i+1] == 1) {
                which[i+1] = 2;
                lms[++n2] = i+1;
            }
        }
        reverse(lms, lms + (n2+1));
        fill(freq, freq + sigma, 0);
        for (int i = 0; i <= n; i++) ++freq[int(s[i])];
        partial_sum(freq, freq + sigma, freq); // hash-cpp-1 =
            ↪ cc46481fc435bcf90a6ccb7e296ff9e8

        auto induce = [&](int* v) { // hash-cpp-2
            fill(sa, sa + n+1, 0);
            int* cur = freq + sigma;
```

```
        auto pushS = [&](int i) { sa[--cur[int(s[i])]] = i;
            ↪ };
        auto pushL = [&](int i) { sa[cur[int(s[i])]]++ = i;
            ↪ };
        copy(freq, freq + sigma, cur);
        for (int i = n2; i >= 0; i--) pushS(v[i]);
        copy(freq, freq + sigma-1, cur + 1);
        for (int i = 0; i <= n; i++) {
            int j = sa[i]-1;
            if (j >= 0 && which[j] == 0) pushL(j);
        }
        copy(freq, freq + sigma, cur);
        for (int i = n; i >= 0; i--) {
            int j = sa[i]-1;
            if (j >= 0 && which[j]) pushS(j);
        }
    }; // hash-cpp-2 = 67f9a319b4923bb284c38a01d1ad54ab

    auto eq = [&](int i, int j) { // hash-cpp-3
        if (s[i] == s[j]) {
            while (s[++i] == s[++j]) {
                if (which[i] == 2) return true;
            }
        }
        return false;
    }; // hash-cpp-3 = 208a2ae3b819fd126c46e4e3a88d30c0

    induce(lms); // hash-cpp-4
    int sigma2 = -1;
    int* s2 = remove_if(sa, sa + n, [&](int i) { return
        ↪ which[i] != 2; });
    for (int i = 0; i <= n2; i++) {
        if (sigma2 <= 0 || !eq(sa[i], sa[i-1])) sigma2++;
        s2[sa[i]>>1] = sigma2;
    }
    for (int i = 0; i <= n2; i++) s2[i] = s2[lms[i]>>1];
    ++sigma2;
    if (sigma2 <= n2) {
        sais(n2, s2, sa, sigma2,
            freq + sigma, lms + (n2+1), which + (n+1));
    } else {
        for (int i = 0; i <= n2; i++) sa[s2[i]] = i;
    }
    auto buf = lms + (n2+1);
    for (int i = 0; i <= n2; i++) buf[i] = lms[sa[i]];
    induce(buf); // hash-cpp-4 =
        ↪ e9bb7e999f55cac59c9fb7d0a330f760
    }

    void build_isa() { // hash-cpp-5
        isa.resize(n+1);
        for (int i = 0; i <= n; i++) isa[sa[i]] = i;
    } // hash-cpp-5 = bcb546b2fc94176fc80672b20a808f7f

    template <class S> void build_lcp(const S& s) {
        assert(n == int(s.size()));
        lcp.resize(n+1); // hash-cpp-6
        for (int i = 0, k = 0; i < n-1; i++) {
            int r = isa[i]-1, j = sa[r];
            while (k < n - max(i, j) && s[i+k] == s[j+k]) k++;
            lcp[r] = k;
            if (k) k--;
        } // hash-cpp-6 = 85193c3617ced5f805117ffdf20255aa
    }
};
```

eertree.hpp

Description: Palindrome tree. Call reset() to move back to the root

55 lines

```
// 0, ..., K-1
template <int sigma> struct Eertree {
    struct Node { // hash-cpp-1
        array<int, sigma> ch;
        int fail;
        int l, r; // location of the first ocurrence
        Node(int f_, int l_, int r_) : ch{}, fail(f_), l(l_), r
            ↪ (r_) {}
        int len() const { return r-l; }
    };
    V<Node> x;
    V<int> buf;
    int cur; // hash-cpp-1 = f5c073ef9f6cdf81ef2d56cb6d2e477
    Eertree(int alloc = 0) {
        if (alloc) {
            x.reserve(alloc+2);
            buf.reserve(alloc);
        }
        x.emplace_back(-1, 1, 0);
        x.emplace_back(0, 0, 0);
        reset();
    }

    void reset() {
        cur = 1;
        buf.clear();
    }

    int append(int a) { // hash-cpp-2
        int i = int(buf.size());
        buf.push_back(a);
        auto works = [&](int v) -> bool {
            int l = i - x[v].len();
            return l > 0 && buf[l-1] == a;
        };
        for (; !works(cur); cur = x[cur].fail) {}
        if (!x[cur].ch[a]) {
            int par = x[cur].fail;
            if (par != -1) {
                for (; !works(par); par = x[par].fail) {}
            }
            int npar = (par == -1 ? 1 : x[par].ch[a]);
            x[cur].ch[a] = int(x.size());
            x.emplace_back(npar, i - x[cur].len() - 1, i + 1);
        }
        cur = x[cur].ch[a];
        return cur;
    } // hash-cpp-2 = 15be9415acd9f07f11b20a59308379a0

    int size() const {
        return int(x.size());
    }
    const Node& operator [] (int i) const {
        return x[i];
    }
};
```


8.1 2D

base.hpp

Description: Primitive operations

83 lines

```

namespace geometry {

using D = double; // hash-cpp-1
const D EPS = D(1e-9);
inline int sgn(D a) { return (a > EPS) - (a < -EPS); }
inline int sgn(D a, D b) { return sgn(a - b); } // hash-cpp
    ↪-1 = eb6175a3f198588d18a518264d1ee5d

const D PI = acos(D(-1));

template <class T = D> struct Point {
    using P = Point; // hash-cpp-2
    T x, y;
    Point(T x_ = T(), T y_ = T()) : x(x_), y(y_) {} // hash-
    ↪cpp-2 = 6494c3c9bfac161e2c65d414a2c7bc83

P& operator += (const P& p) { x += p.x, y += p.y; return
    ↪*this; } // hash-cpp-3
P& operator -= (const P& p) { x -= p.x, y -= p.y; return
    ↪*this; }
friend P operator + (const P& a, const P& b) { return P(a
    ↪) + b; }
friend P operator - (const P& a, const P& b) { return P(a
    ↪) - b; } // hash-cpp-3 = 32704
    ↪ee5f47251cb7a5a8bcddb7996e3

P& operator *= (const T& t) { x *= t, y *= t; return *
    ↪this; } // hash-cpp-4
P& operator /= (const T& t) { x /= t, y /= t; return *
    ↪this; }
friend P operator * (const P& a, const T& t) { return P(a
    ↪) * t; }
friend P operator / (const P& a, const T& t) { return P(a
    ↪) / t; } // hash-cpp-4 = 56
    ↪a8dfabc9e0968b82d5006dda2d4d7e

friend D dot(const P& a, const P& b) { return a.x * b.x +
    ↪ a.y * b.y; }
friend D crs(const P& a, const P& b) { return a.x * b.y -
    ↪ a.y * b.x; }

P operator - () const { return P(-x, -y); }

friend int cmp(const P& a, const P& b) { // hash-cpp-5
    int z = sgn(a.x, b.x);
    return z ? z : sgn(a.y, b.y);
} // hash-cpp-5 = 1553bdfc52835908d4fc0bd0a91b7134

friend bool operator < (const P& a, const P& b) { return
    ↪cmp(a, b) < 0; }
friend bool operator <= (const P& a, const P& b) { return
    ↪cmp(a, b) <= 0; }

friend D dist2(const P& p) { return p.x * p.x + p.y * p.y
    ↪; }
friend auto dist(const P& p) { return sqrt(dist2(p)); }

friend P unit(const P& p) { return p / p.dist(); }

friend D arg(const P& p) { return atan2(p.y, p.x); }

friend D rabs(const P& p) { return max(std::abs(p.x), std
    ↪::abs(p.y)); }

```

```

friend bool operator == (const P& a, const P& b) { return
    ↪sgn(rabs(a - b)) == 0; }
friend bool operator != (const P& a, const P& b) { return
    ↪!(a == b); }

explicit operator pair<T, T> () const { return pair<T, T>
    ↪(x, y); }

static P polar(D m, D a) { return P(m * cos(a), m * sin(a)
    ↪); }

};
using P = Point<D>;

inline int sgn crs(const P& a, const P& b) { // hash-cpp-6
    D cr = crs(a, b);
    if (std::abs(cr) <= (rabs(a) + rabs(b)) * EPS) return 0;
    return (cr < 0 ? -1 : 1);
} // hash-cpp-6 = 715f69675680678da17cc8e5d7d2e1f2

// not tested
inline D norm_angle(D a) { // hash-cpp-7
    D res = fmod(a + PI, 2*PI);
    if (res < 0) res += PI;
    else res -= PI;
    return res;
} // hash-cpp-7 = af057ce01a3fcc81b04c1504548eb73

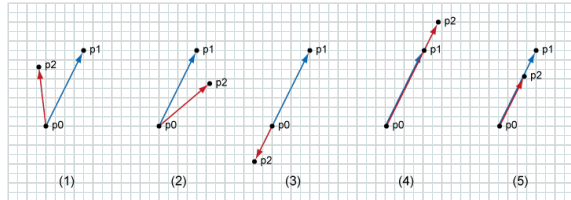
// not tested
inline D norm_nonnegative(D a) { // hash-cpp-8
    D res = fmod(a, 2*PI);
    if (res < 0) res += 2*PI;
    return res;
} // hash-cpp-8 = b899a21e5dbdcde83a81a840e5f9e328

// arg given lengths a, b, c,
// assuming a, b, c are valid
inline D arg(D a, D b, D c) { // hash-cpp-9
    return acos(clamp<D>((a * a + b * b - c * c) / (2 * a * b
    ↪), -1, 1));
} // hash-cpp-9 = 446a9f9aff310fdad6bafc632c7b5c3c

} // namespace geometry

```

ccw.hpp

Description:

"geometry/base.hpp"

22 lines

```

namespace geometry {

// CGL_1_C
// 1: COUNTER_CLOCKWISE (1)
// -1: CLOCKWISE (2)
// 2: ONLINE_BACK (3)
// -2: ONLINE_FRONT (4)
// 0: ON_SEGMENT (5)
inline int ccw(const P& a, const P& b) { // hash-cpp-1
    int s = sgn crs(a, b);

```

```

    if (s) return s;
    if (!sgn(rabs(b)) || !sgn(rabs(b-a))) return 0;
    if (dot(a, b) < 0) return 2;
    if (dot(-a, b-a) < 0) return -2;
    return 0;
} // hash-cpp-1 = fdf5d91850a67e77c2432aec81e836eb

inline int ccw(const P& a, const P& b, const P& c) {
    return ccw(b-a, c-a);
}

} // namespace geometry

```

linear.hpp

Description: Line/segment operations

76 lines

```

"geometry/ccw.hpp"

namespace geometry {

// Work in progress
struct L { // hash-cpp-1
    P s, t;
    L(P s_ = P(), P t_ = P()) : s(s_), t(t_) {}
    friend P vec(const L& l) { return l.t - l.s; }
    friend auto dist(const L& l) { return dist(vec(l)); }
    friend D arg(const L& l) { return arg(vec(l)); }
}; // hash-cpp-1 = 87c781f4f81ba18dc33d97a7d3de1743

inline P project(const L& l, const P& p) { // hash-cpp-2
    P v = vec(l);
    return l.s + v * dot(v, p - l.s) / dist2(v);
} // hash-cpp-2 = 6c1b8640934518c28805ff8abd24ab79

inline int ccw(const L& l, const P& p) { return ccw(l.s, l.
    ↪t, p); }

inline bool insSL(const L& s, const L& l) { // hash-cpp-3
    int a = ccw(l, s.s), b = ccw(l, s.t);
    return (a % 2 == 0 || b % 2 == 0 || a != b);
} // hash-cpp-3 = f4cae3c1b1b14b35890348251586bbcc

inline bool insSS(const L& s, const L& t) { // hash-cpp-4
    int a = ccw(s, t.s), b = ccw(s, t.t),
    c = ccw(t, s.s), d = ccw(t, s.t);
    return (a * b <= 0 && c * d <= 0);
} // hash-cpp-4 = a8ed5652fe62541c10c7ea4b729906c4

inline D distLP(const L& l, const P& p) { // hash-cpp-5
    return std::abs(crs(vec(l), p - l.s)) / dist(l);
} // hash-cpp-5 = ec21f2c9fcb170c0b65c7118172e6767

inline D distSP(const L& s, const P& p) { // hash-cpp-6
    P q = project(s, p);
    if (ccw(s, q) == 0) {
        return dist(p - q);
    } else {
        return min(dist(s.s - p), dist(s.t - p));
    }
} // hash-cpp-6 = 1606015a080bef59202968db31b60baa

inline D distSS(const L& s, const L& t) { // hash-cpp-7
    if (insSS(s, t)) return 0;
    return min({
        distSP(s, t.s), distSP(s, t.t), distSP(t, s.s), distSP(
    ↪t, s.t)
    });
} // hash-cpp-7 = 7213f72dd7063b6226348e3eb1c0dbcc

```



```
// TODO: usage
inline int crossLL(const L& l, const L& m, P& r) { // hash-
    ↪cpp-8
    P vl = vec(l), vm = vec(m);
    D crl = crs(vl, vm), cr2 = crs(vl, l.t - m.s);
    if (sgncrs(vl, vm) == 0) {
        r = l.s;
        if (sgncrs(vec(l), l.t - m.s)) return 0;
        return -1;
    }
    r = m.s + vm * cr2 / crl;
    return 1;
} // hash-cpp-8 = 8518d588ab977248305ed2ff949b418f

// TODO usage
inline int crossSS(const L& l, const L& m, P& r) { // hash-
    ↪cpp-9
    int u = crossLL(l, m, r);
    if (u == 0) return 0;
    if (u == -1) {
        r = max(min(l.s, l.t), min(m.s, m.t));
        P q = min(max(l.s, l.t), max(m.s, m.t));
        return (q < r) ? 0 : (q == r ? 1 : -1);
    }
    if (ccw(l, r) == 0 && ccw(m, r) == 0) return 1;
    return 0;
} // hash-cpp-9 = 57a9b2ceb12937b59727715a7da092c9

} // namespace geometry
```

polygonal.hpp

Description: Polygon operations

"geometry/ccw.hpp", "geometry/linear.hpp" 123 lines

```
namespace geometry {

inline D area2(const V<P>& pol) { // hash-cpp-1
    if (pol.empty()) return 0;
    D res = 0;
    P a = pol.back();
    for (P b : pol) {
        res += crs(a, b);
        a = b;
    }
    return res;
} // hash-cpp-1 = 33dcd4ec795f9208c687cb8f433c0f83

// (1:left) | (2: right) is inside between v[i] -- v[i + 1]
inline V<pair<P, int>> insPoll(const V<P>& pol, const L& l)
    ↪ {
    using Pi = pair<P, int>;
    V<Pi> v;
    P a, b = pol.back();
    for (auto c : pol) {
        a = b; b = c;
        P p;
        if (crossLL({a, b}, l, p) != 1) continue;
        int sa = ccw(l, a) % 2, sb = ccw(l, b) % 2;
        if (sa > sb) swap(sa, sb);
        if (sa != 1 && sb == 1) v.push_back({p, 1});
        if (sa == -1 && sb != -1) v.push_back({p, 2});
    }
    sort(v.begin(), v.end(), [&](Pi x, Pi y){
        auto vl = vec(l);
        return dot(vl, x.first - l.s) < dot(vl, y.first - l.s);
    });
    int m = int(v.size());
    V<Pi> res;
```

```
for (int i = 0; i < m; i++) {
    if (i) v[i].second ^= v[i - 1].second;
    if (!res.empty() && res.back().first == v[i].first) res
        ↪.pop_back();
    res.push_back(v[i]);
}
return res;
}

// 0: outside, 1: on line, 2: inside
inline int contains(const V<P>& pol, const P& p) { // hash-
    ↪cpp-2
    if (!pol.size()) return 0;
    int in = -1;
    P a_, b_ = pol.back();
    for (auto c : pol) {
        a_ = b_, b_ = c;
        P a = a_, b = b_;
        if (ccw(a, b, p) == 0) return 1;
        if (a.y > b.y) swap(a, b);
        if (!(a.y <= p.y && p.y < b.y)) continue;
        if (sgn(a.y, p.y) ? (crs(a - p, b - p) > 0) : (a.x > p.
            ↪x)) in *= -1;
    }
    return in + 1;
} // hash-cpp-2 = d882fa609311ea32e0272dfb7687c2a4

// pol: sorted and distinct
inline V<P> convex_lower(const V<P>& pts) { // hash-cpp-3
    assert(pts.size() >= 2);
    V<P> res;
    for (P d : pts) {
        while (res.size() > 1) {
            //if (ccw(res.end() [-2], res.end() [-1], d) != -1)
            ↪break;
            if (ccw(res.end() [-2], res.end() [-1], d) == 1) break;
            res.pop_back();
        }
        res.push_back(d);
    }
    return res;
} // hash-cpp-3 = 29c9b3dace98447e753933bbbf3e5763

inline V<P> convex(V<P> pts) { // hash-cpp-4
    sort(pts.begin(), pts.end());
    pts.erase(unique(pts.begin(), pts.end()), pts.end());
    if (pts.size() <= 1) return pts;
    V<P> lo = convex_lower(pts);
    reverse(pts.begin(), pts.end());
    V<P> up = convex_lower(pts);
    lo.insert(lo.begin(), up.begin() + 1, up.end() - 1);
    return lo;
} // hash-cpp-4 = 0f6a15113e7873dcabbdf471463886c2

inline V<P> convex_cut(const V<P>& pol, const L& l) { //
    ↪hash-cpp-5
    if (pol.empty()) return {};
    V<P> q;
    P a, b = pol.back();
    for (auto c : pol) {
        a = b, b = c;
        if ((ccw(l, a) % 2) * (ccw(l, b) % 2) < 0) {
            P buf;
            crossLL(l, L(a, b), buf);
            q.push_back(buf);
        }
        if (ccw(l, b) != -1) q.push_back(b);
    }
}
```

```
return q;
} // hash-cpp-5 = 78abfe09b6be0a372cc416265f50ab8e

// pol: convex
inline D diameter(const V<P>& pol) { // hash-cpp-6
    int n = int(pol.size());
    if (n == 2) return dist(pol[1] - pol[0]);
    int x = 0, y = 0;
    for (int i = 1; i < n; i++) {
        if (pol[i] < pol[x]) x = i;
        if (pol[y] < pol[i]) y = i;
    }
    D ans = 0;
    int sx = x, sy = y;
    while (sx != y || sy != x) {
        ans = max(ans, dist(pol[x] - pol[y]));
        int nx = (x + 1 < n) ? x + 1 : 0, ny = (y + 1 < n) ? y
            ↪+ 1 : 0;
        if (crs(pol[nx] - pol[x], pol[ny] - pol[y]) < 0) {
            x = nx;
        } else {
            y = ny;
        }
    }
    return ans;
} // hash-cpp-6 = eaebe0c1913a759ddff9fda7a63a058f

} // namespace geometry
```

circular.hpp

Description: Circle operations

"geometry/base.hpp", "geometry/linear.hpp" 96 lines

```
namespace geometry {

struct C {
    P c;
    D r;
    C(P c_ = P(), D r_ = D()) : c(c_), r(r_) {}

    friend P eval(const C& a, const D& angle) {
        return a.c + P::polar(a.r, angle);
    }
};

// NOT TESTED
// 0: outside; 1: on; 2: inside
inline int contains(const C& c, const P& p) { // hash-cpp-1
    return sgn(c.r - dist(p - c.c)) + 1;
} // hash-cpp-1 = ccabefbce6d3385cda996d3900448a5a

// 0-apart; 1-coincide;
// 2-a<b; 3-a<=b;
// 4-a>b; 5-a>=b;
// 6-a touches b; 7-a cross b
inline int insCC(const C& a, const C& b){ // hash-cpp-2
    D c = dist(a.c - b.c);
    if (sgn(c) == 0 && sgn(a.r, b.r) == 0) return 1;
    int d = sgn(c + a.r - b.r);
    if (d <= 0) return d+3;
    int e = sgn(c + b.r - a.r);
    if (e <= 0) return e+5;
    int f = sgn(c - a.r - b.r);
    if (f <= 0) return -f+6;
    return 0;
} // hash-cpp-2 = 2a53c987ff805b98279648263ce5ede1
```

```

inline C incircle(const P& a, const P& b, const P& c) { //
    ↪ hash-cpp-3
    D da = dist(b - c);
    D db = dist(a - c);
    D dc = dist(a - b);
    D s = da + db + dc;
    return C(
        (a * da + b * db + c * dc) / s,
        std::abs(crs(b-a, c-a)) / s
    );
} // hash-cpp-3 = 16141c15a9d73bdab9db92783059d6e0

inline C outcircle(const P& a, P b, P c) { // hash-cpp-4
    b -= a, c -= a;
    D bb = dist2(b) / 2;
    D cc = dist2(c) / 2;
    D g = crs(b, c);
    D x = (bb * c.y - b.y * cc) / g;
    D y = (b.x * cc - bb * c.x) / g;
    D r = sqrt(x * x + y * y);
    x += a.x, y += a.y;
    return C(P(x, y), r);
} // hash-cpp-4 = d6b82a105b9f1236f464e5b79f797623

inline int crossCL(const C& c, const L& l, array<P, 2>& res
    ↪) { // hash-cpp-5
    D u = distLP(l, c.c);
    int t = sgn(u, c.r);
    if (t == 1) return 0;
    P v = project(l, c.c);
    P d = (t == 0 ? P(0, 0) : vec(l) * (sqrt(c.r * c.r - u *
        ↪ u) / dist(l)));
    res = {v - d, v + d};
    return 1 - t;
} // hash-cpp-5 = 033bf3aca850b39d8c71d57d5423d700

// args of two intersections r, l seen by a.c,
// assuming two circles cross
inline pair<D, D> crossCC_args(const C& a, const C& b) { //
    ↪ hash-cpp-6
    P diff = b.c - a.c;
    D c = arg(diff);
    D d = arg(a.r, dist(diff), b.r);
    return {c - d, c + d};
} // hash-cpp-6 = f5d8208d16adc5736be6be6763db3c6e

inline int crossCC(const C& a, const C& b, array<P, 2>& res
    ↪) { // hash-cpp-7
    int t = insCC(a, b);
    if (t == 0 || t == 1 || t == 2 || t == 4) return 0;
    auto [l, r] = crossCC_args(a, b);
    res = {eval(a, l), eval(a, r)};
    return 2 - (t == 3 || t == 5 || t == 6);
} // hash-cpp-7 = 5e1c3c99c88d87a73b0fde2410a0b514

inline int tangent(const C& c, const P& p, array<P, 2>& res
    ↪) { // hash-cpp-8
    P diff = p - c.c;
    D dd = dist(diff);
    int t = sgn(c.r, dd);
    if (t == 1) return 0;
    D d = acos(min<D>(c.r / dd, 1));
    D a = arg(diff);
    res = {eval(c, a - d), eval(c, a + d)};
    return 1 - t;
} // hash-cpp-8 = 95201751eafe5e2b3c829248ef6b020b

} // namespace geometry

```

closest-pair.hpp

Description: Given a set of points, returns the squared distance between the closest pair(s)

Time: $\mathcal{O}(N \log^2 N)$ but practically fast

```

"geometry/base.hpp" 31 lines
namespace geometry {

inline D closest_pair(V<P> pts) { // hash-cpp-1
    assert(pts.size() > 1);
    sort(pts.begin(), pts.end(), [](const P& a, const P& b)
        ↪-> bool {
        return a.x < b.x;
    });
    D best = dist2(pts[0] - pts[1]);
    yc([&](auto self, int l, int r) -> void {
        if (l+1 == r) return;
        int md = (l+r)/2;
        self(l, md), self(md, r);
        V<P> cnds;
        for (int i = l; i < r; i++) {
            D dx = (pts[i] - pts[md-1]).x;
            if (sgn(dx * dx, best) <= 0) cnds.push_back(pts[i]);
        }
        sort(cnds.begin(), cnds.end(), [](const P& a, const P&
            ↪ b) -> bool {
            return a.y < b.y;
        });
        int nc = int(cnds.size());
        for (int i = 0; i < nc; i++) {
            for (int j = i+1; j < i+7 && j < nc; j++) {
                best = min(best, dist2(cnds[i] - cnds[j]));
            }
        }
    })(0, int(pts.size()));
    return best;
} // hash-cpp-1 = 1a5bf1bc99163c021c24ffe0faef418c

} // namespace geometry

```

Appendix (9)

techniques.txt 159 lines

Recursion
Divide and conquer
 Finding interesting points in $N \log N$
Algorithm analysis
 Master theorem
 Amortized time complexity
Greedy algorithm
 Scheduling
 Max contiguous subvector sum
 Invariants
 Huffman encoding
Graph theory
 Dynamic graphs (extra book-keeping)
 Breadth first search
 Depth first search
 * Normal trees / DFS trees
 Dijkstra's algorithm
 MST: Prim's algorithm
 Bellman-Ford
 Konig's theorem and vertex cover
 Min-cost max flow
 Lovasz toggle
 Matrix tree theorem
 Maximal matching, general graphs
 Hopcroft-Karp
 Hall's marriage theorem
 Graphical sequences
 Floyd-Warshall
 Euler cycles
 Flow networks
 * Augmenting paths
 * Edmonds-Karp
 Bipartite matching
 Min. path cover
 Topological sorting
 Strongly connected components
 2-SAT
 Cut vertices, cut-edges and biconnected components
 Edge coloring
 * Trees
 Vertex coloring
 * Bipartite graphs (\Rightarrow trees)
 * 3^n (special case of set cover)
 Diameter and centroid
 K'th shortest path
 Shortest cycle
Dynamic programming
 Knapsack
 Coin change
 Longest common subsequence
 Longest increasing subsequence
 Number of paths in a dag
 Shortest path in a dag
 Dynprog over intervals
 Dynprog over subsets
 Dynprog over probabilities
 Dynprog over trees
 3^n set cover
 Divide and conquer
 Knuth optimization
 Convex hull optimizations
 RMQ (sparse table a.k.a 2^k -jumps)
 Bitonic cycle
 Log partitioning (loop over most restricted)

Combinatorics
 Computation of binomial coefficients
 Pigeon-hole principle
 Inclusion/exclusion
 Catalan number
 Pick's theorem
Number theory
 Integer parts
 Divisibility
 Euclidean algorithm
 Modular arithmetic
 * Modular multiplication
 * Modular inverses
 * Modular exponentiation by squaring
 Chinese remainder theorem
 Fermat's little theorem
 Euler's theorem
 Phi function
 Frobenius number
 Quadratic reciprocity
 Pollard-Rho
 Miller-Rabin
 Hensel lifting
 Vieta root jumping
Game theory
 Combinatorial games
 Game trees
 Mini-max
 Nim
 Games on graphs
 Games on graphs with loops
 Grundy numbers
 Bipartite games without repetition
 General games without repetition
 Alpha-beta pruning
Probability theory
Optimization
 Binary search
 Ternary search
 Unimodality and convex functions
 Binary search on derivative
Numerical methods
 Numeric integration
 Newton's method
 Root-finding with binary/ternary search
 Golden section search
Matrices
 Gaussian elimination
 Exponentiation by squaring
Sorting
 Radix sort
Geometry
 Coordinates and vectors
 * Cross product
 * Scalar product
 Convex hull
 Polygon cut
 Closest pair
 Coordinate-compression
 Quadtrees
 KD-trees
 All segment-segment intersection
Sweeping
 Discretization (convert to events and sweep)
 Angle sweeping
 Line sweeping
 Discrete second derivatives
Strings

Longest common substring
Palindrome subsequences
Knuth-Morris-Pratt
Tries
Rolling polynomial hashes
Suffix array
Suffix tree
Aho-Corasick
Manacher's algorithm
Letter position lists
Combinatorial search
 Meet in the middle
 Brute-force with pruning
 Best-first (A^*)
 Bidirectional search
 Iterative deepening DFS / A^*
Data structures
 LCA (2^k -jumps in trees in general)
 Pull/push-technique on trees
 Heavy-light decomposition
 Centroid decomposition
 Lazy propagation
 Self-balancing trees
 Convex hull trick (wcipeg.com/wiki/Convex_hull_trick)
 Monotone queues / monotone stacks / sliding queues
 Sliding queue using 2 stacks
 Persistent segment tree