
Insert - Specific Records - Tickets

Insert the below records into tickets table.

Ticket_id	Schedule_id	User_id	No_seats
T1	S5	1	2
T2	S2	5	1

Hint: Data is case sensitive

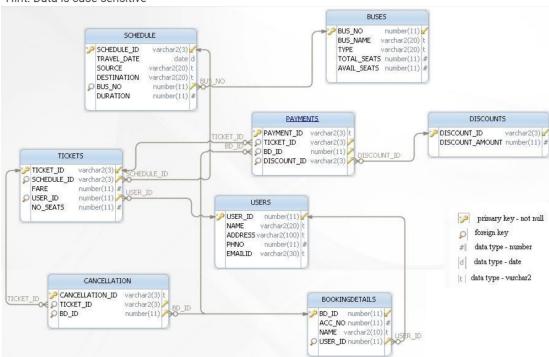

```
dml2.sql Ū
```

- 1 INSERT INTO tickets VALUES('T1', 'S5', NULL, 1, 2);
 2 INSERT INTO tickets VALUES('T2', 'S2', NULL, 5, 1);