

```
C:\Users\Pooj>terraform
Usage: terraform [global options] <subcommand> [args]

The available commands for execution are listed below.
The primary workflow commands are given first, followed by
less common or more advanced commands.

Main commands:
  init       Prepare your working directory for other commands
  validate   Check whether the configuration is valid
  plan       Show changes required by the current configuration
  apply      Create or update infrastructure
  destroy    Destroy previously-created infrastructure
```


```
All other commands:
  console    Try Terraform expressions at an interactive command prompt
  fmt        Reformat your configuration in the standard style
  force-unlock Release a stuck lock on the current workspace
  get        Install or upgrade remote Terraform modules
  graph      Generate a Graphviz graph of the steps in an operation
  import     Associate existing infrastructure with a Terraform resource
  login      Obtain and save credentials for a remote host
  logout     Remove locally-stored credentials for a remote host
  metadata   Metadata related commands
  modules    Show all declared modules in a working directory
  output     Show output values from your root module
  providers  Show the providers required for this configuration
  query      Search and list remote infrastructure with Terraform
  refresh    Update the state to match remote systems
  show       Show the current state or a saved plan
  stacks     Manage HCP Terraform stack operations
  state      Advanced state management
```

```
graph      Generate a Graphviz graph of the steps in an operation
import     Associate existing infrastructure with a Terraform resource
login      Obtain and save credentials for a remote host
logout     Remove locally-stored credentials for a remote host
metadata   Metadata related commands
modules    Show all declared modules in a working directory
output     Show output values from your root module
providers  Show the providers required for this configuration
query      Search and list remote infrastructure with Terraform
refresh    Update the state to match remote systems
show       Show the current state or a saved plan
stacks     Manage HCP Terraform stack operations
state      Advanced state management
taint      Mark a resource instance as not fully functional
test       Execute integration tests for Terraform modules
untaint    Remove the 'tainted' state from a resource instance
version    Show the current Terraform version
workspace  Workspace management
```

Global options (use these before the subcommand, if any):

- chdir=DIR Switch to a different working directory before executing the given subcommand.
- help Show this help output or the help for a specified subcommand.
- version An alias for the "version" subcommand.

```
C:\Users\Pooj>terraform --version
Terraform v1.14.7
on windows_amd64
```

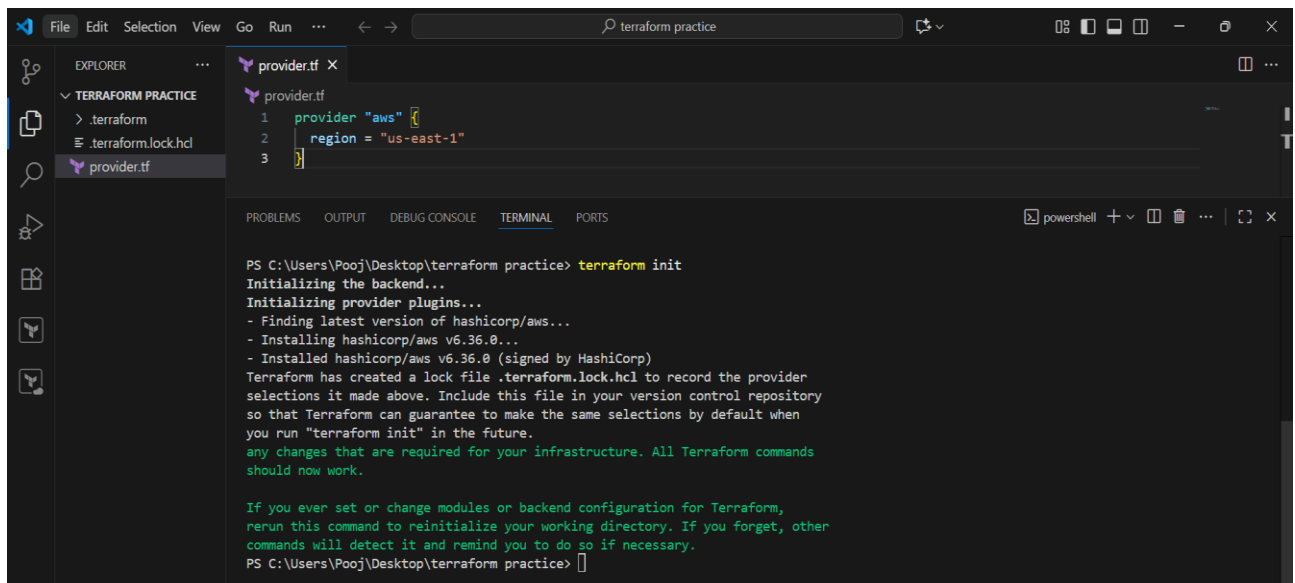




The screenshot shows the Visual Studio Code interface. The Explorer pane on the left shows a project named 'TERRAFORM PRACTICE' with files '.terraform', '.terraform.lock.hcl', and 'provider.tf'. The 'provider.tf' file is open in the editor, showing the following configuration:

```
provider "aws" {
  region = "us-east-1"
}
```

The Terminal pane at the bottom shows the output of the 'terraform init' command:

```
PS C:\Users\Pooj\Desktop\terraform practice> terraform init
Initializing the backend...
Initializing provider plugins...
- Finding latest version of hashicorp/aws...
- Installing hashicorp/aws v6.36.0...
- Installed hashicorp/aws v6.36.0 (signed by HashiCorp)
Terraform has created a lock file .terraform.lock.hcl to record the provider
selections it made above. Include this file in your version control repository
so that Terraform can guarantee to make the same selections by default when
you run "terraform init" in the future.
any changes that are required for your infrastructure. All Terraform commands
should now work.

If you ever set or change modules or backend configuration for Terraform,
rerun this command to reinitialize your working directory. If you forget, other
commands will detect it and remind you to do so if necessary.
PS C:\Users\Pooj\Desktop\terraform practice>
```

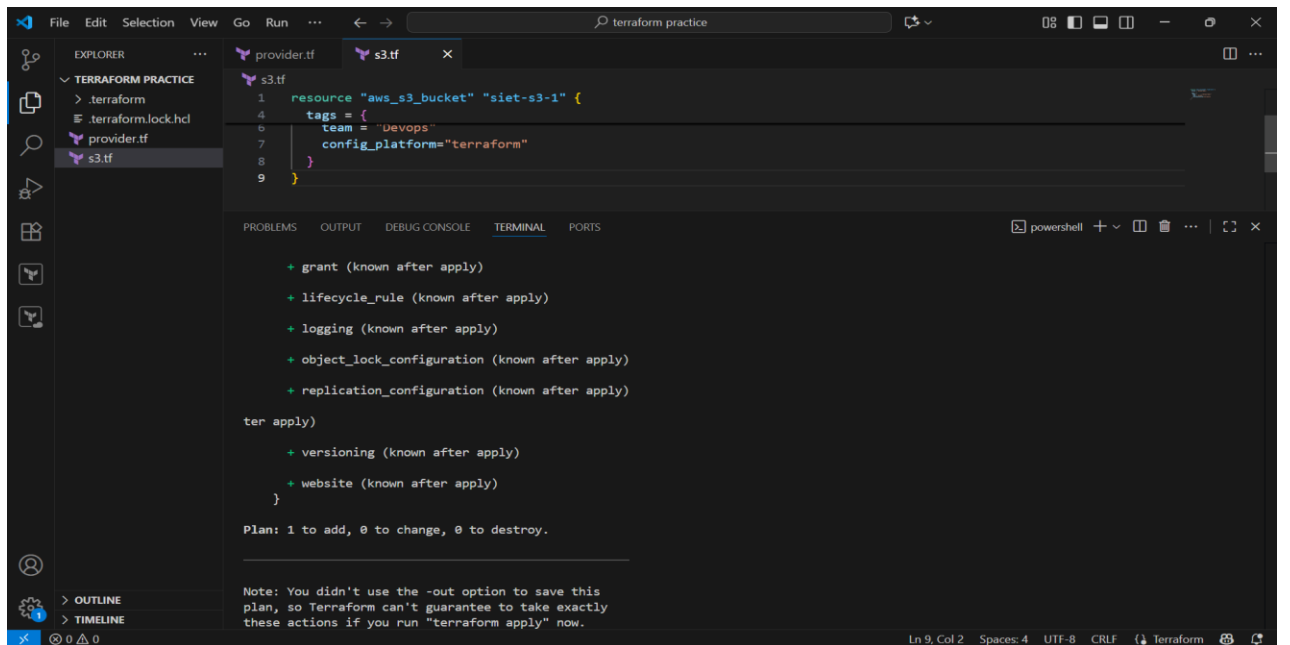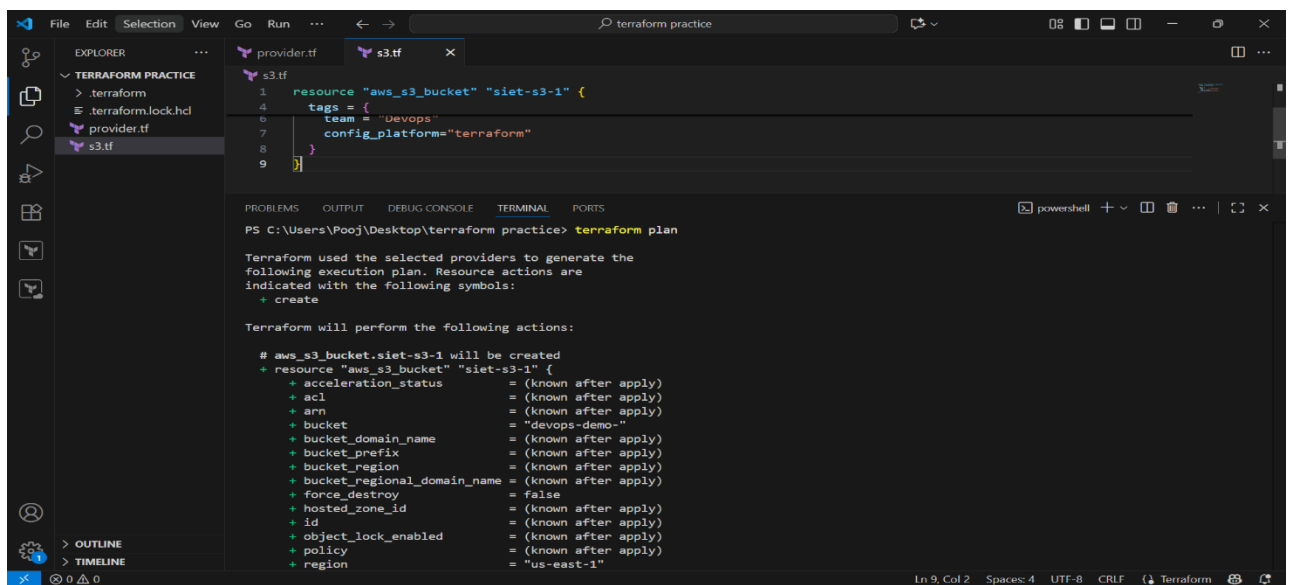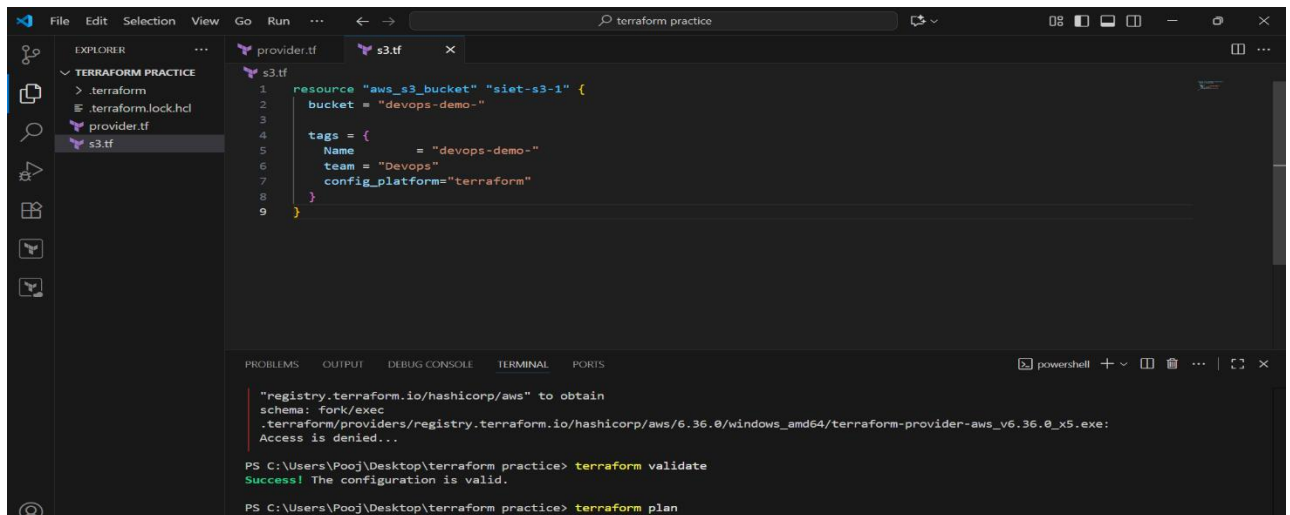

This screenshot shows a Visual Studio Code editor with a Terraform configuration file named `s3.tf`. The configuration defines an `aws_s3_bucket` resource named `siet_bucket` with the bucket name `devopsdemo-pooja-2026` and specific tags. The terminal window displays the output of a `terraform apply` command, showing the plan, confirmation prompt, and successful creation of the bucket.

```
1 resource "aws_s3_bucket" "siet_bucket" {
2   bucket = "devopsdemo-pooja-2026"
3
4   tags = {
5     Name       = "devopsdemo-pooja-2026"
6     team       = "Devops"
7     config_platform = "terraform"
8   }
9 }
```

terminal

```
+ versioning (known after apply)
+ website (known after apply)
}


Plan: 1 to add, 0 to change, 0 to destroy.

Do you want to perform these actions?
Terraform will perform the actions described above.
Only 'yes' will be accepted to approve.

Enter a value: yes

aws_s3_bucket.siet_bucket: Creating...
aws_s3_bucket.siet_bucket: Still creating... [00m10s elapsed]
aws_s3_bucket.siet_bucket: Creation complete after 17s [id=devopsdemo-pooja-2026]

Apply complete! Resources: 1 added, 0 changed, 0 destroyed.
PS C:\Users\Pooj\Desktop\terraform practice>
```

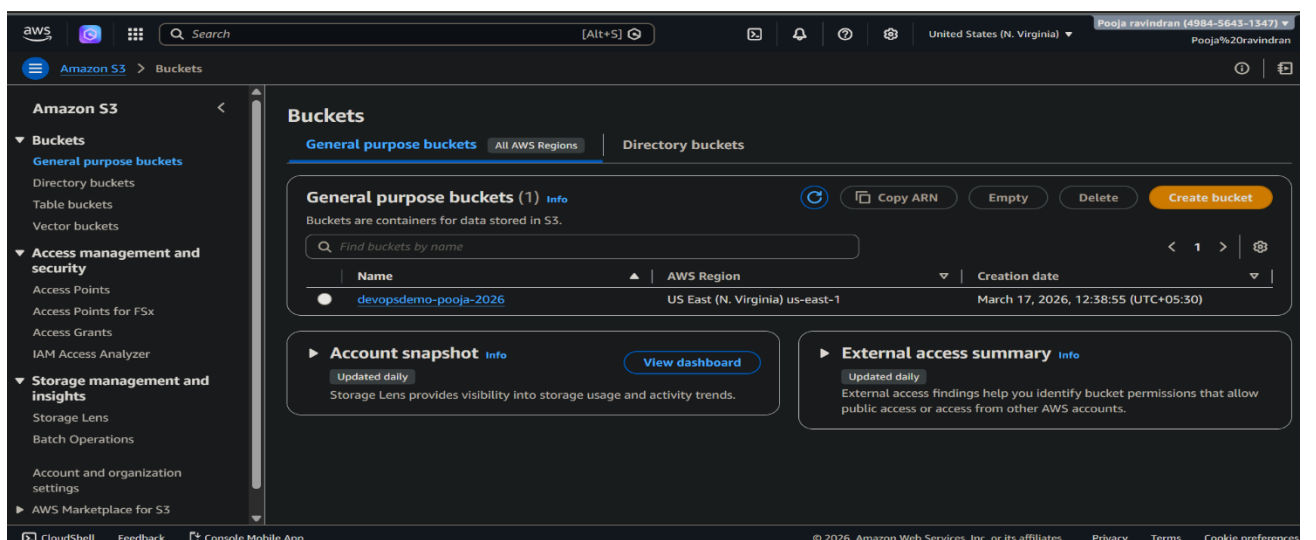

This screenshot shows the same Visual Studio Code editor with the `s3.tf` file. The terminal window displays the output of a `terraform destroy` command, showing the plan, confirmation prompt, and successful destruction of the bucket.

```
1 resource "aws_s3_bucket" "siet_bucket" {
2   bucket = "devopsdemo-pooja-2026"
3
4   tags = {
5     Name       = "devopsdemo-pooja-2026"
6     team       = "Devops"
7     config_platform = "terraform"
8   }
9 }
```

terminal

```
- enabled = false -> null
- mfa_delete = false -> null
}

Plan: 0 to add, 0 to change, 1 to destroy.

Do you really want to destroy all resources?
Terraform will destroy all your managed infrastructure, as shown above.
There is no undo. Only 'yes' will be accepted to confirm.

Enter a value: yes

aws_s3_bucket.siet_bucket: Destroying... [id=devopsdemo-pooja-2026]
aws_s3_bucket.siet_bucket: Destruction complete after 2s

Destroy complete! Resources: 1 destroyed.
PS C:\Users\Pooj\Desktop\terraform practice>
```

The screenshot shows a VS Code editor with three Terraform files open: `provider.tf`, `s3.tf`, and `iam.tf`. The `iam.tf` file contains the following code:

```
1 resource "aws_iam_user" "sietdev" {
2   name = "sietdev"
3   path = "/system/"
4   tags = {
5     Name      = "devopsdemo"
6     team      = "Devops"
7   }
8 }
```

The terminal window at the bottom shows the output of a Terraform command:

```
Only 'yes' will be accepted to approve.

Enter a value: yes

aws_iam_user.sietdev: Creating...
aws_s3_bucket.siet_bucket: Creating...
aws_iam_user.sietdev: Creation complete after 2s [id=sietdev]
aws_s3_bucket.siet_bucket: Creation complete after 8s [id=devopsdemo-pooja-2026]

Apply complete! Resources: 2 added, 0 changed, 0 destroyed.
PS C:\Users\Pooj\Desktop\terraform practice>
```

