<u>Phase-1: LockedMe – Virtual Key for Repositories</u>

This document contains sections for:

- Sprint planning and Task completion
- Core concepts used in project
- Flow of the Application.
- <u>Demonstrating the product capabilities, appearance, and user</u> interactions.
- Unique Selling Points of the Application
- Conclusions

Sprints planning and Task completion


The project is planned to be completed in 1 sprint. Tasks assumed to be completed in the sprint are:

- Creating the flow of the application
- Initializing git repository to track changes as development progresses.
- Writing the Java program to fulfill the requirements of the project.
- Testing the Java program with different kinds of User input
- Pushing code to GitHub.
- Creating this specification document highlighting application capabilities, appearance, and user interactions.

Core concepts used in project

Collections framework, File Handling, Searching, Sorting, Flow Control, Recursion, Exception Handling, Streams API.

Flow of the Application

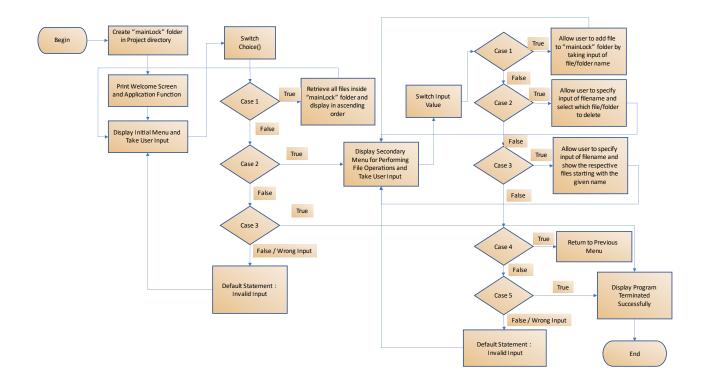

Demonstrating the product capabilities, appearance, and user interactions

To demonstrate the product capabilities, below are the sub-sections configured to highlight appearance and user interactions for the project:

- 1 <u>Creating the project in Eclipse</u>
- Writing a program in Java for the entry point of the application (LockedMeMain.java)
- Writing a program in Java to display Menu options available for the user (MenuOptions.java)
- 4 Writing a program in Java to handle Menu options selected by user (HandleOptions.java)
- 5 Writing a program in Java to perform the File operations as specified by user (FileOperations.java)
- 6 Pushing the code to GitHub repository.

Step 1: Creating a new project in Eclipse

- Open Eclipse
- Go to File -> New -> Project -> Java Project -> Next.
- Type in any project name and click on "Finish."
- Select your project and go to File -> New -> Class.
- Enter LockedMeMain in any class name, check the checkbox "public static void main(String[] args)", and click on "Finish."

Step 2: Writing a program in Java for the entry point of the application (**LockedMeMain.java**)

```
package com.lockedme;

public class LockedMeMain {
    public static void main(String[] args) {
          // Create "main" folder if not present in current folder structure
          FileOperations. createMainFolderIfNotPresent("mainLock");

          MenuOptions.printWelcomeScreen("LockedMe", "Pooja Gurumurti
Tamragouri");

          HandleOptions.handleWelcomeScreenInput();
    }
}
```

Step 3: Writing a program in Java to display Menu options available for the user (**MenuOptions.java**)

- Select your project and go to File -> New -> Class.
- Enter MenuOptions in class name and click on "Finish."
- MenuOptions consists methods for -:
- 3.1. Displaying Welcome Screen
- 3.2. <u>Displaying Initial Menu</u>
- 3.3. Displaying Secondary Menu for File Operations available.

Step 3.1: Writing method to display Welcome Screen

```
| LockedModeImjava | PricOperationsjava | MandeOptomsjava | MemoOptomsjava | Memooptomsjava
```

Step 3.2: Writing method to display Initial Menu

Step 3.3: Writing method to display Secondary Menu for File Operations

```
**Select any option number from below and press Enter

1) Add a file to "mainLock" folder
2) Delete a file from "mainLock" folder
3) Search for a file from "mainLock" folder
4) Show Previous Menu
5) Exit program
```

Step 4: Writing a program in Java to handle Menu options selected by user (**HandleOptions.java**)

- Select your project and go to File -> New -> Class.
- Enter HandleOptions in class name and click on "Finish."
- HandleOptions consists methods for -:

- **4.1.** Handling input selected by user in initial Menu
- 4.2. Handling input selected by user in secondary Menu for File Operations

Step 4.1: Writing method to handle user input in initial Menu

```
public static void handleWelcomeScreenInput() {
              boolean running = true;
              Scanner sc = new Scanner(System.in);
              do {
                     try {
                             MenuOptions. displayMenu();
                             int input = sc.nextInt();
                             switch (input) {
                             case 1:
                                    FileOperations. displayAllFiles("mainLock");
                             case 2:
                                    HandleOptions. handleFileMenuOptions();
                             case 3:
                                    System. out. println ("Program exited successfully.");
                                    running = false;
                                    sc.close();
                                    System. exit(0);
                                    break;
                             default:
                                    System. out. println ("Please select a valid option from
above.");
                             }
                     } catch (Exception e) {
                             System. out. println(e.getClass().getName());
                             handleWelcomeScreenInput();
                     }
              } while (running == true);
       }
```

Step 4.2: Writing method to handle user input in Secondary Menu for File Operations

```
public static void handleFileMenuOptions() {
              boolean running = true;
              Scanner sc = new Scanner(System.in);
              do {
                     try {
                             MenuOptions. displayFileMenuOptions();
                            FileOperations.createMainFolderIfNotPresent("mainLock");
                            int input = sc.nextInt();
                            switch (input) {
                             case 1:
                                    // File Add
                                    System. out. println ("Enter the name of the file to be
added to the \"mainLock\" folder");
                                    String fileToAdd = sc.next();
                                    FileOperations.createFile(fileToAdd, sc);
                                    break;
                             case 2:
```

```
// File/Folder delete
                                     System. out. println ("Enter the name of the file to be
deleted from \"mainLock\" folder");
                                     String fileToDelete = sc.next();
       FileOperations.createMainFolderIfNotPresent("mainLock");
                                     List<String> filesToDelete =
FileOperations. displayFileLocations(fileToDelete, "main");
                                     String deletionPrompt = "\nSelect index of which file
to delete?"
                                                   + "\n(Enter 0 if you want to delete all
elements)";
                                     System. out. println(deletionPrompt);
                                     int idx = sc.nextInt();
                                     if (idx != 0) {
       FileOperations. deleteFileRecursively(filesToDelete.get(idx - 1));
                                    } else {
                                            // If idx == 0, delete all files displayed for the
name
                                            for (String path : filesToDelete) {
       FileOperations. deleteFileRecursively(path);
                                     }
                                     break;
                             case 3:
                                     // File/Folder Search
                                     System. out. println ("Enter the name of the file to be
searched from \"main\" folder");
                                     String fileName = sc.next();
                      FileOperations.createMainFolderIfNotPresent("mainLock");
                                     FileOperations. displayFileLocations(fileName,
"main");
                                     break;
                             case 4:
                                     // Go to Previous menu
                                    return;
                             case 5:
                                     // Exit
                                     System. out. println ("Program exited successfully.");
                                     running = false;
```

```
### Control ### Junction ### Control ### C
```

Step 5: Writing a program in Java to perform the File operations as specified by user (**FileOperations.java**)

- Select your project and go to File -> New -> Class.
- Enter **FileOperations** in class name and click on "Finish."

- FileOperations consists methods for -:
- **5.1.** Creating "main" folder in project if it's not already present
- **5.2.** <u>Displaying all files in "main" folder in ascending order and also with directory structure.</u>
- 5.3. Creating a file/folder as specified by user input.
- 5.4. Search files as specified by user input in "main" folder and it's subfolders.
- 5.5. Deleting a file/folder from "main" folder

Step 5.1: Writing method to create "mainLock" folder in project if it's not present

```
public static void createMainFolderIfNotPresent(String folderName) {
    File file = new File(folderName);

    // If file doesn't exist, create the mainLock folder
    if (!file.exists()) {
        file.mkdirs();
    }
}
```

Step 5.2: Writing method to display all files in "mainLock" folder in ascending order and also with directory structure. ("`--" represents a directory. "|--" represents a file.)

```
public static void displayAllFiles(String path) {
               FileOperations. createMainFolderIfNotPresent("mainLock");
               // All required files and folders inside "main" folder relative to current
               // folder
               System. out.println("Displaying all files with directory structure in
ascending order\n");
               // listFilesInDirectory displays files along with folder structure
               List<String> filesListNames = FileOperations. listFilesInDirectory(path, 0,
new ArrayList<String>());
               System. out. println ("Displaying all files in ascending order\n");
               Collections. sort(filesListNames);
               filesListNames.stream().forEach(System.out.:println);
       public static List<String> listFilesInDirectory(String path, int indentationCount,
List<String> fileListNames) {
               File dir = new File(path);
               File∏ files = dir.listFiles();
               List<File> filesList = Arrays.asList(files);
               Collections. sort(filesList);
               if (files != null && files.length > 0) {
                      for (File file : filesList) {
                              System. out. print(" ".repeat(indentationCount * 2));
```

```
if (file.isDirectory()) {
                                      System.out.println(" `-- " + file.getName());
                                      // Recursively indent and display the files
                                      fileListNames.add(file.getName());
                                      listFilesInDirectory(file.getAbsolutePath(),
indentationCount + 1, fileListNames);
                              } else {
                                      System. out. println(" | -- " + file.getName());
                                      fileListNames.add(file.getName());
                              }
                      }
               } else {
                       System.out.print(" ".repeat(indentationCount * 2));
                       System. out. println(" | -- Empty Directory");
               }
               System. out. println();
               return fileListNames:
}
```

```
🔐 Problems 🏿 a Javadoc 🔼 Declaration 📃 Console 🗶
areaOfRectangle [Java Application] C:\Program Files\Java\jdk-15.0.2\bin\javaw.exe (10-Mar-2023, 12:29:01 am)
2) Display menu for File operations
Exit program
Displaying all files with directory structure in ascending order
   '-- aabc
      -- practice.txt
      -- sdmcet.txt
    - abc.txt
     pooja.txt
      qrst.txt
  -- ajoop.txt
-- javafsd.txt
Displaying all files in ascending order
aabc
abc
abc.txt
ajoop.txt
javafsd.txt
pooja.txt
practice.txt
grst.txt
sdmcet.txt
```

Step 5.3: Writing method to create a file/folder as specified by user input.

```
public static void createFile(String fileToAdd, Scanner sc) {
          FileOperations.createMainFolderIfNotPresent("mainLock");
          Path pathToFile = Paths.get("./mainLock/" + fileToAdd);
```

```
try {
                      Files.createDirectories(pathToFile.getParent());
                      Files. createFile(pathToFile);
                      System. out. println(fileToAdd + " created successfully");
                      System. out.println("Would you like to add some content to the file?
(Y/N)");
                      String choice = sc.next().toLowerCase();
                      sc.nextLine();
                      if (choice.equals("y")) {
                              System. out.println("\n\nlnput content and press enter\n");
                              String content = sc.nextLine();
                             Files. write(pathToFile, content.getBytes());
                              System. out.println("\nContent written to file " + fileToAdd);
                              System. out.println("Content can be read using Notepad or
Notepad++");
                      }
              } catch (IOException e) {
                      System. out. println ("Failed to create file " + fileToAdd);
                      System.out.println(e.getClass().getName());
              }
       }
```

Output: Folders are automatically created along with file

```
**Select any option number from below and press Enter

1) Retrieve all files inside "mainLock" folder
2) Display menu for File operations

3) Exit program

2

**Select any option number from below and press Enter

1) Add a file to "mainLock" folder
2) Delete a file from "mainLock" folder
3) Search for a file from "mainLock" folder
4) Show Previous Nenu
5) Exit program

1
Enter the name of the file to be added to the "mainLock" folder isedept created successfully
10 Would you like to add some content to the file? (Y/N)

Y

Input content and press enter

Checking if file content is written in specified file.

Content written to file isedept
Content variete to file isedept
Content can be read using Notepad or Notepad++
```

Step 5.4: Writing method to search for all files as specified by user input in "mainLock" folder and it's subfolders.

public static List<String> displayFileLocations(String fileName, String path) {

```
List<String> fileListNames = new ArrayList<>();
               FileOperations. searchFileRecursively(path, fileName, fileListNames);
              if (fileListNames.isEmpty()) {
                      System. out.println("\n\n**** Couldn't find any file with given file
name \"" + fileName + "\" ****\n\n");
              } else {
                      System. out.println("\n\nFound file at below location(s):");
                      List<String> files = IntStream.range(0, fileListNames.size())
                                     .mapToObj(index -> (index + 1) + ": " +
fileListNames.get(index)).collect(Collectors.toList());
                      files.forEach(System.out::println);
              }
              return fileListNames;
       }
       public static void searchFileRecursively(String path, String fileName, List<String>
fileListNames) {
               File dir = new File(path);
               File[] files = dir.listFiles();
              List<File> filesList = Arrays.asList(files);
              if (files != null && files.length > 0) {
                      for (File file : filesList) {
                              if (file.getName().startsWith(fileName)) {
                                     fileListNames.add(file.getAbsolutePath());
                              }
                              // Need to search in directories separately to ensure all files
of required
                              // fileName are searched
                              if (file.isDirectory()) {
                                     searchFileRecursively(file.getAbsolutePath(),
fileName, fileListNames);
                              }
                      }
              }
       }
```

All files starting with the user input are displayed along with index

```
**Select any option number from below and press Enter

1) Add a file to "mainLock" folder
2) Delete a file from "mainLock" folder
3) Search for a file from "mainLock" folder
4) Show Previous Menu
5) Exit program

3
Enter the name of the file to be searched from "mainLock" folder
pooja

Found file at below location(s):
1: C:\Users\POOJA\Downloads\LockedMe-main\LockedMe-main\mainLock\abc\pooja.txt
2: C:\Users\POOJA\Downloads\LockedMe-main\LockedMe-main\mainLock\abc\pooja.txt

**Select any option number from below and press Enter

1) Add a file to "mainLock" folder
2) Delete a file from "mainLock" folder
3) Search for a file from "mainLock" folder
4) Show Previous Menu
5) Exit program
```

Step 5.5: Writing method to delete file/folder specified by user input in "mainLock" folder and it's subfolders. It uses the searchFilesRecursively method and prompts user to specify which index to delete. If folder selected, all it's child files and folder will be deleted recursively. If user wants to delete all the files specified after the search, they can input value 0.

```
public static void deleteFileRecursively(String path) {
```

```
File currFile = new File(path);
               File∏ files = currFile.listFiles();
               if (files != null && files.length > 0) {
                       for (File file : files) {
                               String fileName = file.getName() + " at " + file.getParent();
                               if (file.isDirectory()) {
                                       deleteFileRecursively(file.getAbsolutePath());
                               }
                               if (file.delete()) {
                                       System.out.println(fileName + " deleted
successfully");
                               } else {
                                       System. out. println ("Failed to delete" + fileName);
                               }
                       }
               }
               String currFileName = currFile.getName() + " at " + currFile.getParent();
               if (currFile.delete()) {
                       System. out.println(currFileName + " deleted successfully");
               } else {
```

```
System. out.println("Failed to delete " + currFileName);
}
```

```
**Select any option number from below and press Enter

1) Add a file to "mainLock" folder
2) Delete a file from "mainLock" folder
3) Search for a file from "mainLock" folder
4) Show Previous Menu
5) Exit program

2
Enter the name of the file to be deleted from "mainLock" folder
ajoop

Found file at below location(s):
1: C:\Users\POOJA\Downloads\LockedMe-main\LockedMe-main\mainLock\ajoop.txt

Select index of which file to delete?
(Enter 0 if you want to delete all elements)
1
ajoop.txt at C:\Users\POOJA\Downloads\LockedMe-main\LockedMe-main\mainLock deleted successfully

**Select any option number from below and press Enter

1) Add a file to "mainLock" folder|
2) Delete a file from "mainLock" folder
3) Search for a file from "mainLock" folder
4) Show Previous Menu
5) Exit program
```

Step 6: Pushing the code to GitHub repository

 Open your command prompt and navigate to the folder where you have created your files.

cd <folder path>

- Initialize repository using the following command: git init
- Add all the files to your git repository using the following command: git add.
- Commit the changes using the following command: git commit. -m <commit message>
- Push the files to the folder you initially created using the following command:

git push -u origin master

Unique Selling Points of the Application

- 1. The application is designed to keep on running and taking user inputs even after exceptions occur. To terminate the application, appropriate option needs to be selected.
- 2. The application can take any file/folder name as input. Even if the user wants to create nested folder structure, user can specify the relative path, and the application takes care of creating the required folder structure.
- 3. User is also provided the option to write content if they want into the newly created file.
- 4. The application doesn't restrict user to specify the exact filename to search/delete file/folder. They can specify the starting input, and the program searches all files/folder starting with the value and displays it. The user is then provided the option to select all files or to select a specific index to delete.
- 5. The application also allows user to delete folders which are not empty.
- 6. The user is able to seamlessly switch between options or return to previous menu even after any required operation like adding, searching, deleting or retrieving of files is performed.
- 7. When the option to retrieve files in ascending order is selected, user is displayed with two options of viewing the files.
 - 7.1. Ascending order of folders first which have files sorted in them,
 - 7.2. Ascending order of all files and folders inside the "mainLock" folder.
- 8. The application is designed with modularity in mind.

Conclusions

Further enhancements to the application can be made which may include:

- Conditions to check if user is allowed to delete the file or add the file at the specific locations.
- Asking user to verify if they really want to delete the selected directory if it's not empty.
- Retrieving files/folders by different criteria like Last Modified, Type, etc.
- Allowing user to append data to the file.

The code for this project is hosted at:

https://github.com/poojagurumurti/Phase-1-Java-Fsd-Project.git

The project is developed by Pooja Gurumurti Tamragouri.