

ORDER MANAGEMENT SYSTEM

STYLECART-FASHION E-COMMERCE DATABASE MANAGEMENT SYSTEM

1.Database Design


1.1 Orders Table

Attribute	Data Type	Constraint
Order_ID	NUMBER	PRIMARY KEY
Customer_ID	NUMBER	FOREIGN KEY
Order_Date	DATE	NOT NULL
Total_Amount	NUMBER(10,2)	NOT NULL
Order_Status	VARCHAR2(20)	NOT NULL
Shipping_Address	VARCHAR2(200)	NOT NULL

1.2 Orders_Details Table

Attribute	Data Type	Constraint
Order_Item_ID	NUMBER	PRIMARY KEY
Order_ID	NUMBER	FOREIGN KEY
Product_ID	NUMBER	FOREIGN KEY
Quantity	NUMBER	NOT NULL
Unit_Price	NUMBER(10,2)	NOT NULL
Subtotal	NUMBER(10,2)	NOT NULL

2.Table Relationships

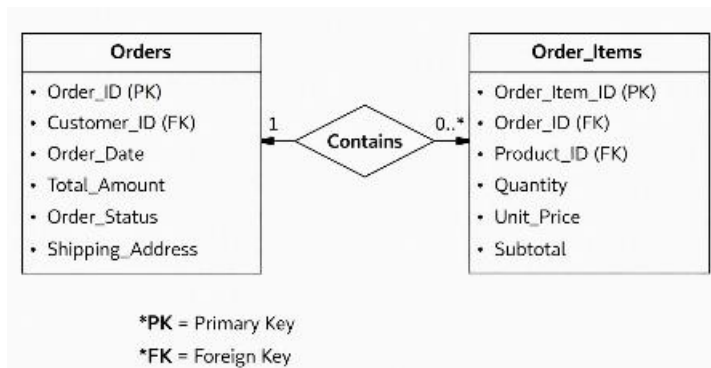

3. Table Creation

3.1 Create Order Table

```
SQL> CREATE TABLE Orders (  
2     Order_ID NUMBER PRIMARY KEY,  
3     Customer_ID NUMBER NOT NULL,  
4     Order_Date DATE DEFAULT SYSDATE,  
5     Total_Amount NUMBER(10,2) NOT NULL,  
6     Order_Status VARCHAR2(20) NOT NULL,  
7     Shipping_Address VARCHAR2(200) NOT NULL  
8 );
```

Table created.

3.2 Create Order_Details

```
SQL> CREATE TABLE Order_Item (  
2     Order_Item_ID NUMBER PRIMARY KEY,  
3     Order_ID NUMBER NOT NULL,  
4     Product_ID NUMBER NOT NULL,  
5     Quantity NUMBER NOT NULL,  
6     Unit_Price NUMBER(10,2) NOT NULL,  
7     Subtotal NUMBER(10,2) NOT NULL,  
8     FOREIGN KEY (Order_ID)  
9         REFERENCES Orders(Order_ID)  
10 );
```

Table created.

4. Order Data Insertion

```

SQL> INSERT INTO Orders
  2 (Order_ID, Customer_ID, Order_Date, Total_Amount, Order_Status, Shipping_Address)
  3 VALUES
  4 (1001, 1, SYSDATE, 1898.00, 'Placed', 'Chennai');

1 row created.

SQL>
SQL> INSERT INTO Orders
  2 (Order_ID, Customer_ID, Order_Date, Total_Amount, Order_Status, Shipping_Address)
  3 VALUES
  4 (1002, 2, SYSDATE, 1599.00, 'Shipped', 'Madurai');

1 row created.

SQL>
SQL> INSERT INTO Orders
  2 (Order_ID, Customer_ID, Order_Date, Total_Amount, Order_Status, Shipping_Address)
  3 VALUES
  4 (1003, 3, SYSDATE, 899.00, 'Delivered', 'Coimbatore');

1 row created.

```

5.Order_Details Data Insertion

```

SQL> INSERT INTO Order_Item
  2 (Order_Item_ID, Order_ID, Product_ID, Quantity, Unit_Price, Subtotal)
  3 VALUES
  4 (1, 1001, 101, 1, 599.00, 599.00);

1 row created.

SQL>
SQL> INSERT INTO Order_Item
  2 (Order_Item_ID, Order_ID, Product_ID, Quantity, Unit_Price, Subtotal)
  3 VALUES
  4 (2, 1001, 102, 1, 1299.00, 1299.00);

1 row created.

SQL>
SQL> INSERT INTO Order_Item
  2 (Order_Item_ID, Order_ID, Product_ID, Quantity, Unit_Price, Subtotal)
  3 VALUES
  4 (3, 1002, 105, 1, 1599.00, 1599.00);

1 row created.

SQL>
SQL> INSERT INTO Order_Item
  2 (Order_Item_ID, Order_ID, Product_ID, Quantity, Unit_Price, Subtotal)
  3 VALUES
  4 (4, 1003, 103, 1, 899.00, 899.00);

1 row created.

```

6.Order Modification Operations

6.1 Modify Order Amount

```
SQL> UPDATE Orders
  2 SET Total_Amount = 2098.00
  3 WHERE Order_ID = 1001;

1 row updated.

SQL> SELECT Order_ID, Total_Amount
  2 FROM Orders
  3 WHERE Order_ID = 1001;

ORDER_ID TOTAL_AMOUNT
-----
1001          2098
```

6.2 Modify Order Data

```
SQL> UPDATE Orders
  2 SET Order_Status = 'Shipped',
  3     Shipping_Address = 'Chennai'
  4 WHERE Order_ID = 1001;

1 row updated.

SQL> SELECT *
  2 FROM Orders
  3 WHERE Order_ID = 1001;

ORDER_ID CUSTOMER_ID ORDER_DAT TOTAL_AMOUNT ORDER_STATUS
-----
SHIPPING_ADDRESS
-----
1001          1 24-SEP-26          2098 Shipped
Chennai
```

7.Order_Details Modification

```
SQL> UPDATE Order_Item
  2  SET Quantity = 2,
  3      Subtotal = 1198.00
  4  WHERE Order_Item_ID = 1;
```

1 row updated.

```
SQL> SELECT *
  2  FROM Order_Item
  3  WHERE Order_Item_ID = 1;
```

ORDER_ITEM_ID	ORDER_ID	PRODUCT_ID	QUANTITY	UNIT_PRICE	SUBTOTAL
1	1001	101	2	599	1198

8.Customer Order History Report

```

SQL> SELECT
  2     o.Customer_ID,
  3     o.Order_ID,
  4     o.Order_Date,
  5     o.Order_Status,
  6     o.Shipping_Address,
  7     oi.Product_ID,
  8     oi.Quantity,
  9     oi.Unit_Price,
10     oi.Subtotal
11 FROM Orders o
12 JOIN Order_Item oi
13     ON o.Order_ID = oi.Order_ID
14 ORDER BY o.Customer_ID, o.Order_Date;

```

```

CUSTOMER_ID  ORDER_ID ORDER_DAT ORDER_STATUS
-----

```

```

SHIPPING_ADDRESS
-----

```

```

PRODUCT_ID  QUANTITY UNIT_PRICE  SUBTOTAL
-----

```

```

      1      1001 24-SEP-26 Shipped
Chennai

```

```

      101         2        599        1198

```

```

      1      1001 24-SEP-26 Shipped
Chennai

```

```

      102         1       1299       1299

```

```

CUSTOMER_ID  ORDER_ID ORDER_DAT ORDER_STATUS
-----

```

```

SHIPPING_ADDRESS
-----

```

```

PRODUCT_ID  QUANTITY UNIT_PRICE  SUBTOTAL
-----

```

PRODUCT_ID	QUANTITY	UNIT_PRICE	SUBTOTAL
2	1002	24-SEP-26	Shipped
Madurai	105	1	1599
3	1003	24-SEP-26	Delivered
Coimbatore			
CUSTOMER_ID	ORDER_ID	ORDER_DAT	ORDER_STATUS
SHIPPING_ADDRESS			
PRODUCT_ID	QUANTITY	UNIT_PRICE	SUBTOTAL
103	1	899	899

9.Customer-wise Order Summary

```
SQL> SELECT
  2     o.Customer_ID,
  3     COUNT(DISTINCT o.Order_ID) AS Total_Orders,
  4     SUM(oi.Subtotal) AS Total_Amount
  5 FROM Orders o
  6 JOIN Order_Item oi
  7     ON o.Order_ID = oi.Order_ID
  8 GROUP BY o.Customer_ID
  9 ORDER BY o.Customer_ID;
```

CUSTOMER_ID	TOTAL_ORDERS	TOTAL_AMOUNT
1	1	2497
2	1	1599
3	1	899