

WORKING WITH DML


- 1) Write an UPDATE statement that changes all NULL values of the AddressLine2 column in the dbo.demoAddress table to 'N/A'.

```
UPDATE dbo.demoAddress
```

```
SET AddressLine2 = 'N/A'
```

```
WHERE AddressLine2 IS NULL;
```

Output

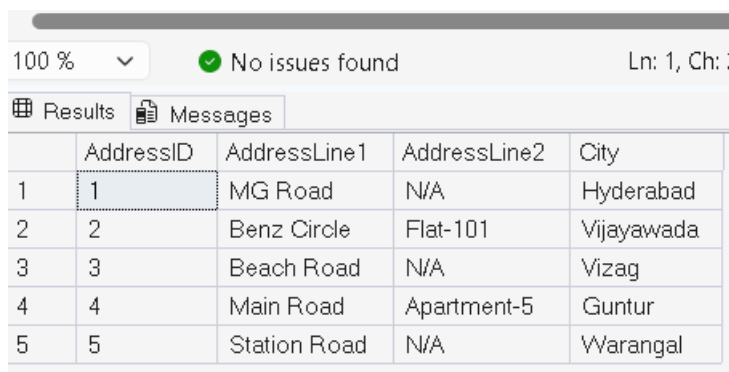

	AddressID	AddressLine1	AddressLine2	City
1	1	MG Road	N/A	Hyderabad
2	2	Benz Circle	Flat-101	Vijayawada
3	3	Beach Road	N/A	Vizag
4	4	Main Road	Apartment-5	Guntur
5	5	Station Road	N/A	Warangal

- 2) Write an UPDATE statement that corrects the UnitPrice with the ListPrice of each row by joining demoSalesOrderDetail with demoProduct.

```
UPDATE d
```


```
SET d.UnitPrice = p.ListPrice
```

```
FROM dbo.demoSalesOrderDetail d
```

```
INNER JOIN dbo.demoProduct p
```

ON d.ProductID = p.ProductID;

Output

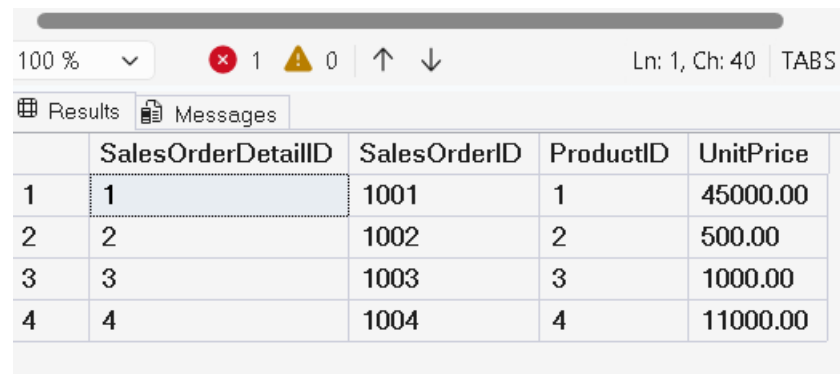

The screenshot shows a SQL Server Enterprise Manager interface. At the top, there is a status bar with '100 %', a red 'x' icon with '1', a yellow triangle icon with '0', and navigation arrows. Below this is a tab bar with 'Results' and 'Messages'. The 'Results' tab is active, displaying a table with 5 columns: an unlabeled index column, 'SalesOrderDetailID', 'SalesOrderID', 'ProductID', and 'UnitPrice'. The table contains 4 rows of data.

	SalesOrderDetailID	SalesOrderID	ProductID	UnitPrice
1	1	1001	1	45000.00
2	2	1002	2	500.00
3	3	1003	3	1000.00
4	4	1004	4	11000.00


**3) Write a query that deletes the rows from
dbo.demoCustomer where the LastName begins with
the letter S.**

DELETE

FROM dbo.demoCustomer

WHERE LastName LIKE 'S%';

Output

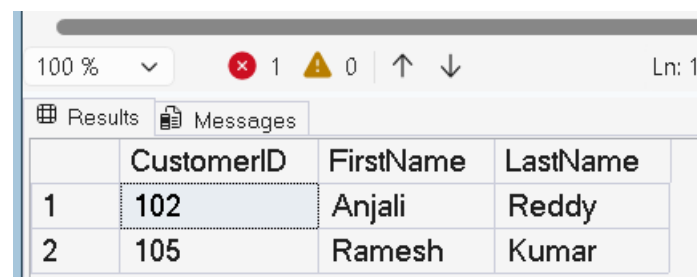

The screenshot shows a SQL Server Enterprise Manager interface. At the top, there is a status bar with '100 %', a red 'x' icon with '1', a yellow triangle icon with '0', and navigation arrows. Below this is a tab bar with 'Results' and 'Messages'. The 'Results' tab is active, displaying a table with 4 columns: an unlabeled index column, 'CustomerID', 'FirstName', and 'LastName'. The table contains 2 rows of data.


	CustomerID	FirstName	LastName
1	102	Anjali	Reddy
2	105	Ramesh	Kumar

4) Delete the rows from dbo.demoCustomer if the customer has not placed an order or if the TotalDue is less than 1000.

```
DELETE c
FROM dbo.demoCustomer c
WHERE
NOT EXISTS
(
    SELECT *
    FROM dbo.demoSalesOrderHeader h
    WHERE h.CustomerID = c.CustomerID
)
OR
(
    SELECT ISNULL(SUM(TotalDue),0)
    FROM dbo.demoSalesOrderHeader h
    WHERE h.CustomerID=c.CustomerID
) < 1000;
```

```
SELECT * FROM dbo.demoCustomer;
```

Output

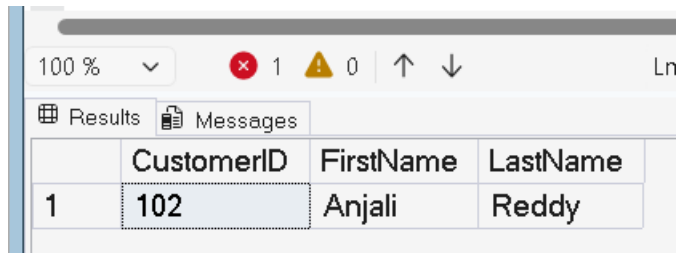

A screenshot of the SQL Server Enterprise Manager interface. The top toolbar shows a zoom level of 100%, 1 error icon (red X), 0 warning icons (yellow triangle), and up/down arrow icons. Below the toolbar, there are tabs for 'Results' and 'Messages'. The 'Results' tab is active, displaying a table with the following data:

	CustomerID	FirstName	LastName
1	102	Anjali	Reddy

5) CREATE TABLE dbo.demoProduct

(

ProductID INT PRIMARY KEY,

Name NVARCHAR(100) NOT NULL,

Color NVARCHAR(15),

StandardCost MONEY NOT NULL,


ListPrice MONEY NOT NULL,

Size NVARCHAR(5),

Weight DECIMAL(8,2)

);


Output

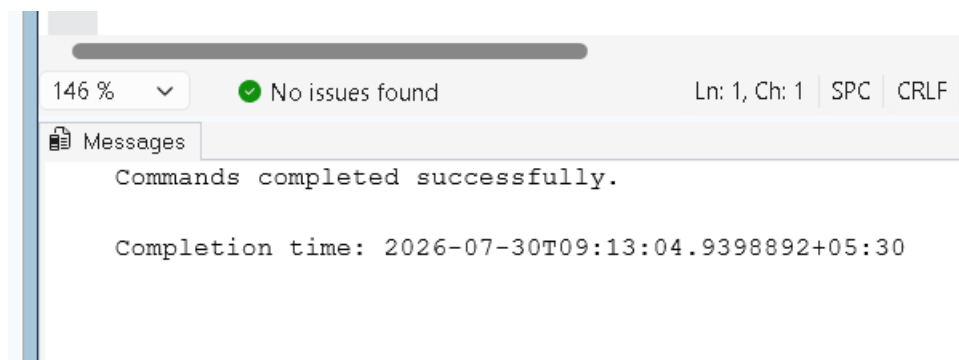

6) Insert five rows into dbo.demoProduct table.

```
INSERT INTO dbo.demoProduct
(ProductID,Name,Color,StandardCost,ListPrice,Size,Weight)
VALUES
(1,'Laptop','Black',40000,45000,'15',2.50),
(2,'Mouse','White',300,500,NULL,0.20),
(3,'Keyboard','Black',700,1000,NULL,0.80),
(4,'Monitor','Black',9000,11000,'24',4.20),
(5,'Printer','Gray',6000,7500,NULL,6.00);
```

Output

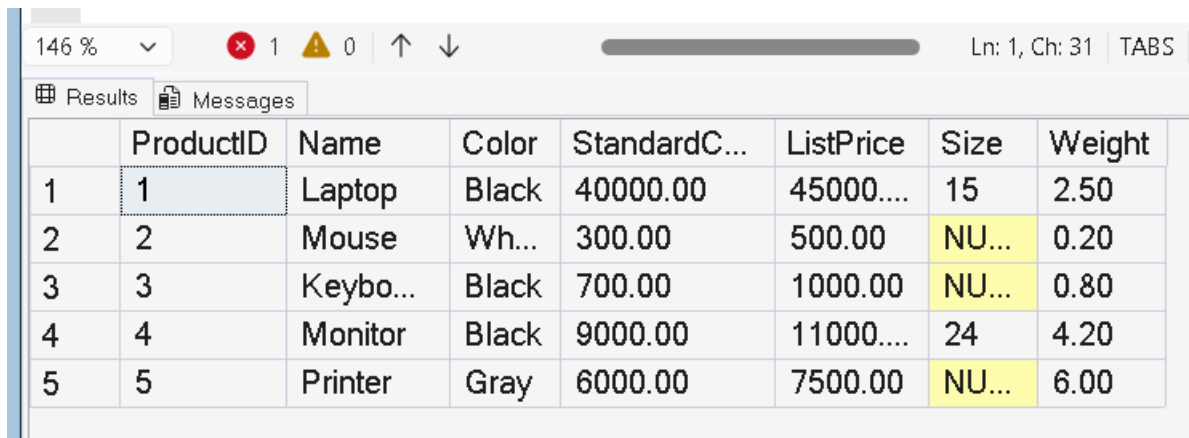

	ProductID	Name	Color	StandardC...	ListPrice	Size	Weight
1	1	Laptop	Black	40000.00	45000....	15	2.50
2	2	Mouse	Wh...	300.00	500.00	NU...	0.20
3	3	Keybo...	Black	700.00	1000.00	NU...	0.80
4	4	Monitor	Black	9000.00	11000....	24	4.20
5	5	Printer	Gray	6000.00	7500.00	NU...	6.00