


1. Aim: To create a simple Android application using Kotlin that displays a `TextView` and changes text on Button click.

Step 1: Install the Android studio

Search “android studio download for windows” in chrome

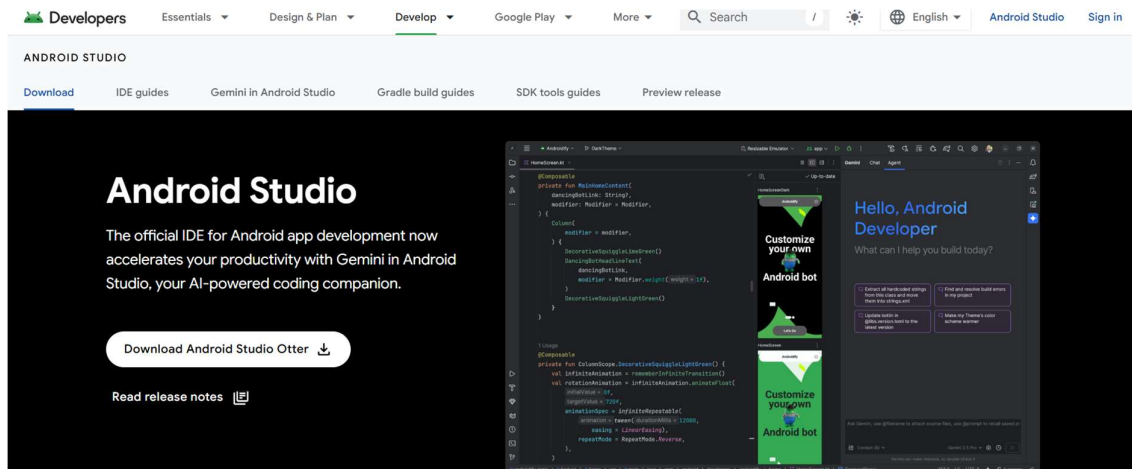


Now Click on “Download Android Studio Otter” and download the exe file and install the android studio

Once the android Studio is download we are ready to start with project set up.

Step 2:

Go to File→ New→ New Project→Empty Views Activity→ Next

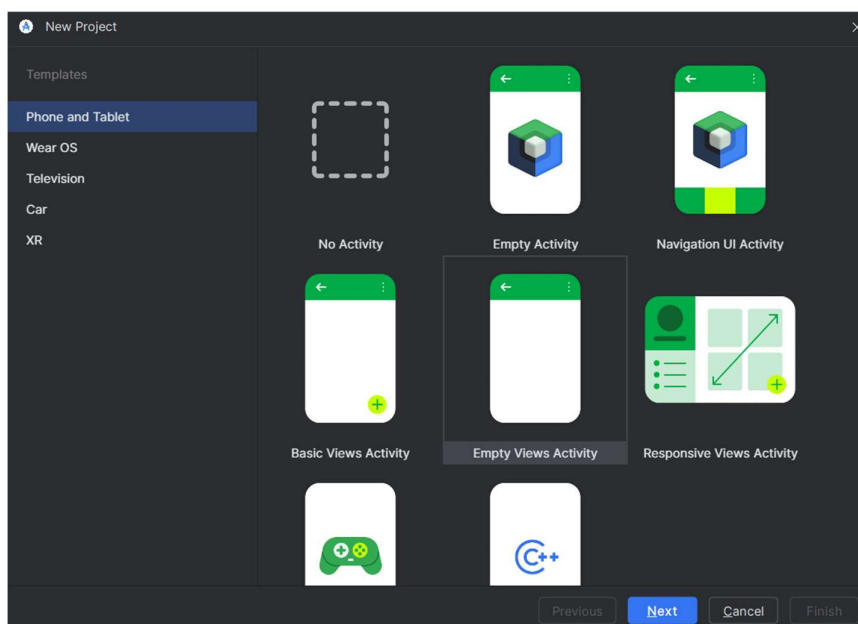

Click on Project name as “SimpleChangeText_Practial_1” → Finish

Step 3: Open the activity_main.xml

1. Go to
app → src → main → res → layout → activity_main.xml
2. Click it.

You will see **Design / Code / Split** tabs at the top.

Click **Split** (so you can see both code + preview) or Click (Alt+Shift+Left). You will see xml code.

Replace it with this given code:

```
<RelativeLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:id="@+id/main"
    android:layout_width="match_parent"
    android:layout_height="match_parent">

    <TextView
        android:id="@+id/myText"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Hello!"
        android:textSize="24sp"
        android:layout_centerInParent="true"/>

    <Button
        android:id="@+id/myButton"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Change Text"
        android:layout_centerHorizontal="true"
        android:layout_below="@id/myText"
        android:layout_marginTop="20dp"/>
</RelativeLayout>
```

Step 4: **Open MainActivity.kt**

Find this file:

app → src → main → java → com.example.simple1 → MainActivity.kt

Open it.

Only Replace after the import with this given code:

```

class MainActivity : AppCompatActivity() {
    override fun onCreate(savedInstanceState: Bundle?) {
        super.onCreate(savedInstanceState)
        enableEdgeToEdge()
        setContentView(R.layout.activity_main)


        val myButton = findViewById<Button>(R.id.myButton)
        val myText = findViewById<TextView>(R.id.myText)

        myButton.setOnClickListener {
            Toast.makeText(this, "Hello dear ♥", Toast.LENGTH_SHORT).show()
            myText.text = "You clicked me! 😊"
        }

        ViewCompat.setOnApplyWindowInsetsListener(findViewById(R.id.main)) { v, insets ->
            val systemBars =
insets.getInsets(WindowInsetsCompat.Type.systemBars())
            v.setPadding(systemBars.left, systemBars.top, systemBars.right,
systemBars.bottom)
            insets
        }
    }
}

```

Output (Virtual Phone):

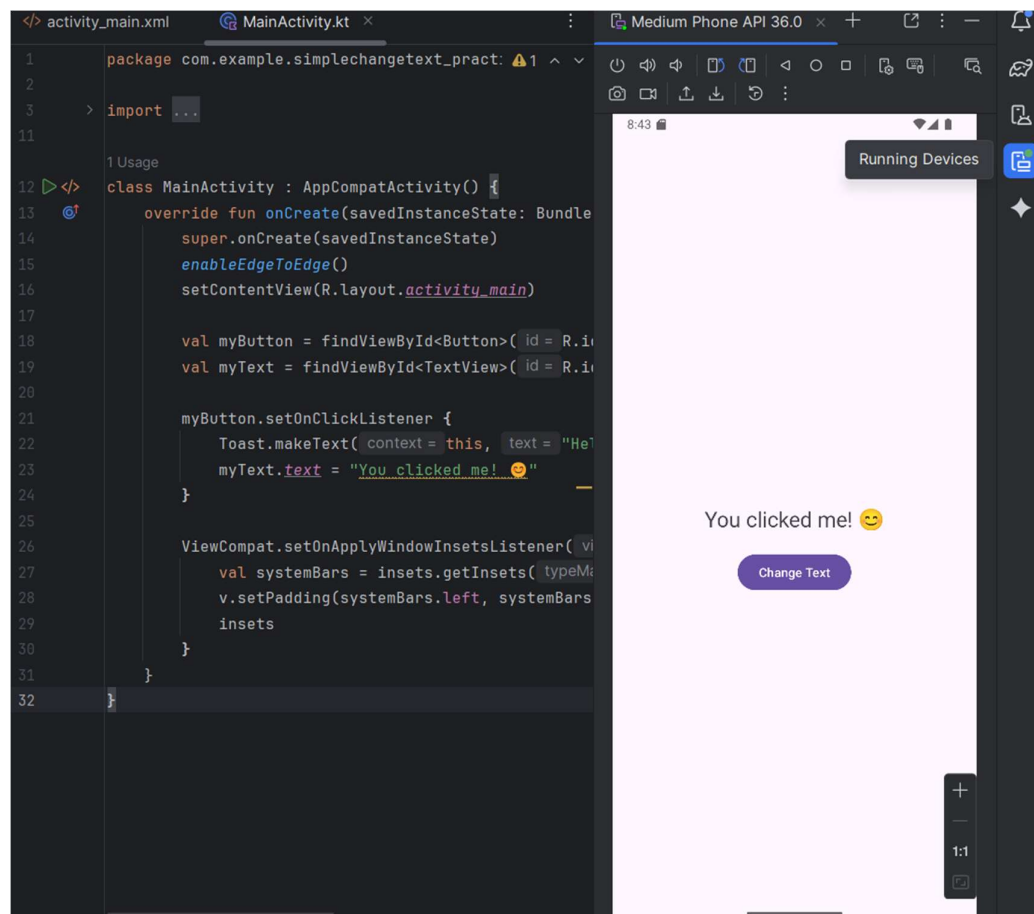

Step 6: Connection this app in Actual phone (your phone)

1. Open your YOUR phone

Unlock it.

2. Open the “Settings” app

It's a **gear**  **icon** (on your home screen or app drawer).

3. Scroll and tap “About device”

On OPPO, it is usually at the **top** of settings.

4. Tap “Version”

Inside About Device.

5. Tap “Build number” 7 times

Your phone will say:

“You are now a developer!”

6. Go back → Additional Settings

Scroll and find:

Additional Settings OR

7. Search and Tap “Developer Options”

Now you will see:

Developer Options (only appears after enabling it)

8. Turn ON USB Debugging

Scroll down and enable:

 **USB Debugging**

Tap **OK** to allow it.

Now connect you’re YOUR phone to your laptop

Use your USB cable → as soon as you connect, your phone will show:

“Allow USB debugging?”

Tap:

✓ **Always allow from this computer**

✓ **Allow**

✓ USB Mode MUST be “File Transfer”

Once your Phone is connected

✓ Select your phone:

At the top device dropdown, choose for example:

👉 OPPO CPH2557

(It should show a green phone icon)

✓ Then click the green RUN ▶ button.

Your app will install and start on your phone.

Output (Real phone):

