


# Create Node-RED Service


Aim: To create a web application create a Node-RED service.

## Steps followed:


- Navigated to the App creation page

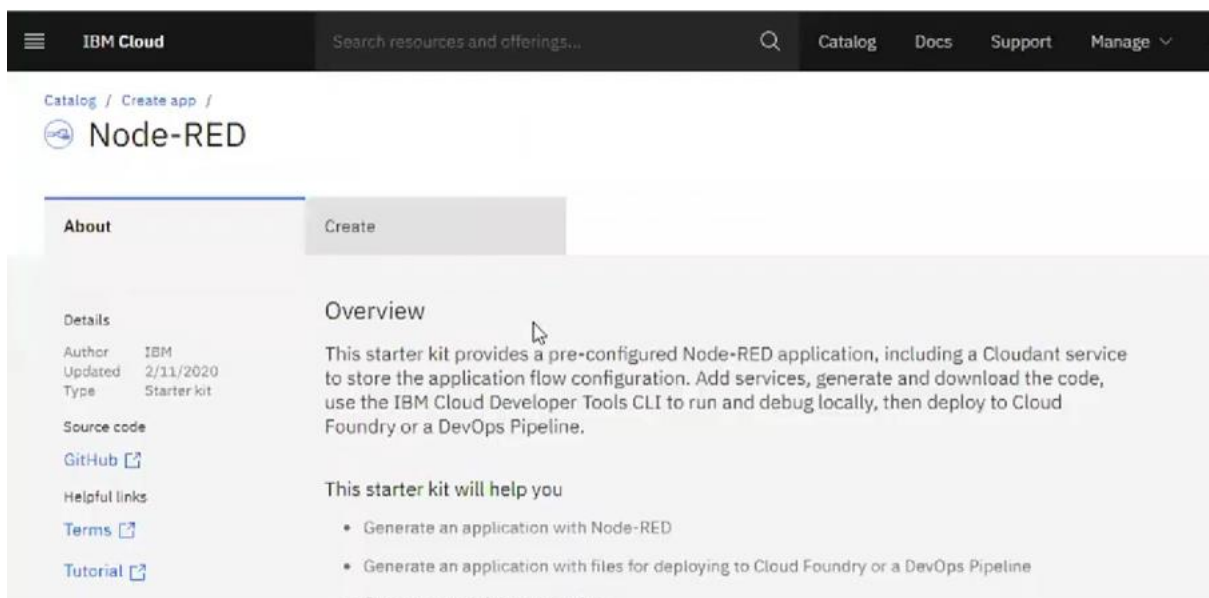


- Entered project details and clicked on create

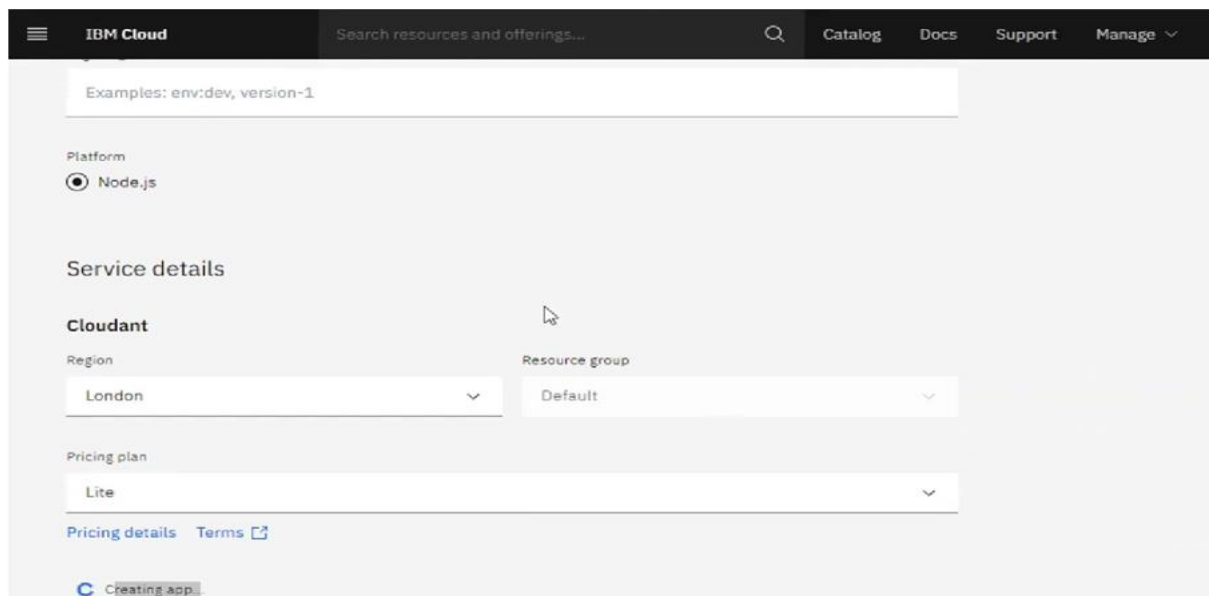

- Clicking on the “Deploy your App” Button

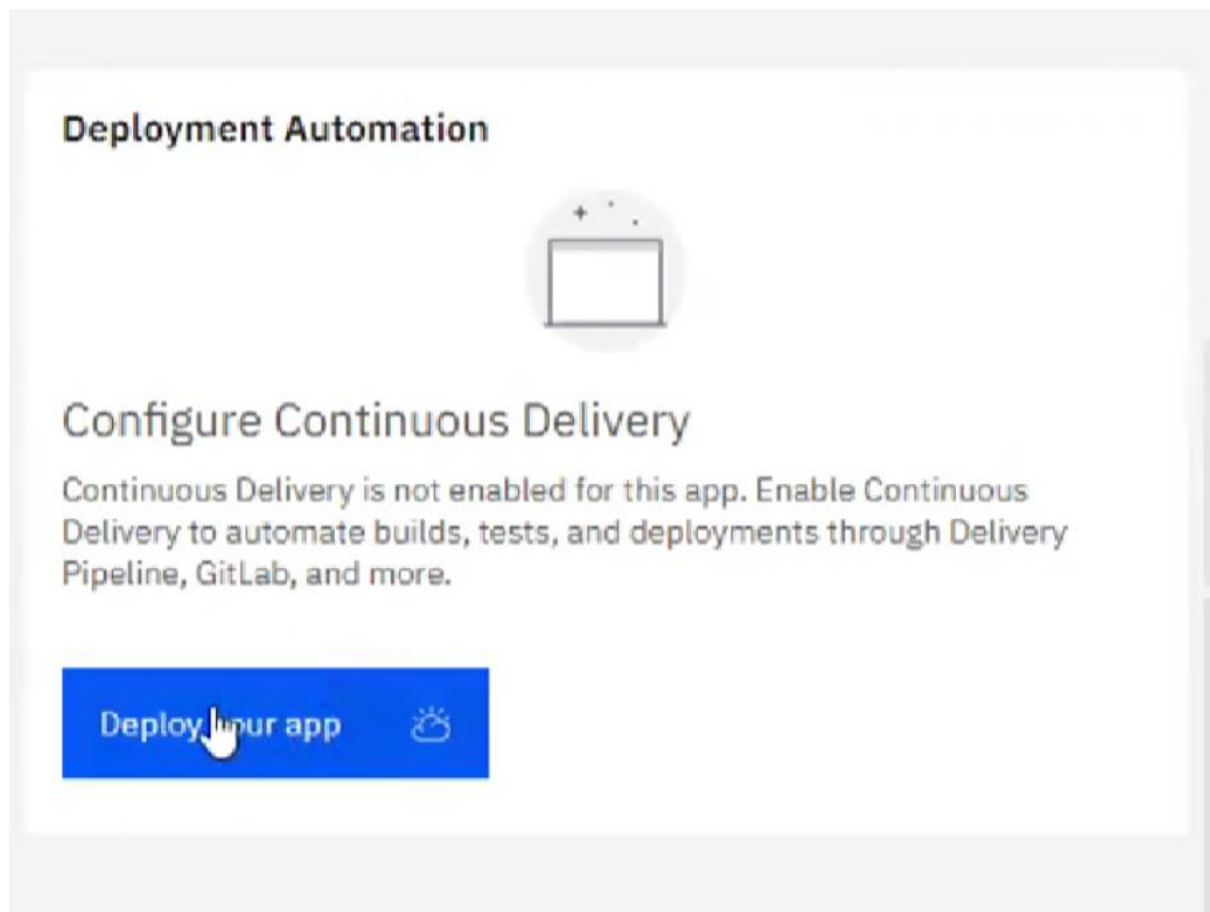

- Setting up the environment and deploying the app

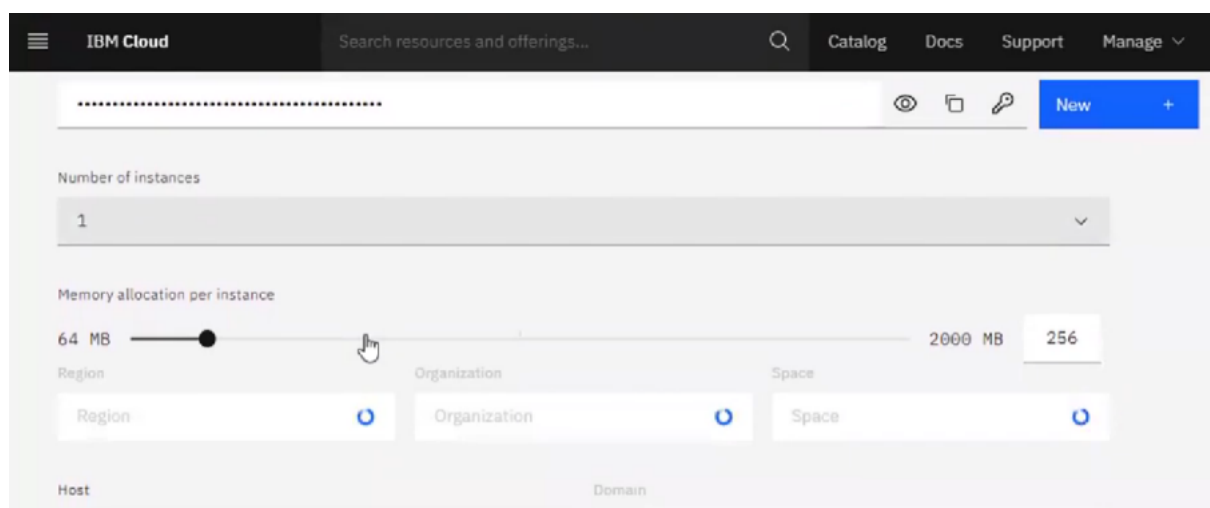


- Successfully deployed the app


## Delivery Pipelines

|            |  |
|------------|--|
| Name       | ci-pipeline <a href="#">↗</a>  |
| Status     |  Success <a href="#">↗</a>  |
| Last input | Last commit by IBM Cloud DevOps Services (7 minutes ago)<br><a href="#">Clone from zip</a> <a href="#">↗</a> |

- Dragged and dropped components into the editor

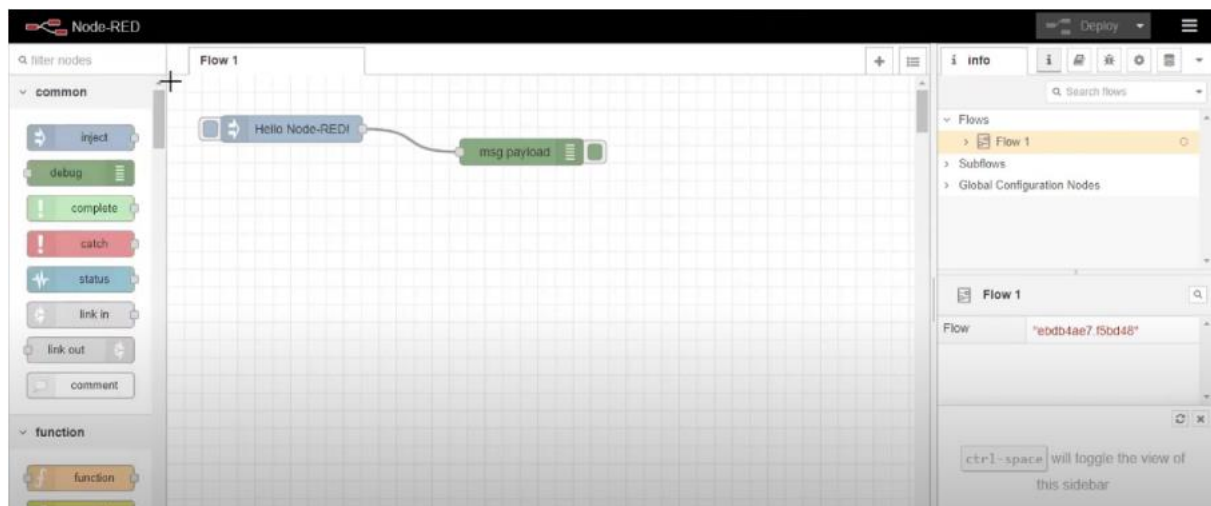

- Editing some values of the properties

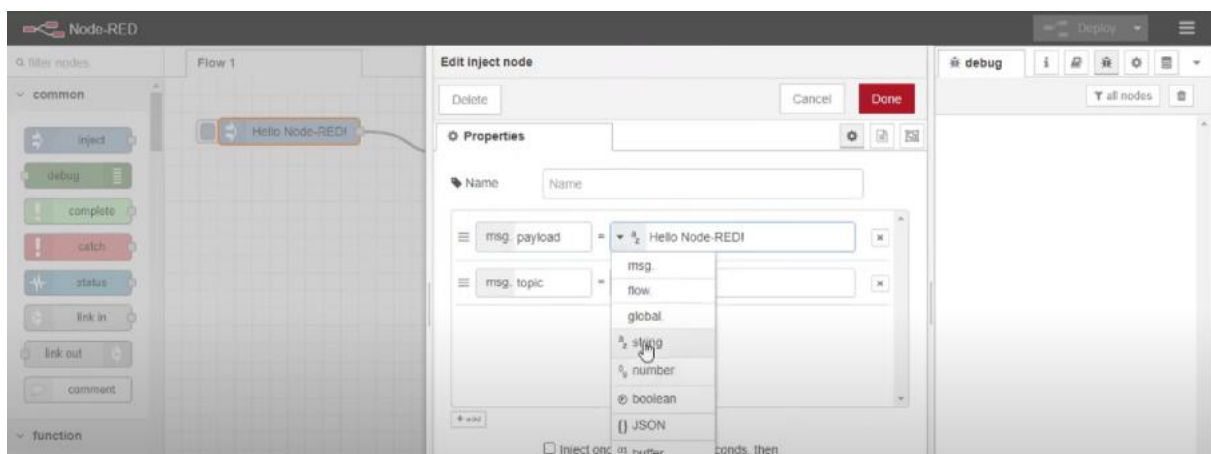

- Successfully deployed the app



**Result: Successfully created a NodeRED service on IBM Cloud**