Physical Config Desktop Custom Interface

IP Configuration

IP Configuration

(•) DHCP ( ) Static

DHCP request successful.

IP Address 192.168.0.100

Subnet Mask 255.255.255.0

Default Gateway 192.168.0.1

DNS Server

IPv6 Configuration


( ) DHCP ( ) Auto Config (•) Static

IPv6 Address /

Link Local Address FE80::260:2FFF:FE35:336E

IPv6 Gateway

IPv6 DNS Server

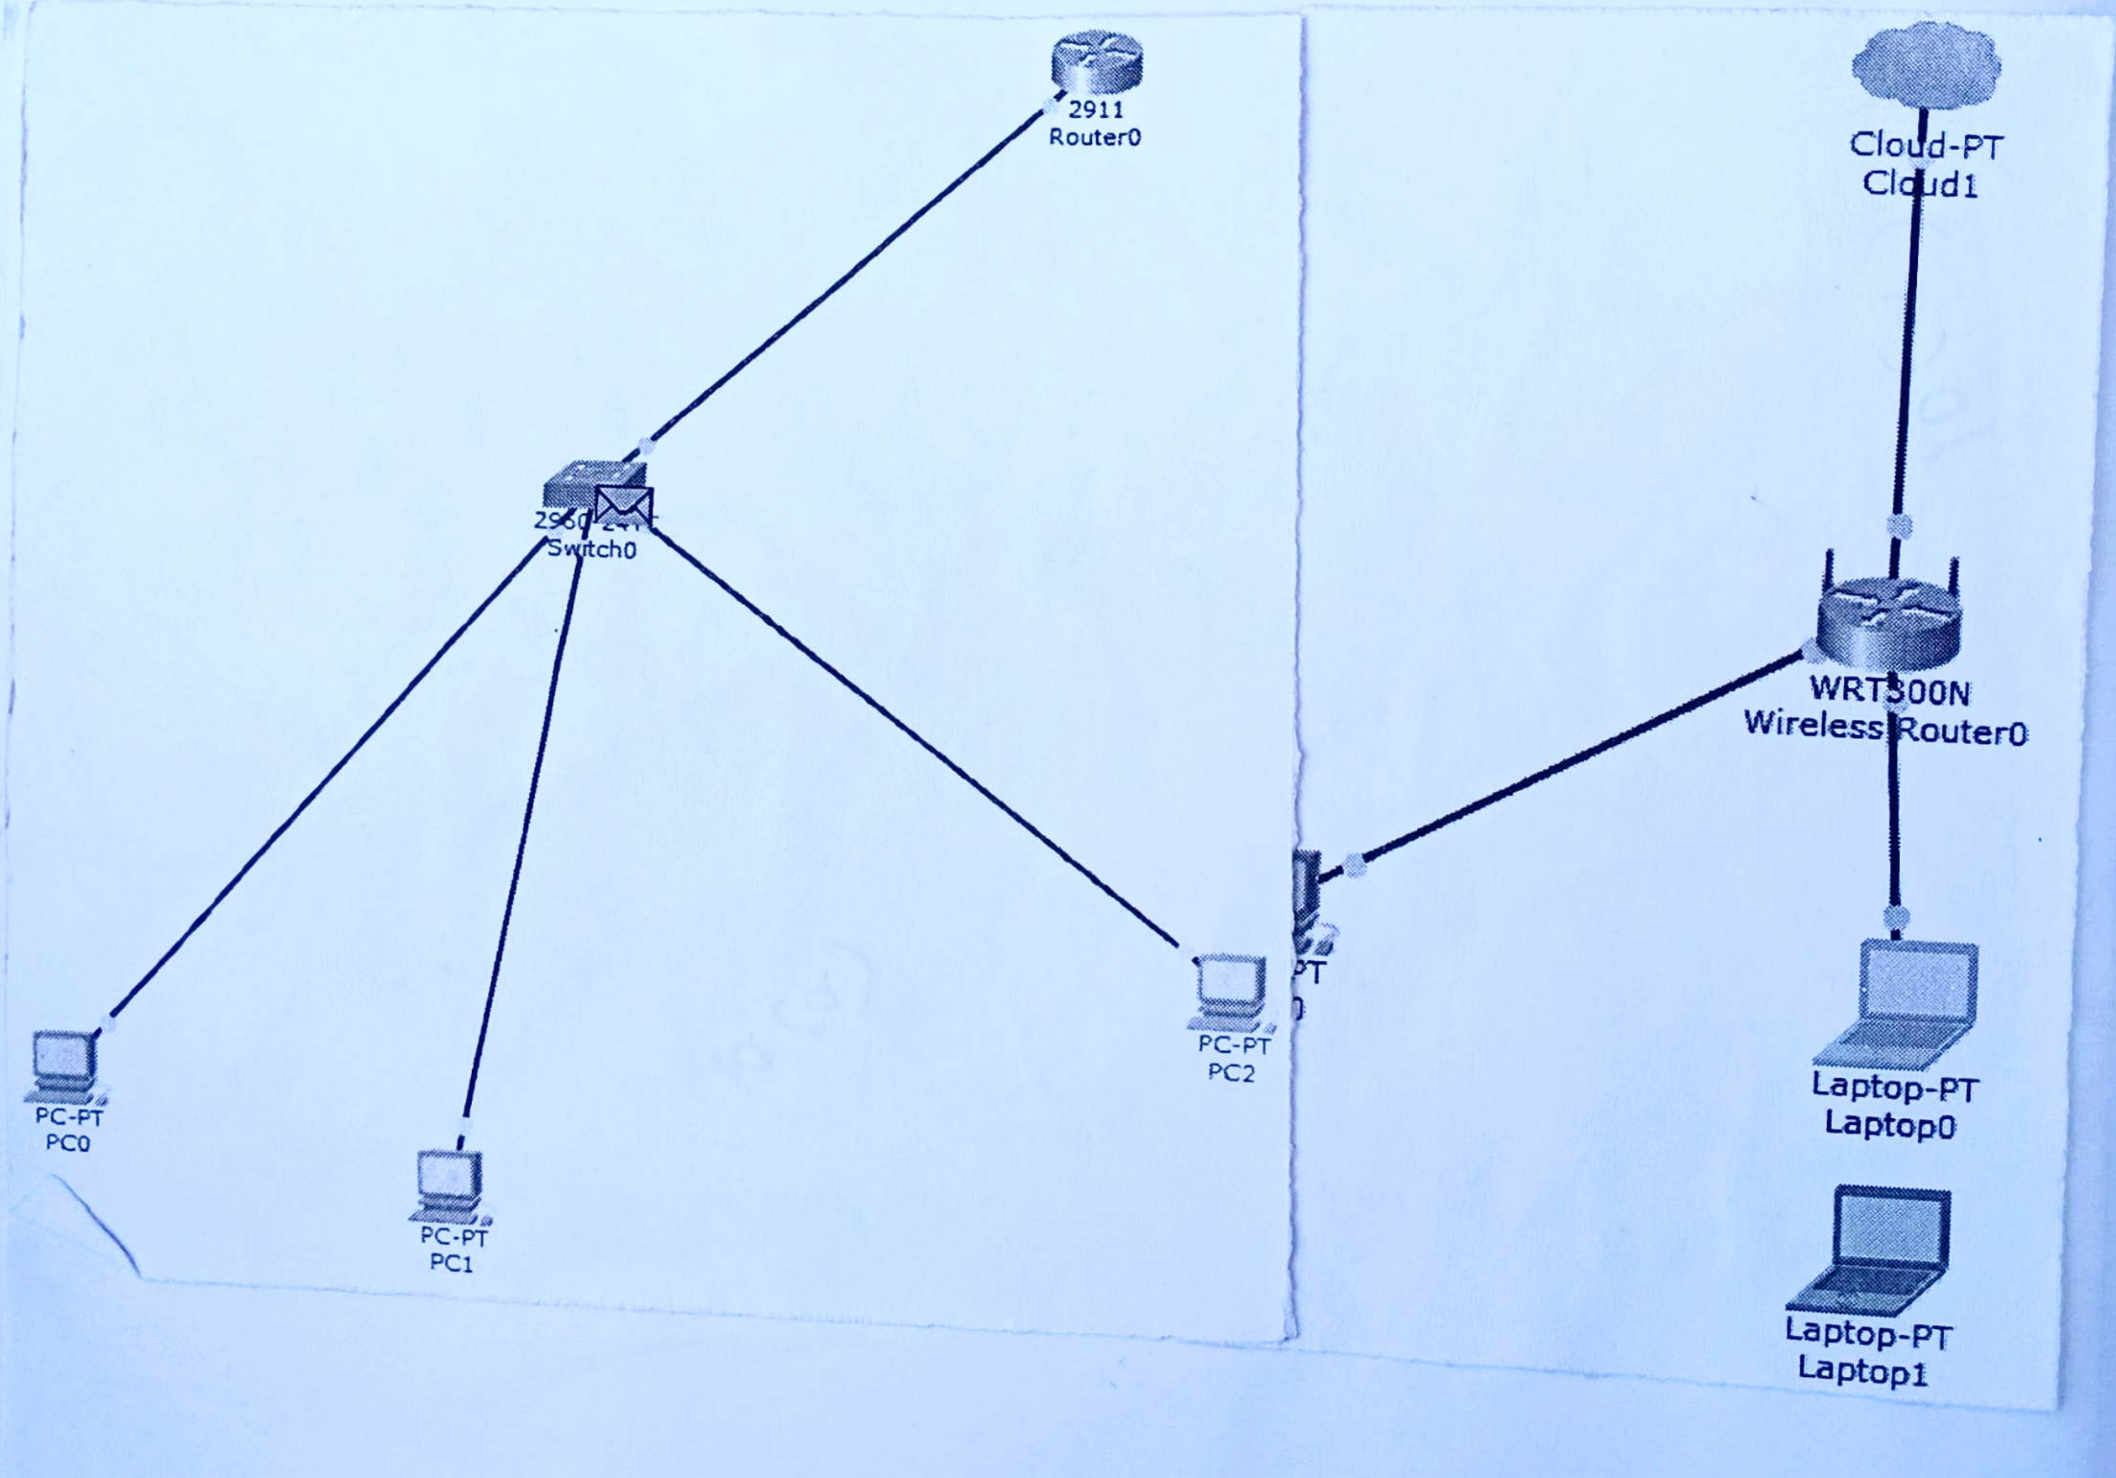

10

Internetworking with Routers in Cisco Packet Tracer Simulator.


a) Simple Internetwork using a Router.

AIM:-

To design and configure a simple internetwork using a router in cisco packet Tracer and observe the routing of packets between different networks.

ALGORITHM /PROCEDURE :-

1) open cisco packet Tracer.
2) Place one cisco 2911 Router, two switches and 3-4 PCs for each network.
3) Connect the PCs to the switches to the router using ethernet cables.
4) Connect the Switches to the router using ethernet cables.
5) Assign static IP address to all PCs and router interfaces.
6) Configure the router interfaces using the assigned IP address.
7) Enable the router interfaces using the no shutdown command.
8) Verify the interface states using show ip interface brief.
9) use simple PDU or the ping command to Send a packet from one network another.
10) Select Simulation Mode and observe the packet.
11) Observe that the router forward the packet through the appropriate interface according to the destination network.

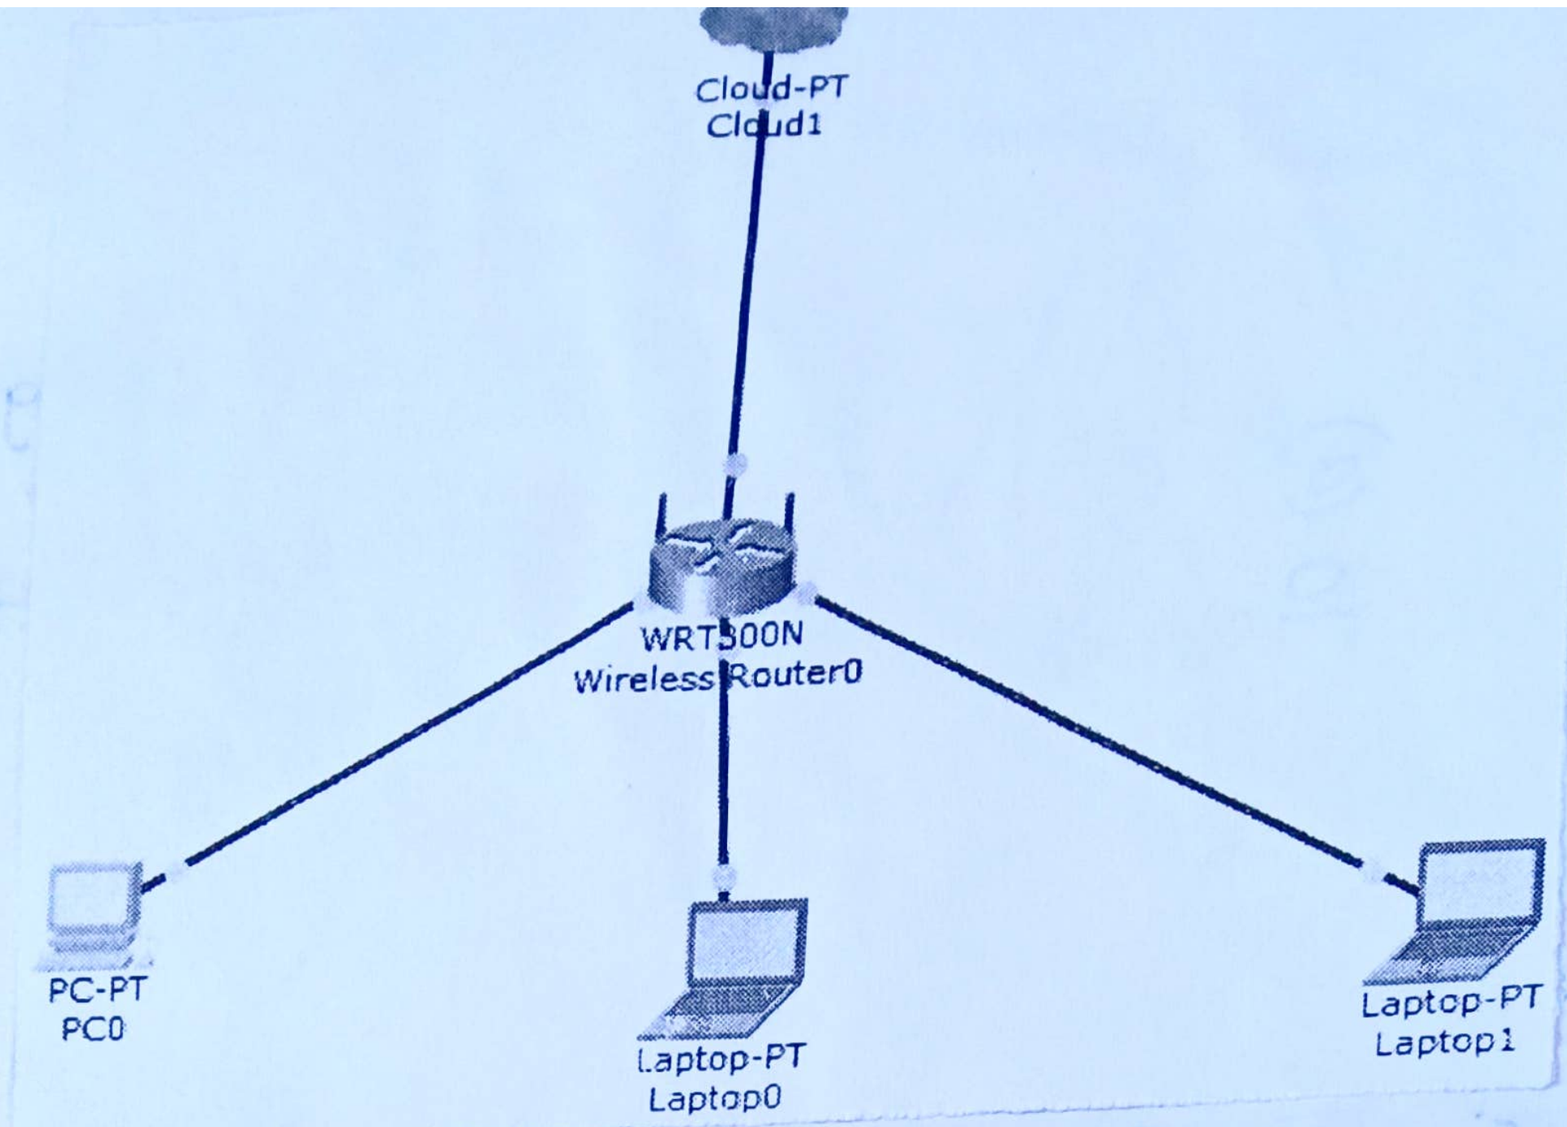


```
Router(config)#interface gigabitethernet 0/1
Router(config-if)#ip address 192.168.20.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state
to up
exit
```

```
Router#enable
Router#show ip interface brief
Interface                  IP-Address      OK? Method Status                Protocol

GigabitEthernet0/0         192.168.10.1    YES manual up                    up

GigabitEthernet0/1         192.168.20.1    YES manual up                    up

GigabitEthernet0/2         unassigned      YES unset  administratively down down

Vlan1                      unassigned      YES unset  administratively down down
Router#
```

Copy Paste

RESULT:-

The Simple internetwork was successfully designed and configured using a router in Cisco packet Tracer. Packet transmission and routing between different network were Successfully observed.