

# Welcome to R in Production!

Please get **settled**,  
grab a **coffee**,  
connect to the **WiFi**, and  
complete the **prework** at

<https://github.com/posit-conf-2025/r-production>



# R in production

The whole game

Hadley Wickham

Chief Scientist, Posit

September 2025



**Hello**  
my name is

**Hadley**



**Hello**  
my name is

**Davis**

**Charlie**

**Tom**



# Your turn

Introduce yourself to your neighbours.

(You are going to talking to each other a lot as you wait for various jobs to finish.)

What does “in production” mean to you?

Why did you choose to come to this workshop?



# Show of hands

- Have you already run code in production?
- Have you used Posit Connect?
- Have you used shiny before?
- Have you used quarto before?
- Do use Git for your the majority of your data science projects?
- Have you used GitHub Actions?
- Have you used the usethis package?



# What does in production mean?

- Code is run on another machine  
(usually a linux server)
- Code is run repeatedly  
(on a schedule, after another job, or on demand)
- Code (and data) is a shared responsibility  
(because it's important and someone cares if it breaks)



09:00 - 10:30	“The whole game”
10:30 - 11:00	Coffee break
11:00 - 12:30	On another machine
12:30 - 13:30	Lunch break
13:30 - 15:00	Repeatedly
15:00 - 15:30	Coffee break
15:30 - 17:00	Shared responsibility





1. Production projects
2. Deployment options
3. GitHub Actions
4. Posit Connect Cloud



# Production projects

---


<https://r-in-production.org/project-life.html>

1. A project must be a self-contained directory
2. There must be a single source of truth (and that must be **git**)
3. Deployment must be automated (NO CLICKING BUTTONS!)

# Self-contained directory

# What is a project?


- Used to be very clear with RStudio: a directory with a .Rproj file
- A little less clear with Positron; now any directory that you happen to have opened.
- But the idea remains the same: put all the stuff you need for a project in one place.
- (Project navigation is also a bit different since Positron tends to be full screen and you only have one open)

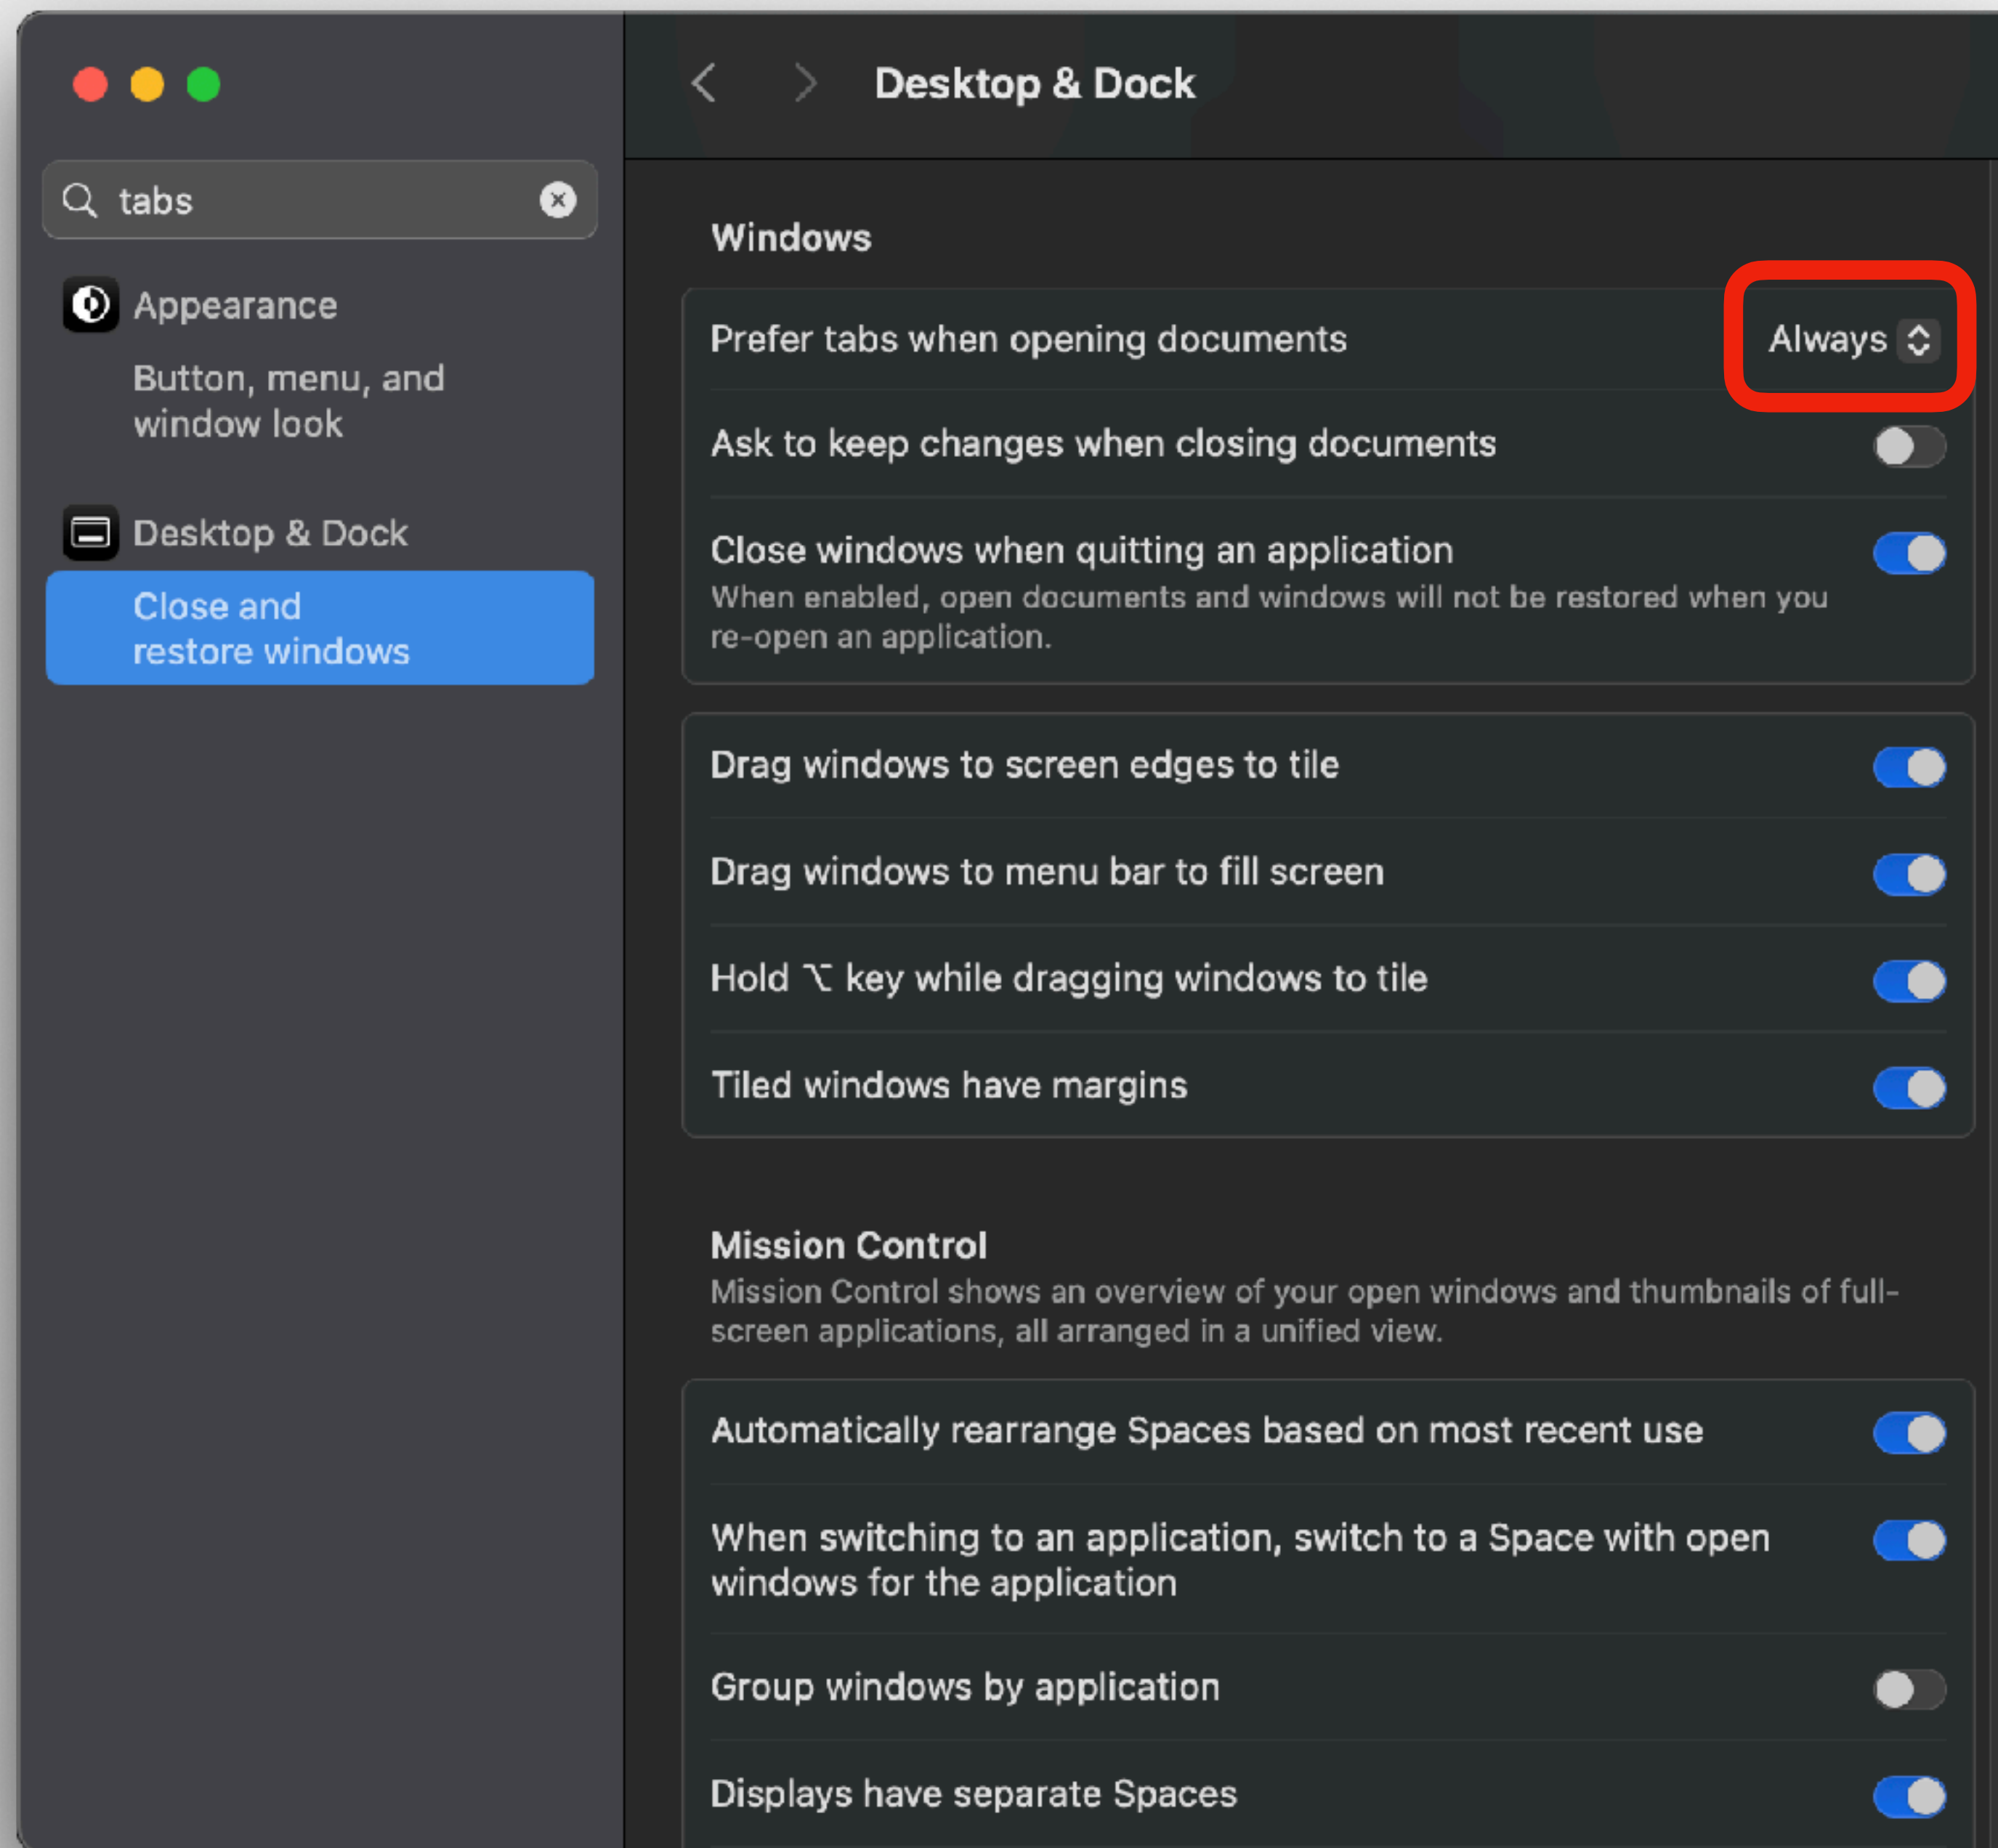

Hopefully not  
needed with  
future Positron  
release




# Cmd + Shift + P

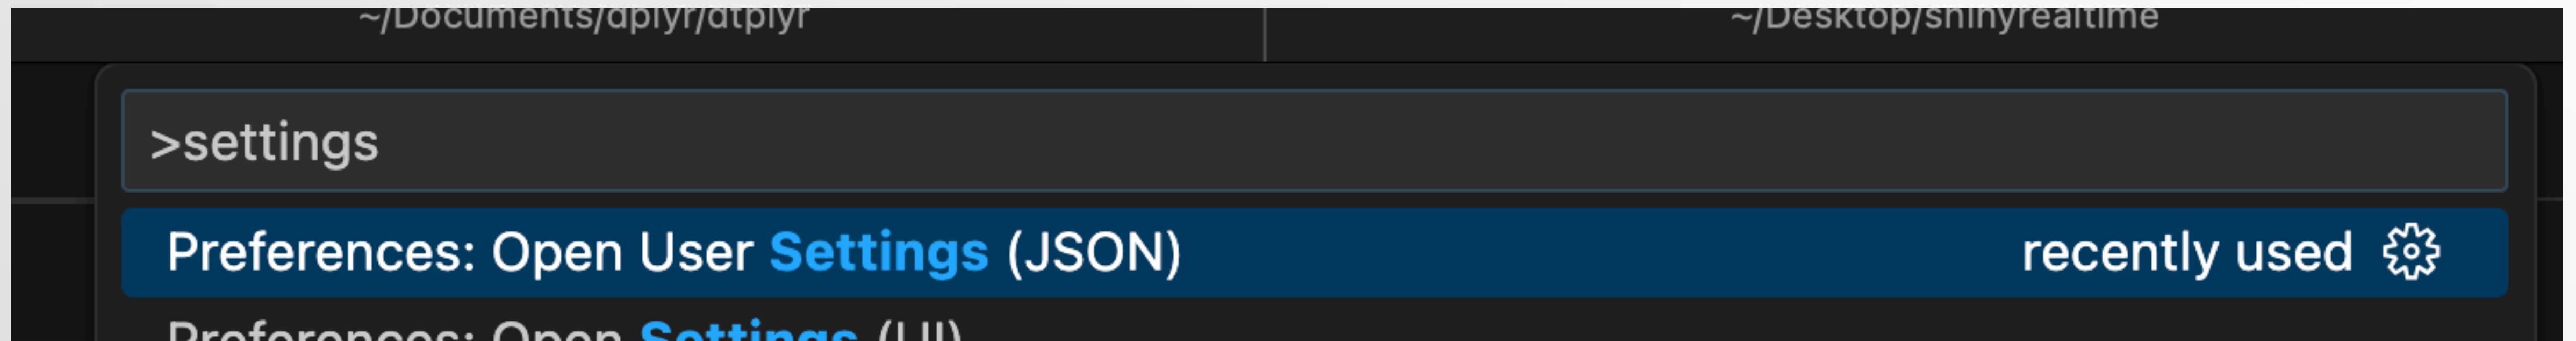


```
"window.nativeTabs": true,  
"window.openFoldersInNewWindow": "on",  
"window.title": "${rootName}${separator}${activeRepositoryBranchName}"
```

# Cmd + O

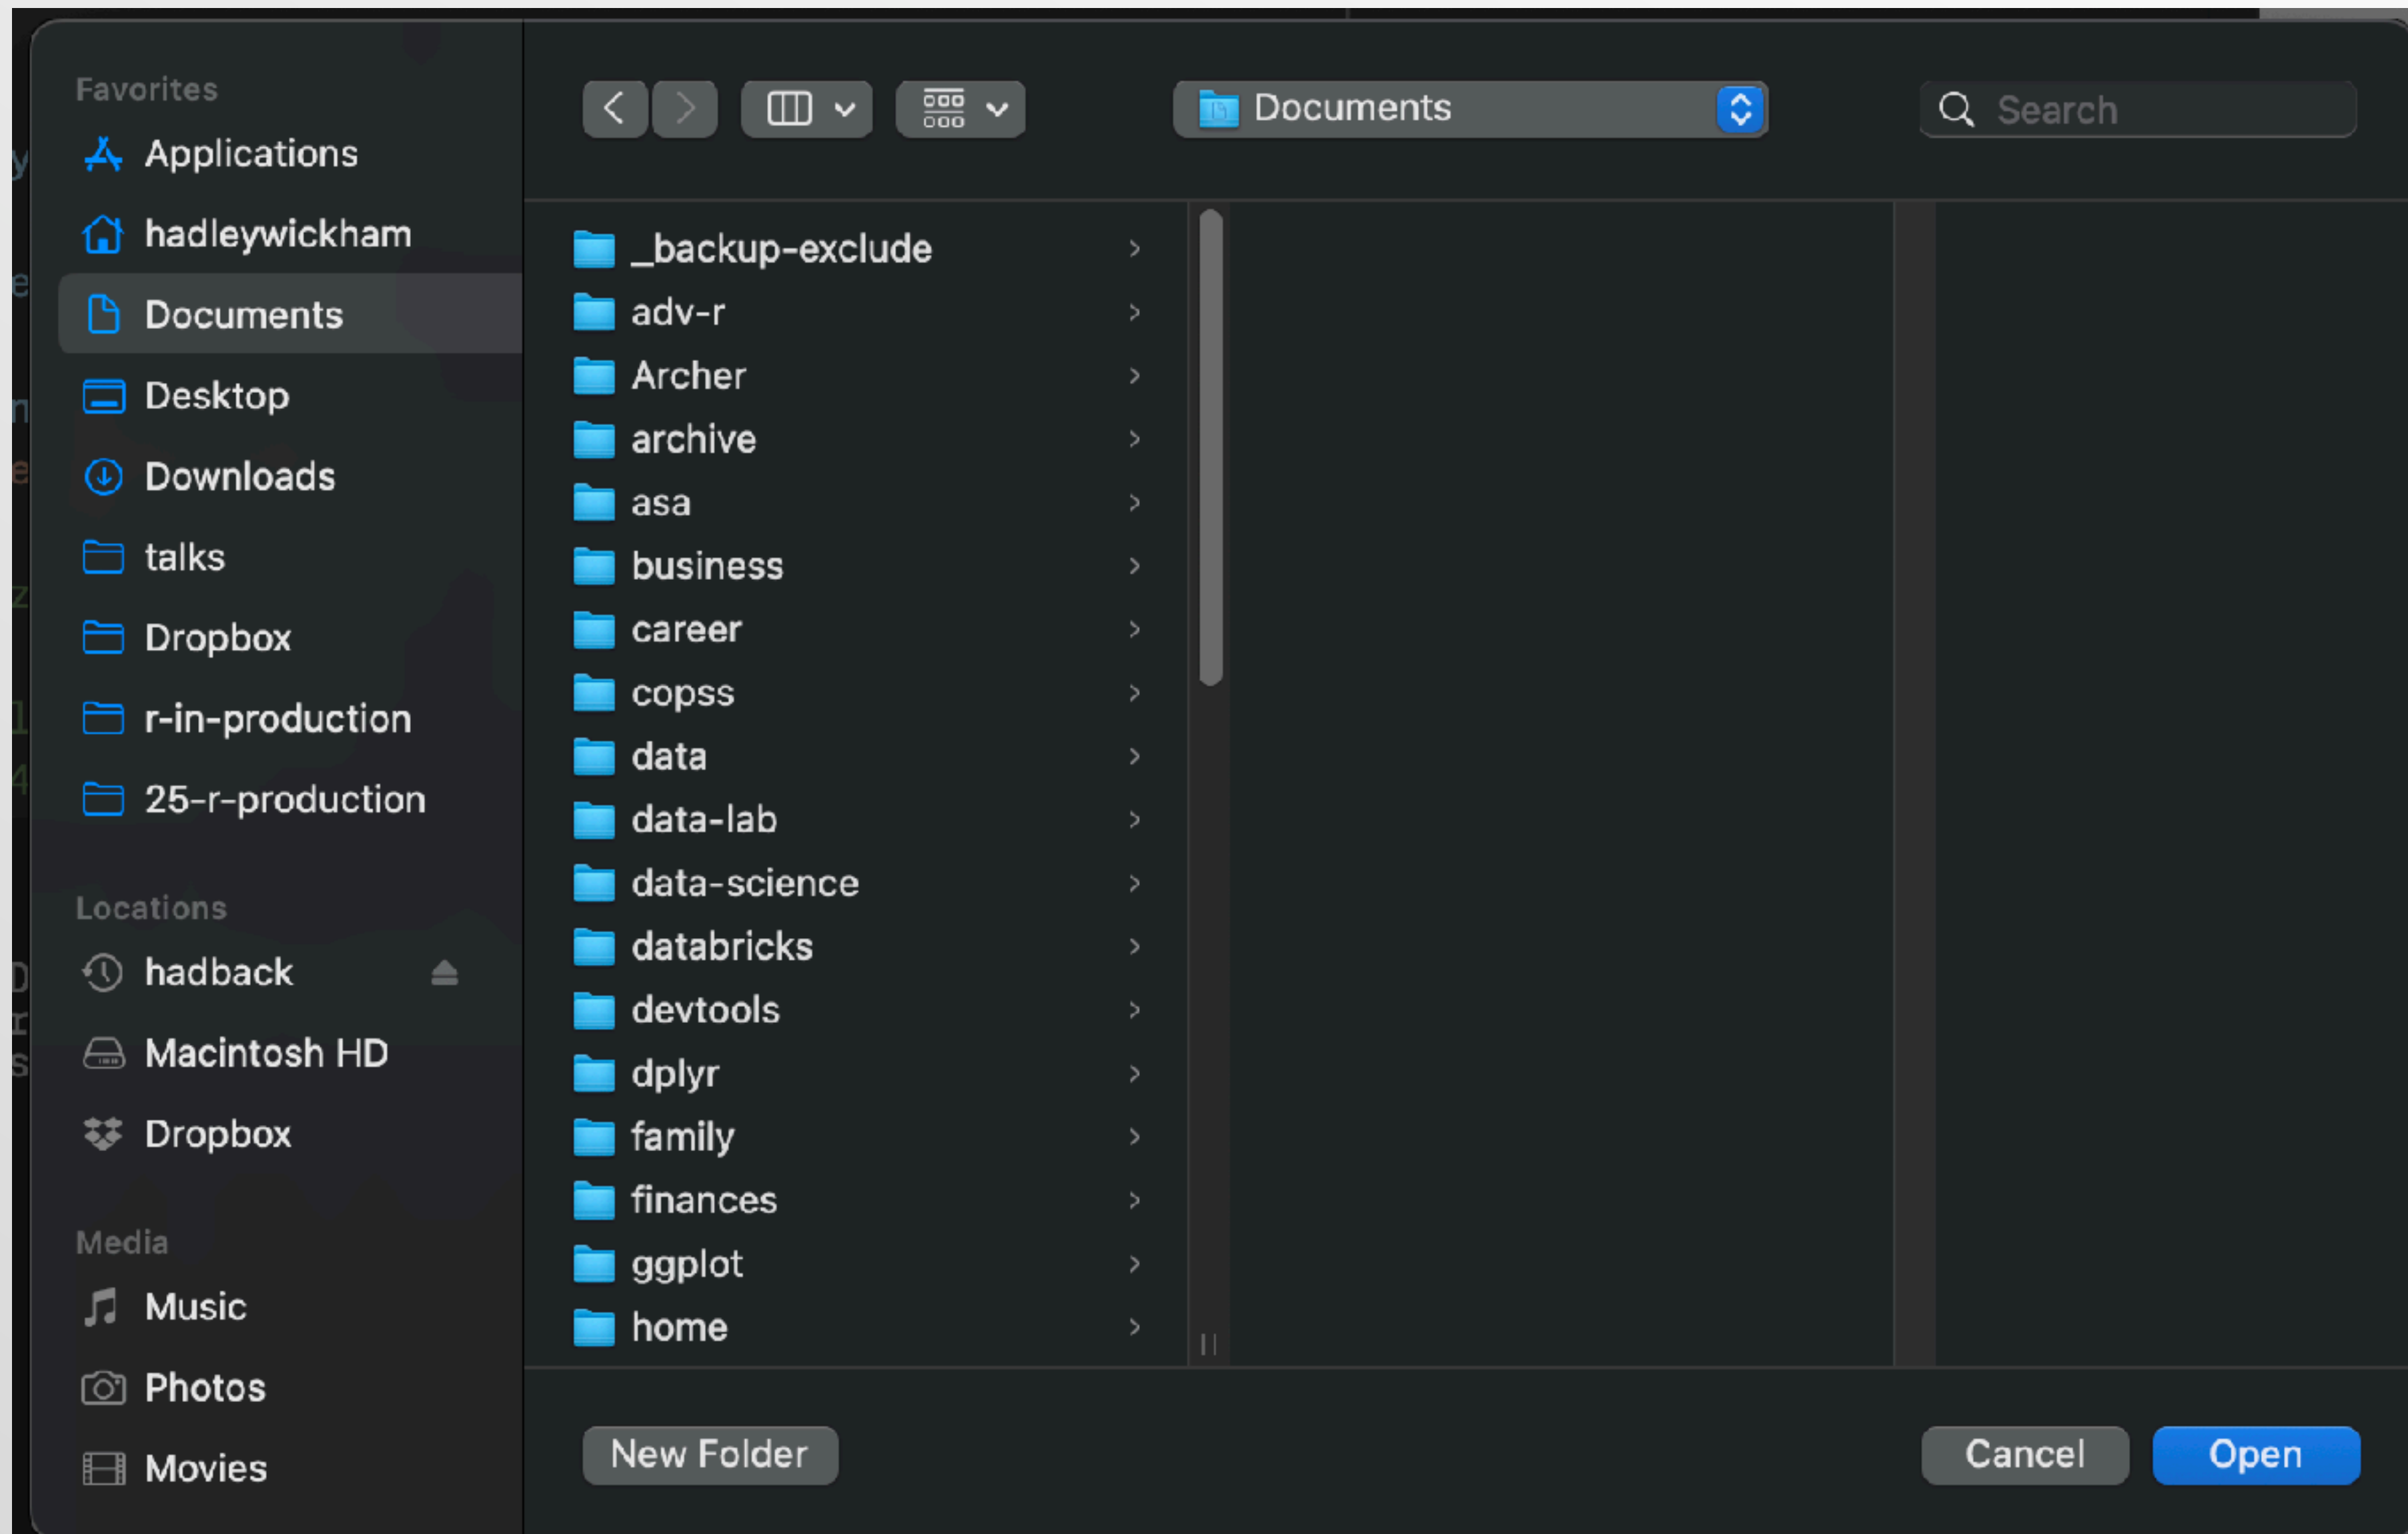



# Ctrl + R

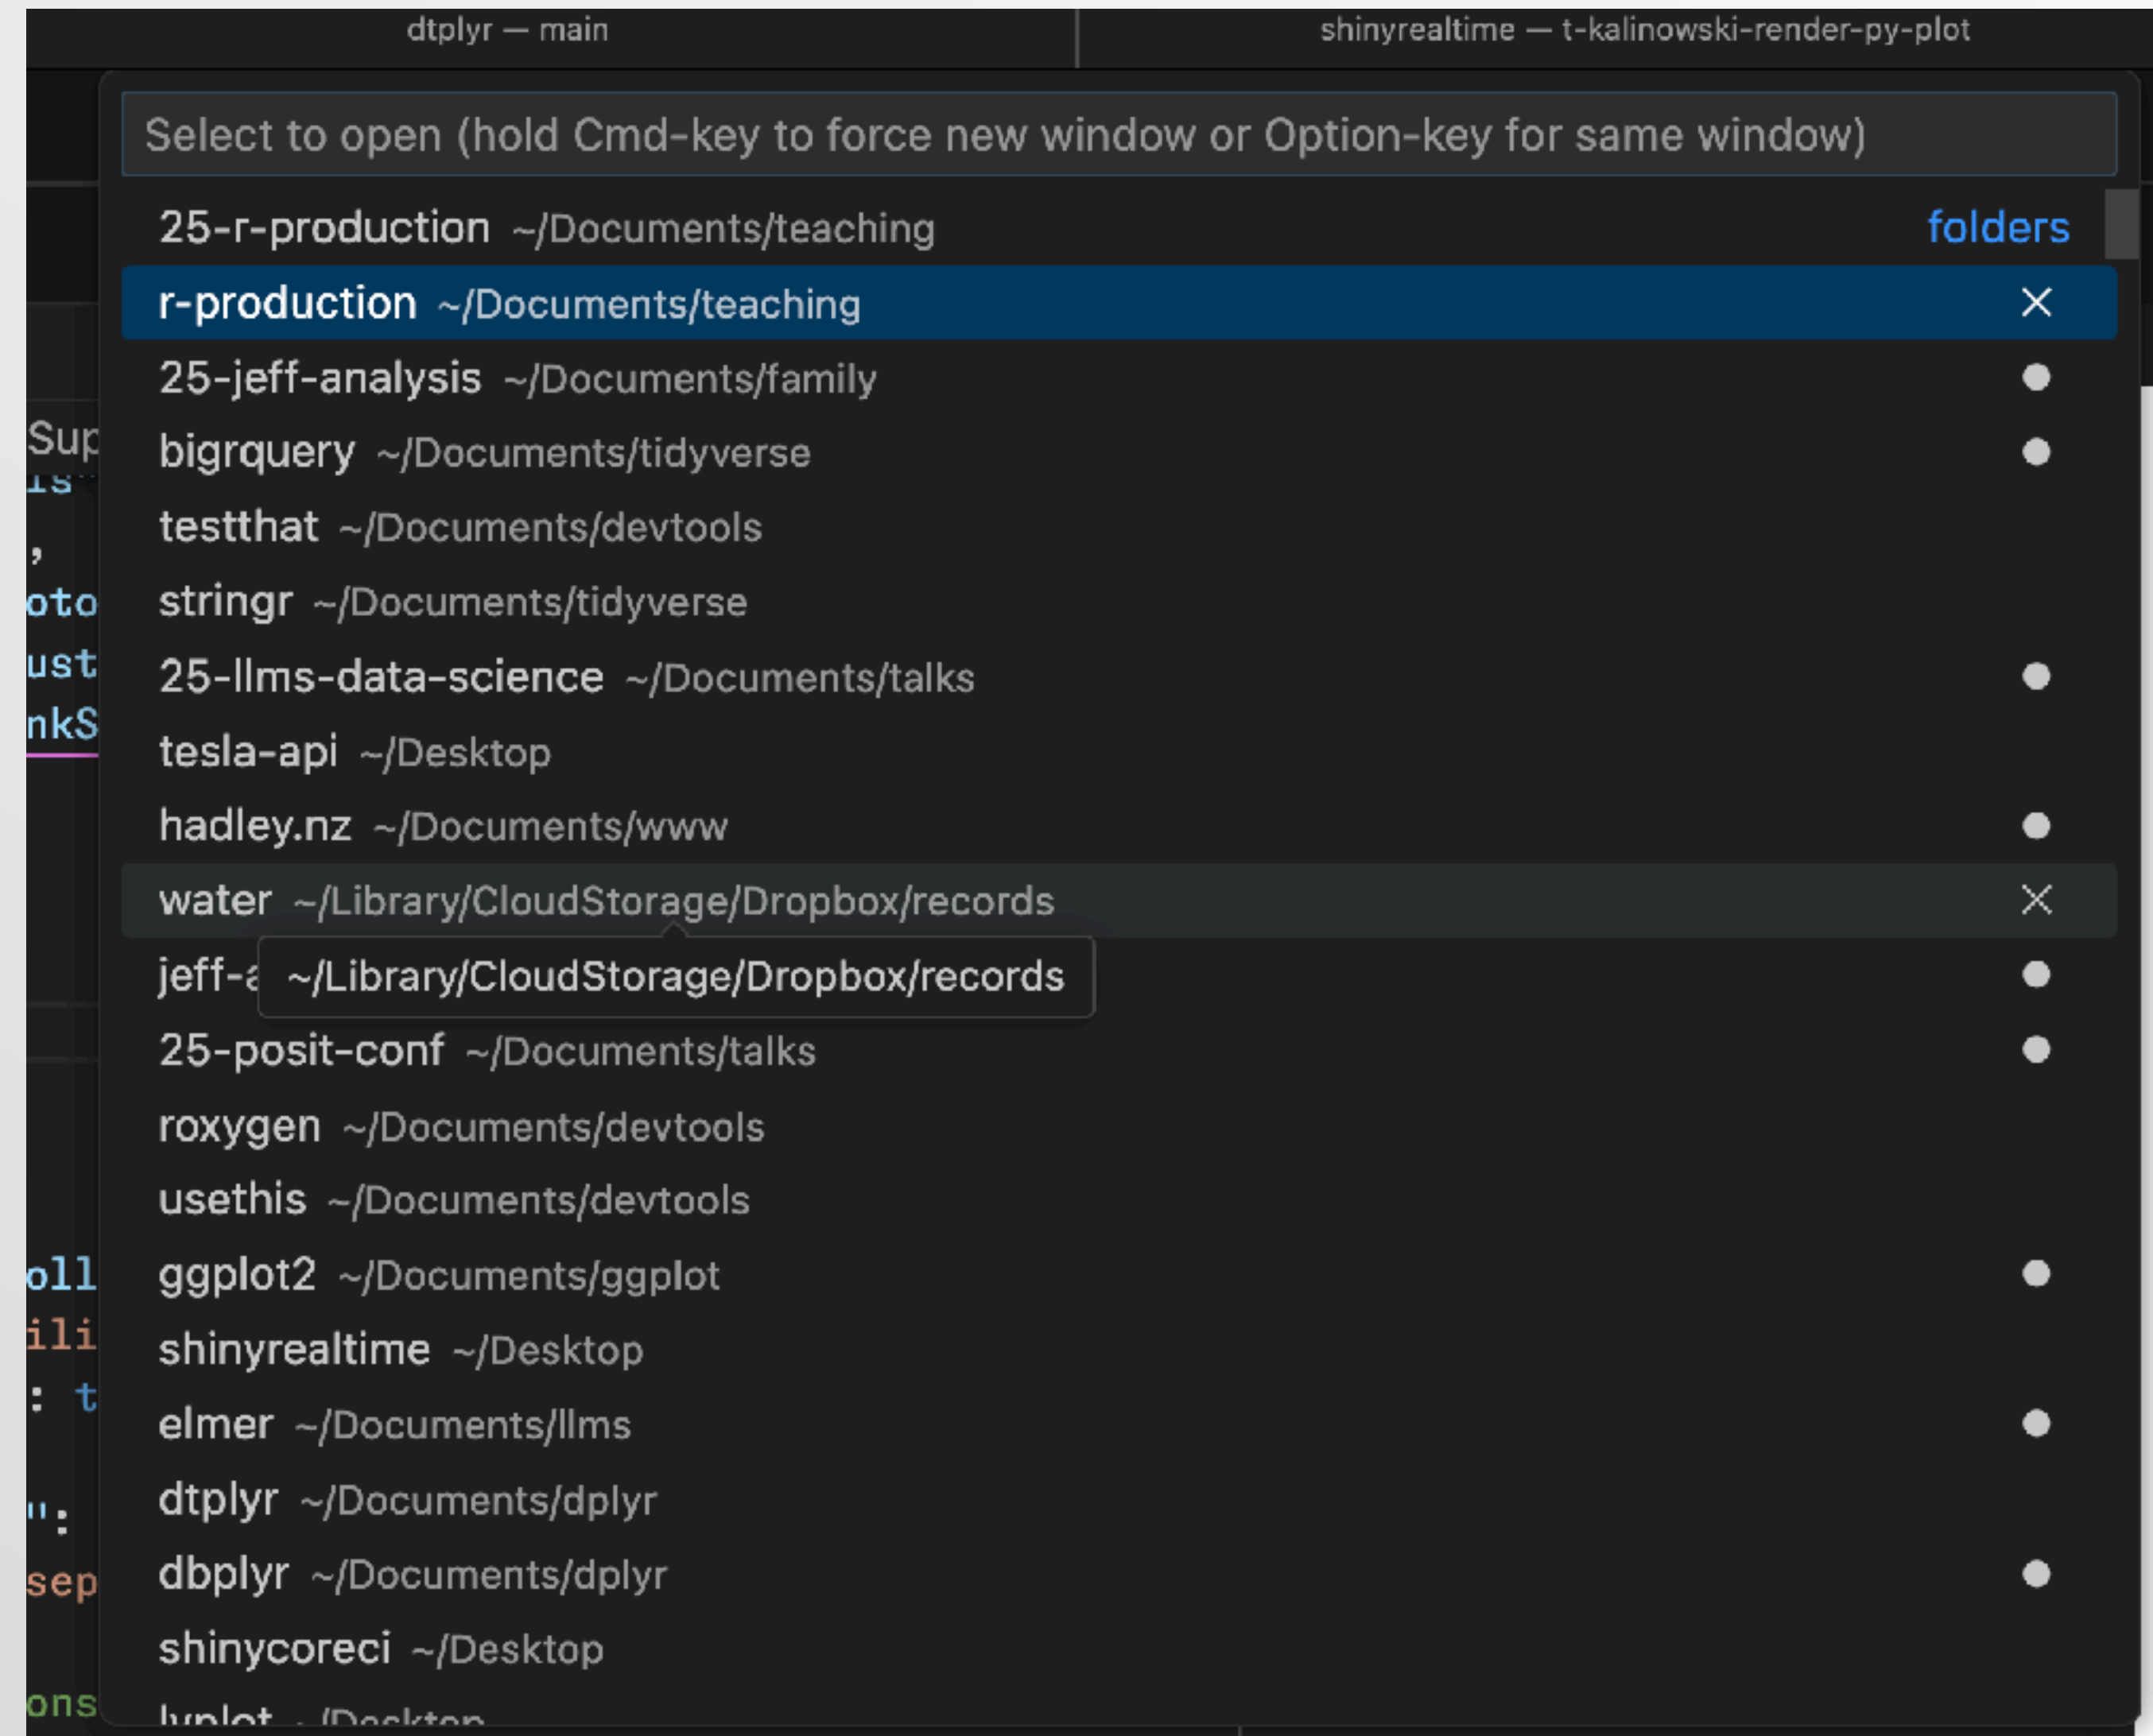

# Lots of ways to create projects

- Create an empty folder
- Use Positron helper
- `usethis::create_project()`

# Your turn

Apart from your R codes, what else needs to go into a project to ensure that it's self contained?

# Single source of truth

# Life starts simple




My laptop




Production server

# You'll have 3 versions if you also have a staging server

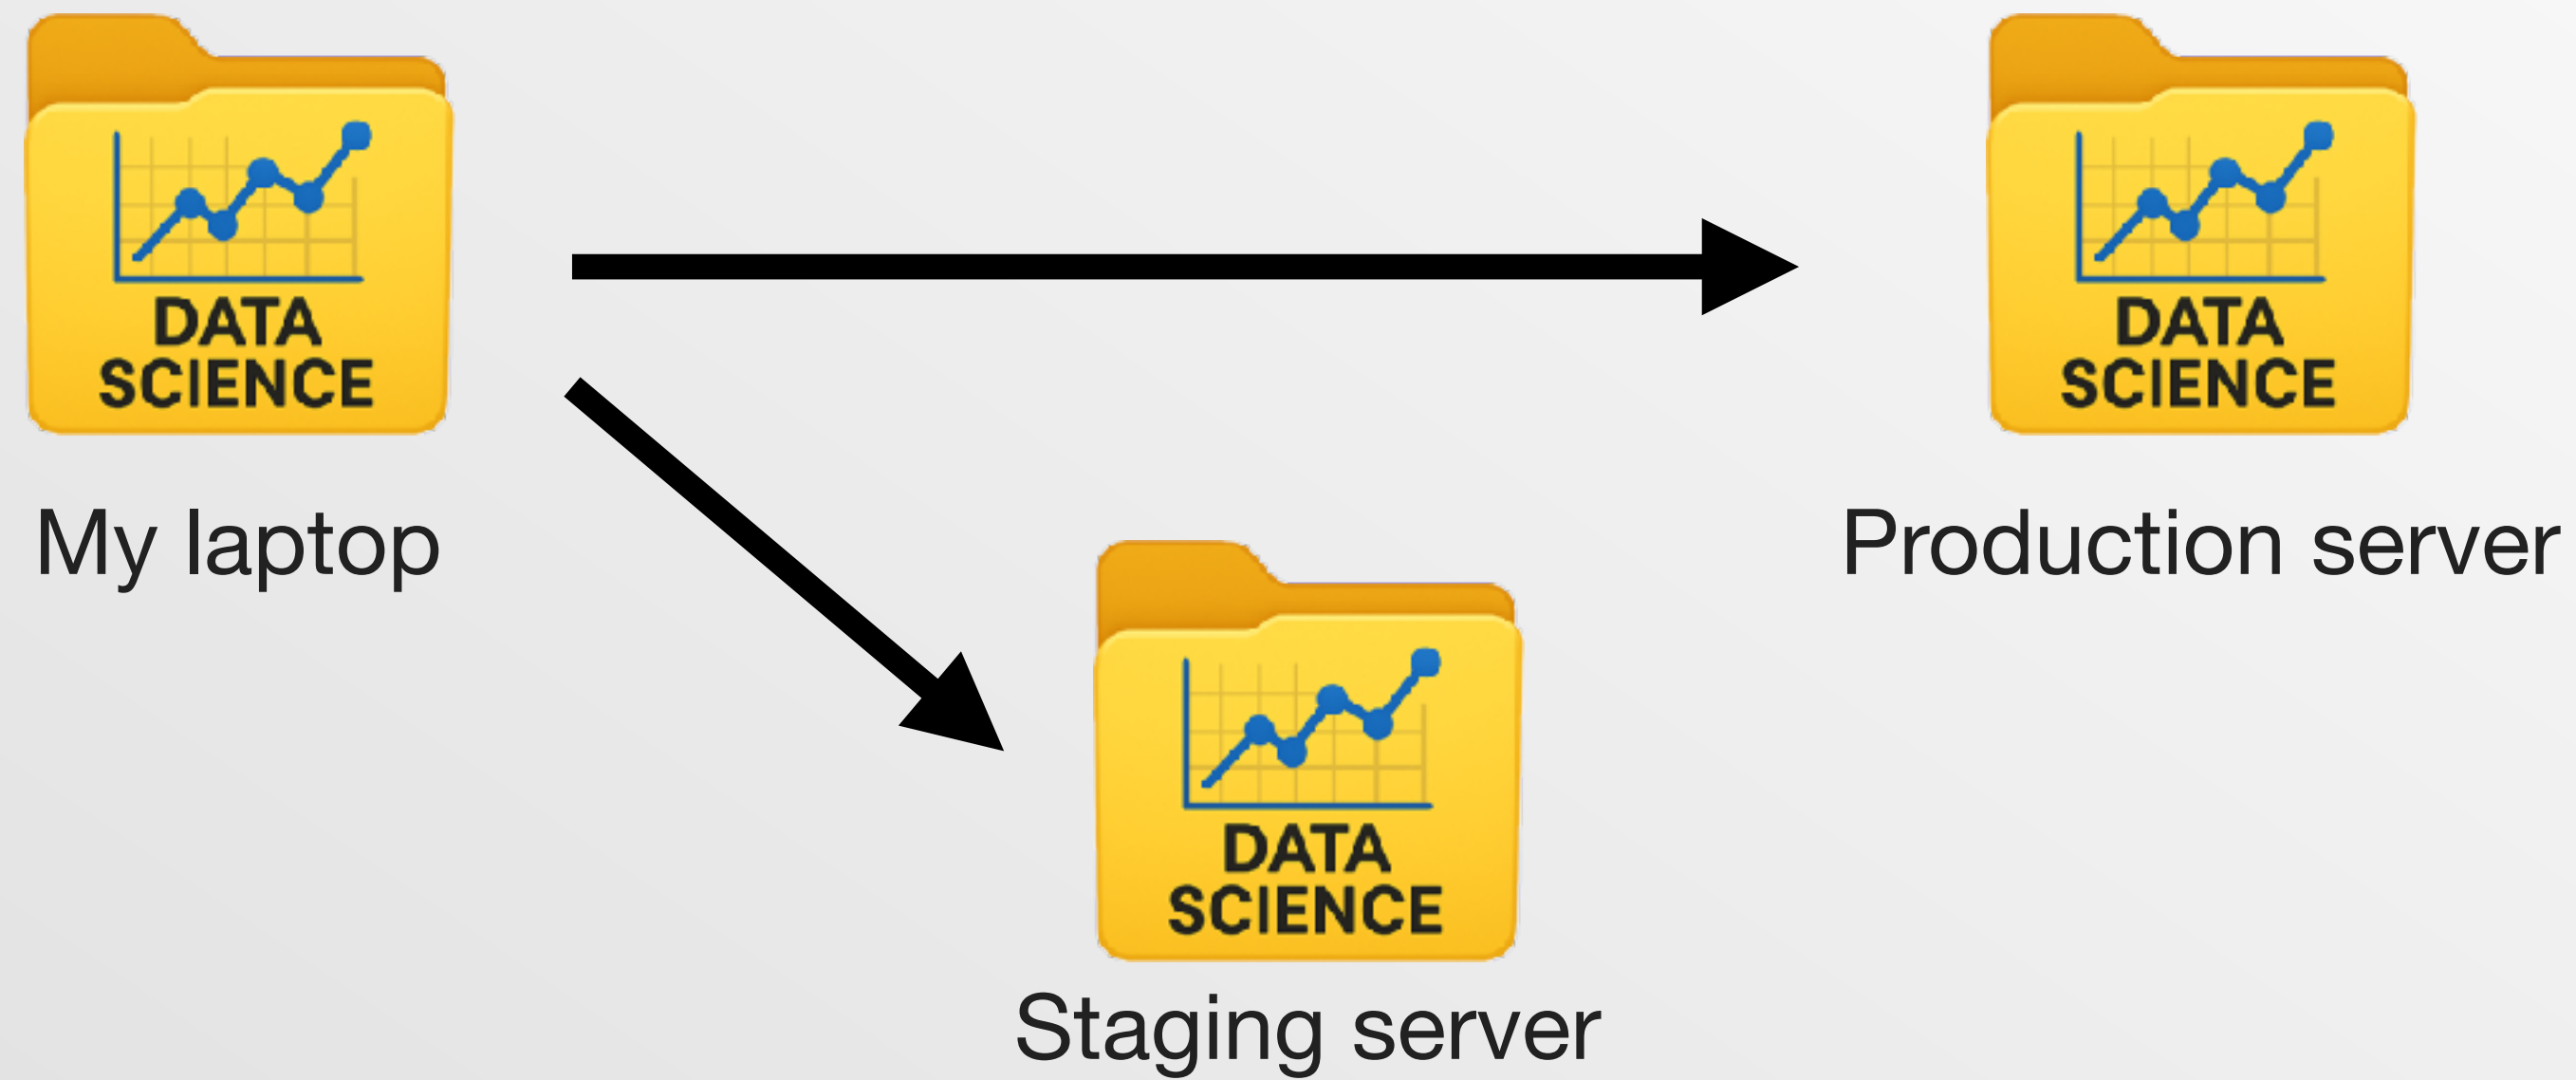


# But what if it's a team project?

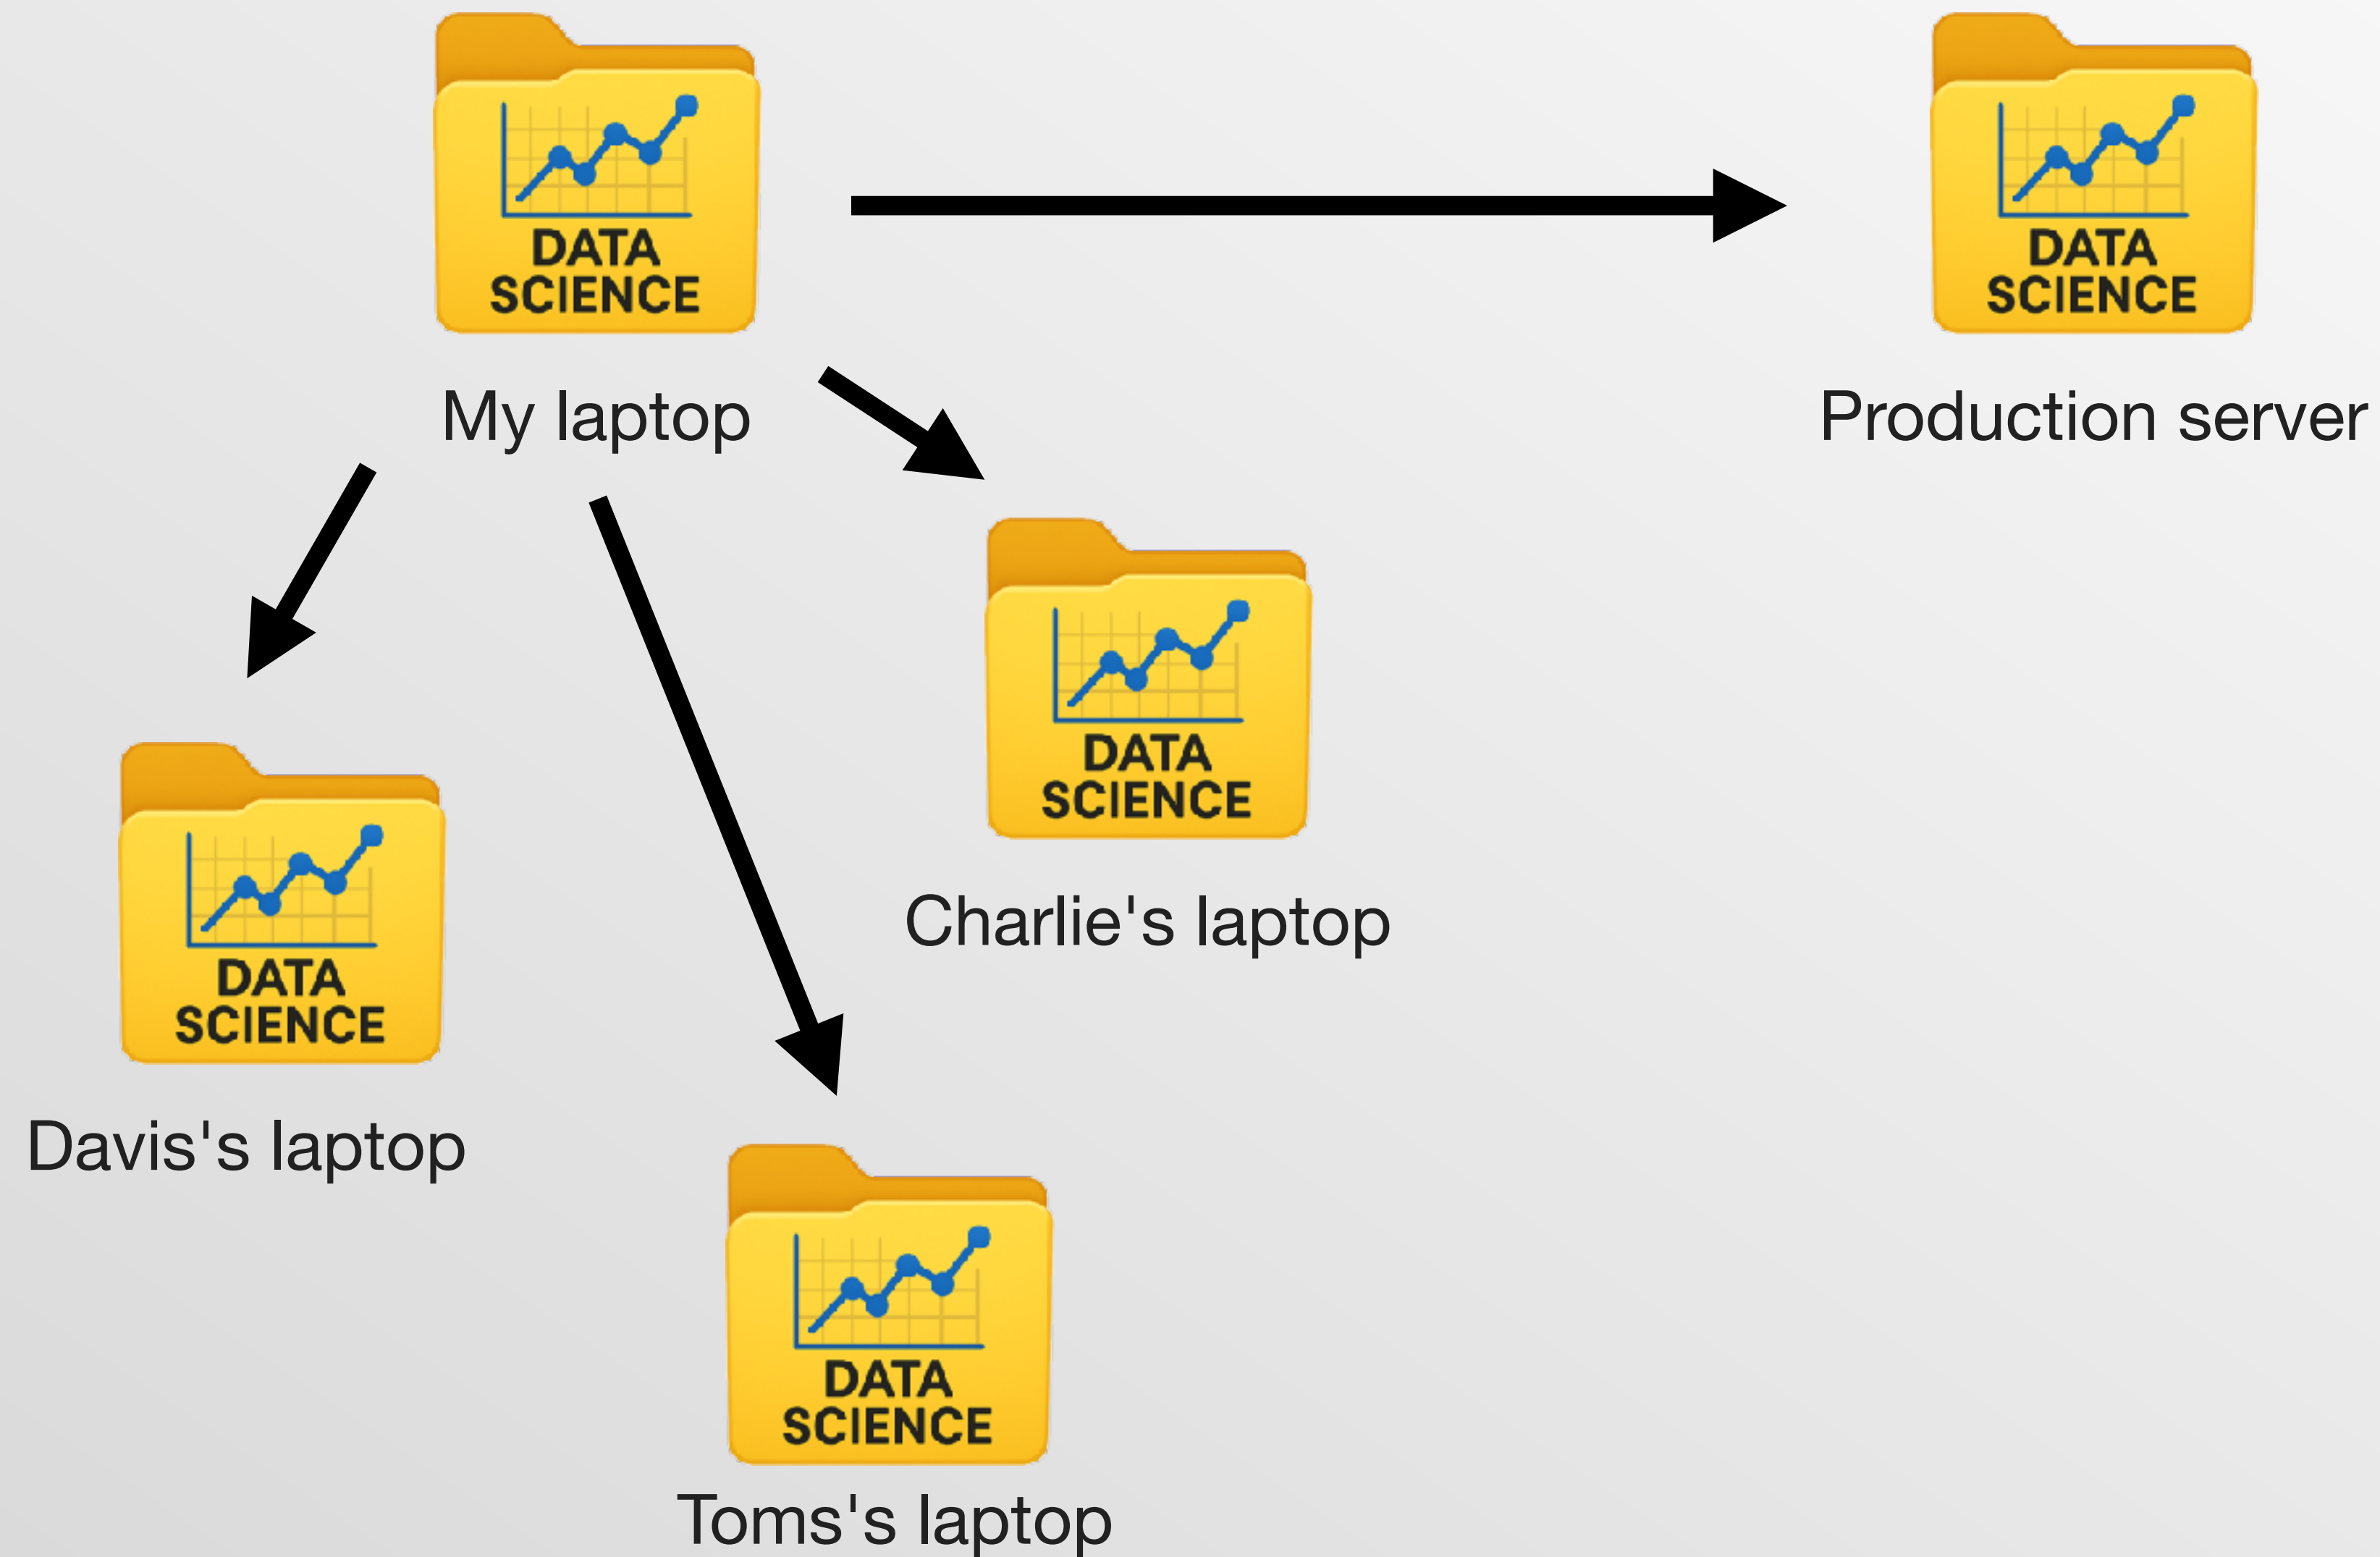




# Does everyone have to get the results back to me?

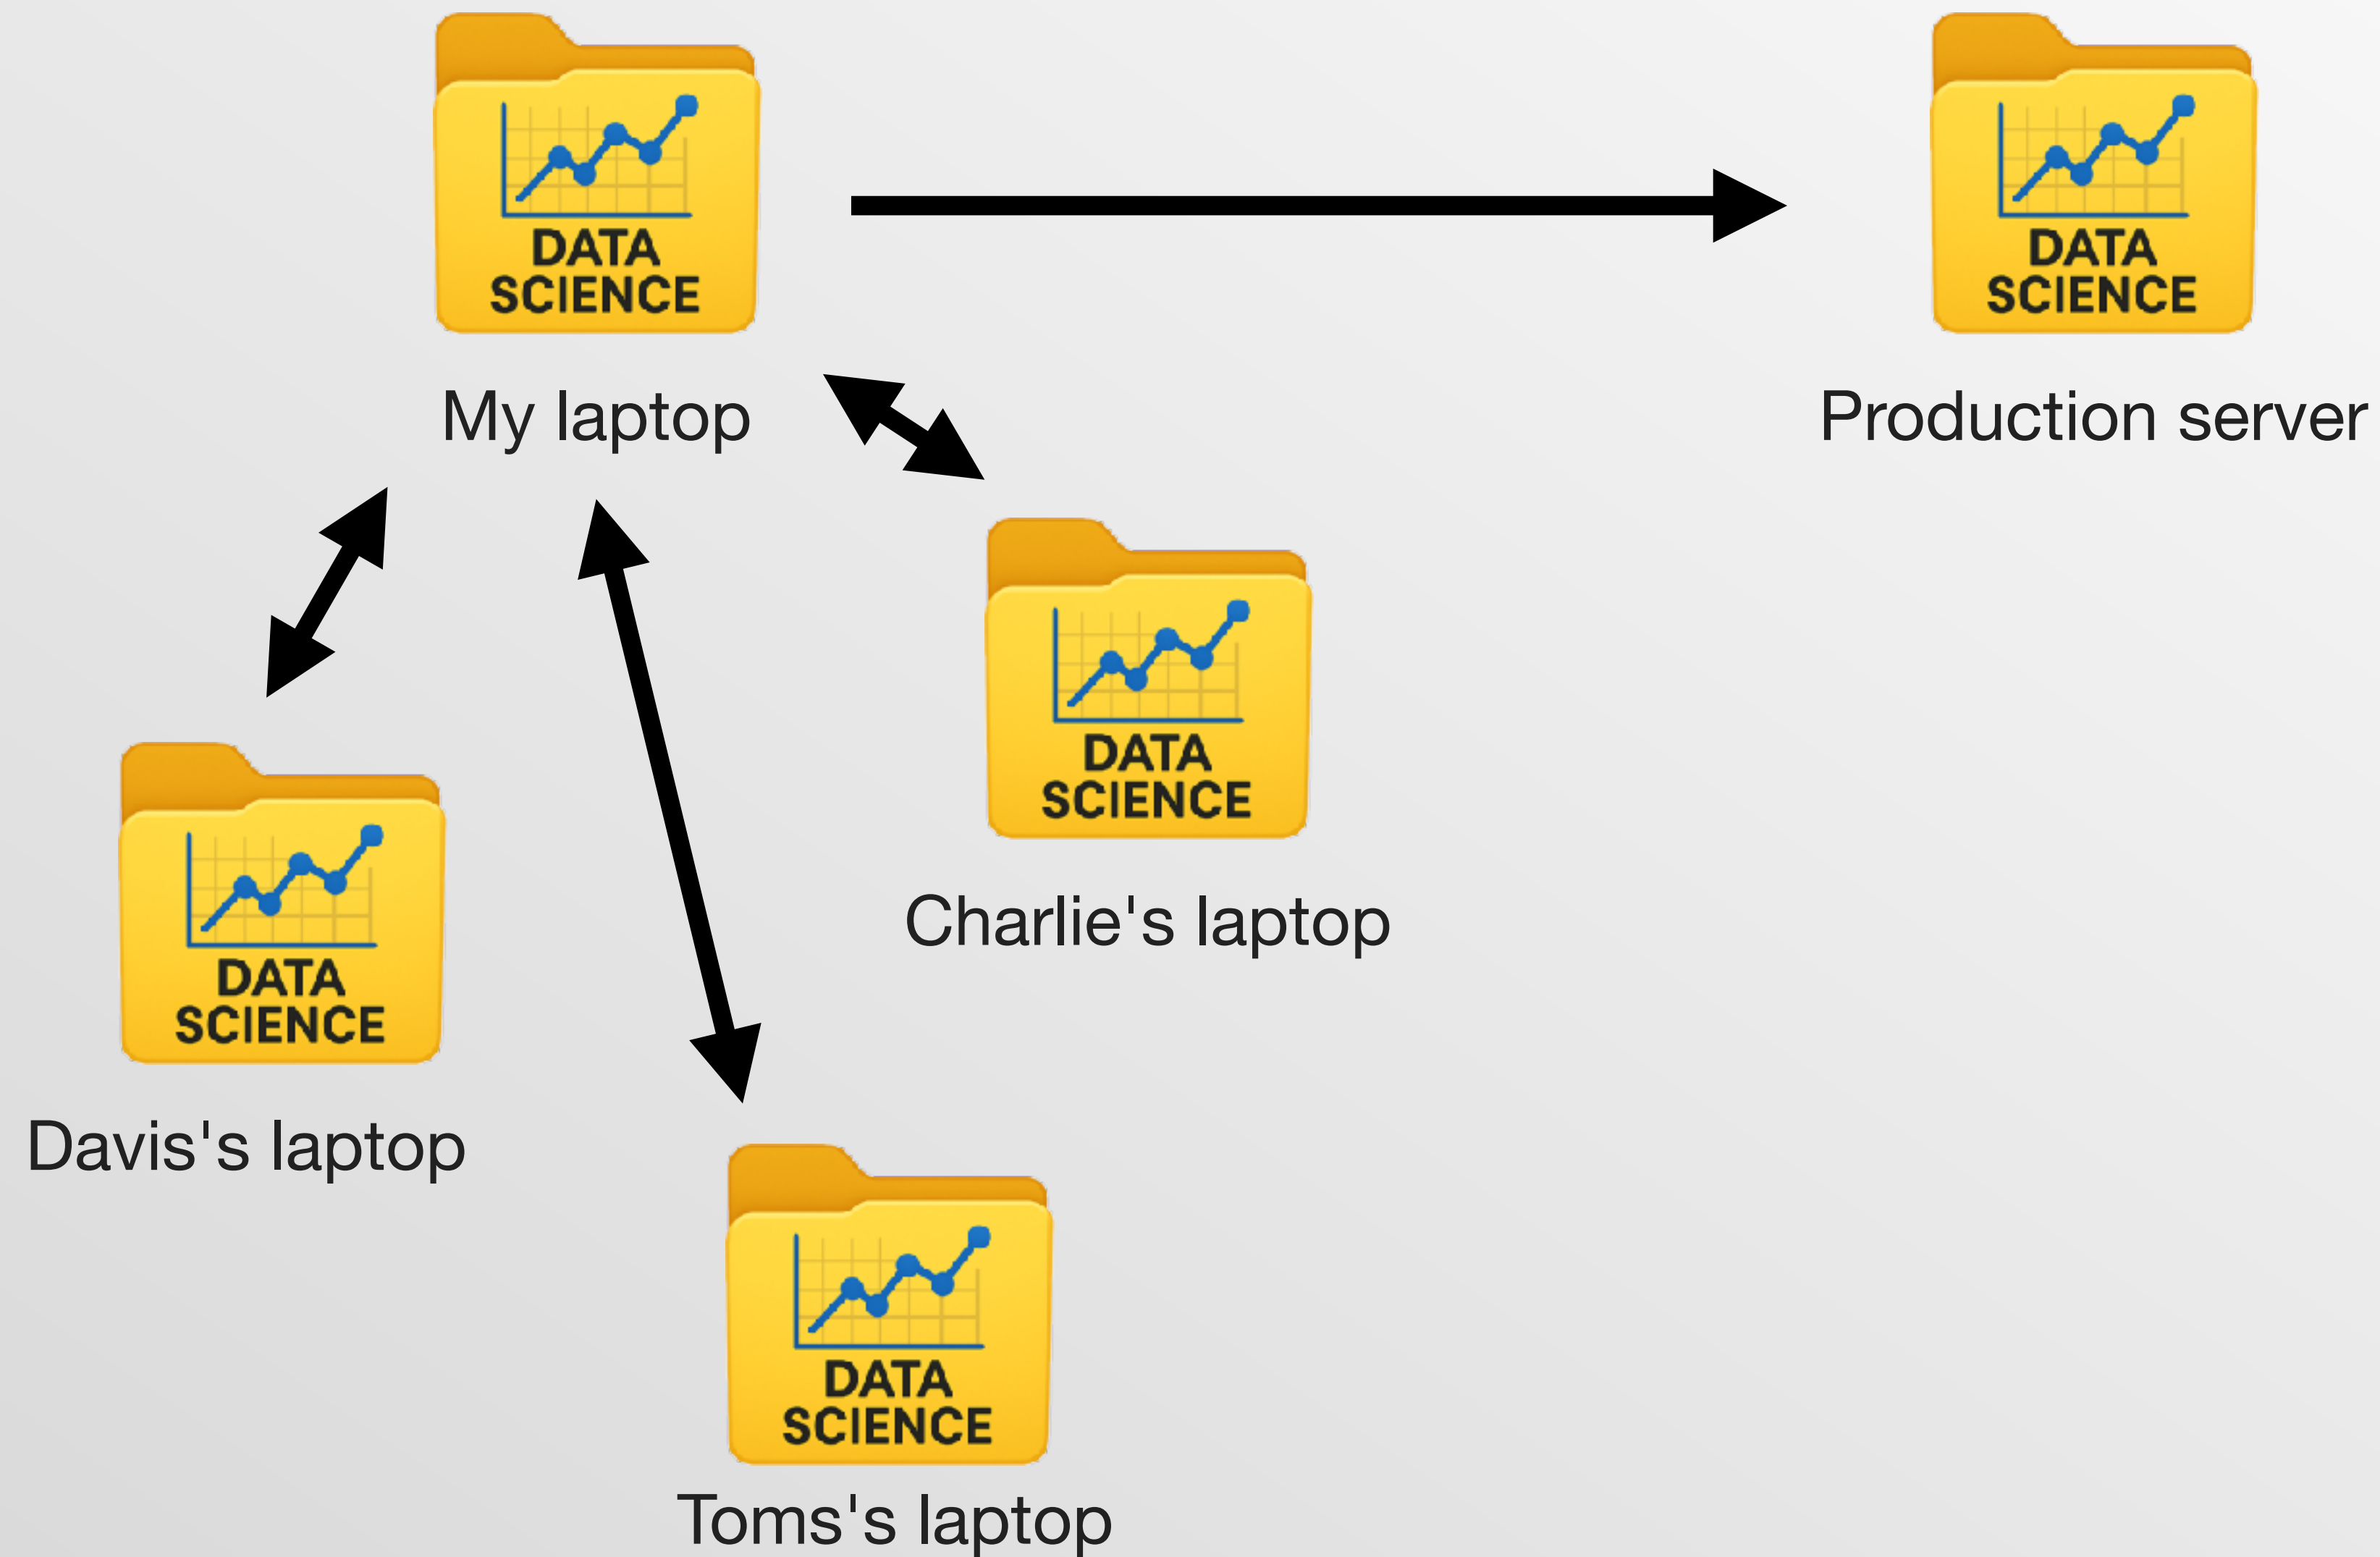





# Can they also share with each other?

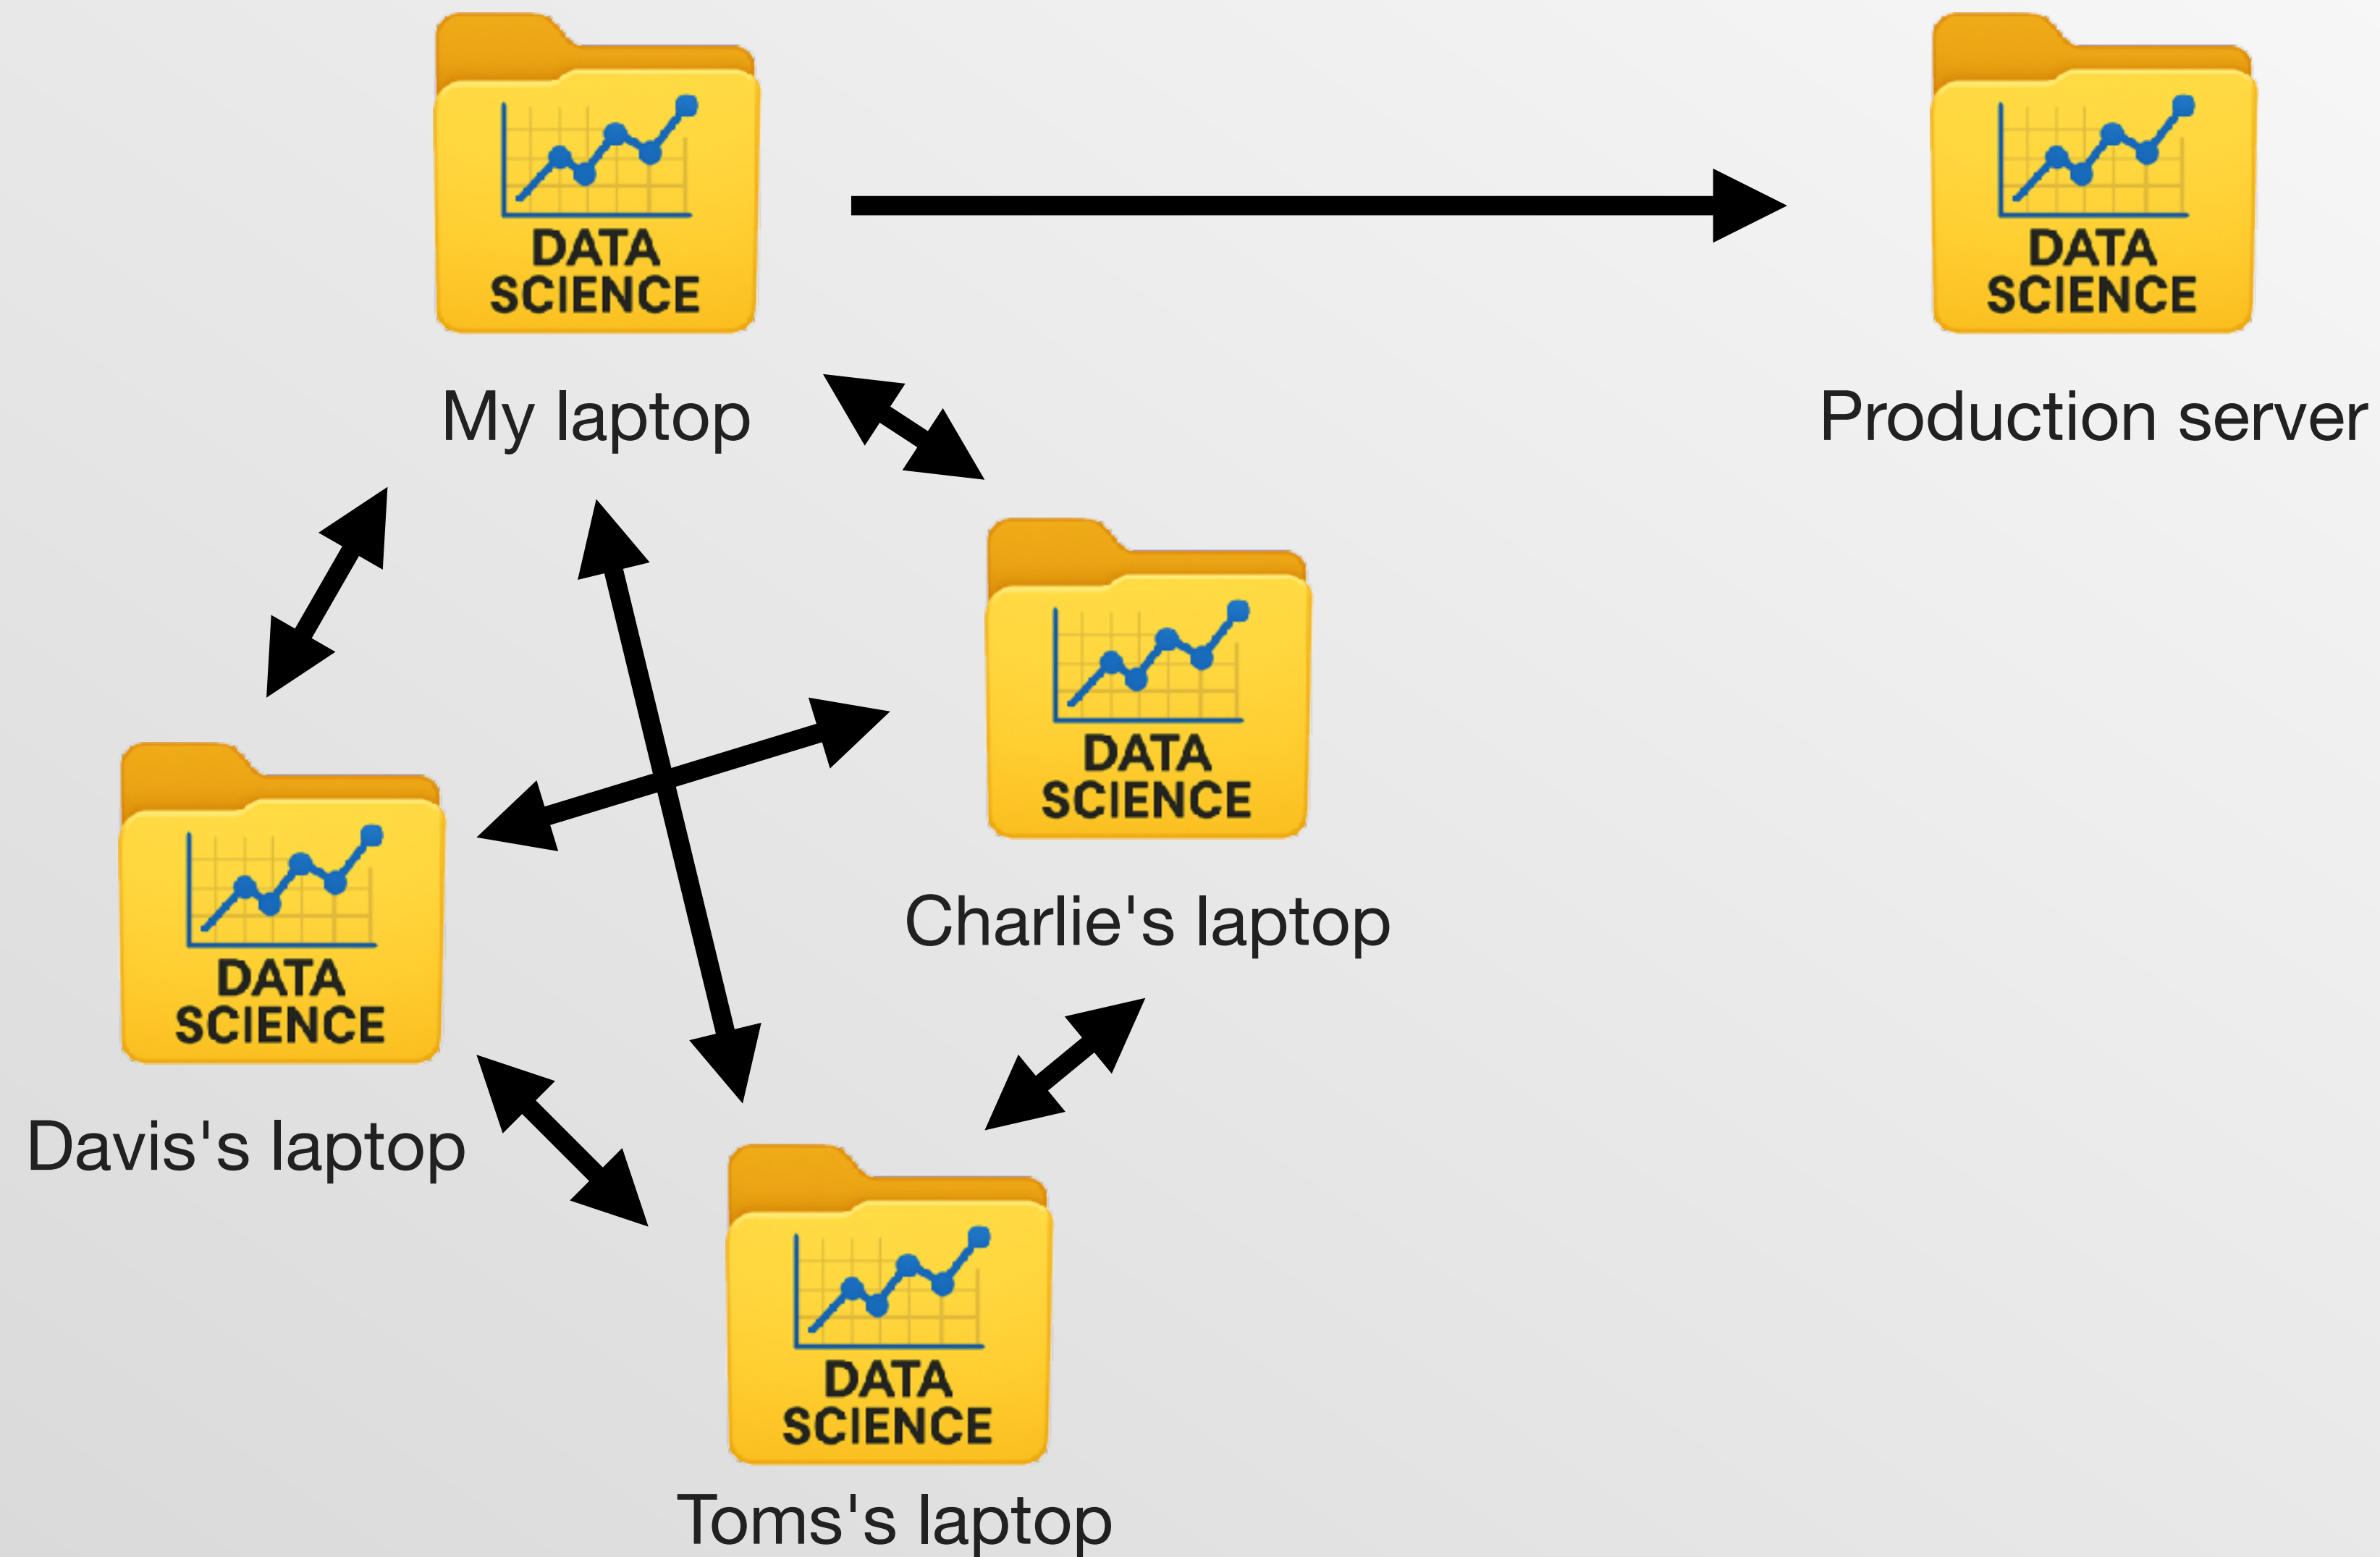

# Maybe they can publish to production too?

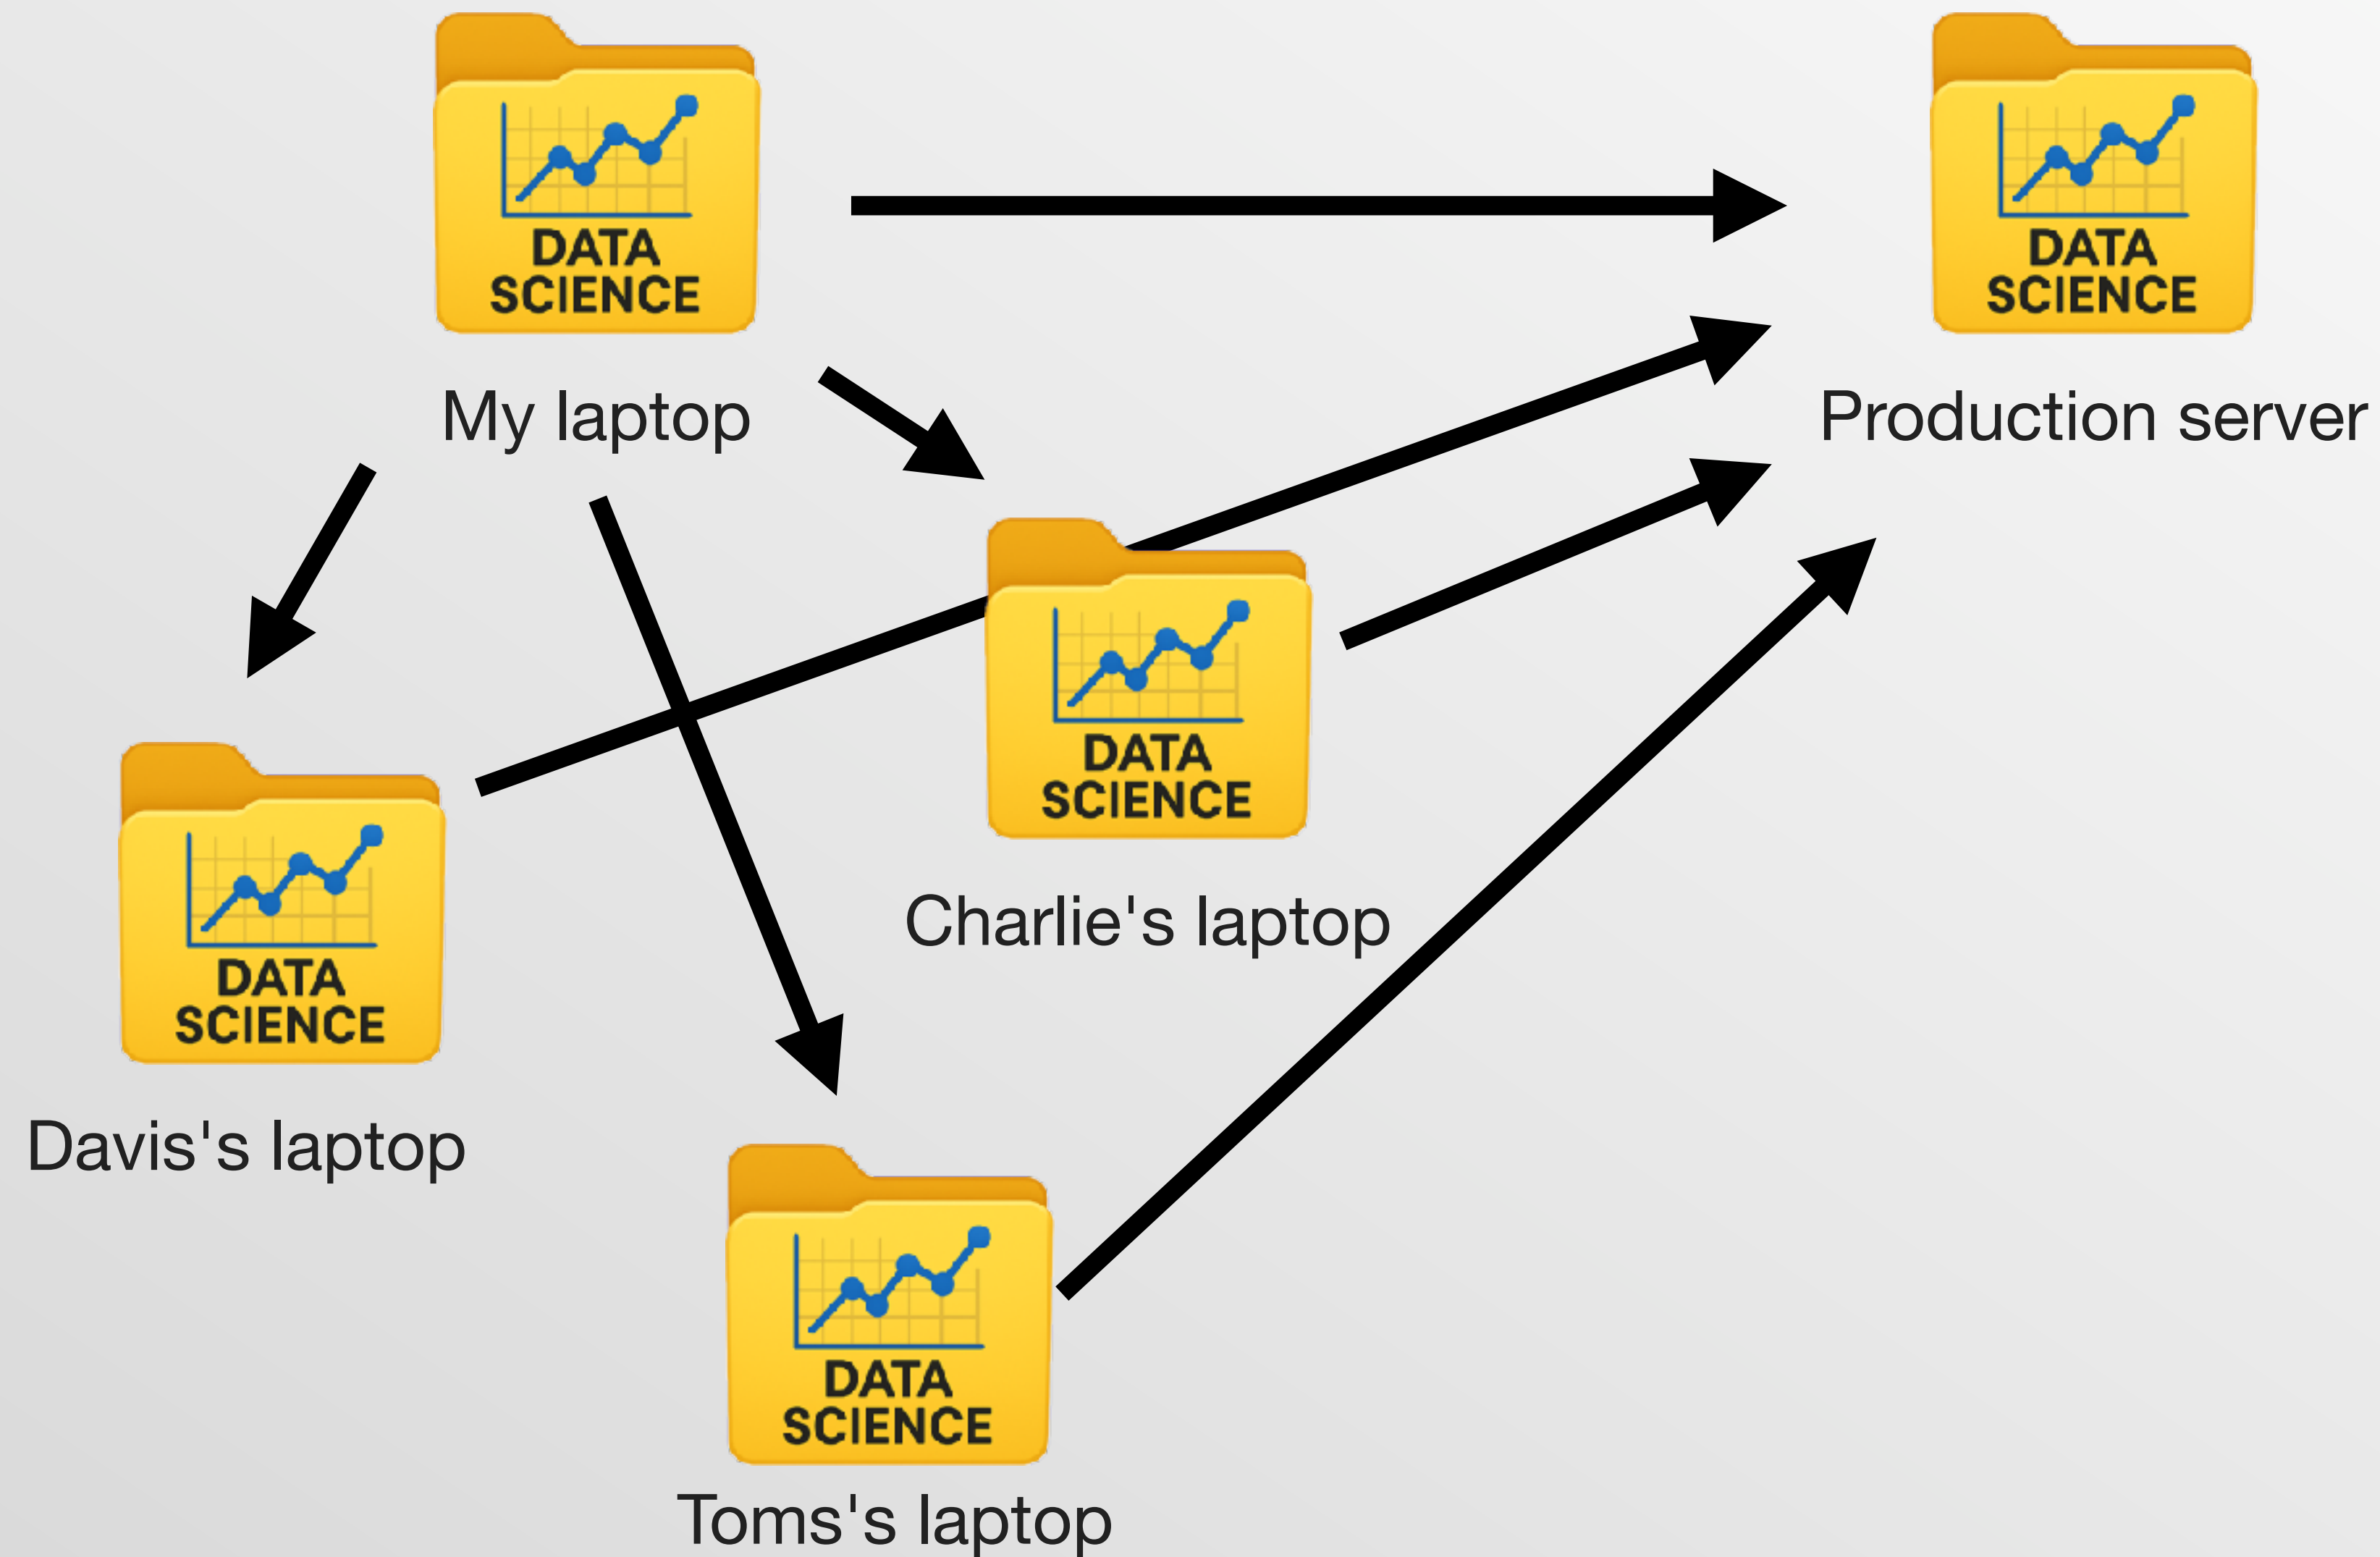

# Maybe we use production as the source of truth?

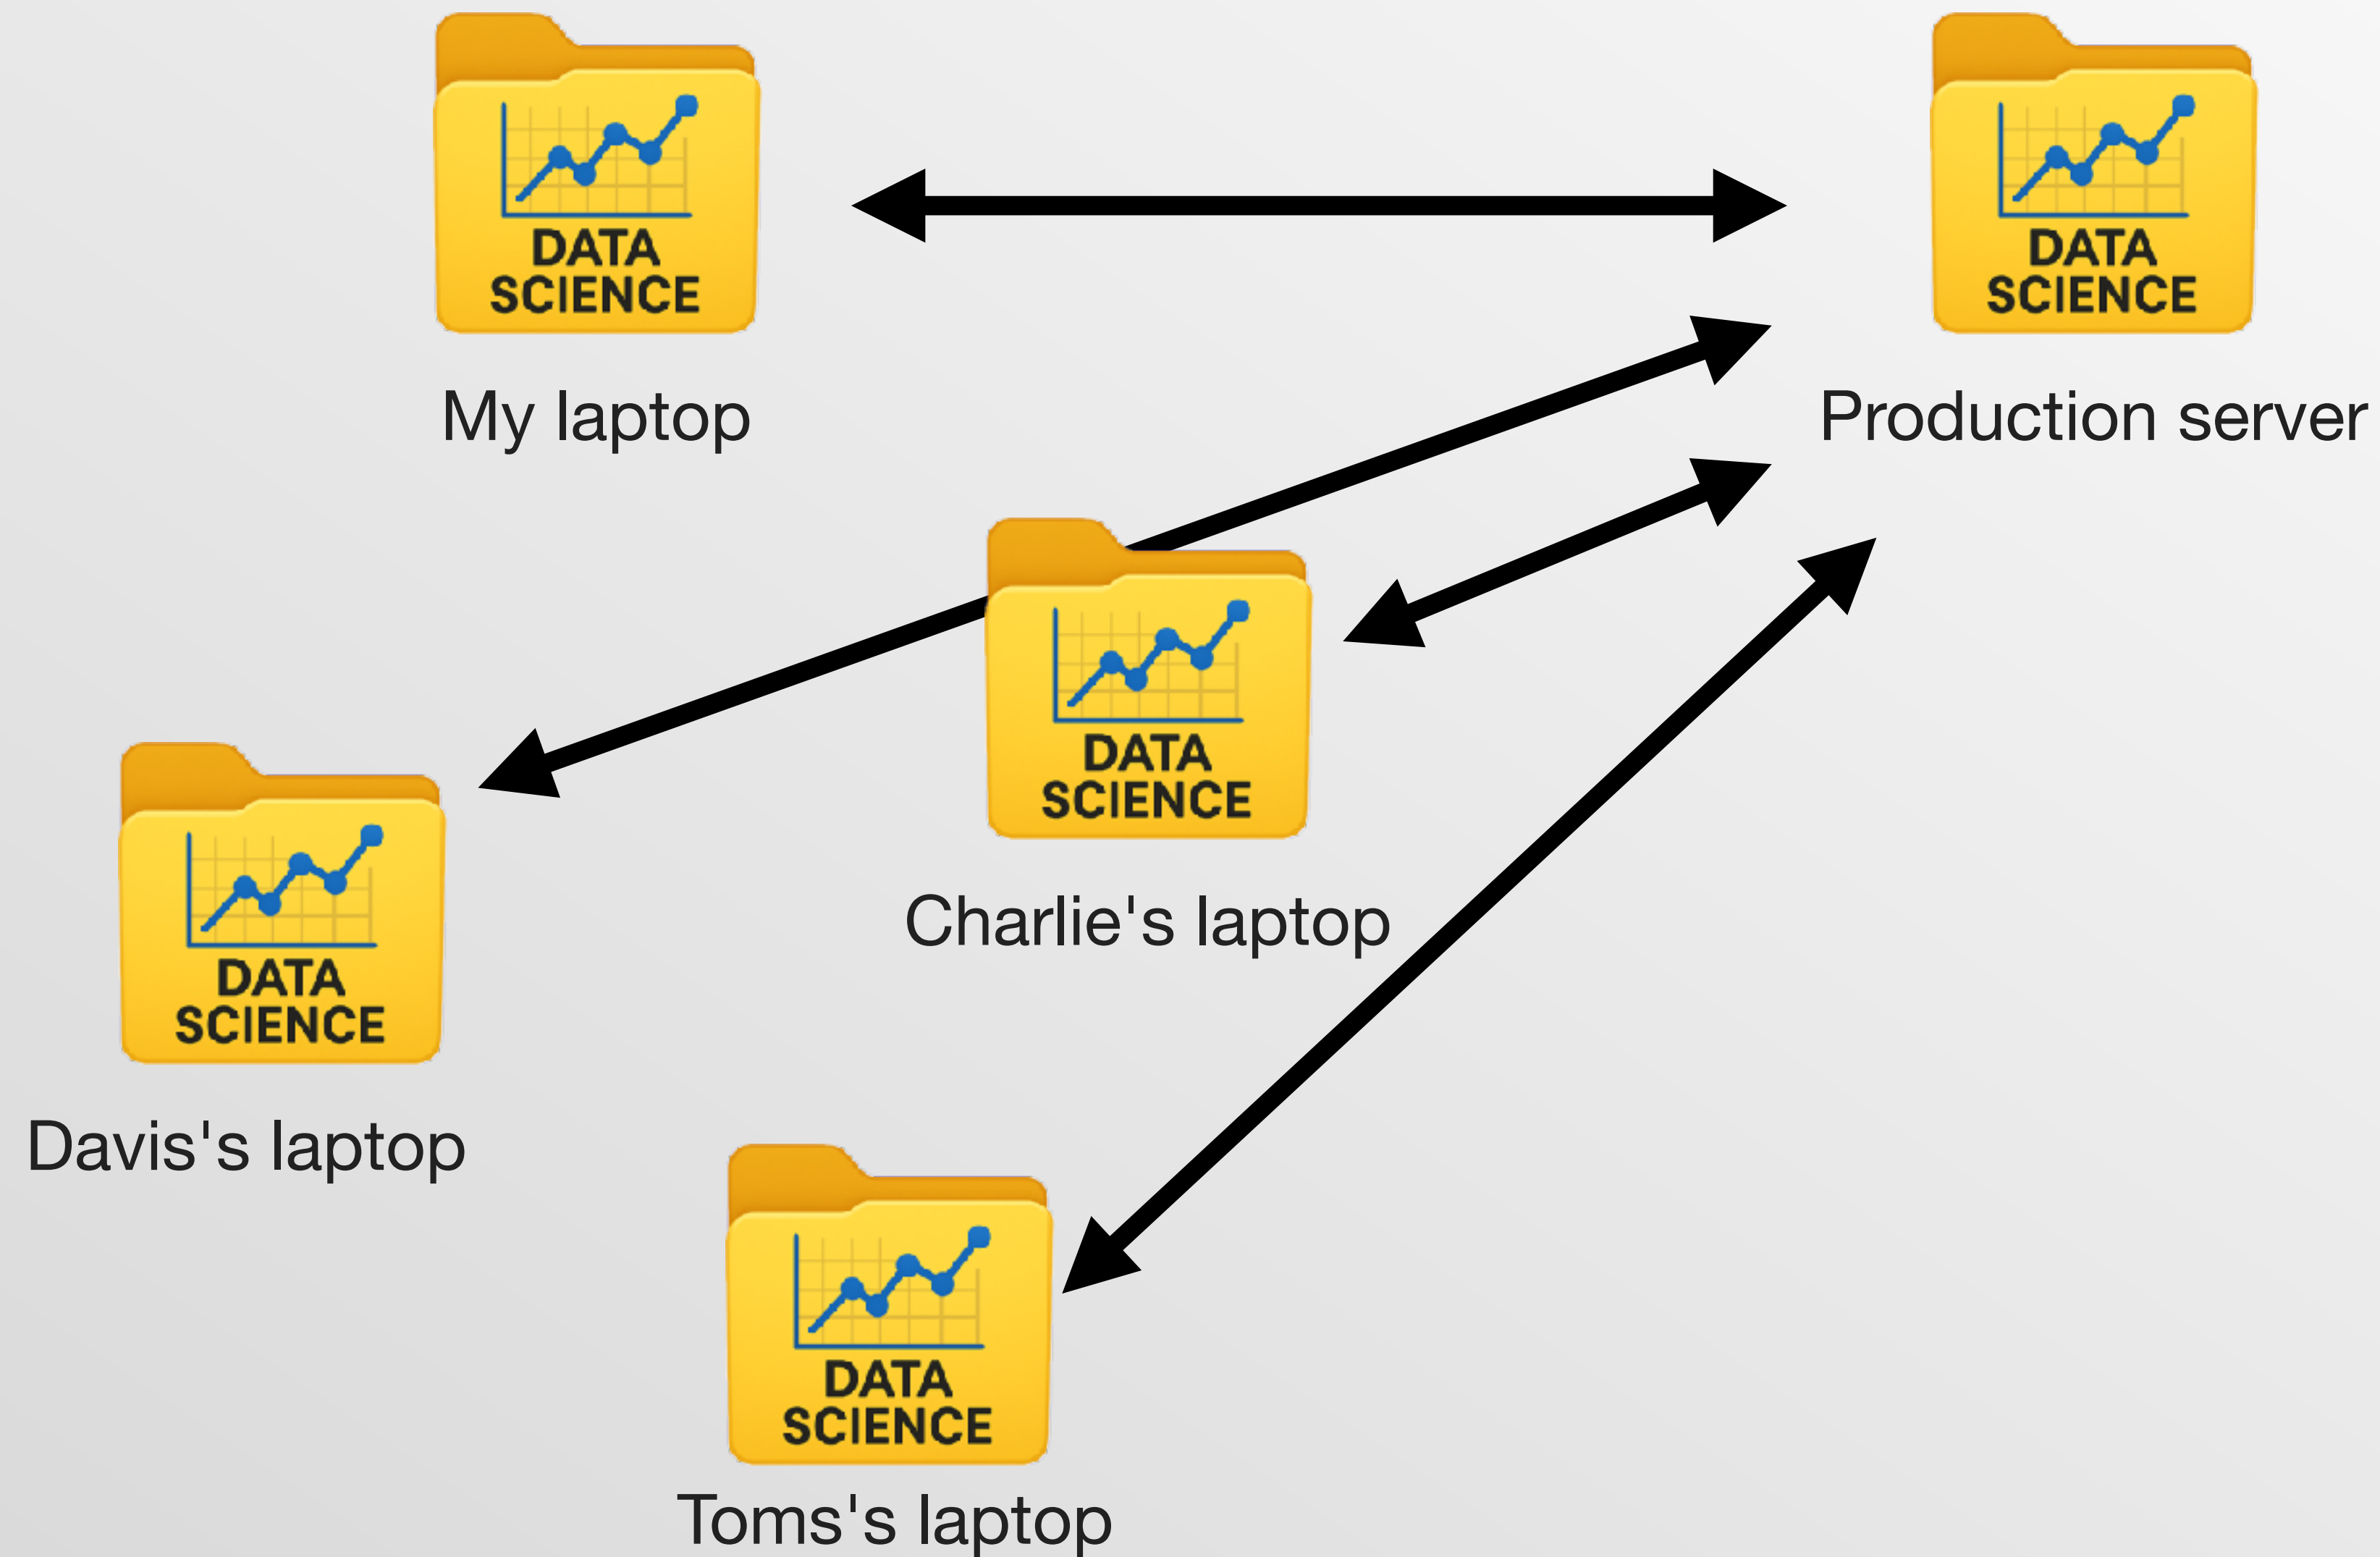


This way lies madness

There is only one true way



# A central git repo must be the source of truth

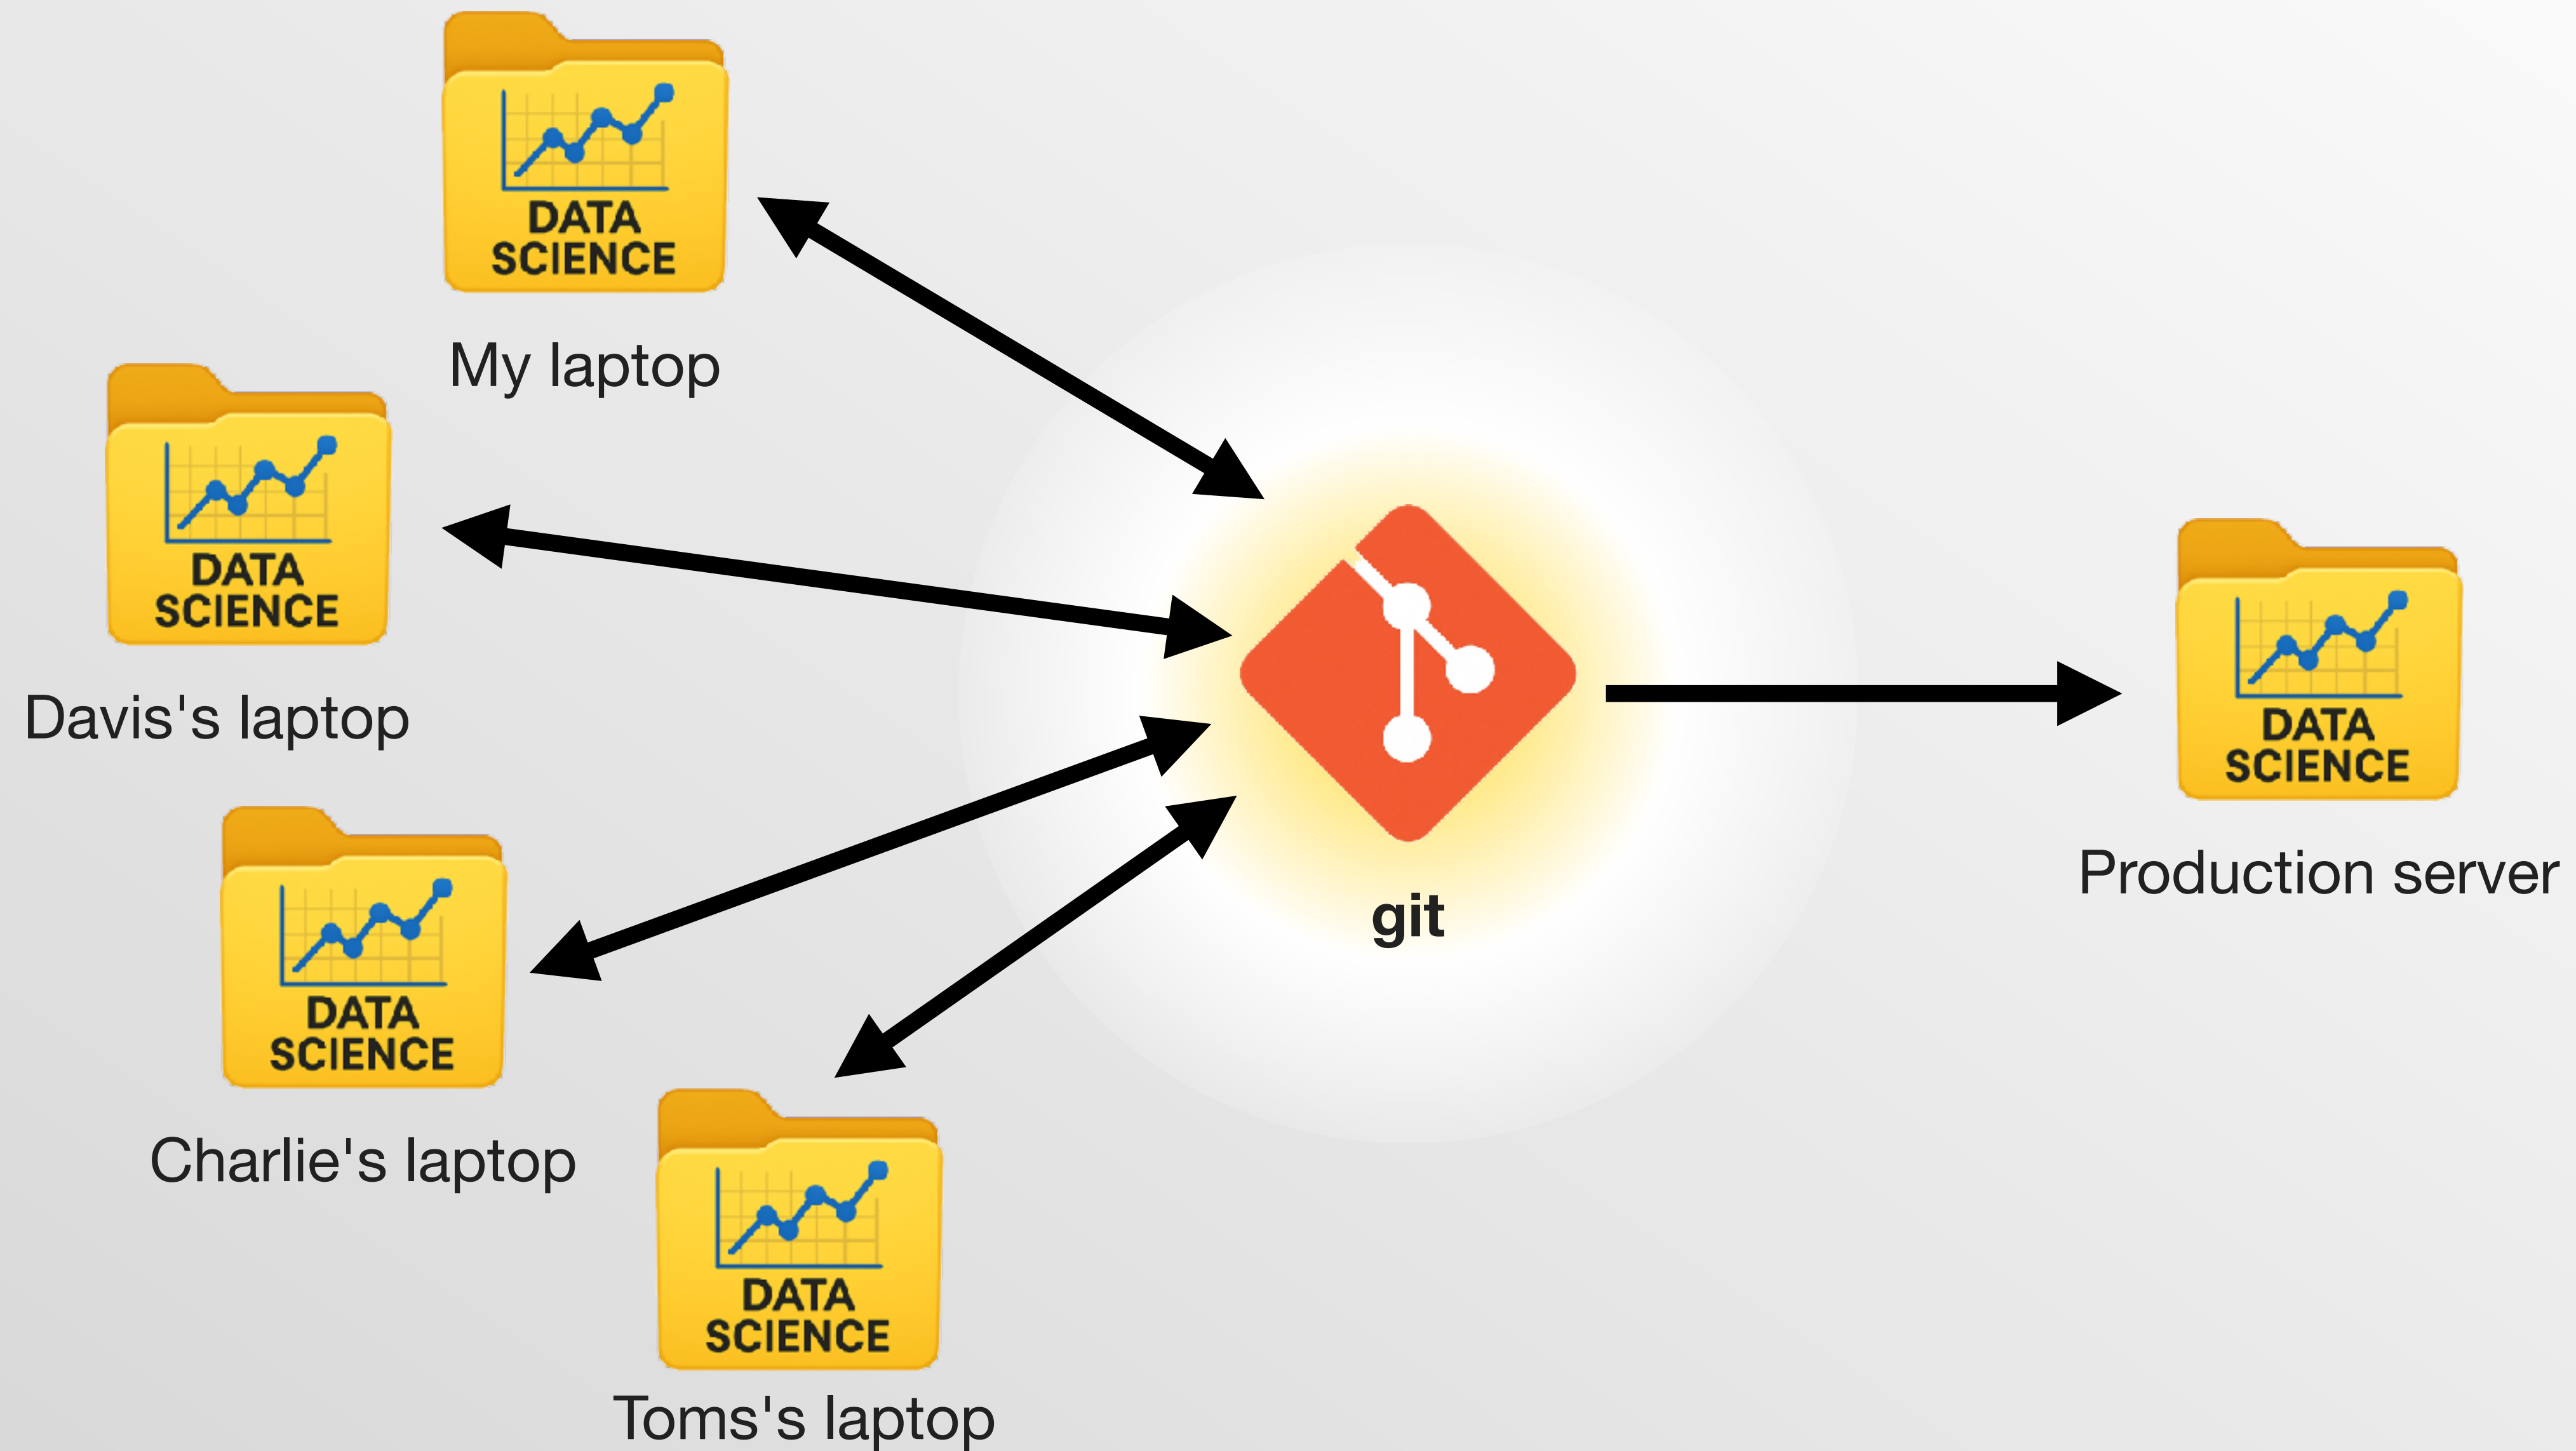

This is why data scientists  
**must** know git

# You also need something like GitHub

- Track issues
- Create and review pull requests
- Readable project documentation with a README
- Automated testing (e.g. CI/CD)
- (Something like GitHub = GitLab, Bitbucket, Azure DevOps.  
If you don't have it, advocate for it!)



# Project first steps

```
# Create a new project
```

```
create_project("~/desktop/dashboard")
```

```
# Set up it to use git and GitHub
```

```
use_git()
```


```
use_github()
```

# Your turn

- Create a new project called **diamonds**
- Set up git
- Publish it to GitHub
- (We'll add some content shortly)

# Automated deployment

# This our next topic

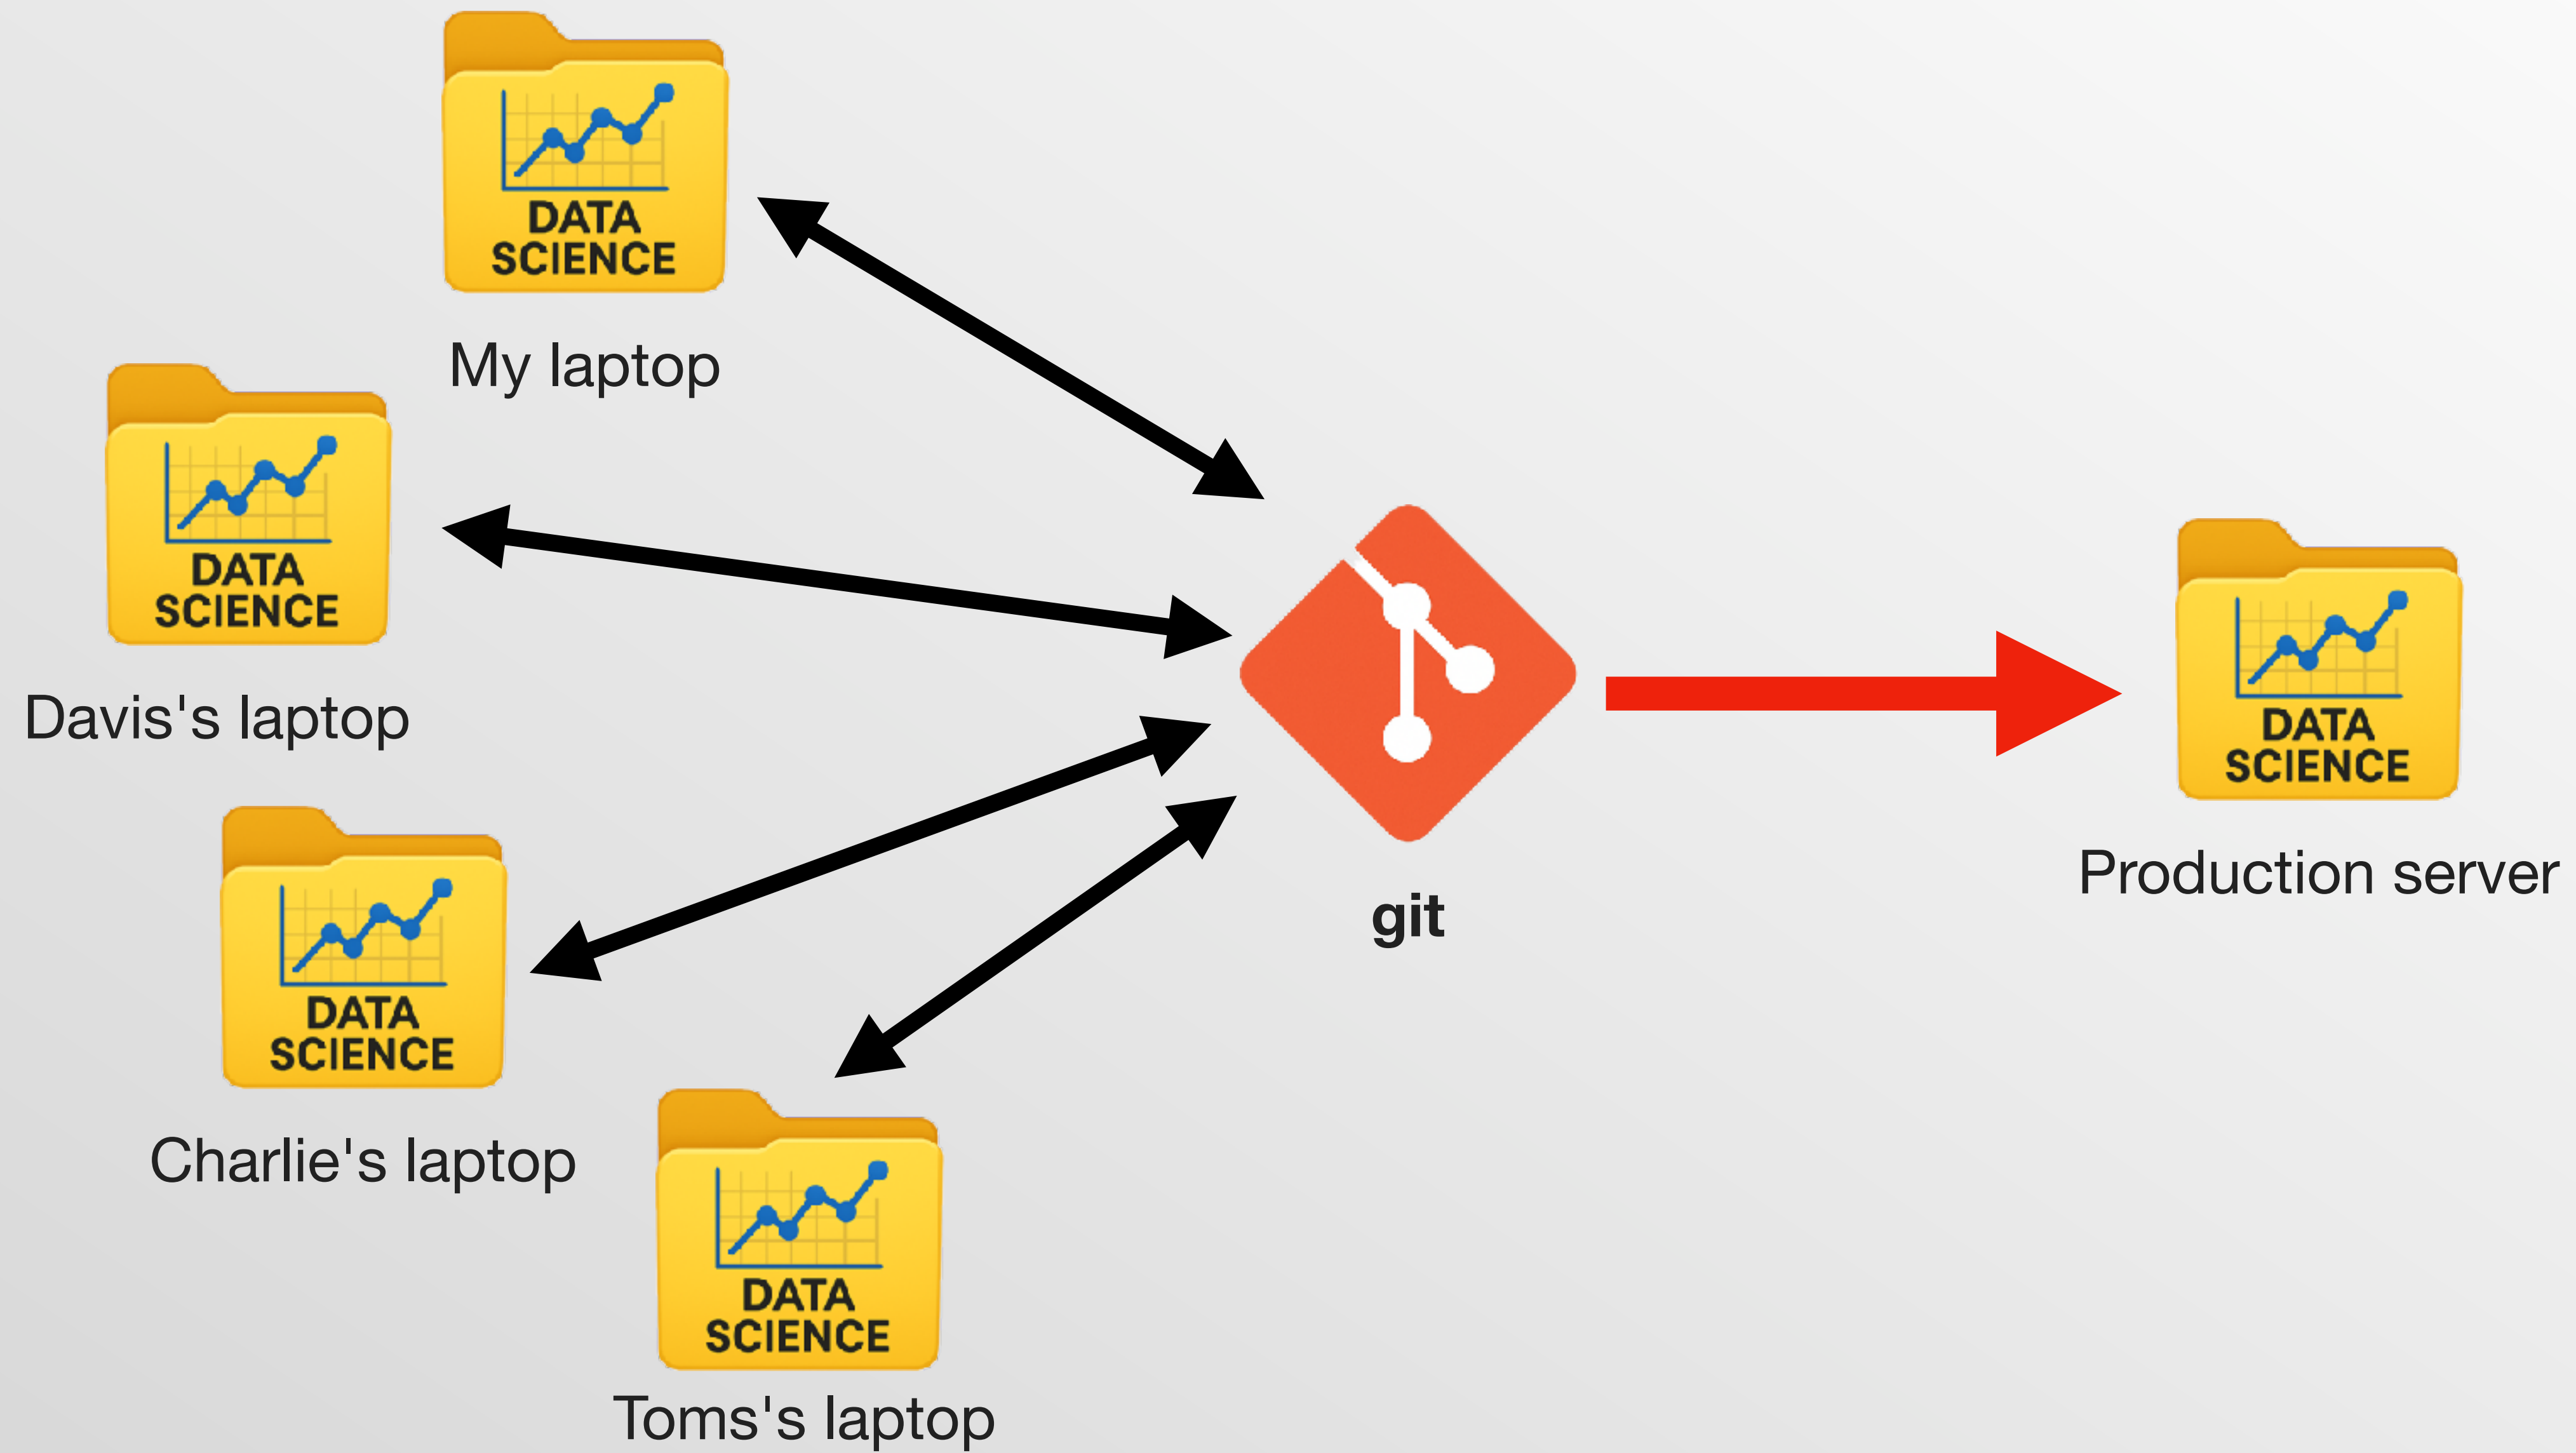

NO POINT AND CLICK

# Deployment options

---

# The details of deploying code vary tremendously



DIY

GitHub  
Actions

Posit  
Connect  
Cloud

Posit  
Connect

shinyapps.io

rpubs.com

quartopub.com

I want to give you experience that you can apply elsewhere



DIY

**GitHub  
Actions**

**Posit  
Connect  
Cloud**

Posit  
Connect



# Two useful categories of production job

Batch	Interactive
R script, Rmd, qmd	shiny app, plumber API
Generate report, prep data, fit model, send notification	Explore data, score model
Run on schedule, or after another job completes	Run on demand
Can be computationally intensive	Best when computationally light
Usually single process	Might spawn multiple runners depending on demand + setup

# Examples

- A dashboard might be a batch job (e.g. flexdashboard, quarto dashboards) or an interactive job (e.g. shinydashboard, shiny + bslib).
- If your interactive job is slow, a powerful and general technique is to pair it with a batch job that performs the heavy computation and saves the results.
- You could render RMarkdown reports interactively by creating a shiny app that calls `rmarkdown::render()` (this is effectively how parameterised reports work in Posit Connect).

# GitHub actions

- Free for public repos, so great for personal projects and learning. Even if you don't use actions, you probably still use Git/GitHub.
- Tidyverse team maintains <https://github.com/r-lib/actions>, which we use primarily for package development, but also supports R in production on GitHub.
- Mid-level, so helps you understand what's going on, without getting too bogged down in the details.
- Only suitable for **batch** jobs.

# Posit Connect Cloud

- Eternal free plan for public projects.  
Various paid options for personal + org usage.
- Growing towards support for all Posit Connect features.
- Most useful for interactive jobs  
(scheduled + parameterised reports coming soon)
- High-level, it takes care of all the details for you.

# If you DIY:

- Use a docker container to capture specific OS version and system dependencies.
- Use rig to install R.
- Use pak to install R packages and system dependencies.
- Use P3M to ensure that you get binaries.  
(e.g. `pak::repo_add(CRAN = "PPM@latest")`; rig does this for you)

# GitHub actions

---




# Personal examples

- <https://github.com/hadley/available-work>: scrapes an artist's website and notifies me when new work is available.
- <https://github.com/hadley/houston-pollen>: scrapes daily pollen data and aggregates it into a yearly parquet file.
- <https://github.com/hadley/cran-deadlines>: turns CRAN deadline data into a Quarto dashboard.



# GitHub action basics

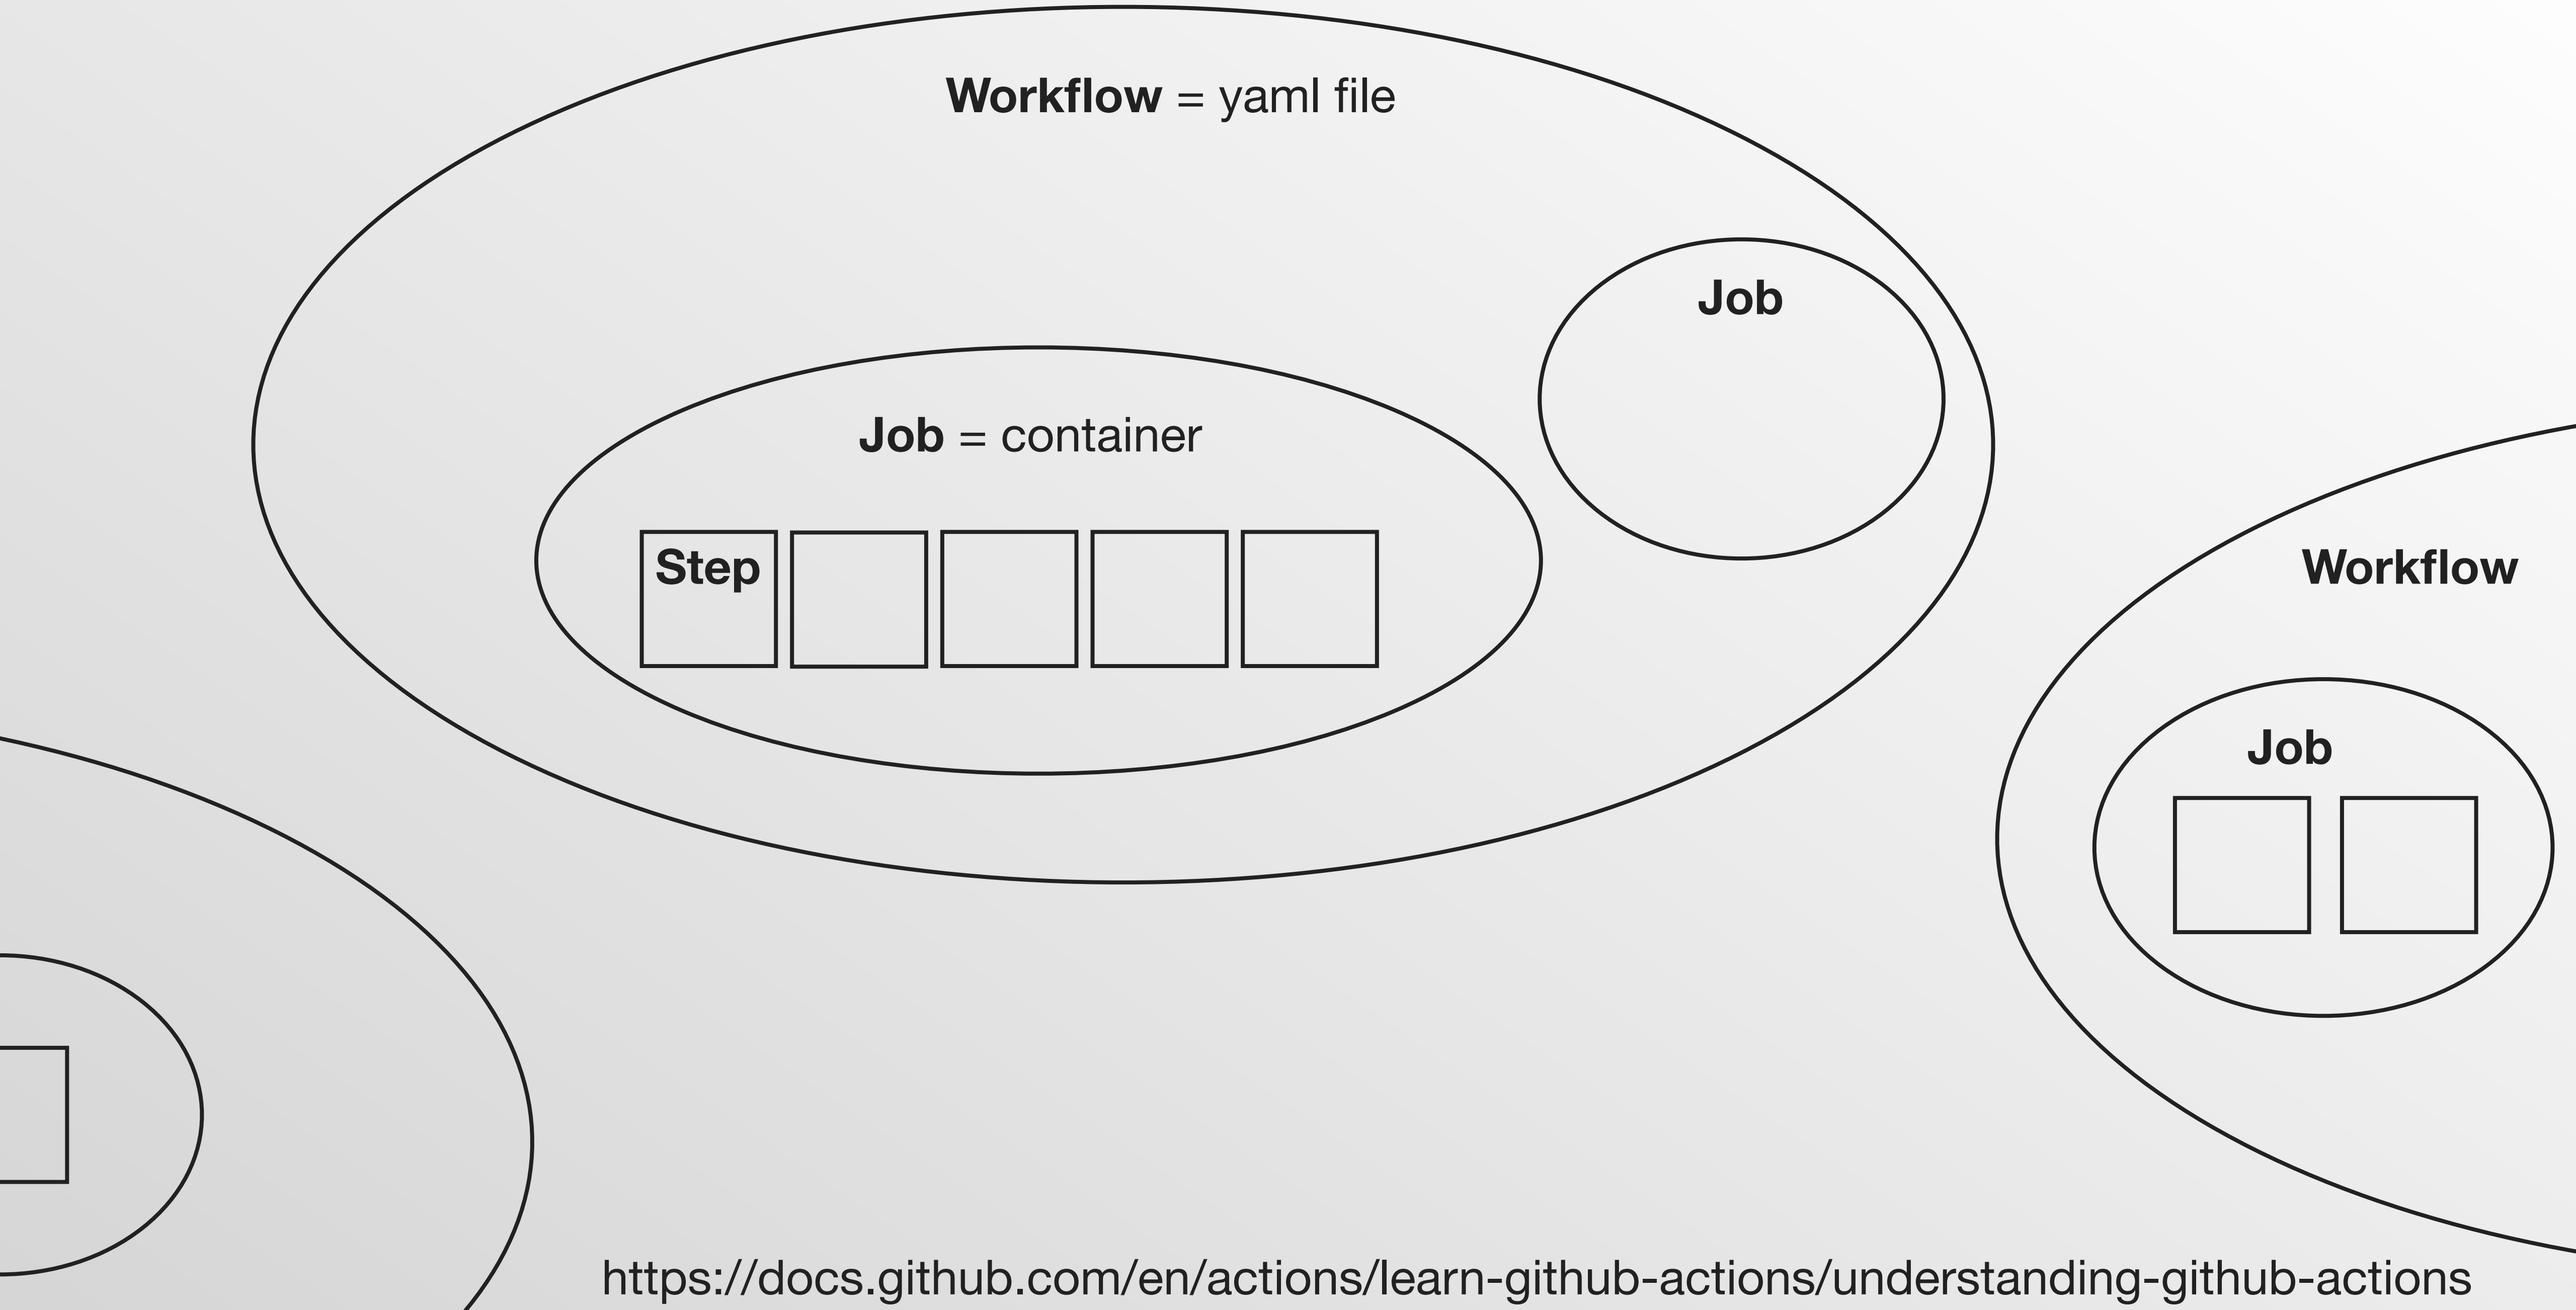

# There are three fields you'll see in every workflow file

# In `.github/workflows/render.yml`

**name:** `render.yml`

# when to run

**on:**

# what to do

**jobs:**

filename = <b>foo.yml</b> action name = <b>foo.yml</b> job name = <b>foo</b>
--

# on tells GHA when to run your code

**on:**

```
# Run when code pushed to GitHub
```

```
push:
```

```
# Run when the user asks for it
```

```
workflow_dispatch:
```

```
# Run at 9:23pm Monday-Friday
```

```
schedule:
```

```
- cron: '23 21 * * 1-5'
```

# Advice

- Usually want `push`, `workflow_dispatch`, and `schedule`. Might also want `pull_request`.
- Use <https://crontab.guru/> or an LLM to design/check your cron tab specification.
- Always include a comment describing it in human language!
- Scheduled job will only run for 60 days after last commit to repo.
- Always use a minute offset  
`sample(setdiff(0:59, seq(0, 60, by = 5)), 1)`

# Generate crontab specifications for:

- 9am every Friday
- On the first and 15th of every month
- Every 30 minutes on the weekend
- Every 3 days at 10:23am
- Every hour during the work week (i.e. 9am-5pm Mon-Fri)

Hint: LLM's do great at these

# 9am in WHAT TIMEZONE?


```
library(lubridate)
```


```
my_time ← ymd_hm("2024-08-15 09:00", tz = "America/Chicago")
```


```
with_tz(my_time, "UTC")
```


```
# As far as I can tell you can't account for daylight savings time
```


# Posit Connect is a clear winner here


  
Info

  
Access

  
Runtime

  
Schedule

  
Tags

  
Vars

☒ Schedule output for default

Timezone

(GMT-07:00) America - Los Angeles

Start date & time

Jul 28, 2023

1

:

25

am

pm

[Reset to Local Time](#)



# jobs field tells GHA what to do

jobs:

scrape:

runs-on: ubuntu-latest

permissions:

contents: write

steps:

- uses: actions/checkout@v4

- uses: r-lib/actions/setup-r@v2

with:

use-public-rspm: true

- uses: r-lib/actions/setup-r-dependencies@v2

- name: Fetch latest data

run: Rscript scrape.R

- name: Collapse into yearly parquet files

run: Rscript collapse.R

- uses: stefanzweifel/git-auto-commit-action@v5

What container should the job use

# There are usually three phases

```
- uses: actions/checkout@v4
- uses: r-lib/actions/setup-r@v2
  with:
    use-public-rspm: true
- uses: r-lib/actions/setup-r-dependencies@v2
```

Setup

```
- name: Fetch latest data
  run: Rscript scrape.R

- name: Collapse into yearly parquet files
  run: Rscript collapse.R
```

Execute

```
- uses: stefanzweifel/git-auto-commit-action@v5
```

Publish

# Common setup steps

```
# check out your repo
```

```
- uses: actions/checkout@v4
```

```
# install R
```

```
- uses: r-lib/actions/setup-r@v2
```

Powered by rig

```
  with:
```

```
    use-public-rspm: true
```

```
# install dependency from files/description
```

```
- uses: r-lib/actions/setup-r-dependencies@v2
```

Powered by pak

```
# install dependency from renv lockfile
```

```
- uses: r-lib/actions/setup-renv@v2
```

Powered by renv

```
# install pandoc
```

```
- uses: r-lib/actions/setup-pandoc@v2
```

```
# install quarto
```

```
- uses: quarto-dev/quarto-actions/install-quarto@v1
```

# Common execution steps

- name: Fetch latest data  
run: Rscript scrape.R
- name: Render Rmarkdown  
shell: Rscript {0}  
run: rmarkdown::render("myfile.Rmd")
- name: Render Quarto directory  
run: quarto render

# Common publishing steps

- `uses: stefanzweifel/git-auto-commit-action@v5`
- `name: Publish to GitHub pages 🚀`  
`if: github.event_name ≠ 'pull_request'`  
`uses: JamesIves/github-pages-deploy-action@v4.5.0`  
`with:`
  - `branch: gh-pages`
  - `folder: docs`

# General advice

- No one remembers what the steps look like. You either copy them from an existing repo or hope that an LLM gives you good advice.
- We have a bunch of examples at <https://github.com/r-lib/actions/tree/v2-branch/examples>
- Comment heavily so when you come back it, you can remember what you were trying to do.
- Don't expect to get it right on the first try!



# Your turn

- Find the actions in each of the repos below. What do they do? What's the same and what's different? Can you figure out how they determine which R packages are needed?
- <https://github.com/hadley/houston-pollen>
- <https://github.com/hadley/available-work>



# Fits in naturally with usethis project workflow

```
create_project("~/desktop/diamonds")
```

```
use_git()
```

```
use_github()
```

```
use_github_pages()
```

```
use_github_action(url = "https://github.com/posit-conf-2025/r-  
production/blob/main/1-render-qmd.yaml", save_as = "render.yaml")
```

# Your turn

- Open your diamonds project.
- Add an qmd that draws a plot of the ggplot2 diamonds dataset. Include the current date and time in the output.
- Check that it works locally then push your code to GitHub.
- Add .github/workflows/render.yml and create a DESCRIPTION that defines your dependencies. (What file name should your Rmd use?)
- Push to GitHub then iterate until it works :)
- Stretch goals on the next slide

# Stretch goals

- Replace **on: push** with **on: workflow\_dispatch**. Push to GitHub, and confirm that the action now doesn't run automatically. Manually trigger the workflow from the actions page.
- Create another Rmd and render it too. Add a link to it from index.Rmd.
- Convert your .Rmd to a .qmd and render it with quarto. What do you need to change?

# Posit Connect Cloud

---

<https://connect.posit.cloud/>


# Compared to GitHub Actions

- Takes care of many more details: it picks a docker image for you; you select from a small set of possible job types.
- Capture dependencies with `rsconnect::writeManifest()`
- Either just works or won't work for your use case.
- Current key use case is shiny apps. Does support quarto batch jobs, but not yet compelling because there's no scheduling.
- Uses different/better dependency installation system
- Fast!

# Personal examples

- <https://github.com/hadley/eggnoqr>
- <https://github.com/hadley/madlib>



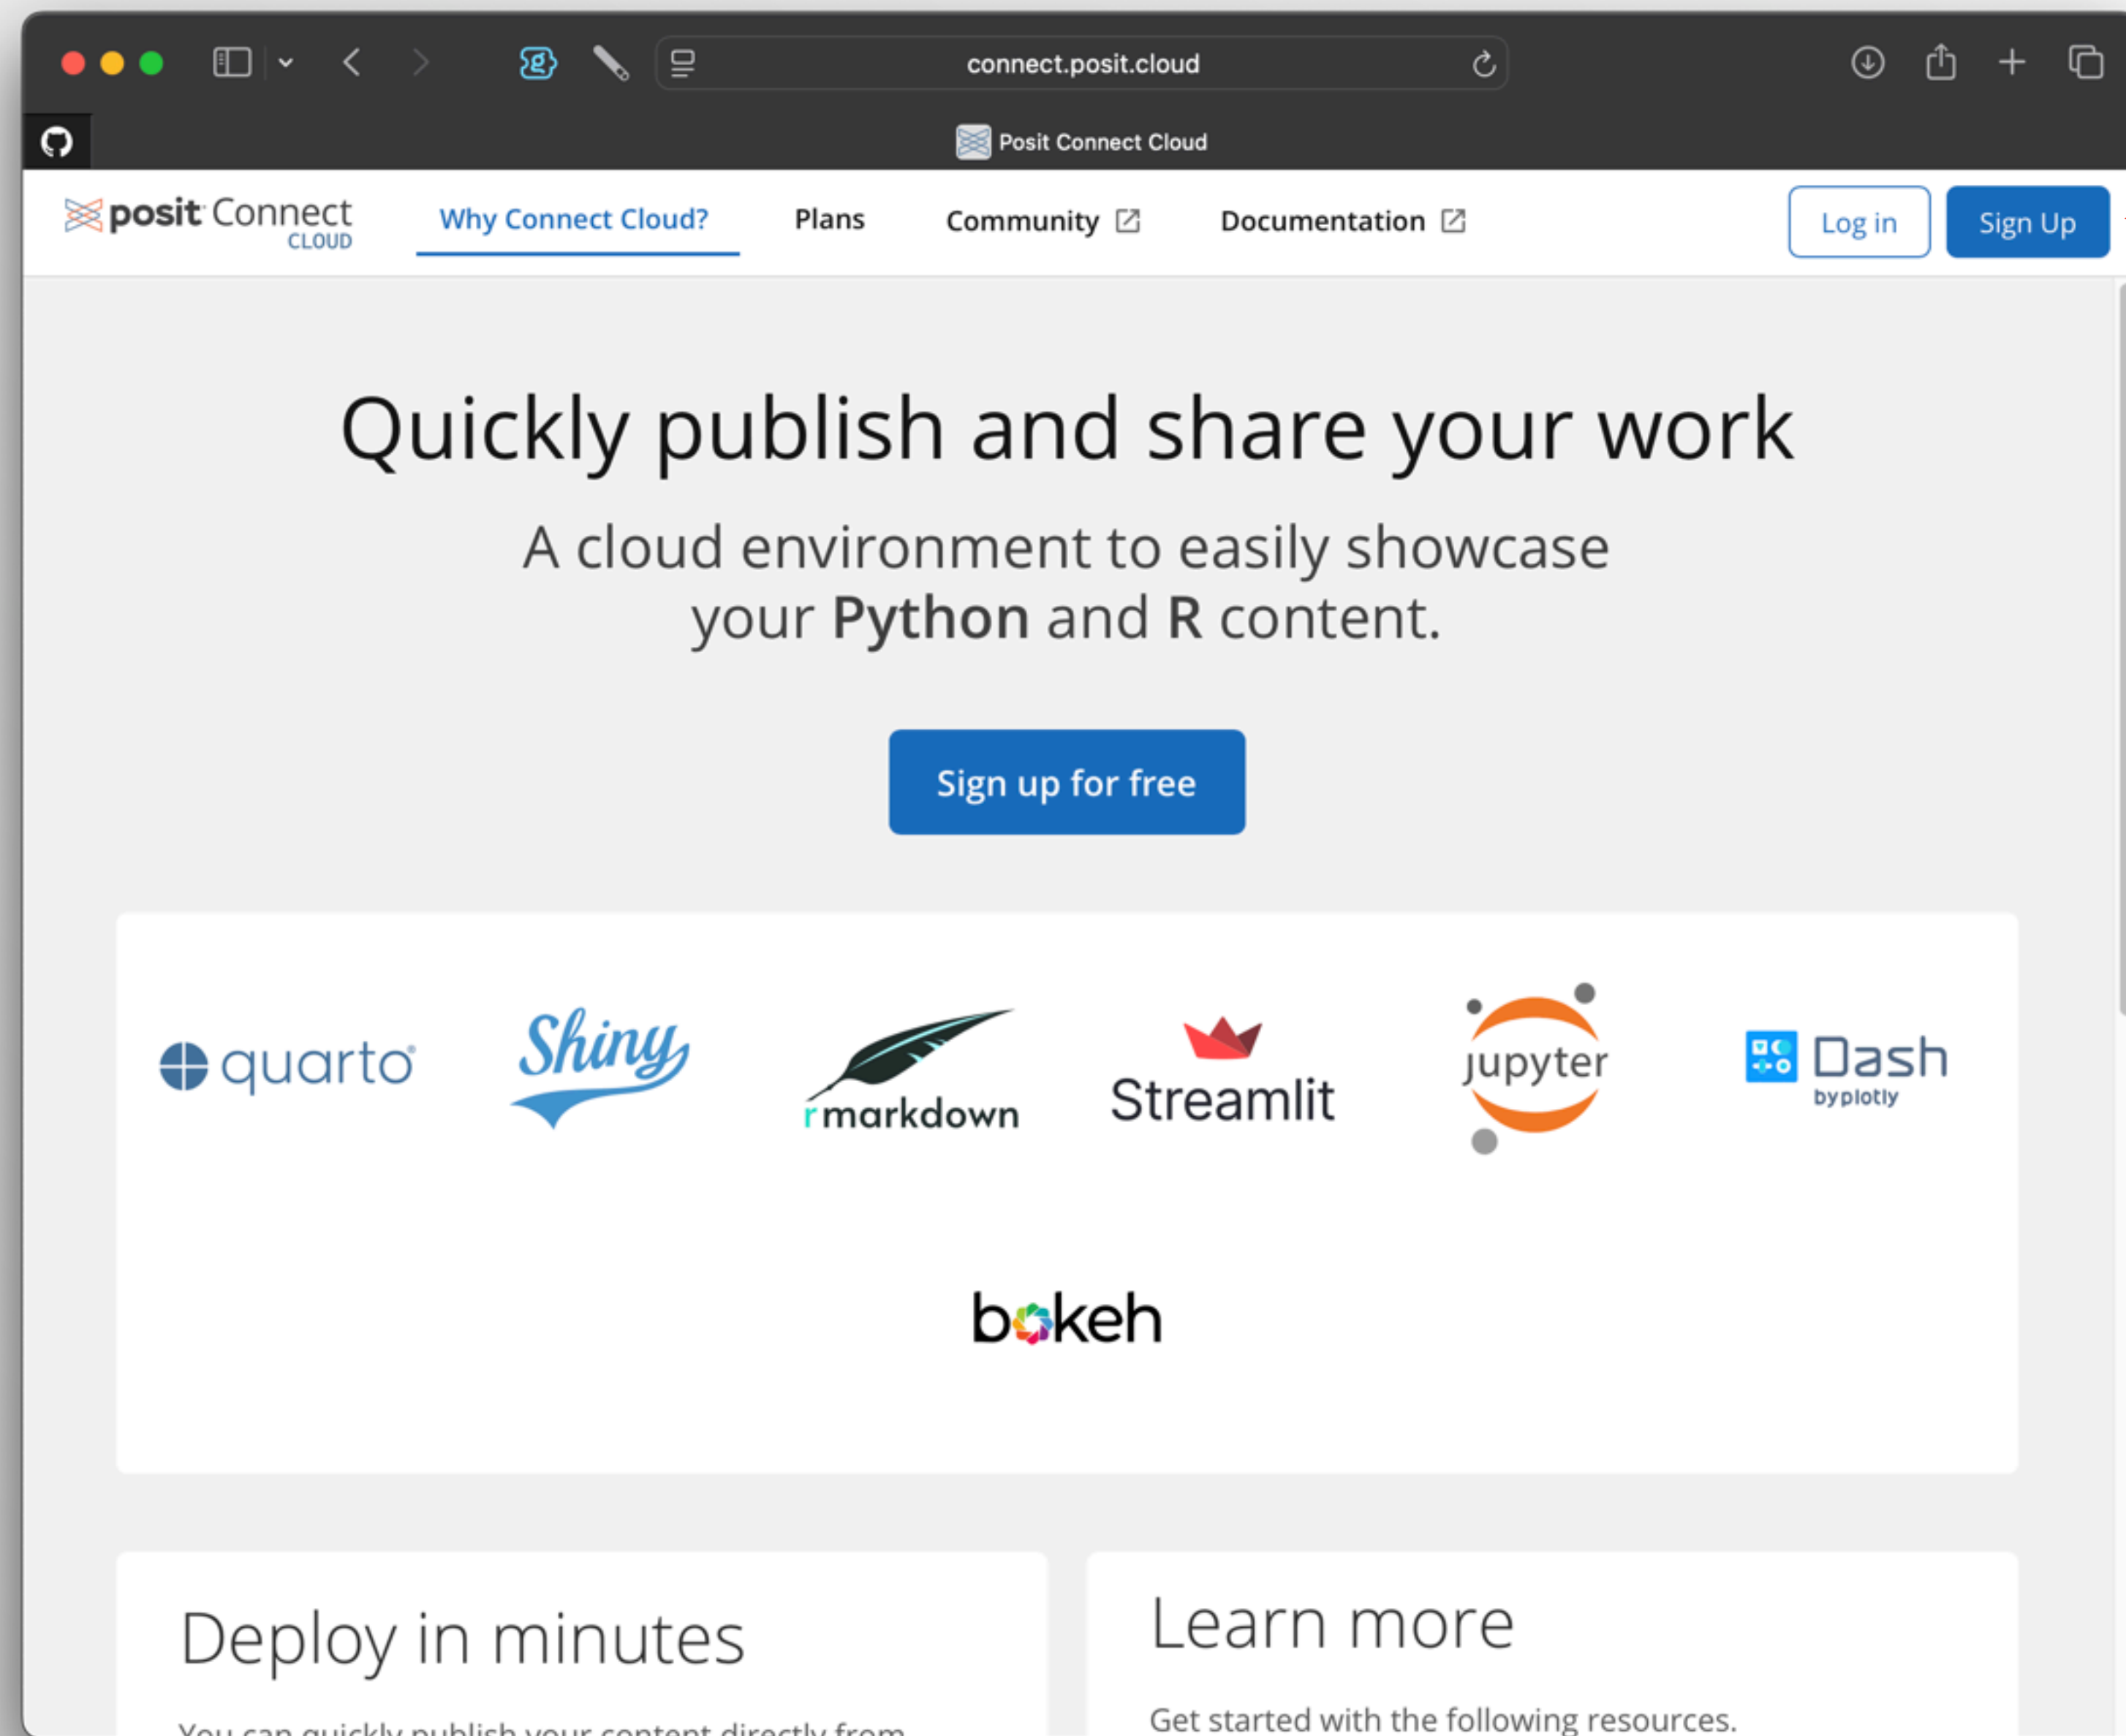



connect.posit.cloud/hadley

Hadley Wickham - Posit Connect Cloud

Hadley Wickham

posit Connect CLOUD

Hadley Wickham

Home

Publish

Admin

Community

Docs

Hadley Wickham

Upgrade Plan

Publish

Search on title, description, or repository

Filter by: Framework

12 results

Sales Data Visualization


Choose Product:

All Products

Select Date Range:

2023-01-01 To 2023-12-31

Sales Data by Product

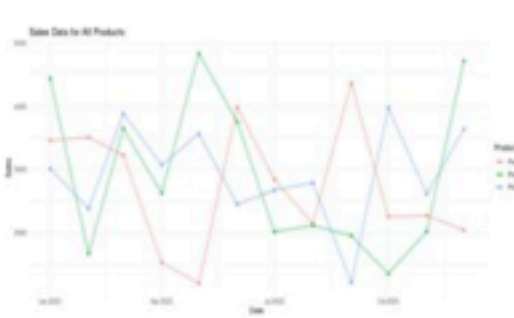

product-sales

Public

99d

Cocktail Selector

Primary Input

Flavor Profile

Flavor

Acid

Sweet

Salty

Bitter

Umami

Spicy

Smoky

Herby

Fruity

Earthy

Woody

Mineral

Alkaline

Sour

Savory

Rich

Light

Dark

Complex

Recipe

A refreshing Mexican cocktail that pairs perfectly with grilled ribs for a sweet and tangy taste.

Ingredients

- 2 oz. tequila
- 1 oz. lime juice
- 1/2 oz. agave nectar
- 1/2 oz. jalapeño liqueur

Instructions

Combine tequila, lime juice, agave nectar, and jalapeño liqueur in a shaker. Shake well and strain into a glass.


cocktails-demo

Public


98d

Startup Error

There was an error setting up this content. Please try again.



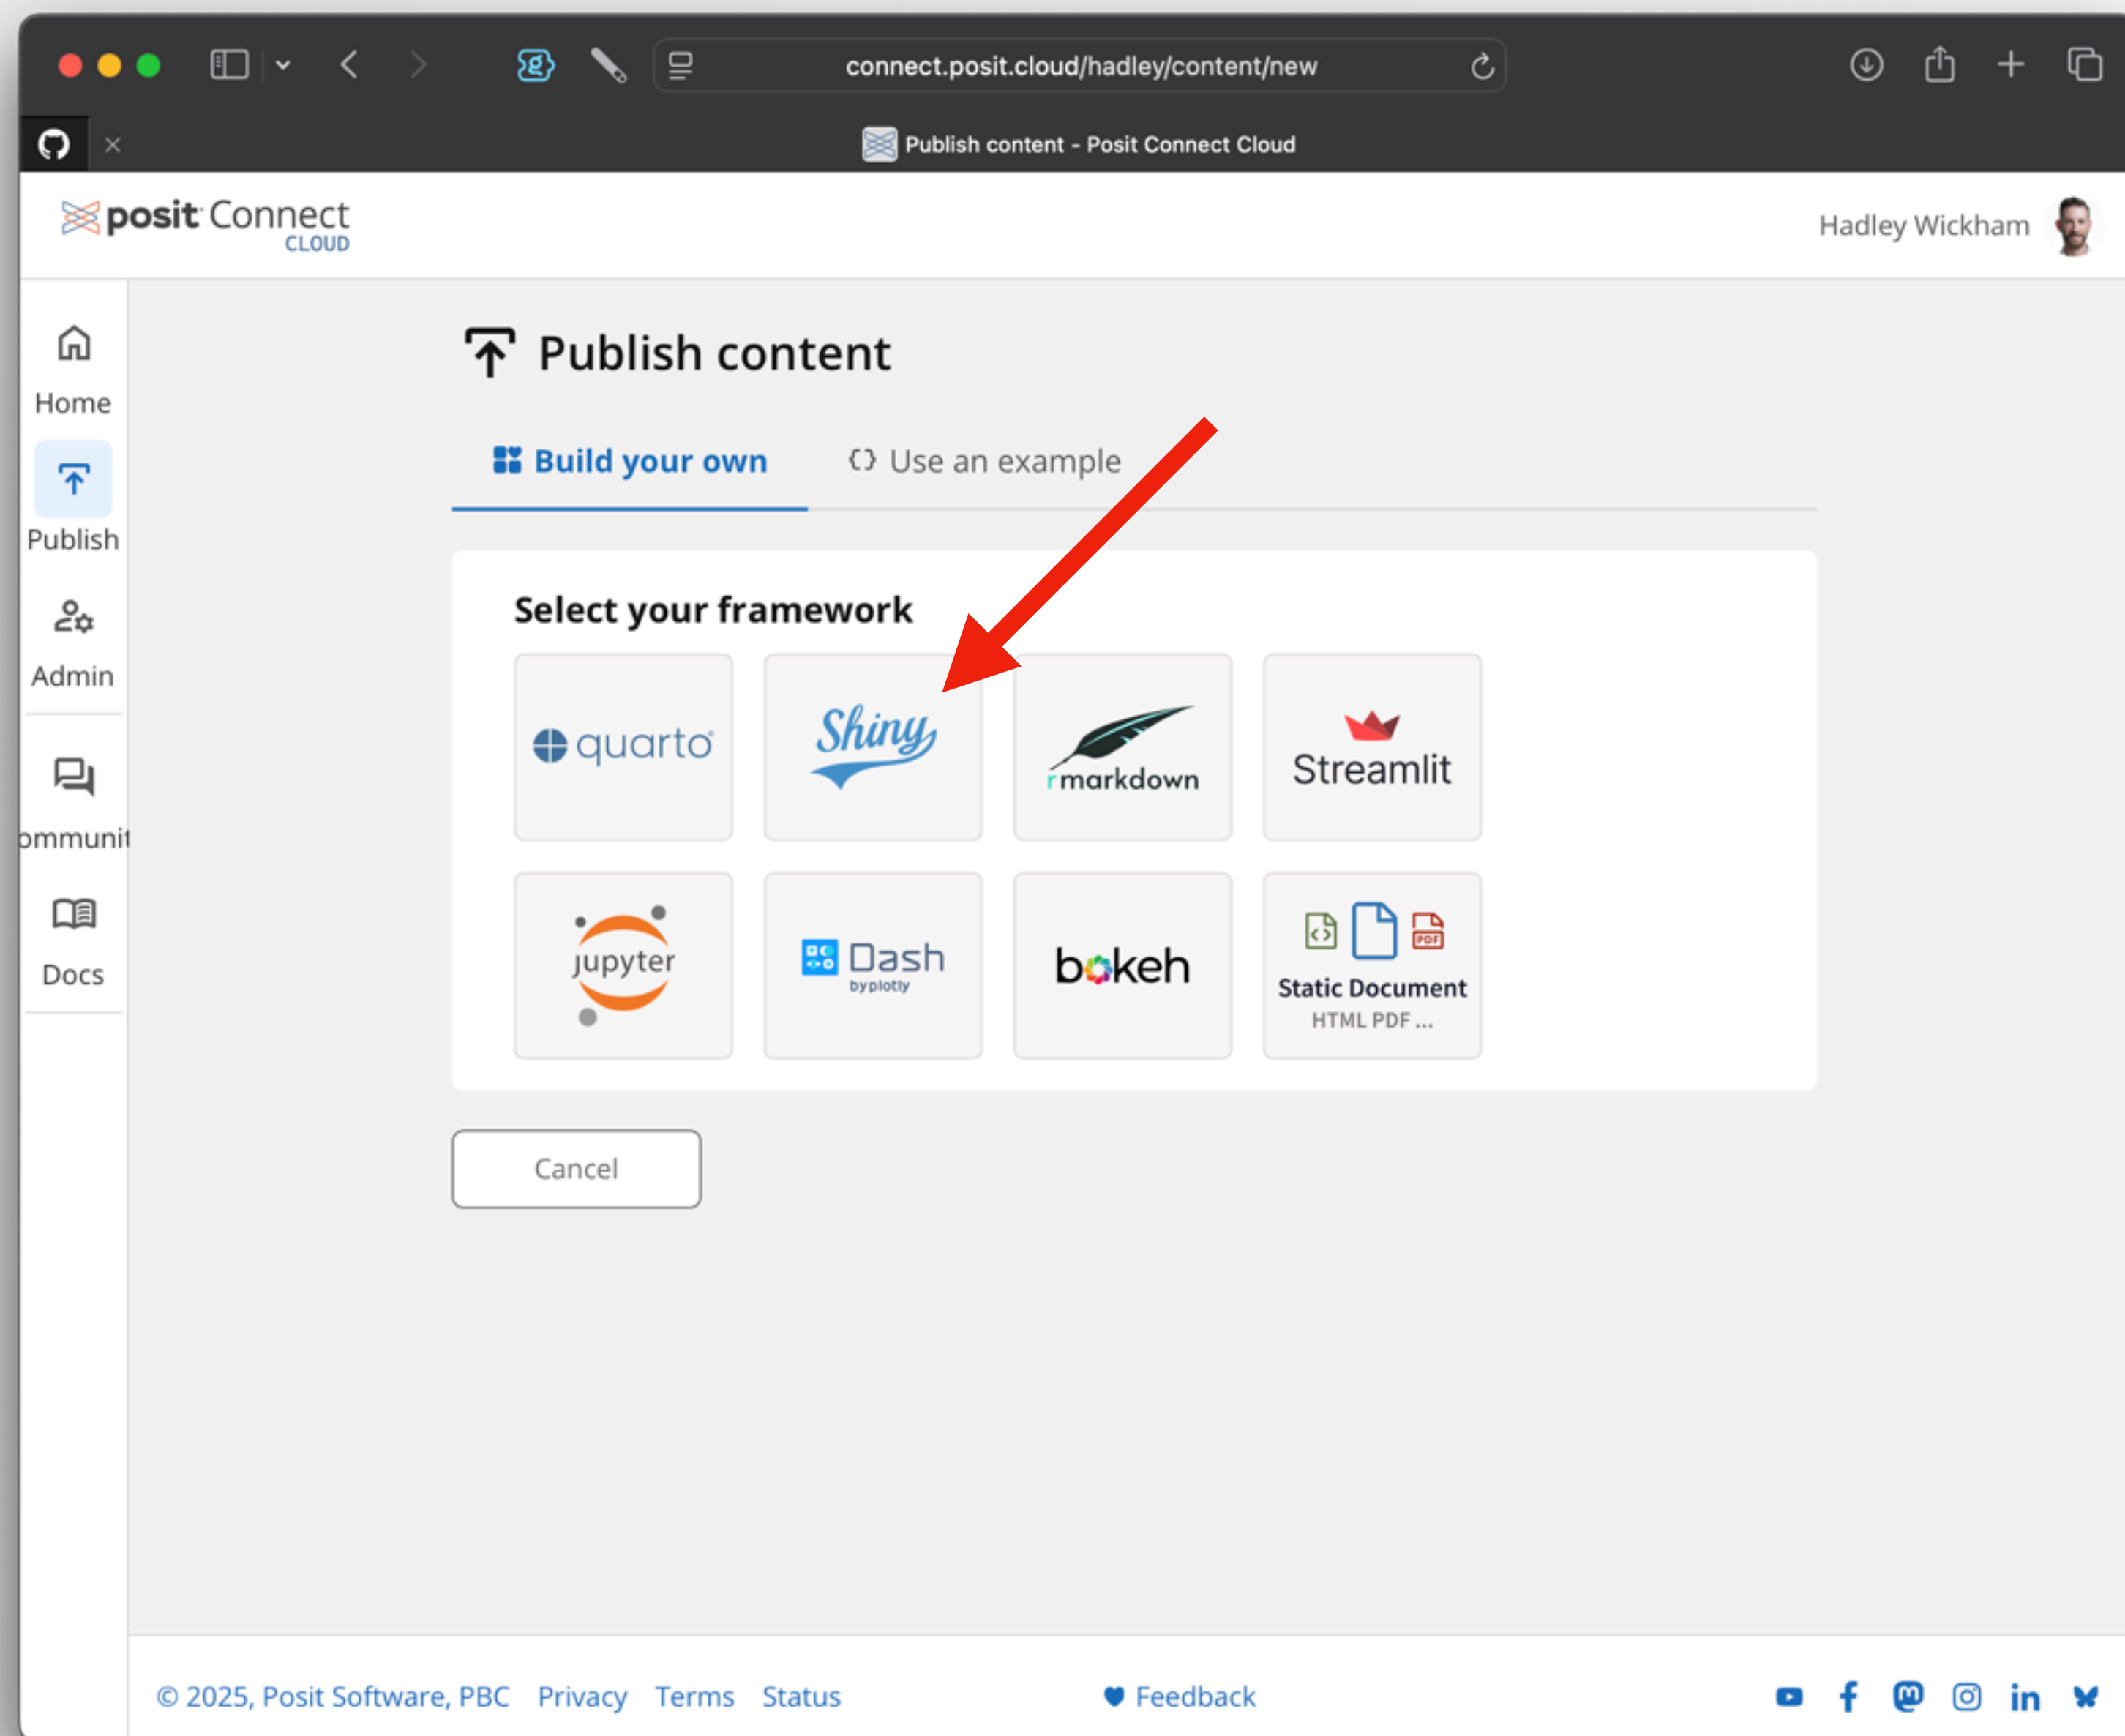

available-work




connect.posit.cloud/hadley/content/new

Publish content - Posit Connect Cloud


posit Connect  
CLOUD

Hadley Wickham 


Home




Publish




Admin





Community




Docs

jupyter

Dash  
byplotly

bokeh

Static Document  
HTML PDF ...

### Configure your source

Repository

hadley/eggnogr

✓ | v

Branch

main

✓ | v

Primary file

app.R


✓ | v


Automatically publish on push ☒

When this is toggled on, we will automatically republish this content when you push to your branch.

> Advanced settings







Cancel

 Publish



© 2025, Posit Software, PBC [Privacy](#) [Terms](#) [Status](#)

[Feedback](#)

connect.posit.cloud/hadley/content/0199348f-67cc-de27

Content Home - Posit Connect Cloud

posit

Connect


CLOUD

eggnogr

🔄

⚙️

Hadley Wickham



Home

Publish

Admin

Community

Docs

1

Retrieving code

→

2

Installing dependencies

→

3

Publishing

Logs

Waiting for logs...


© 2025, Posit Software, PBC


Privacy


Terms


Status


Feedback
















connect.posit.cloud/hadley/content/0199348f-67cc-de27

Content Home - Posit Connect Cloud

posit

Connect

CLOUD

eggnogr

Hadley Wickham

Home

Publish

Admin

Community

Docs

eggnogr

Egg nog recipe by [Jeffrey Morgenthaler](#) .  
Scaling by Hadley Wickham, R, and [shiny](#) .  
How much eggnog do you want?  

1

serving

☐ Clyde common variation? (no rum)

☒ Nice numbers? (makes vol approx)

☐ Would you like metric units?

[Read the source](#)

Ingredients

1		large eggs
1.5	oz	granulated sugar
0.25	tsp	freshly-grated nutmeg
1	oz	brandy
1	oz	spiced rum
3	oz	whole milk
2	oz	heavy cream

(all units by volume, not weight)

Instructions

1. Beat eggs in blender for one minute on medium speed.

2. Slowly add sugar and blend for one additional minute.

3. With blender still running, add nutmeg, brandy, rum, milk and cream until combined.

4. Chill thoroughly to allow flavors to combine.

5. Serve in chilled wine glasses or champagne coupes, grating additional nutmeg on top immediately before serving.

Info

Logs

Variables

Republish

© 2025, Posit Software, PBC

Privacy

Terms

Status

Feedback

# Your turn

- Create a new madlibs project.
- `use_git()`; `use_github()`.
- Copy in 1-madlibs.R and name it **app.R**. Commit.
- `rsconnect::writeManifest()`. Commit.
- Push to GitHub.
- Deploy with connect cloud & view it.
- Stretch goals on next slide.

# Stretch goals

- Improve the madlib story or instructions.
- Remove the button and have the output update live.
- Convert it to bslib.
- Use shinyvalidate to check the inputs.
- (Don't know how? Try asking an LLM.)
- Publish your diamonds project to connect cloud



# Differences between Connect and Connect Cloud

- Scheduled & parameterised reports.
- Can also host APIs.
- Automatically send emails (hard to do these days).
- Highest-level interface: automatically detects job type from file structure and calls `writeManifest()` when you click deploy.
- Costs \$\$\$ & requires IT integration, but seamlessly integrated with your auth so stuff just works.

Want to learn more? Head to the lounge