
Main Layout 25-07-2023 by DbSchema.com - Wise Coders

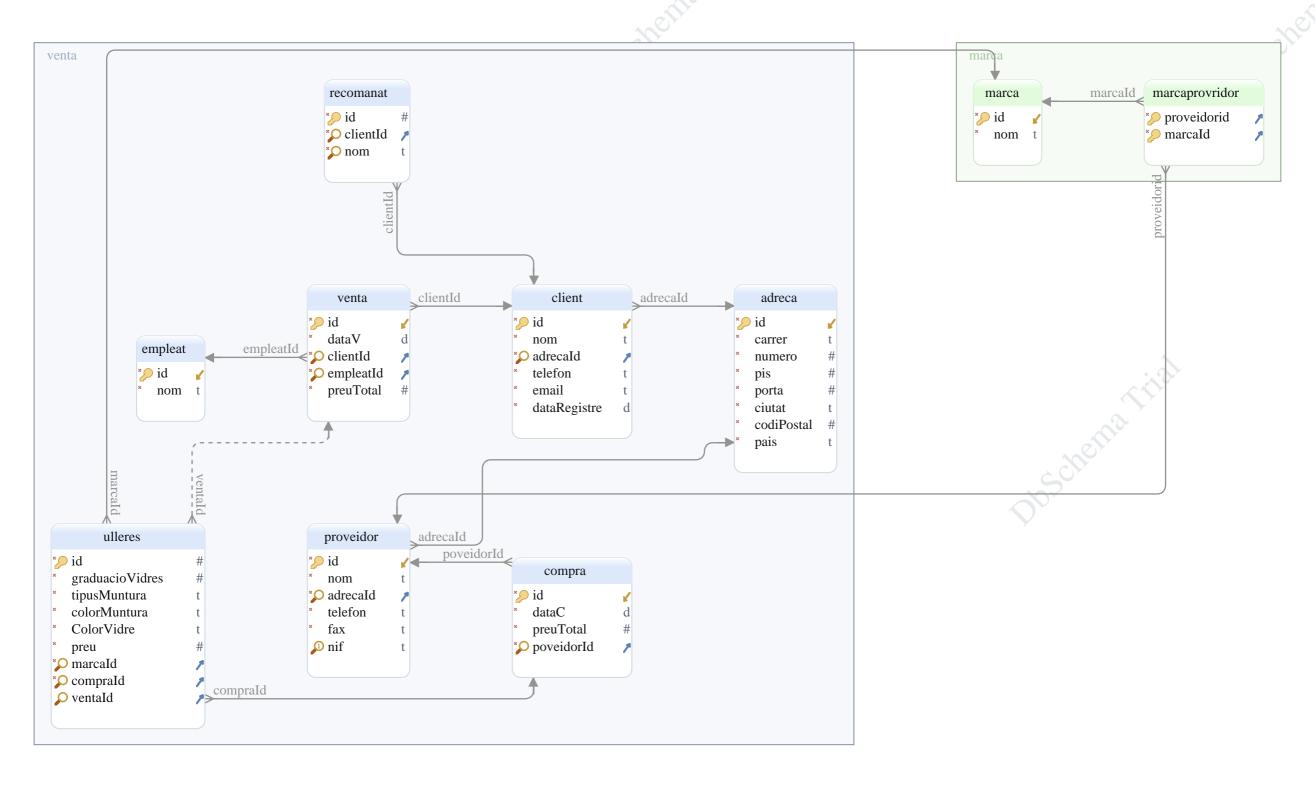

Main Layout

Collection adreca

* Pk	id	int
*	carrer	string
*	numero	int
*	pis	int
*	porta	int
*	ciutat	string
*	codiPostal	int
*	pais	string
Indexes		
Pk	pk adreca	id
	ind	id
Options		

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci

Collection client

* Pk	id	int
*	nom	string
* Idx	adrecaId	int
*	telefon	string
*	email	string
*	dataRegistre	date
Indexes		
Pk	pk client	id
	ind	id
	adrecaId	adrecaId
Relationship	ps	
	client ibfk 1 (adrecaId) ref adreca (id)	

Options

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci

Collection compra

* Pk	id	int
*	dataC	date
*	preuTotal	double
* Idx	poveidorId	int

	on compra	
Indexes		
Pk	pk compra	id
	ind	id
	poveidorId	poveidorId
Relations	hips	
	compra ibfk 1 (poveidorId) ref proveidor (id)	
Options		
ENGINE:	=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci	
Collecti	on empleat	
* Pk	id	int
*	nom	string
Indexes		
Pk	pk empleat	id
	ind	id
Options		
ENGINE:	=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci	
Callagti	on marca	
* Pk	id	int
*	nom	string
Indexes	пош	sumg
Pk	pk marca	id
1 K	ind	id
Options	niu	iu
	=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci	
ENGINE	=IIIII0Db DEFAULT CHARSET=utt811104 COLLATE=utt811104_general_ct	
	on marcaprovridor	
* Pk	proveidorid	int
* Pk	marcaId	int
Indexes		
Pk	pk marcaprovridor	marcaId, proveidorid
	ind	marcaId
	proveidorid	proveidorid
Relations	hips	
	marcaprovridor ibfk 1 (marcaId) ref marca (id)	

Collection marcaprovridor

marcaprovridor ibfk 2 (proveidorid) ref proveidor (id)

Options

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci

Collection proveidor

* Pk	id	int
*	nom	string
* Idx	adrecaId	int
*	telefon	string
*	fax	string
Unq	nif	string
Indexes		
Pk	pk proveidor	id
Unq	nif	nif
	ind	id
	adrecaId	adrecaId
Relationship	ps	

Options

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci

proveidor ibfk 1 (adrecaId) ref adreca (id)

Collection recomanat

* Pk	id	int
* Idx	clientId	int
* Idx	nom	string
Indexes		
Pk	pk recomanat	id
	ind	nom
	clientId	clientId
Relationships		

recomanat ibfk 1 (clientId) ref client (id)

Options

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci

Collection ulleres

* Pk id int

Collection ulleres

Conection	i uncres	
*	graduacioVidres	int
*	tipusMuntura	string
*	colorMuntura	string
*	ColorVidre	string
*	preu	double
* Idx	marcaId	int
* Idx	compraId	int
Idx	ventaId	int
Indexes		
Pk	pk ulleres	id
	ind	id
	compraId	compraId
	marcaId	marcaId
	ventaId	ventaId
Relationship	ps	
	ulleres ibfk 1 (compraId) ref compra (id)	
	ulleres ibfk 2 (marcaId) ref marca (id)	
	ulleres ibfk 3 (ventaId) ref venta (id)	
0		

Options

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci

Collection venta

* Pk	1d	int
*	dataV	date
* Idx	clientId	int
* Idx	empleatId	int
*	preuTotal	double
Indexes		
Pk	pk venta	id
	ind	id
	clientId	clientId
	empleatId	empleatId
Relationshi	DS	

Relationships

venta ibfk 1 (clientId) ref client (id)
venta ibfk 2 (empleatId) ref empleat (id)

Options

 $ENGINE=InnoDB\ DEFAULT\ CHARSET=utf8mb4\ COLLATE=utf8mb4_general_ci$