

Main Layout 25-07-2023 by DbSchema.com - Wise Coders

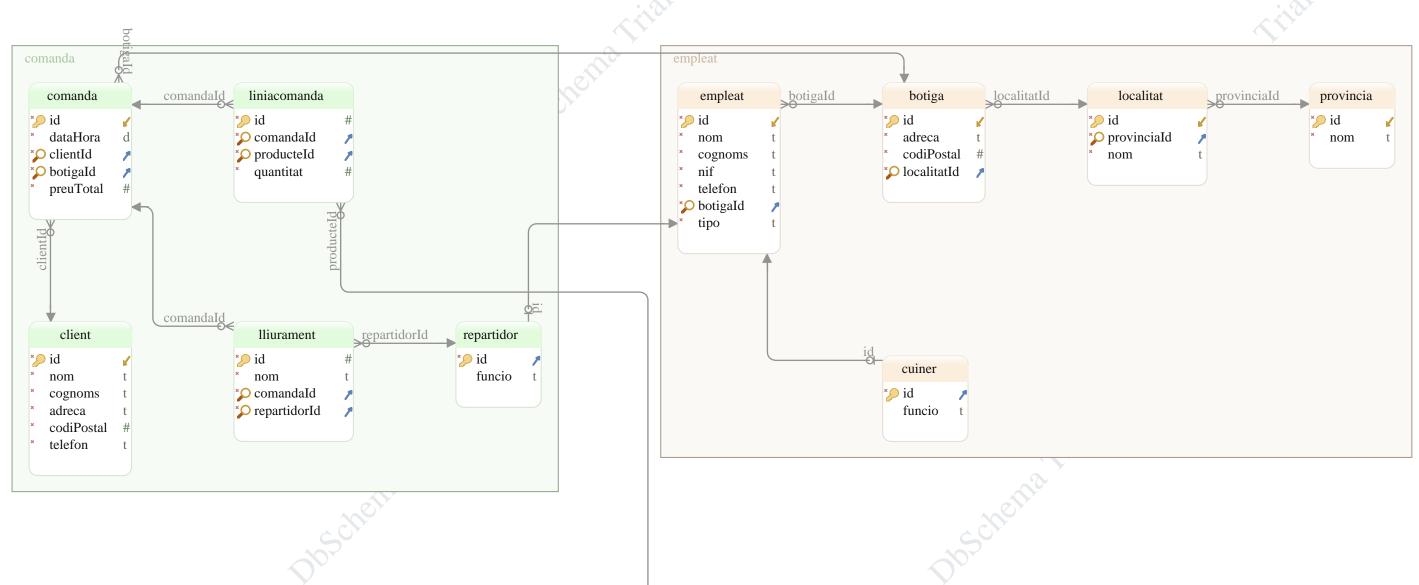

This is a layout.

- Double-click table headers, columns, or foreign keys to edit
- Drag tables to the layout from the structure tree, or add them by pressing the arrow icon near columns
- Create multiple layouts with the same or different tables
- Right-click the layout to create new tables

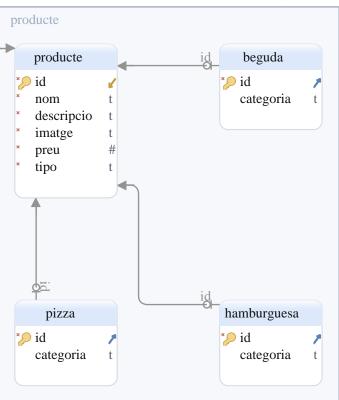

Main Layout

Table beguda

Table beguna		
* Pk	id	INT
	categoria	VARCHAR(10)
Indexes		
Pk	pk_beguda	id
	ind	id
Foreign Keys		
	beguda_ibfk_1 (id) ref producte (id)	
Options		

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci

Table botiga

* Pk	id	INT
*	adreca	VARCHAR(150)
*	codiPostal	INT
* Idx	localitatId	INT
Indexes		
Pk	pk_botiga	id
	ind	id
	localitatId	localitatId
Foreign Keys		

botiga_ibfk_1 (localitatId) ref localitat (id)

Options

ENGINE=InnoDB AUTO_INCREMENT=226 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci

Table client

* Pk	id	INT
*	nom	VARCHAR(40)
*	cognoms	VARCHAR(100)
*	adreca	VARCHAR(151)
*	codiPostal	INT
*	telefon	VARCHAR(9)
Indexes		
Pk	pk_client	id
	ind	id
Options		

ENGINE=InnoDB AUTO_INCREMENT=142 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci

Table comanda

* Pk	id	INT
*	dataHora	DATETIME
* Idx	clientId	INT
* Idx	botigaId	INT
*	preuTotal	DOUBLE
Indexes		
Pk	pk_comanda	id
	ind	id
	clientId	clientId
	botigaId	botigaId

Foreign Keys

comanda_ibfk_1 (clientId) ref client (id)

-						4
Tai	h	e	CC	m	ar	าสล

comanda_ibfk_2 (botigaId) ref botiga (id)

Options

ENGINE=InnoDB AUTO_INCREMENT=338 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci

Table cuiner

10010 0011101		
* Pk	id	INT
	funcio	VARCHAR(10)
Indexes		
Pk	pk_cuiner	id
	ind	id
Foreign Keys		
	cuiner_ibfk_1 (id) ref empleat (id)	

Options

ENGINE=InnoDB AUTO_INCREMENT=478 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci

ENGINE=InnoDB AUTO_INCREMENT=478 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci

Table empleat

Tubic chipicut		
* Pk	id	INT
*	nom	VARCHAR(40)
*	cognoms	VARCHAR(80)
*	nif	VARCHAR(9)
*	telefon	VARCHAR(9)
* Idx	botigaId	INT
*	tipo	ENUM('cuiner', 'repartidor')
Indexes		
Pk	pk_empleat	id
	ind	id
	botigaId	botigaId
Foreign Keys		
	empleat_ibfk_1 (botigaId) ref botiga (id)	

Table hamburguesa

Table Hallibul	guesa	
* Pk	id	INT
	categoria	VARCHAR(10)
Indexes		
Pk	pk_hamburguesa	id
	ind	id
Foreign Keys		
	hamburguesa_ibfk_1 (id) ref producte (id)	

Options

 $ENGINE=InnoDB\ DEFAULT\ CHARSET=utf8mb4\ COLLATE=utf8mb4_general_ci$

Table liniacomanda

comandaId

* Pk	id	INT
* Idx	comandaId	INT
* Idx	producteId	INT
*	quantitat	INT
Indexes		
Pk	pk_liniacomanda	id

comandaId

Table liniaco	omanda	
	producteId	producteId
Foreign Keys		
	liniacomanda_ibfk_1 (comandaId) ref comanda (id)	
	liniacomanda_ibfk_2 (producteId) ref producte (id)	
Options		
ENGINE=Innol	DB AUTO_INCREMENT=506 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci	
Table lliuram	nent	
* Pk	id	INT
*	nom	VARCHAR(40)
* Idx	comandaId	INT
* Idx	repartidorId	INT
Indexes		
Pk	pk_lliurament	id
	ind	id
	comandaId	comandaId
	repartidorId	repartidorId
Foreign Keys		
	lliurament_ibfk_1 (comandaId) ref comanda (id)	
	lliurament_ibfk_2 (repartidorId) ref repartidor (id)	
Options		
ENGINE=Innol	DB AUTO_INCREMENT=1073 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci	
Table localita	at	
* Pk	id	INT
* Idx	provinciaId	INT
*	nom	VARCHAR(40)
Indexes		
Pk	pk_localitat	id
	ind	id
	provinciald	provinciaId
Foreign Keys		
	localitat_ibfk_1 (provinciaId) ref provincia (id)	
Options		
ENGINE=Innol	DB AUTO_INCREMENT=217 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci	
Table pizza		
* Pk	id	INT
	categoria	VARCHAR(10)
Indexes		
Pk	pk_pizza	id
	ind	id
Foreign Keys		
	pizza_ibfk_1 (id) ref producte (id)	
Options		
ENGINE=Innol	DB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci	
Table produc		
* Pk	id	INT
*	nom	VARCHAR(40)
*	descripcio	VARCHAR(250)
*	imatge	VARCHAR(120)

Table produ	Table producte				
*	preu	DOUBLE			
*	tipo	ENUM('hamburguesa','pizza','beguda')			
Indexes					
Pk	pk_producte	id			
	ind	id			
Options					
ENGINE=Inno	DB AUTO_INCREMENT=142 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci				
Table provir	ncia				
* Pk	id	INT			
*	nom	VARCHAR(40)			
Indexes					
Pk	pk_provincia	id			
	ind	id			
Options					
ENGINE=Inno	DB AUTO_INCREMENT=142 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci				
Table repart	idor				
* Pk	id	INT			
	funcio	VARCHAR(10)			
Indexes					
Pk	pk_repartidor	id			
	ind	id			

ENGINE=InnoDB AUTO_INCREMENT=478 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci

repartidor_ibfk_1 (id) ref empleat (id)

Foreign Keys

Options