

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



Network Programming: Part I

Assignment Project Exam Help


15-213/18-213/14-513/15-513/18-613:

Introduction to Computer Systems

22nd Lecture, November 12, 2020

<https://powcoder.com>

Add WeChat powcoder

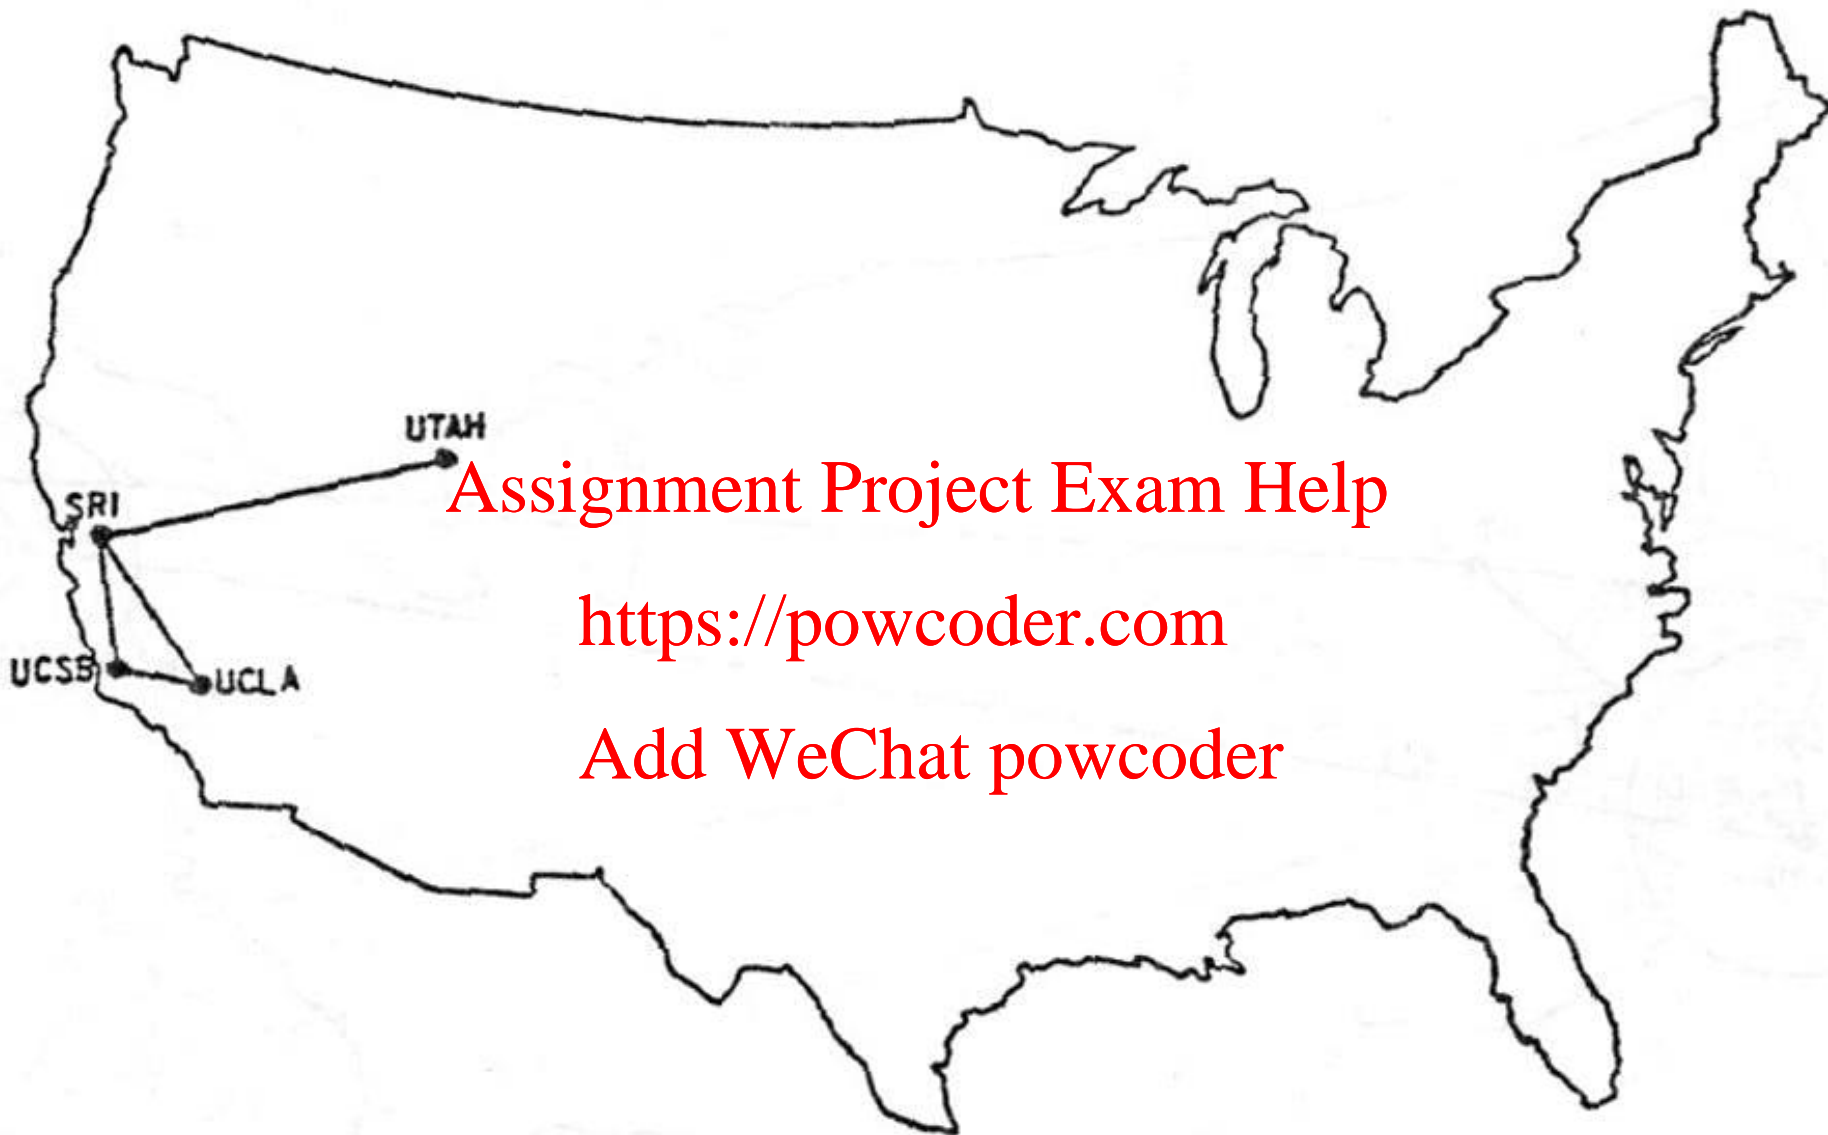


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

The ARPANET in December 1969

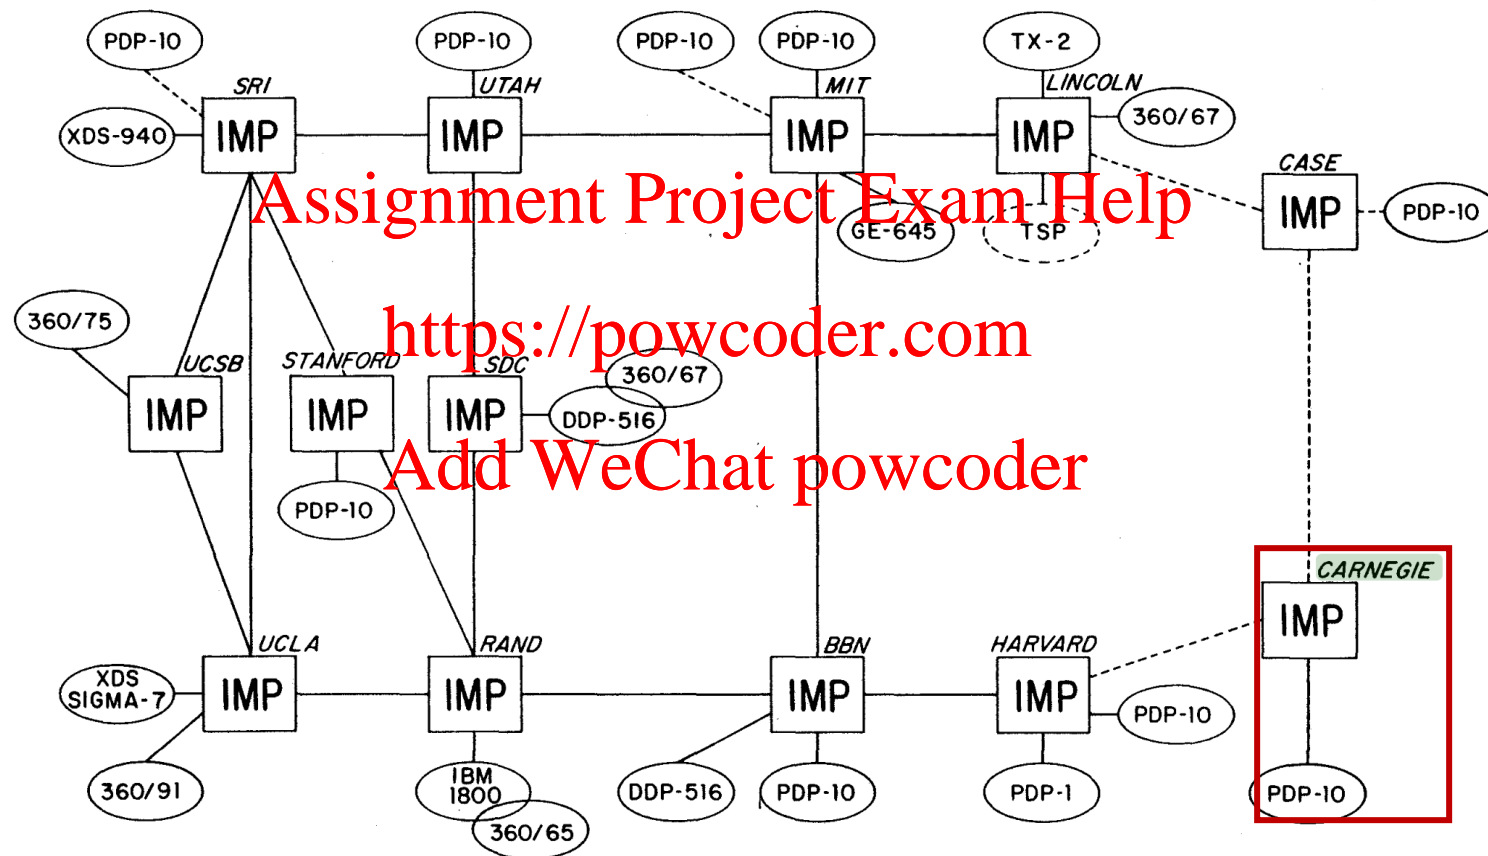


ARPA NET, DECEMBER 1970


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

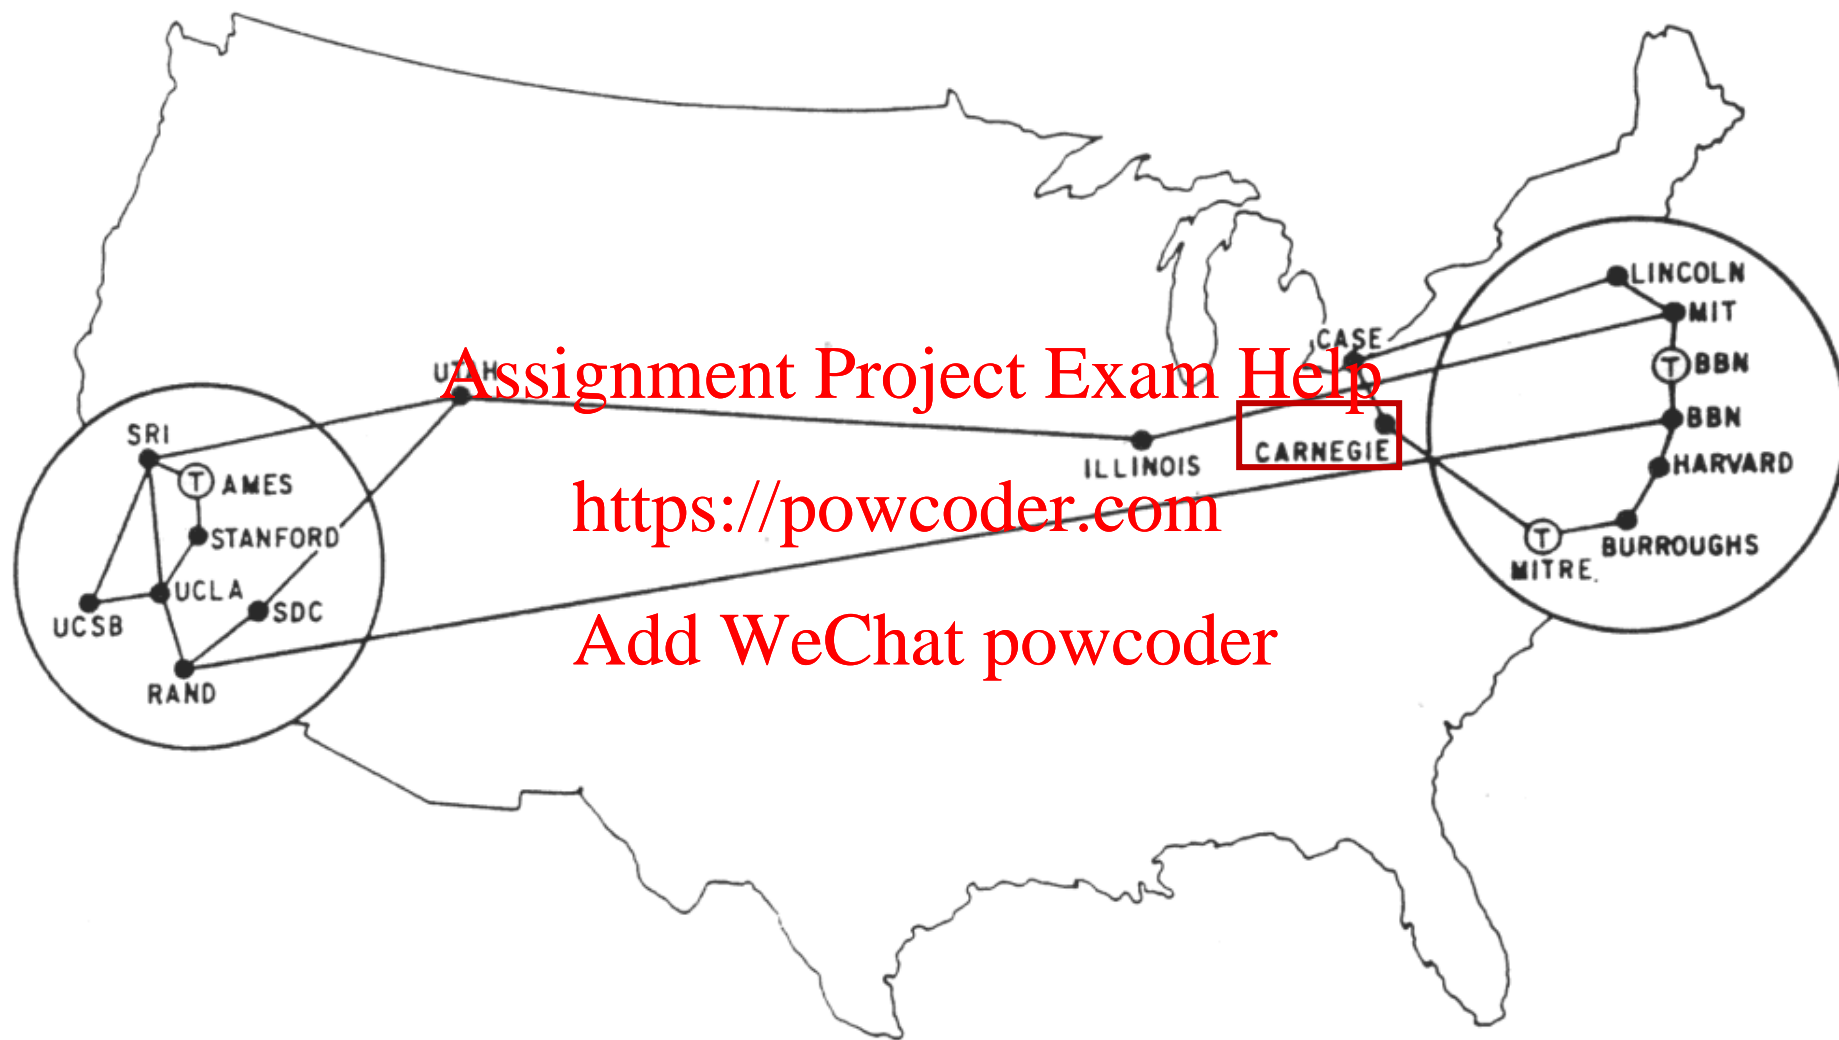

ARPANET LOGICAL MAP, MARCH 1977

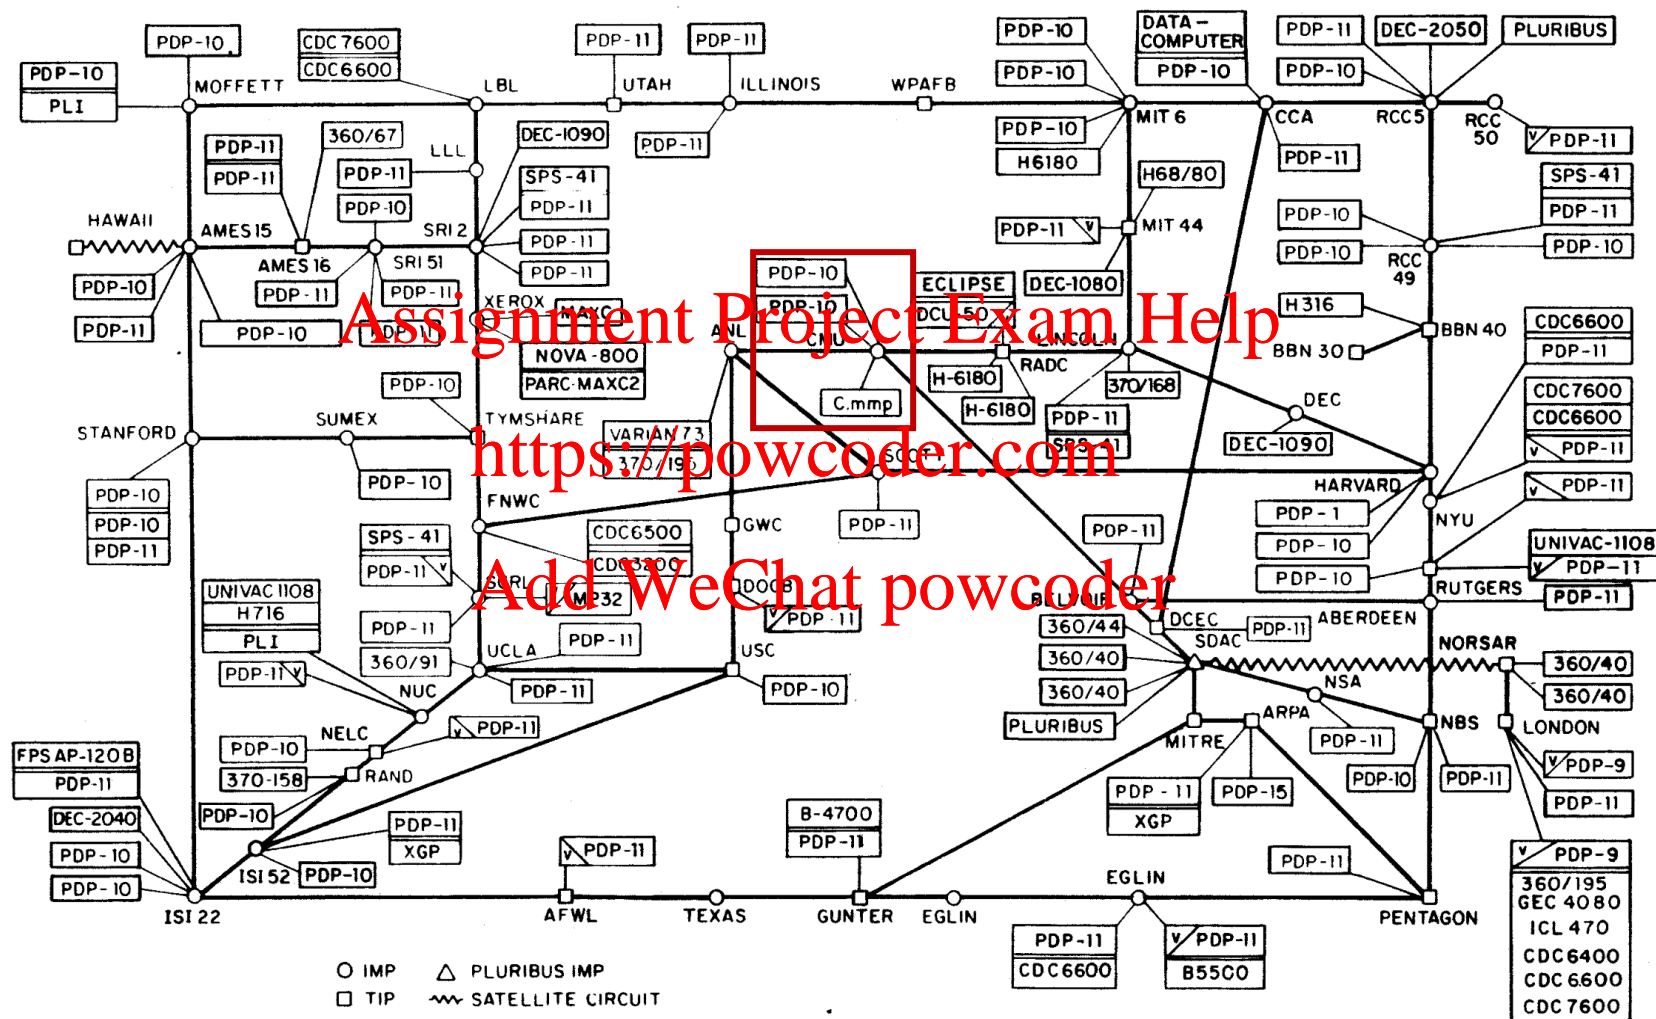

Today

- **Networks** CSAPP 11.1-11.2
- **Global IP Internet** CSAPP 11.3
- **Sockets Interface** CSAPP 11.4

Assignment Project Exam Help


<https://powcoder.com>

Add WeChat powcoder

A Client-Server Transaction


■ Most network applications are based on the client-server model:

- A **server** process and one or more **client** processes
- Server manages some **resource**
- Server provides **service** by manipulating resource for clients
- Server activated by request from client (vending machine analogy)

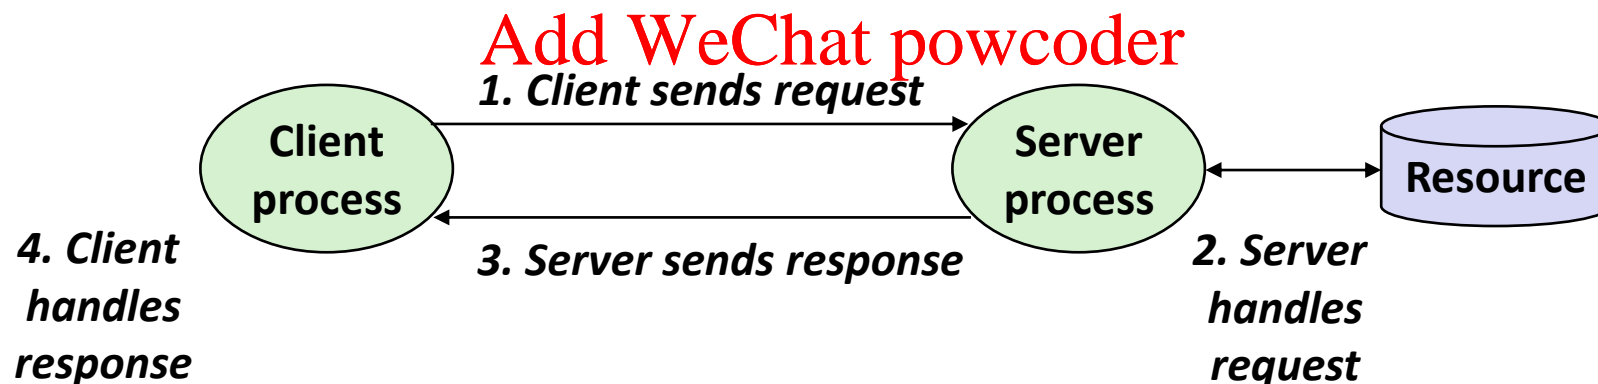

*Note: clients and servers are processes running on hosts
(can be the same or different hosts)*

Hardware Organization of a Network Host

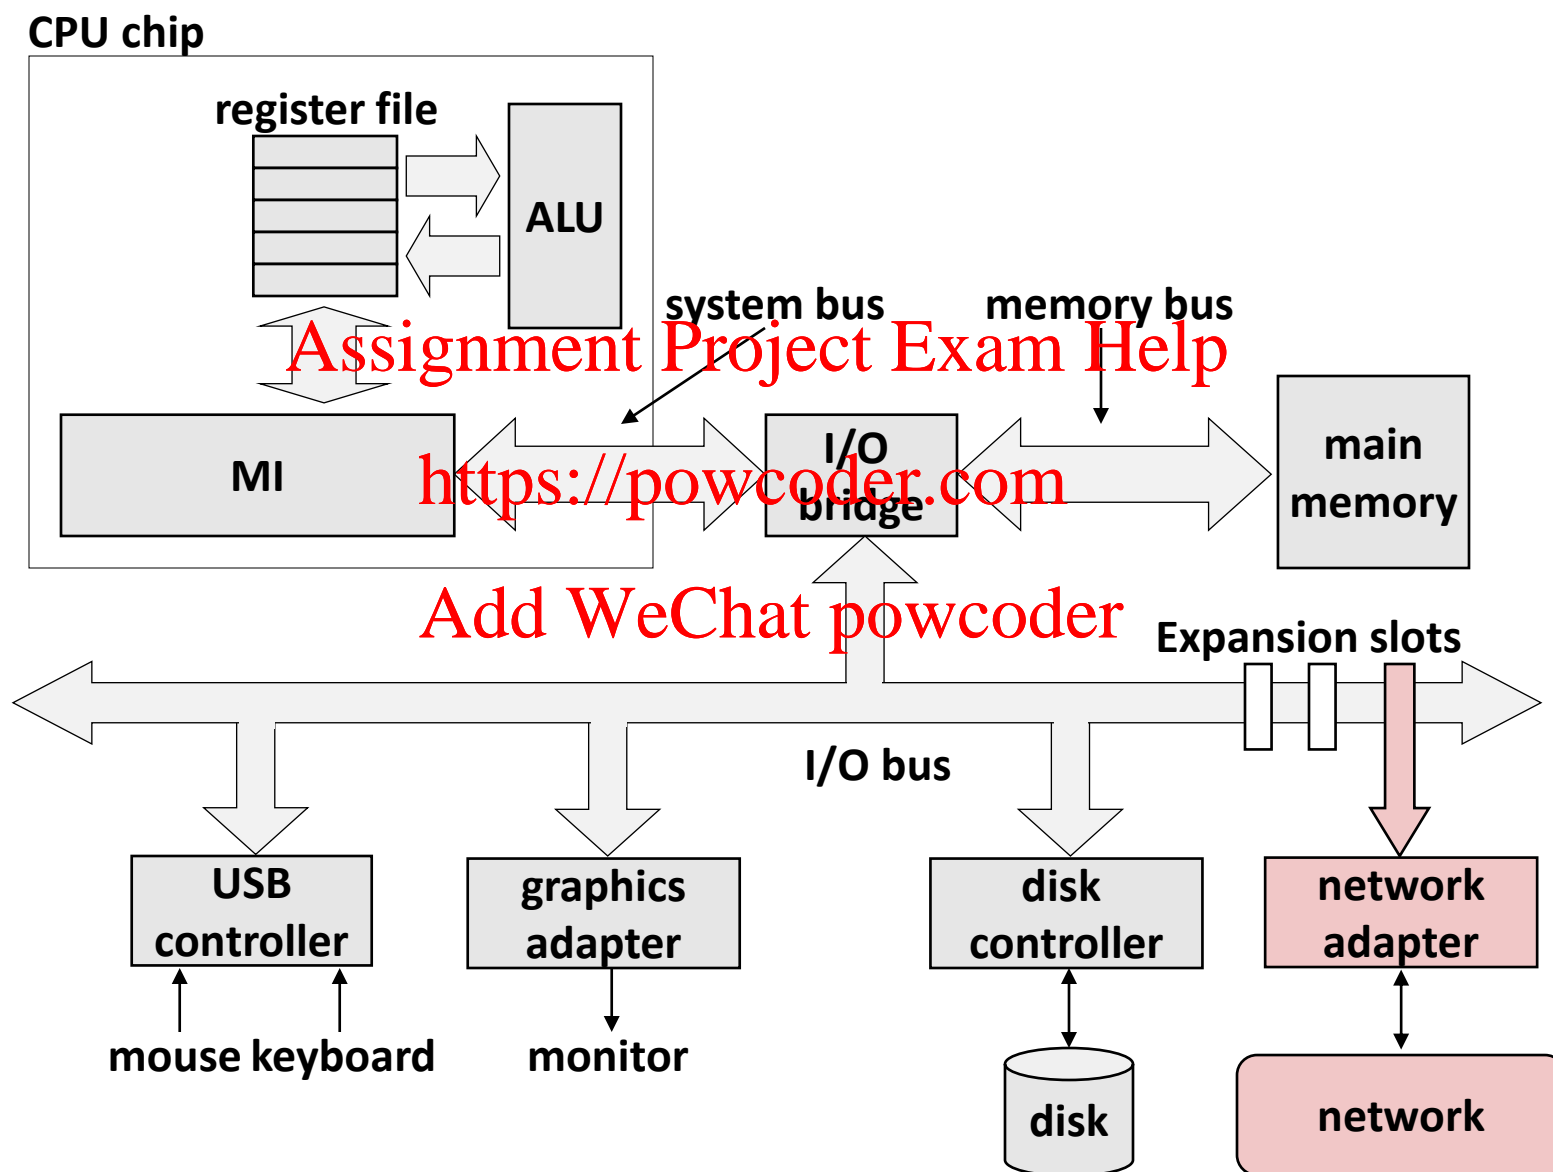

Computer Networks

■ A **network** is a hierarchical system of boxes and wires organized by geographical proximity

- BAN (Body Area Network) spans devices carried / worn on body
- SAN* (System Area Network) spans cluster or machine room
 - Switched Ethernet, Qadrics QSW, ...
- LAN (Local Area Network) spans a building or campus
 - Ethernet is most prominent example
- WAN (Wide Area Network) spans country or world
 - Typically high-speed point-to-point phone lines


■ An **internetwork** (*internet*) is an interconnected set of networks

- The Global IP Internet (uppercase “I”) is the most famous example of an internet (lowercase “i”)

■ Let's see how an internet is built from the ground up

* Not to be confused with a Storage Area Network

Lowest Level: Ethernet Segment

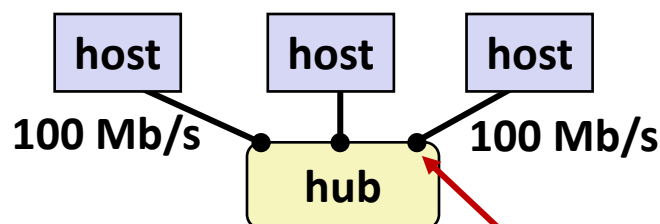

Assignment Project Exam Help

- Ethernet segment consists of a collection of *hosts* connected by wires (twisted pairs) to a *hub*


- Spans room or floor in a building

■ Operation

- Each Ethernet adapter has a unique 48-bit address (MAC address)
 - E.g., 00:16:ea:e3:54:e6
- Hosts send bits to any other host in chunks called *frames*
- Hub slavishly copies each bit from each port to every other port
 - Every host sees every bit

[Note: Hubs are obsolete. Bridges (switches, routers) became cheap enough to replace them]

Next Level: Bridged Ethernet Segment

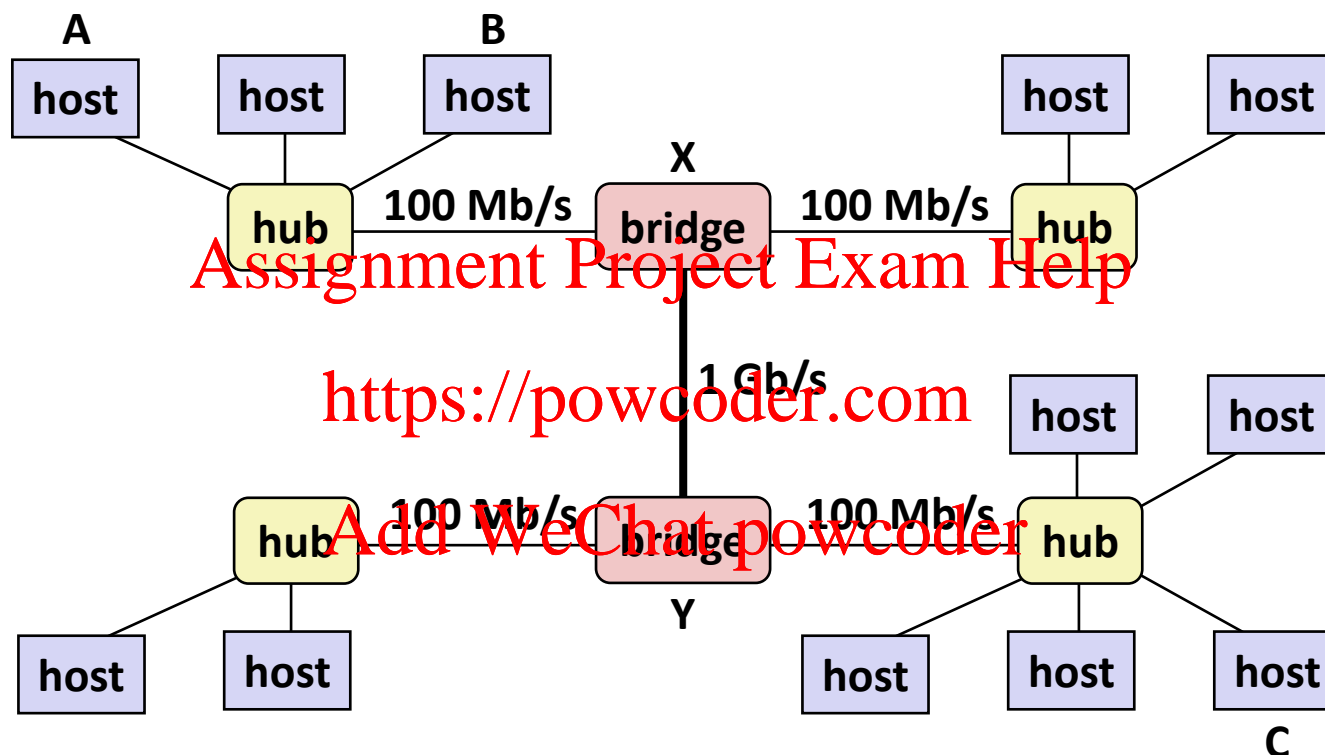


- Spans building or campus
- Bridges cleverly learn which hosts are reachable from which ports and then selectively copy frames from port to port

Conceptual View of LANs

- For simplicity, hubs, bridges, and wires are often shown as a collection of hosts attached to a single wire:

Assignment Project Exam Help




<https://powcoder.com>

Add WeChat powcoder

Next Level: internets


- Multiple incompatible LANs can be physically connected by specialized computers called **routers**
- The connected networks are called an **internet** (lower case)

Assignment Project Exam Help

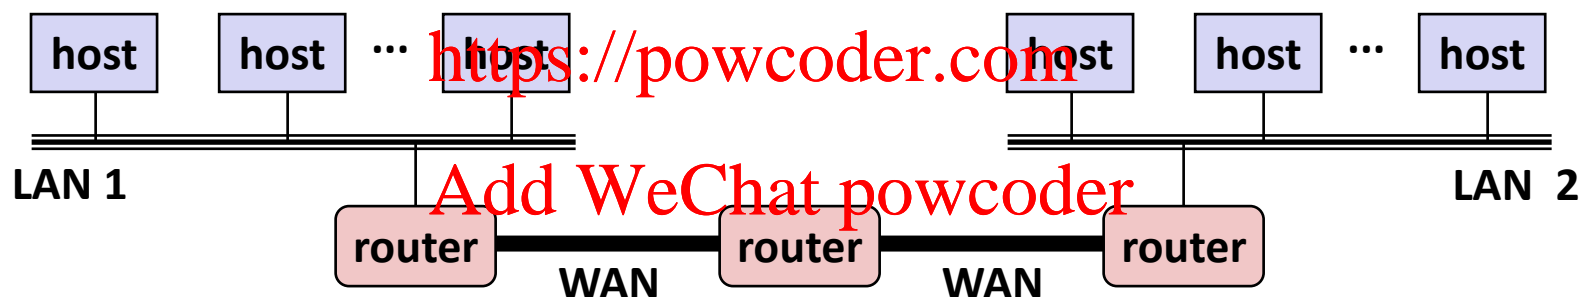

LAN 1 and LAN 2 might be completely different, totally incompatible (e.g., Ethernet, Fibre Channel, 802.11, T1-links, DSL, ...)*

Logical Structure of an internet

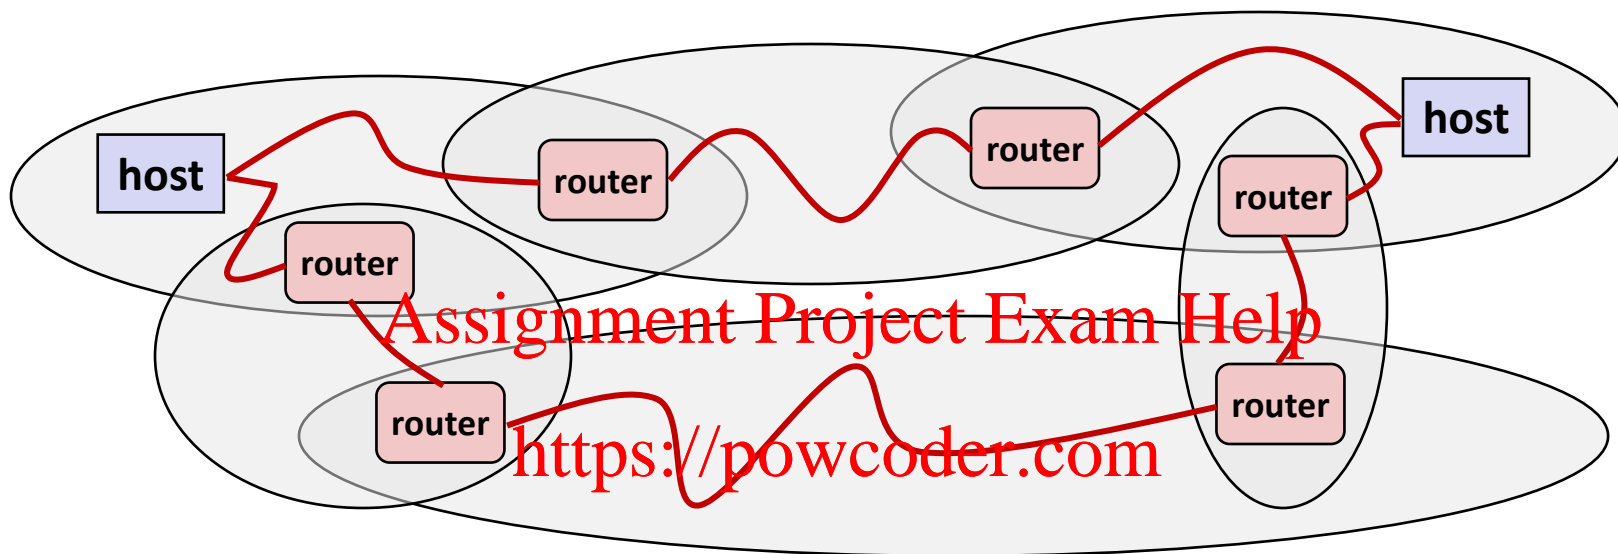

Add WeChat powcoder

■ Ad hoc interconnection of networks

- No particular topology
- Vastly different router & link capacities

■ Send packets from source to destination by hopping through networks

- Router forms bridge from one network to another
- Different packets may take different routes

The Notion of an internet Protocol

- How is it possible to send bits across incompatible LANs and WANs?

- Solution: **protocol** software running on each host and router

- Protocol is a set of rules that governs how hosts and routers should cooperate when they transfer data from network to network.
- Smooths out the differences between the different networks

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

What Does an internet Protocol Do?

■ Provides a *naming scheme*

- An internet protocol defines a uniform format for *host addresses*
- Each host (and router) is assigned at least one of these internet addresses that uniquely identifies it.

Assignment Project Exam Help


■ Provides a *delivery mechanism*

- An internet protocol defines a standard transfer unit (*packet*)
- Packet consists of *header* and *payload*
 - Header: contains info such as packet size, source and destination addresses
 - Payload: contains data bits sent from source host

<https://powcoder.com>

Add WeChat powcoder

Transferring internet Data Via Encapsulation

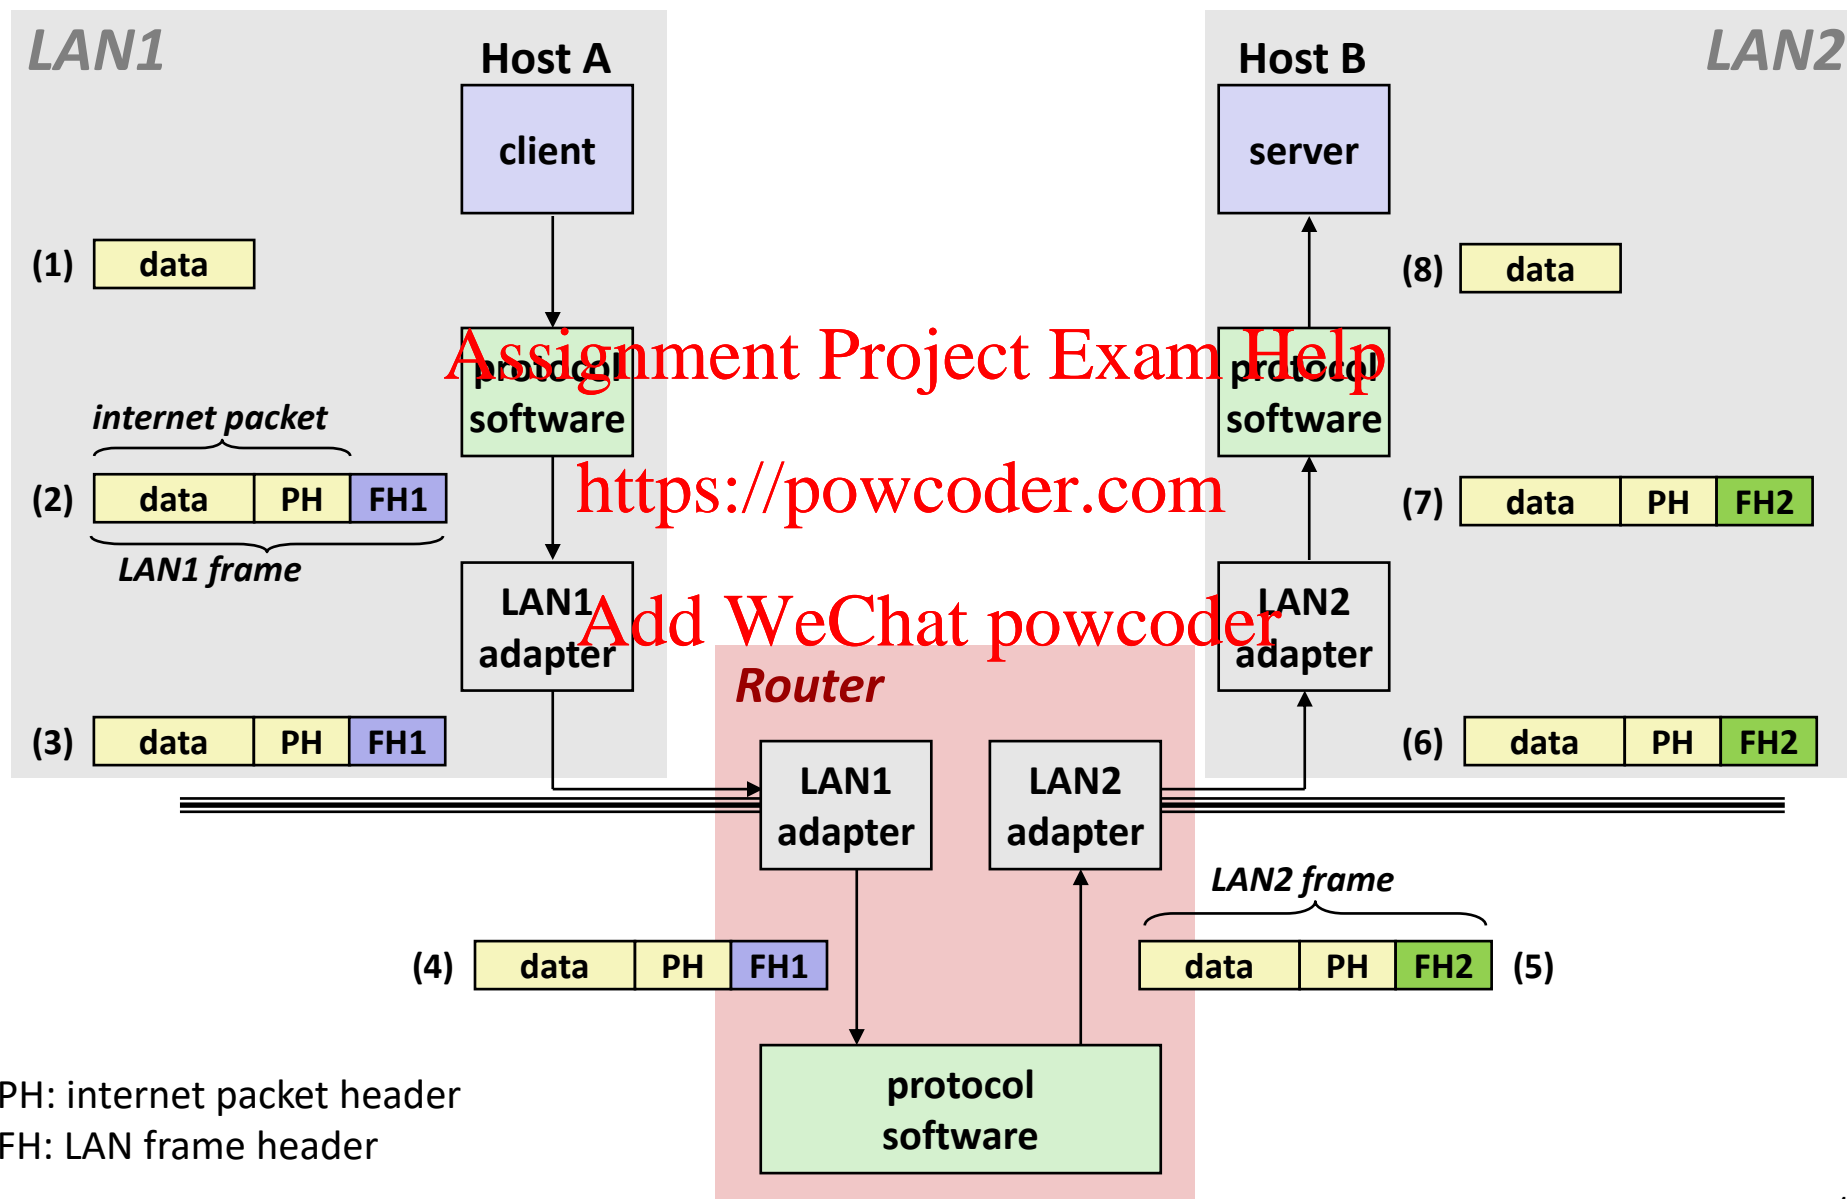

Other Issues

■ We are glossing over a number of important questions:

- What if different networks have different maximum frame sizes? (segmentation)
- How do routers know where to forward frames?
- How are routers informed when the network topology changes?
- What if packets get lost?

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

- ## ■ These (and other) questions are addressed by the area of systems known as *computer networking*

Today


- Networks
- **Global IP Internet**
- Sockets Interface


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

A Map of 460 Billion Device Connections to the Internet collected by the Carna Botnet

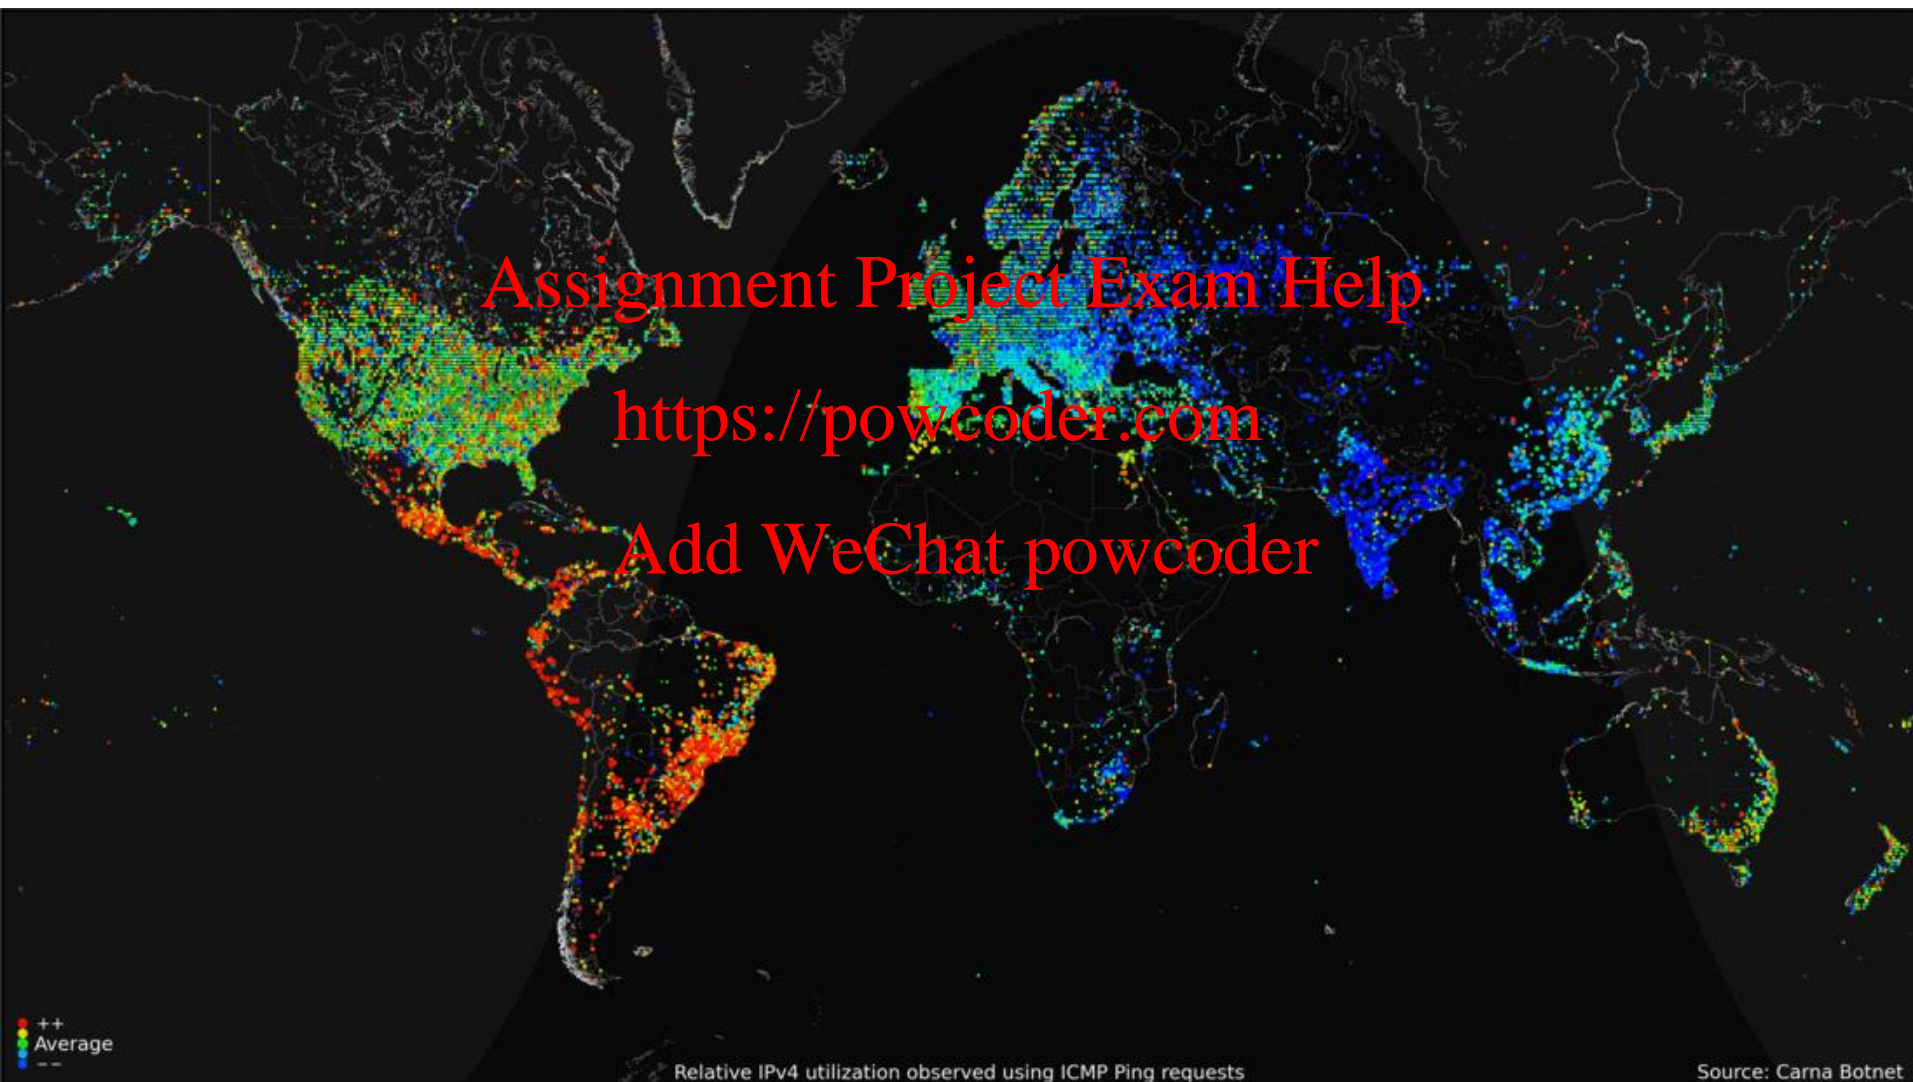

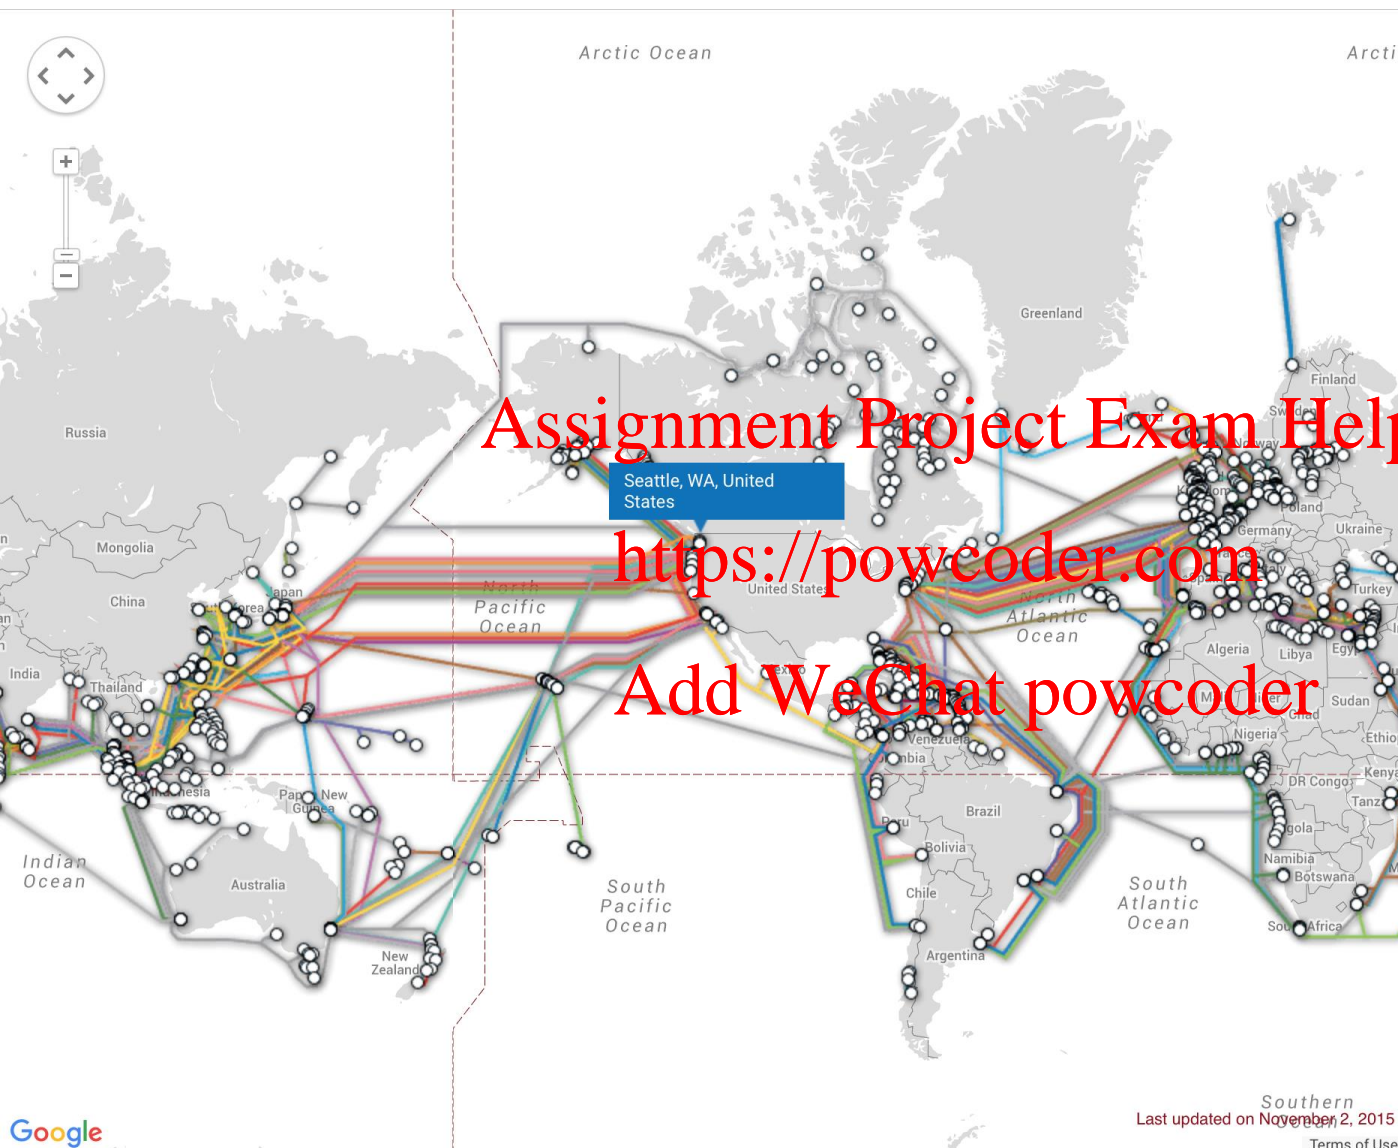

TeleGeography

Submarine Cable Map

The [Submarine Cable Map](#) is a free resource from TeleGeography. Data contained in this map is drawn from the [Global Bandwidth Research Service](#) and is updated on a regular basis.

To learn more about TeleGeography or this map please click [here](#).



Sponsored in part by Huawei Marine

Feedback [t](#) [f](#) [github](#)

Q Search

[Submarine Cable List](#)

[Seattle, WA, United States](#)

[Email link](#)

[Cables](#)

[Arctic Fibre](#)

Last updated on November 2, 2015
[Terms of Use](#)

All content © 2015 PriMetrica, Inc.

Global IP Internet (upper case)


- Most famous example of an internet
- Based on the TCP/IP protocol family
 - IP (Internet Protocol)
 - Provides *basic naming scheme* and unreliable *delivery capability* of packets (datagrams) from *host-to-host*
 - UDP (Unreliable Datagram Protocol)
 - Uses IP to provide *unreliable datagram delivery* from *process-to-process*
 - TCP (Transmission Control Protocol)
 - Uses IP to provide *reliable* byte streams from *process-to-process* over *connections*
- Accessed via a mix of Unix file I/O and functions from the *sockets interface*

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Hardware and Software Organization of an Internet Application

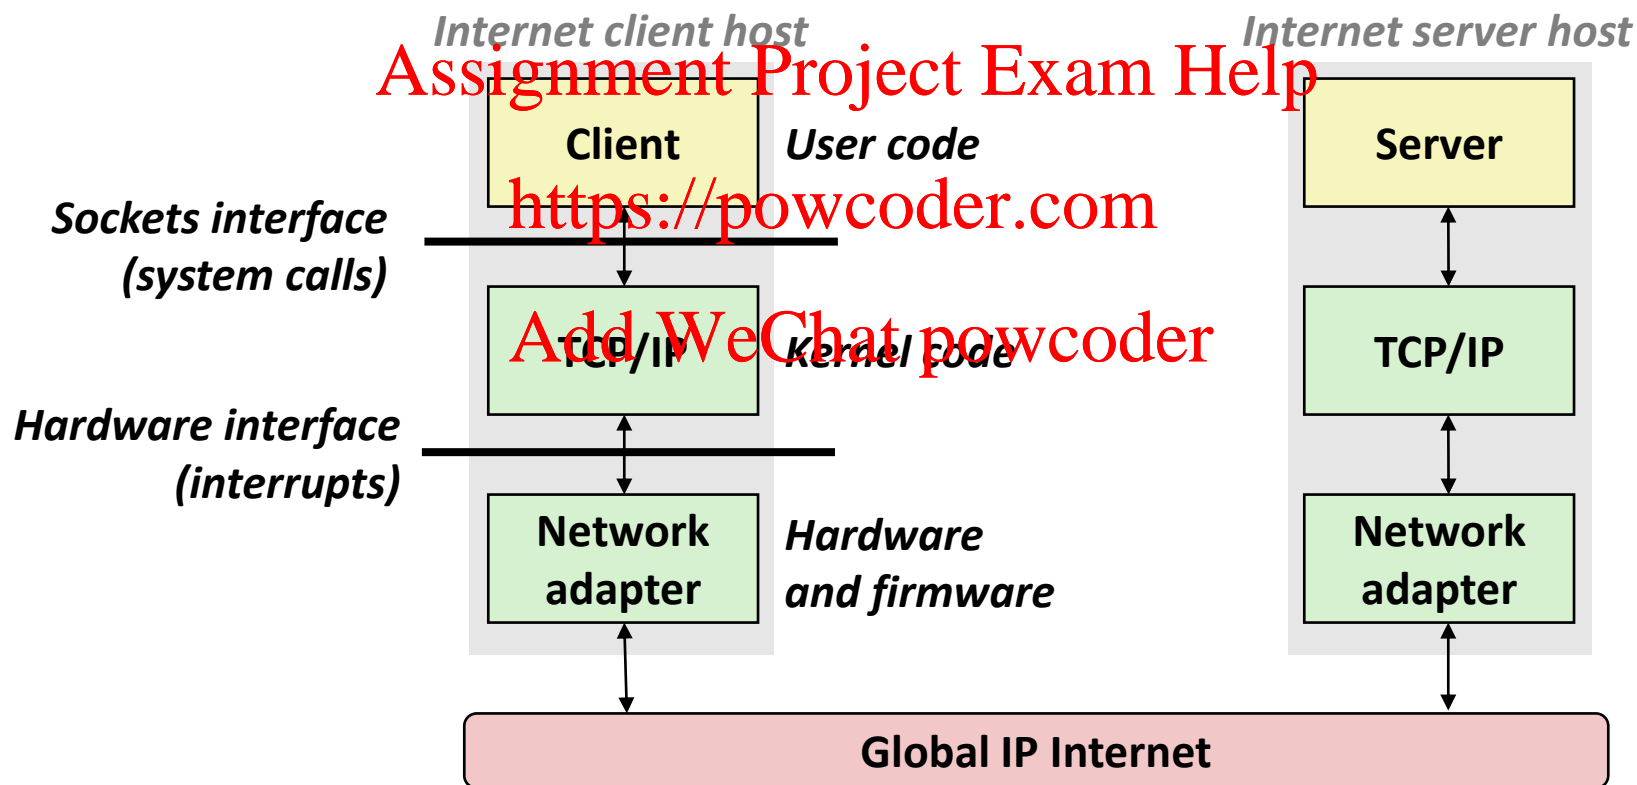

A Programmer's View of the Internet

1. Hosts are mapped to a set of 32-bit *IP addresses*

- 128.2.203.179
- 127.0.0.1 (always *localhost*)

Assignment Project Exam Help

2. The set of IP addresses is mapped to a set of identifiers called Internet *domain names*

- 128.2.217.3 is mapped to *www.cs.cmu.edu*


<https://powcoder.com>

Add WeChat powcoder

3. A process on one Internet host can communicate with a process on another Internet host over a *connection*

Aside: IPv4 and IPv6

- The original Internet Protocol, with its 32-bit addresses, is known as *Internet Protocol Version 4 (IPv4)*
- 1996: Internet Engineering Task Force (IETF) introduced *Internet Protocol Version 6 (IPv6)* with 128-bit addresses
 - Intended as the successor to IPv4
- Majority of Internet traffic still carried by IPv4

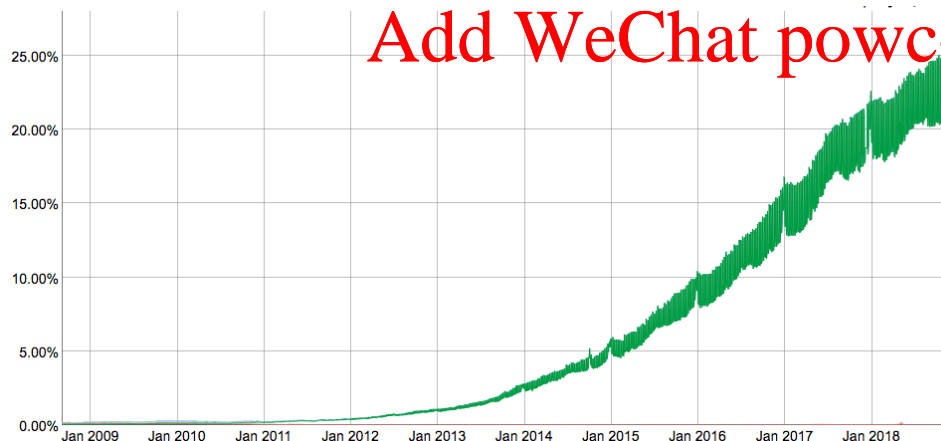

IPv6 traffic at Google

- We will focus on IPv4, but will show you how to write networking code that is protocol-independent.

(1) IP Addresses

- 32-bit IP addresses are stored in an *IP address struct*
 - IP addresses are always stored in memory in *network byte order* (big-endian byte order)
 - True in general for any integer transferred in a packet header from one machine to another.
 - E.g., the port number used to identify an Internet connection.

```
/* Internet address structure */  
struct in_addr {  
    uint32_t    s_addr; /* network byte order (big-endian) */  
};
```

<https://powcoder.com>

Add WeChat powcoder

Dotted Decimal Notation

- By convention, each byte in a 32-bit IP address is represented by its decimal value and separated by a period
 - IP address: `0x8002C2F2` = `128.2.194.242`


Assignment Project Exam Help

- Use `getaddrinfo` and `getnameinfo` functions (described later) to convert between IP addresses and dotted decimal format.

<https://powcoder.com>

Add WeChat powcoder

(2) Internet Domain Names

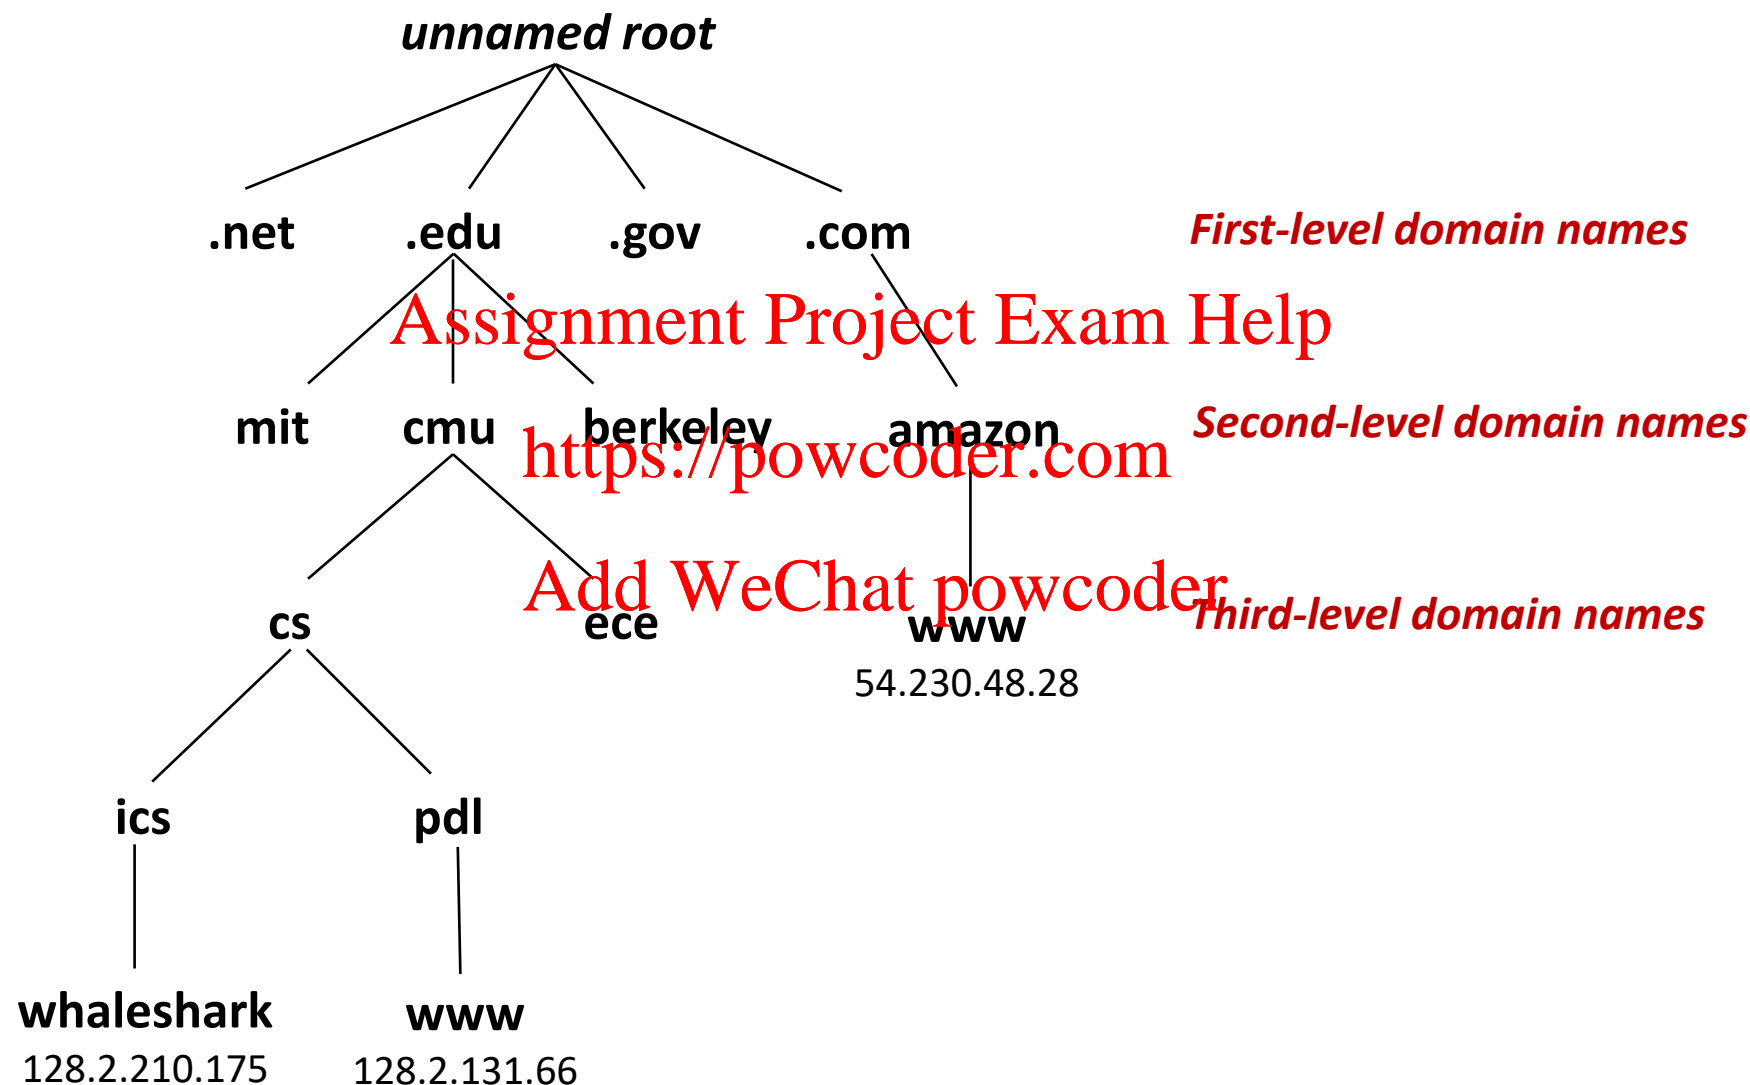

.space	.store	.stream	.studio
.study	.style	.supplies	.supply
.support	.surf	.surgery	.sydney
.systems	.taipei	.tattoo	.tax
.taxi	.team	.tech	.technology
.tennis	.theater	.theatre	.tienda
.tips	.tires	.tirol	.today
.tokyo	.tools	.top	.tours
.town	.toys	.trade	.trading
.training	.tube	.university	.uno
.vacations	.vegas	.ventures	.versicherung
.vet	.viajes	.video	.villas
.vin	.vip	.vision	.vlaanderen
.vodka	.vote	.voting	.voto
.voyage	.wales	.wang	.watch
.webcam	.website	.wed	.wedding
.whoswho	.wien	.wiki	.win
.wine	.work	.works	.world
.wtf	.在线	.移动	.онлайн
.сайт	.сайт	.org	.中文网
.संगठन	.机构	.みんな	.游戏
.企业	.xyz	.yoga	.yokohama
.zone			

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Domain Naming System (DNS)

- The Internet maintains a mapping between IP addresses and domain names in a huge worldwide distributed database called **DNS**

Assignment Project Exam Help

- Conceptually, programmers can view the DNS database as a collection of millions of host entries.

<https://powcoder.com>

- Each host entry defines the mapping between a set of domain names and IP addresses.
- In a mathematical sense, a host entry is an equivalence class of domain names and IP addresses.

Add WeChat powcoder

Properties of DNS Mappings

- Can explore properties of DNS mappings using `nslookup`

- (In our examples, the output is edited for brevity)

- Each host has a locally defined domain name `localhost` which always maps to the loopback address `127.0.0.1`

```
linux> nslookup localhost
Address: 127.0.0.1
```

- Use `hostname` to determine real domain name of local host:

```
linux> hostname
whaleshark.ics.cs.cmu.edu
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Properties of DNS Mappings (cont)

- Simple case: one-to-one mapping between domain name and IP address:

```
linux> nslookup whaleshark.ics.cs.cmu.edu  
Address: 128.2.210.175
```

- Multiple domain names mapped to the same IP address:

```
linux> nslookup cs.mit.edu  
Address: 18.62.1.6  
linux> nslookup eecs.mit.edu  
Address: 18.62.1.6
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Properties of DNS Mappings (cont)

- Multiple domain names mapped to multiple IP addresses:

```
linux> nslookup www.twitter.com
```

```
Address: 104.244.42.65
```

```
Address: 104.244.42.129
```

```
Address: 104.244.42.193
```

```
Address: 104.244.42.1
```

```
linux> nslookup www.twitter.com
```

```
Address: 104.244.42.129
```

```
Address: 104.244.42.65
```

```
Address: 104.244.42.193
```

```
Address: 104.244.42.1
```

- Some valid domain names don't map to any IP address:

```
linux> nslookup ics.cs.cmu.edu
```

```
(No Address given)
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

(3) Internet Connections

- Clients and servers communicate by sending streams of bytes over **connections**. Each connection is:

- *Point-to-point*: connects a pair of processes.
- *Full-duplex*: data can flow in both directions at the same time,
- *Reliable*: stream of bytes sent by the source is eventually received by the destination in the same order it was sent.

<https://powcoder.com>

- A **socket** is an endpoint of a connection

- Socket address is an IP address: port pair

- A **port** is a 16-bit integer that identifies a process:

- **Ephemeral port**: Assigned automatically by client kernel when client makes a connection request.
- **Well-known port**: Associated with some **service** provided by a server (e.g., port 80 is associated with Web servers)

Well-known Service Names and Ports

- Popular services have permanently assigned **well-known ports** and corresponding **well-known service names**:
 - echo servers: echo 7
 - ftp servers: ftp 21
 - ssh servers: ssh 22
 - email servers: smtp 25
 - Web servers: http 80
- Mappings between well-known ports and service names is contained in the file `/etc/services` on each Linux machine.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Anatomy of a Connection

- A connection is uniquely identified by the socket addresses of its endpoints (*socket pair*)
 - (cliaddr:cliport, servaddr:servport)

Assignment Project Exam Help

<https://powcoder.com>


Add WeChat powcoder



51213 is an ephemeral port allocated by the kernel

80 is a well-known port associated with Web servers


Using Ports to Identify Services

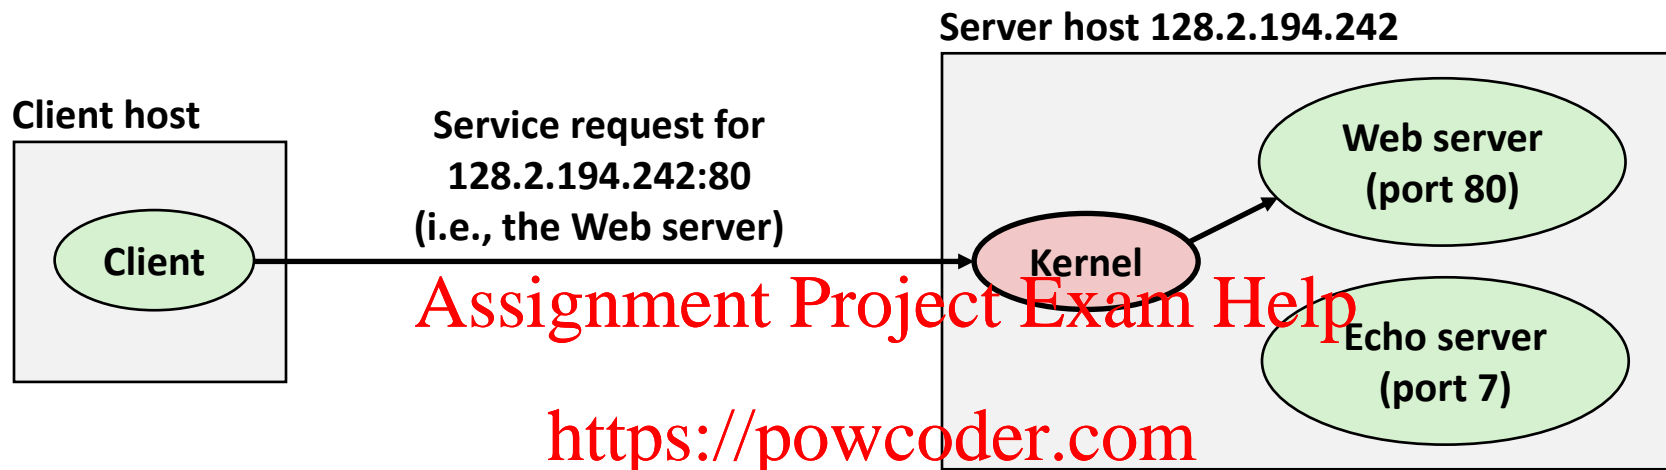

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

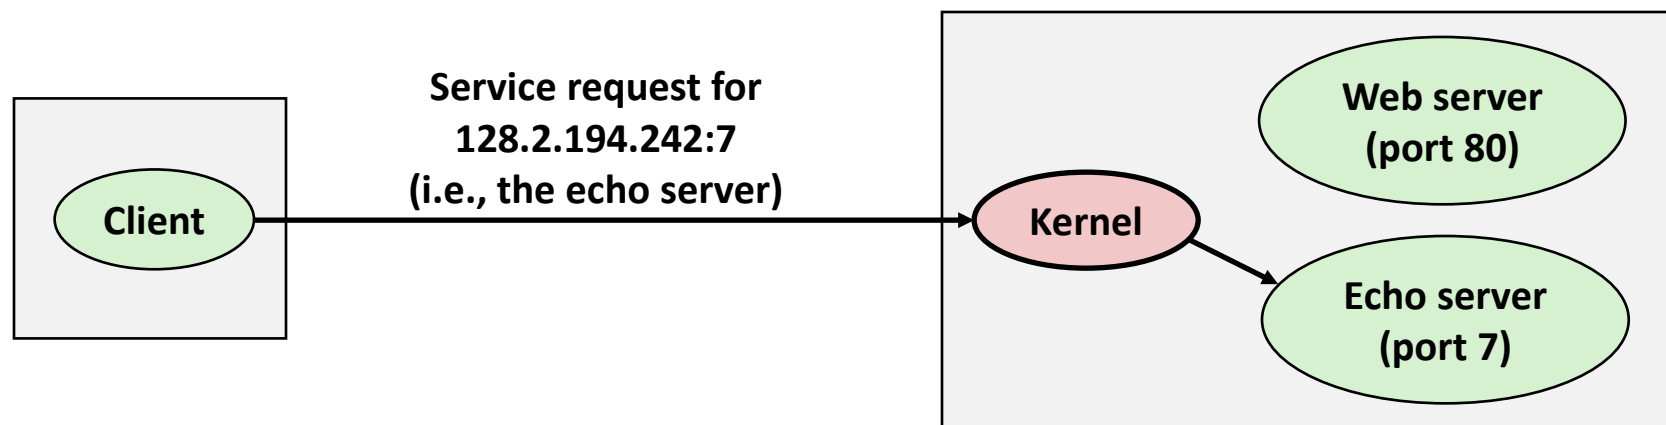

Today

- Networks
- Global IP Internet
- Sockets Interface

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Sockets Interface

- Set of system-level functions used in conjunction with Unix I/O to build network applications.
- Created in the early 80's as part of the original Berkeley distribution of Unix that contained an early version of the Internet protocols.
- Available on all modern systems
 - Unix variants, Windows, OS X, IOS, Android, ARM

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Sockets

■ What is a socket?

- To the kernel, a socket is an endpoint of communication
- To an application, a socket is a file descriptor that lets the application read/write from/to the network
 - **Remember:** All Unix I/O devices, including networks, are modeled as files

■ Clients and servers communicate with each other by reading from and writing to socket descriptors



■ The main distinction between regular file I/O and socket I/O is how the application “opens” the socket descriptors

Quiz Time!

Assignment Project Exam Help

<https://powcoder.com>

Check out:

Add WeChat powcoder

<https://canvas.cmu.edu/courses/17808>

Socket Programming Example

■ Echo server and client

■ Server

- Accepts connection request
- Repeats back lines as they are typed

■ Client

- Requests connection to server
- Repeatedly:
 - Read line from terminal
 - Send to server
 - Read reply from server
 - Print line to terminal

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Echo Server/Client Session Example

Client

```

bambooshark: ./echoclient whaleshark.ics.cs.cmu.edu 6616      (A)
This line is being echoed                                     (B)
This line is being echoed
This one is, too      Assignment Project Exam Help           (C)
This one is, too
^D
bambooshark: ./echoclient whaleshark.ics.cs.cmu.edu 6616      (D)
This one is a new connection                                 (E)
This one is a new connection
^D

```


<https://powcoder.com>
Add WeChat powcoder


Server

```

whaleshark: ./echoserveri 6616
Connected to (BAMBOOSHARK.ICS.CS.CMU.EDU, 33707)      (A)
server received 26 bytes                                (B)
server received 17 bytes                                (C)
Connected to (BAMBOOSHARK.ICS.CS.CMU.EDU, 33708)      (D)
server received 29 bytes                                (E)

```

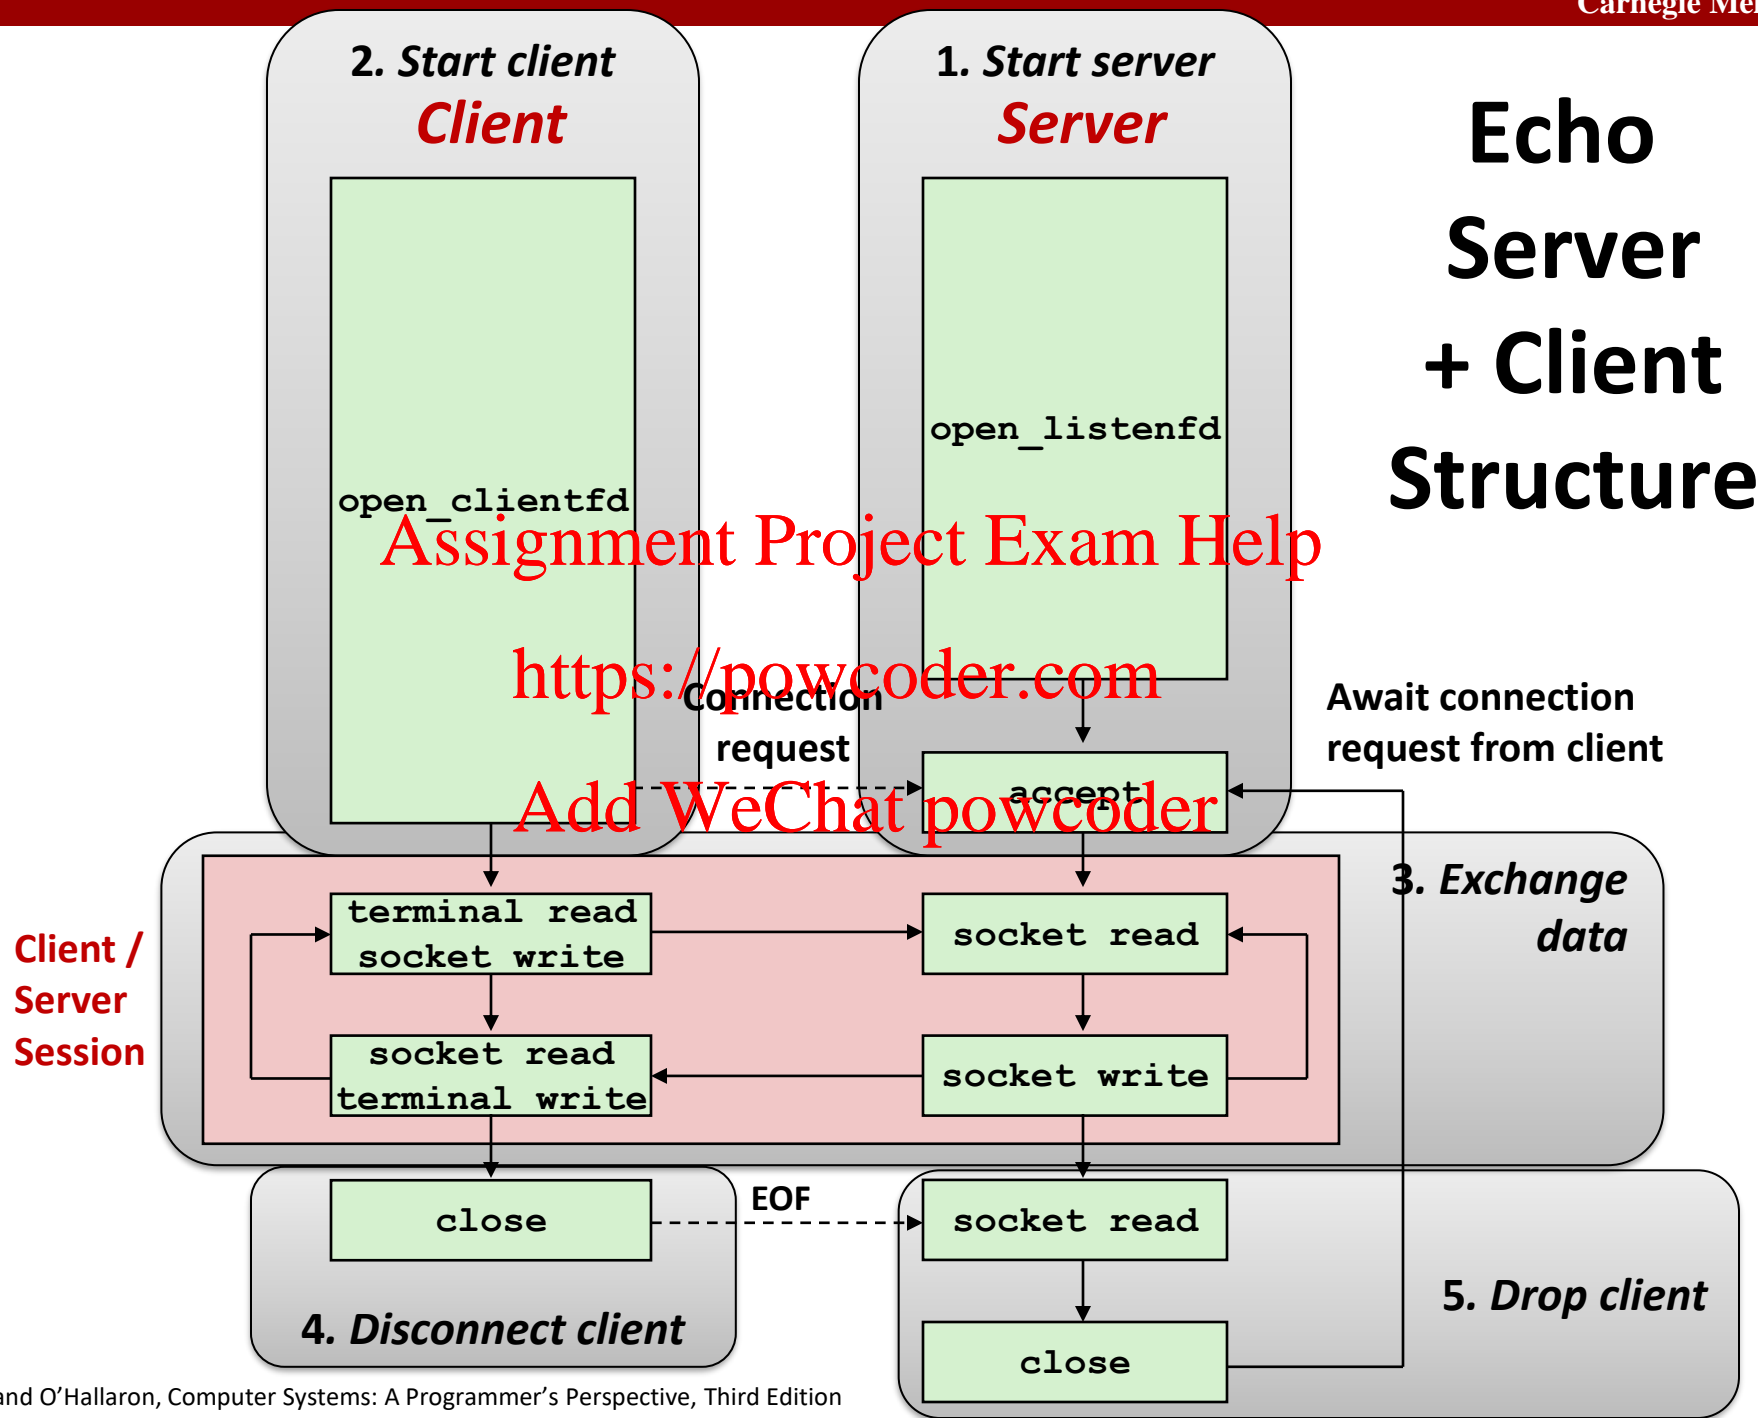

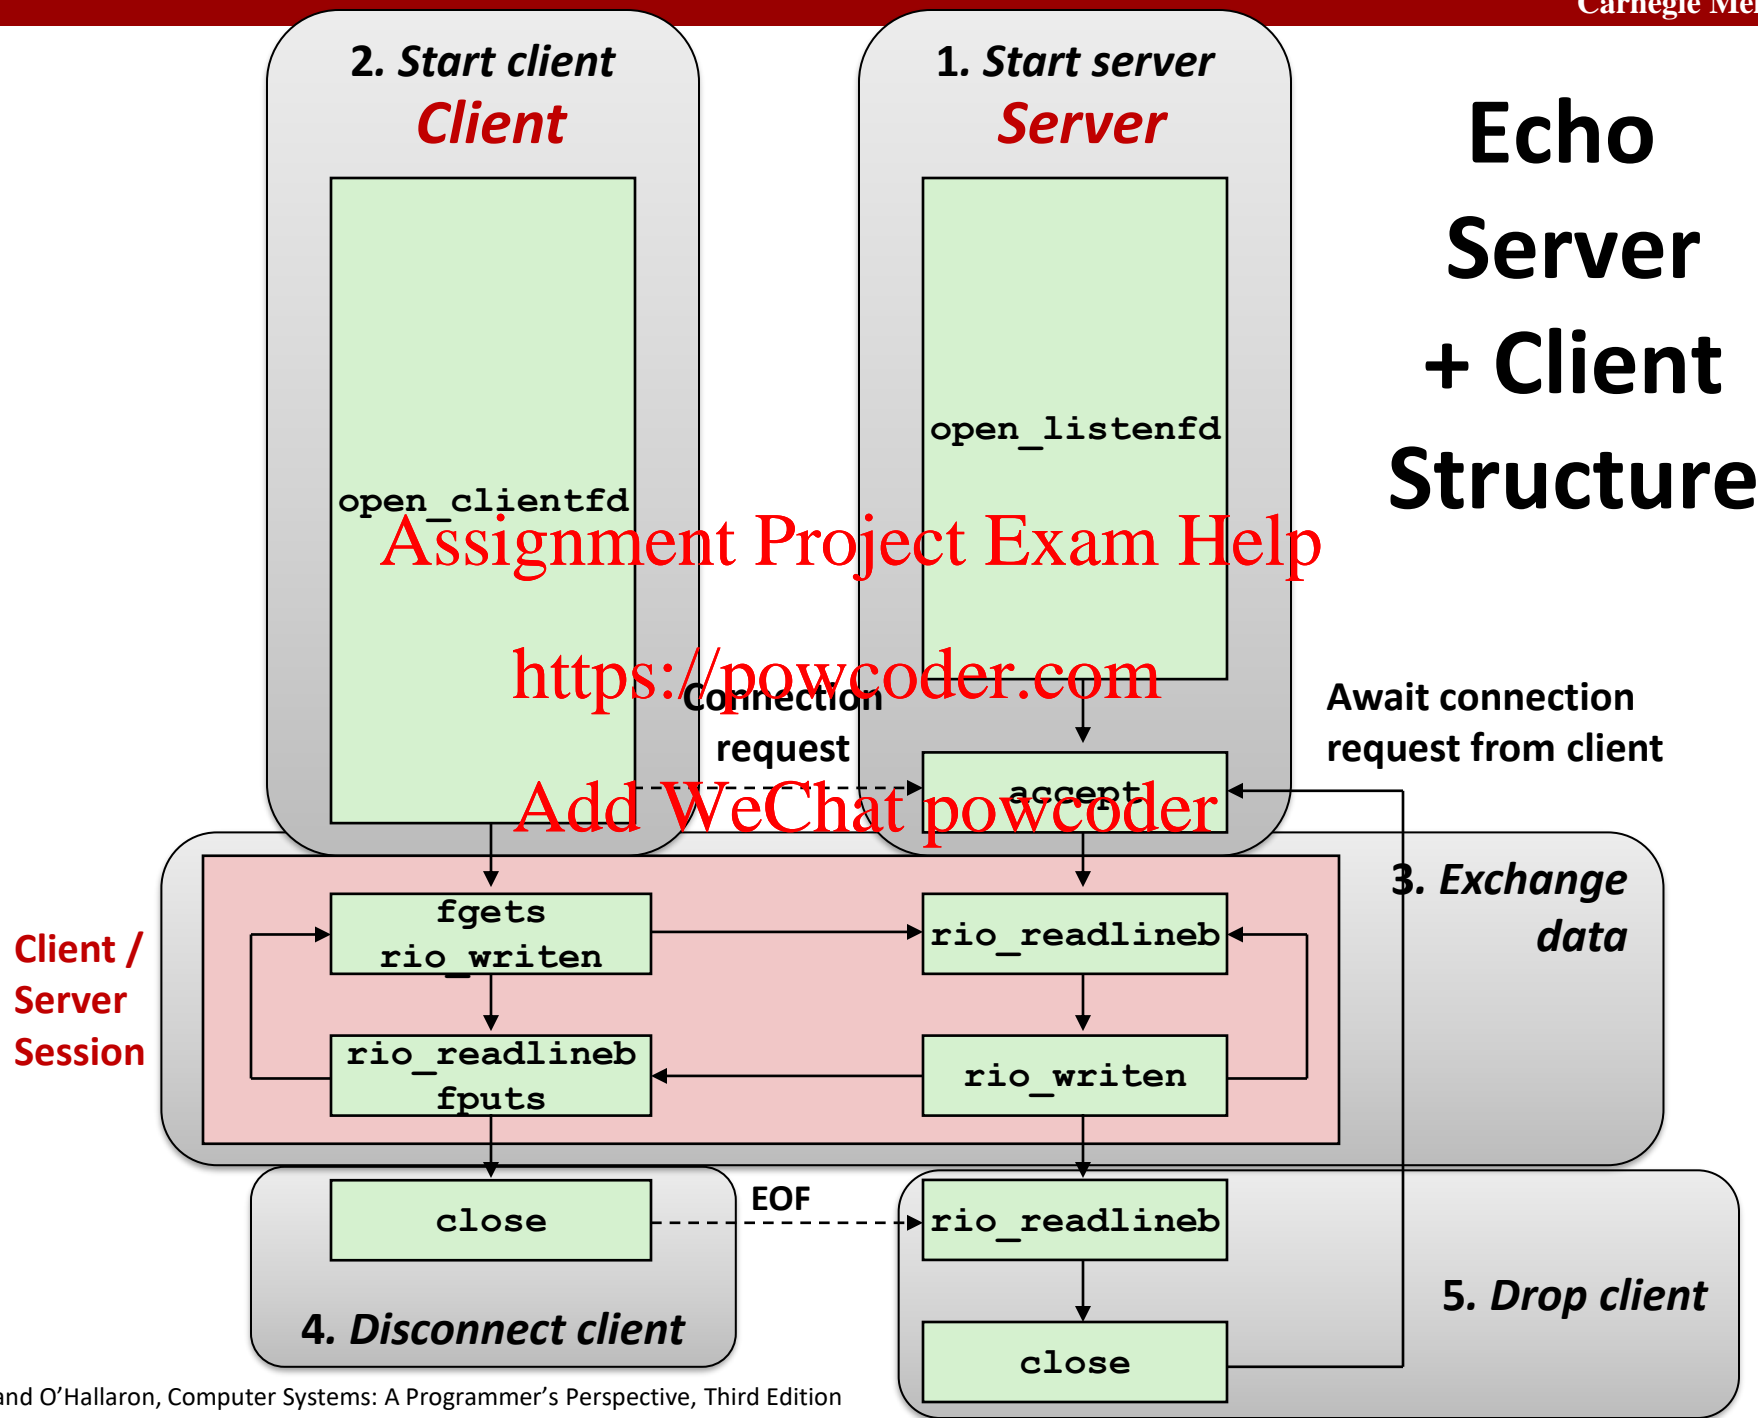

Recall: Unbuffered RIO Input/Output

- Same interface as Unix `read` and `write`
- Especially useful for transferring data on network sockets

```
#include "csapp.h"
```

```
ssize_t rio_readn(int fd, void *usrbuf, size_t n);
```

```
ssize_t rio_writen(int fd, void *usrbuf, size_t n);
```

Return: num. bytes transferred if OK, 0 on EOF (`rio_readn` only), -1 on error

- `rio_readn` returns short count only if it encounters EOF
 - Only use it when you know how many bytes to read
- `rio_writen` never returns a short count
- Calls to `rio_readn` and `rio_writen` can be interleaved arbitrarily on the same descriptor

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Recall: Buffered RIO Input Functions

- Efficiently read text lines and binary data from a file partially cached in an internal memory buffer

```
#include "csapp.h"
```

```
void rio_readinitb(rio_t *rp, int fd);
```

```
ssize_t rio_readlineb(rio_t *rp, void *usrbuf, size_t maxlen);
```

```
ssize_t rio_readnb(rio_t *rp, void *usrbuf, size_t n);
```

Return: num. bytes read if OK, 0 on EOF, -1 on error

- rio_readlineb** reads a **text line** of up to **maxlen** bytes from file **fd** and stores the line in **usrbuf**
 - Especially useful for reading text lines from network sockets
- Stopping conditions
 - maxlen** bytes read
 - EOF encountered
 - Newline ('\n') encountered

Echo Client: Main Routine

```
#include "csapp.h"

int main(int argc, char **argv)
{
    int clientfd;
    char *host, *port, buf[MAXLINE];
    rio_t rio;


    host = argv[1];
    port = argv[2];

    clientfd = Open_clientfd(host, port);
    Rio_readinitb(&rio, clientfd);

    while (Fgets(buf, MAXLINE, stdin) != NULL) {
        Rio_writen(clientfd, buf, strlen(buf));
        Rio_readlineb(&rio, buf, MAXLINE);
        Fputs(buf, stdout);
    }
    Close(clientfd);
    exit(0);
}
```

Assignment Project Exam Help
<https://powcoder.com>
Add WeChat powcoder

echoclient.c

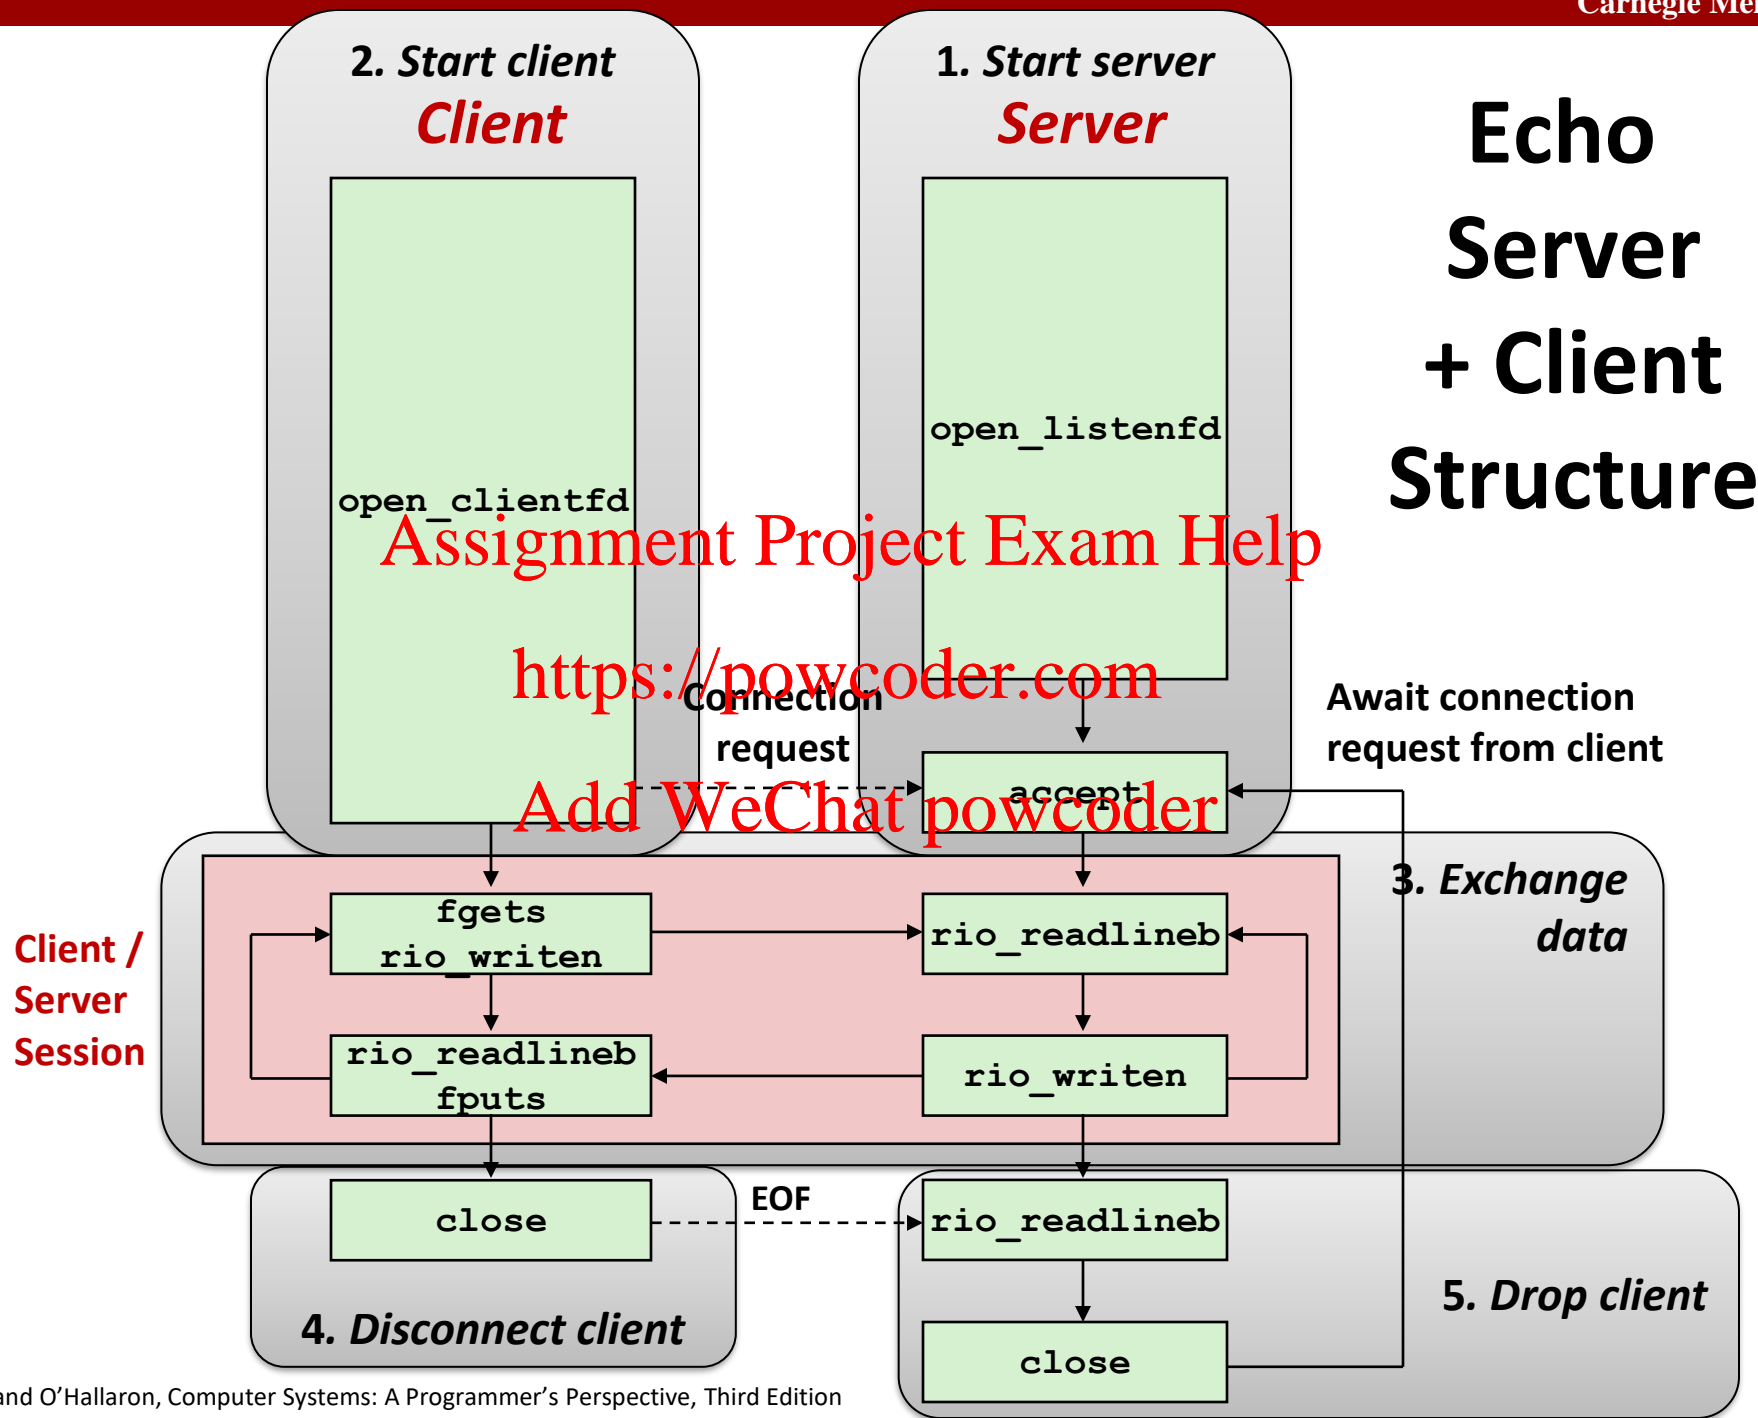

Iterative Echo Server: Main Routine

```
#include "csapp.h"
void echo(int connfd);

int main(int argc, char **argv)
{
    int listenfd, connfd;
    socklen_t clientlen;
    struct sockaddr_storage clientaddr; /* Enough room for any addr */
    char client_hostname[MAXLINE], client_port[MAXLINE];

    listenfd = Open_listenfd(argv[1]);
    while (1) {
        clientlen = sizeof(struct sockaddr_storage); /* Important! */
        connfd = Accept(listenfd, (SA *)&clientaddr, &clientlen);
        Getnameinfo((SA *)&clientaddr, clientlen,
                    client_hostname, MAXLINE, client_port, MAXLINE, 0);
        printf("Connected to (%s, %s)\n", client_hostname, client_port);
        echo(connfd);
        Close(connfd);
    }
    exit(0);
}
```

Assignment Project Exam Help
<https://powcoder.com>
Add WeChat powcoder

echoserveri.c

Echo Server: echo function

- The server uses RIO to read and echo text lines until EOF (end-of-file) condition is encountered.
 - EOF condition caused by client calling `close(clientfd)`

Assignment Project Exam Help

```
void echo(int connfd)
{
    size_t n;
    char buf[MAXLINE];
    rio_t rio;

    Rio_readinitb(&rio, connfd);
    while((n = Rio_readlineb(&rio, buf, MAXLINE)) != 0) {
        printf("server received %d bytes\n", (int)n);
        Rio_writen(connfd, buf, n);
    }
}
```

echo.c

<https://powcoder.com>

Add WeChat powcoder

Socket Address Structures

■ Generic socket address:

- For address arguments to **connect**, **bind**, and **accept** (*next lecture*)
- Necessary only because C did not have generic (**void ***) pointers when the sockets interface was designed
- For casting convenience, we adopt the Stevens convention:

typedef struct sockaddr SA;

```
struct sockaddr {
    uint16_t  sa_family; /* Protocol family */
    char      sa_data[14]; /* Address data */
};
```

sa_family



Family Specific


Socket Address Structures

■ Internet (IPv4) specific socket address:

- Must cast `(struct sockaddr_in *)` to `(struct sockaddr *)` for functions that take socket address arguments.

Assignment Project Exam Help

```
struct sockaddr_in {
    uint16_t    sin_family; /* Protocol family (always AF_INET) */
    uint16_t    sin_port;  /* Port num in network byte order */
    struct in_addr sin_addr; /* IP addr in network byte order */
    unsigned char sin_zero[8]; /* Pad to size of (struct sockaddr) */
};
```

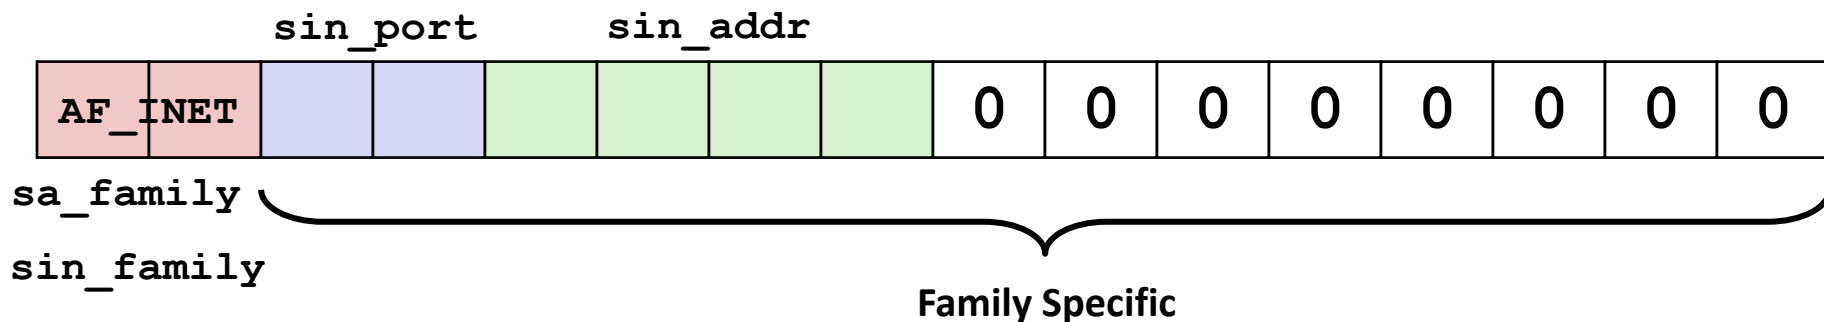

Host and Service Conversion: `getaddrinfo`

- `getaddrinfo` is the modern way to convert string representations of hostnames, host addresses, ports, and service names to socket address structures.
 - Replaces obsolete `gethostbyname` and `getservbyname` funcs.

<https://powcoder.com>

■ Advantages:

- Reentrant (can be safely used by threaded programs).
- Allows us to write portable protocol-independent code
 - Works with both IPv4 and IPv6

■ Disadvantages

- Somewhat complex
- Fortunately, a small number of usage patterns suffice in most cases.

Host and Service Conversion: getaddrinfo

```

int getaddrinfo(const char *host,           /* Hostname or address */
               const char *service,       /* Port or service name */
               const struct addrinfo *hints, /* Input parameters */
               struct addrinfo **result);  /* Output linked list */
void freeaddrinfo(struct addrinfo *result); /* Free linked list */
const char *gai_strerror(int errcode);    /* Return error msg */

```


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

- Given host and service, `getaddrinfo` returns result that points to a linked list of `addrinfo` structs, each of which points to a corresponding socket address struct, and which contains arguments for the sockets interface functions.
- Helper functions:
 - `freeaddrinfo` frees the entire linked list.
 - `gai_strerror` converts error code to an error message.

Linked List Returned by getaddrinfo

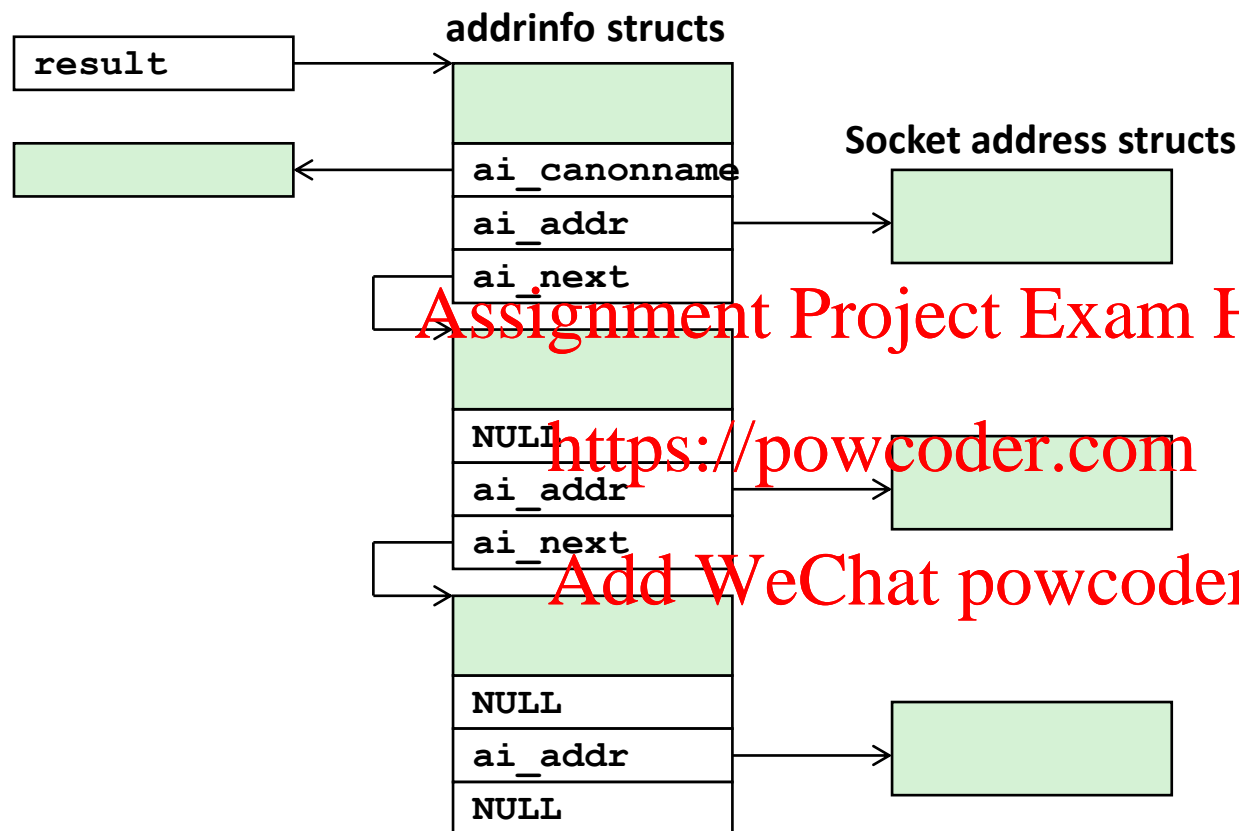

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

addrinfo Struct

```

struct addrinfo {
    int          ai_flags;      /* Hints argument flags */
    int          ai_family;     /* First arg to socket function */
    int          ai_socktype;   /* Second arg to socket function */
    int          ai_protocol;   /* Third arg to socket function */
    char*        ai_canonname;  /* Canonical host name */
    size_t       ai_addrlen;    /* Size of ai_addr struct */
    struct sockadd *ai_addr;     /* Ptr to socket address structure */
    struct addrinfo *ai_next;    /* Ptr to next item in linked list */
};

```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

- Each `addrinfo` struct returned by `getaddrinfo` contains arguments that can be passed directly to `socket` function.
- Also points to a socket address struct that can be passed directly to `connect` and `bind` functions.

(`socket`, `connect`, `bind` to be discussed next lecture)

Host and Service Conversion: `getnameinfo`

- `getnameinfo` is the inverse of `getaddrinfo`, converting a socket address to the corresponding host and service.
 - Replaces obsolete `gethostbyaddr` and `getservbyport` funcs.
 - Reentrant and protocol independent.

Assignment Project Exam Help

<https://powcoder.com>

```
int getnameinfo(const SA *sa, socklen_t salen, /* In: socket addr */
                char *host, size_t hostlen, /* Out: host */
                char *serv, size_t servlen, /* Out: service */
                int flags); /* optional flags */
```

Add WeChat powcoder

Conversion Example

```
#include "csapp.h"
```

```
int main(int argc, char **argv)
```

```
{
```

```
    struct addrinfo *p, *listp, hints;
```

```
    char buf[MAXLINE];
```

```
    int rc, flags;
```

```
    /* Get a list of addrinfo records */
```

```
    memset(&hints, 0, sizeof(struct addrinfo));
```

```
    // hints.ai_family = AF_INET;          /* IPv4 only */
```

```
    hints.ai_socktype = SOCK_STREAM; /* Connections only */
```

```
    if ((rc = getaddrinfo(argv[1], NULL, &hints, &listp)) != 0) {  
        fprintf(stderr, "getaddrinfo error: %s\n", gai_strerror(rc));  
        exit(1);  
    }
```

hostinfo.c

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Conversion Example (cont)

```
/* Walk the list and display each IP address */
flags = NI_NUMERICHOST; /* Display address instead of name */
for (p = listp; p; p = p->ai_next) {
    Getnameinfo(p->ai_addr, p->ai_addrlen,
                buf, MAXLINE, NULL, 0, flags);
    printf("%s\n", buf);
}

/* Clean up */
Freeaddrinfo(listp);

exit(0);
}
```

hostinfo.c

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Running hostinfo

```
whaleshark> ./hostinfo localhost  
127.0.0.1
```

```
whaleshark> ./hostinfo whaleshark.ics.cs.cmu.edu  
128.2.210.175
```

```
whaleshark> ./hostinfo twitter.com  
199.16.156.230
```

```
199.16.156.38
```

```
199.16.156.102
```

```
199.16.156.198
```

```
whaleshark> ./hostinfo google.com
```

```
172.217.15.110
```

```
2607:f8b0:4004:802::200e
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Today

- Networks
- Global IP Internet
- Sockets Interface

Assignment Project Exam Help

<https://powcoder.com>

Next time

Add WeChat powcoder

- Using `getaddrinfo` for host and service conversion
- Writing clients and servers
- Writing Web servers!

Additional slides

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Basic Internet Components

■ Internet backbone:

- collection of routers (nationwide or worldwide) connected by high-speed point-to-point networks

■ Internet Exchange Points (IXP):

- router that connects multiple backbones (often referred to as peers)
- Also called Network Access Points (NAP)

■ Regional networks:

- smaller backbones that cover smaller geographical areas (e.g., cities or states)

■ Point of presence (POP):

- machine that is connected to the Internet

■ Internet Service Providers (ISPs):


- provide dial-up or direct access to POPs

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Internet Connection Hierarchy

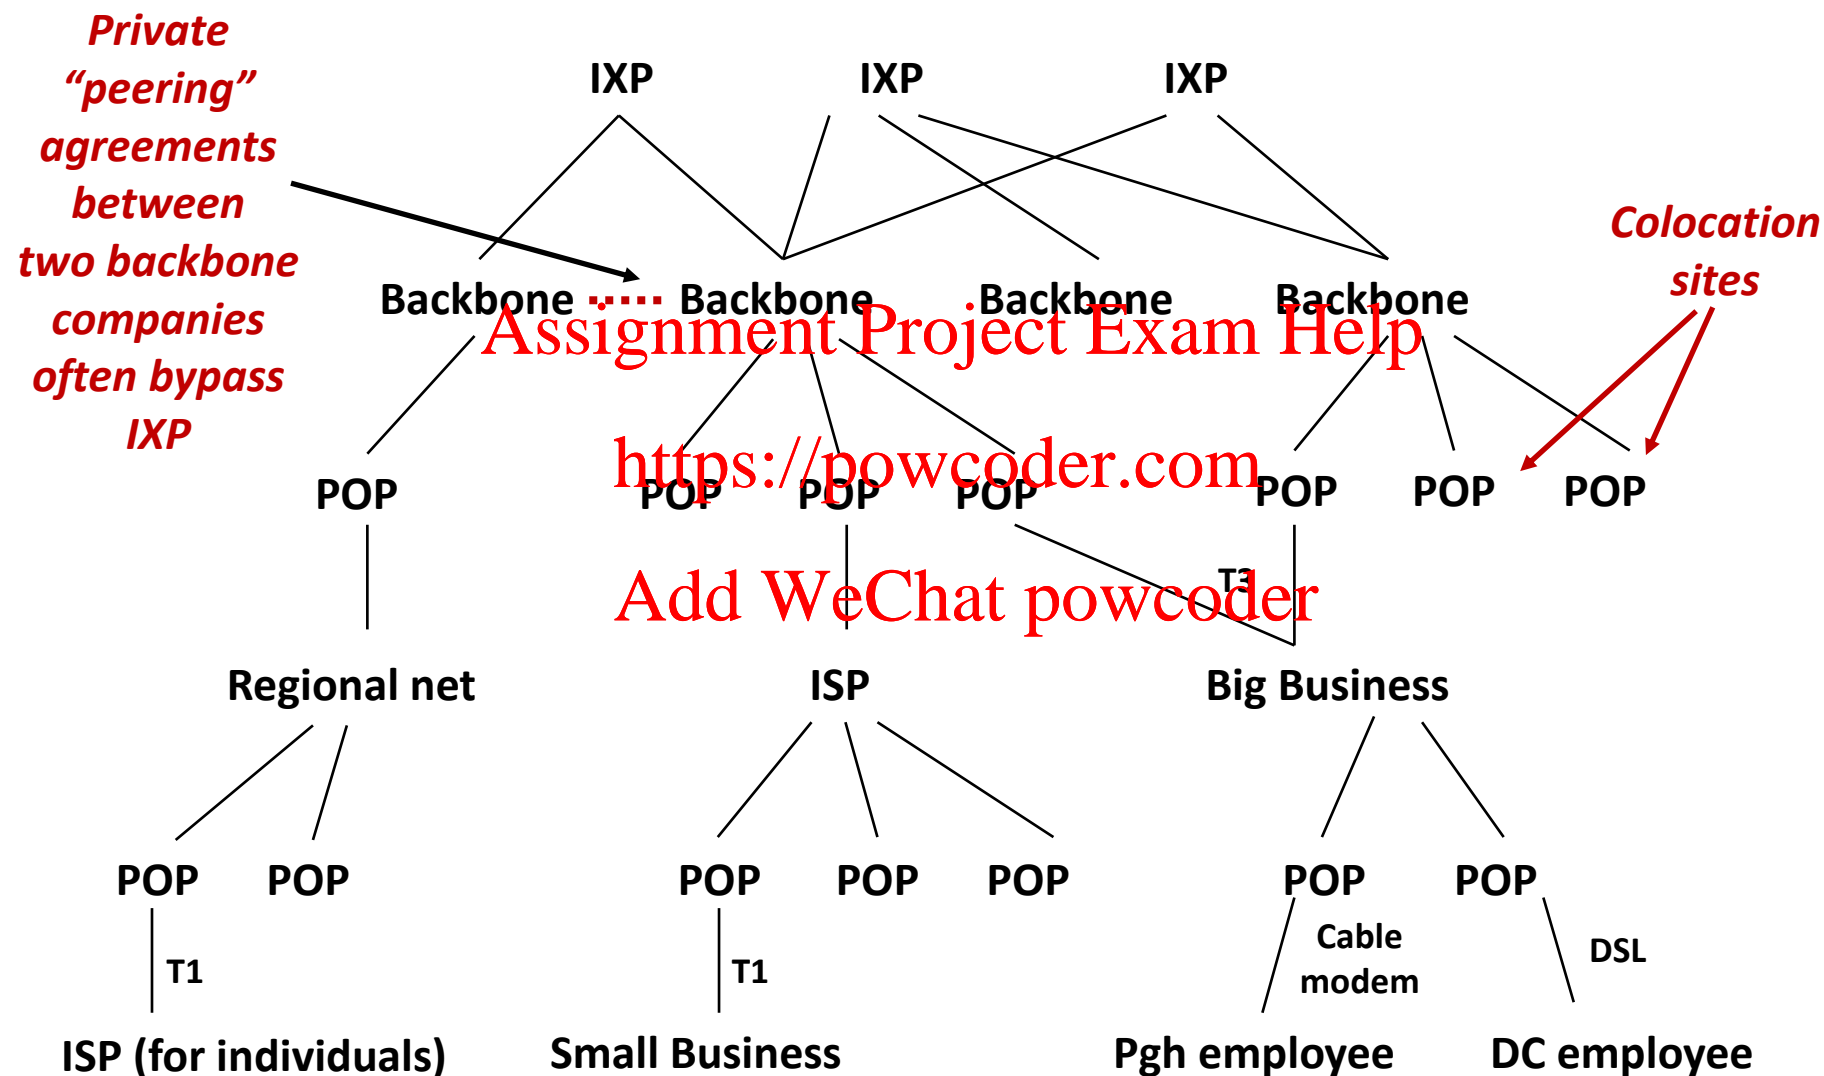

IP Address Structure

■ IP (V4) Address space divided into classes:

	0	1	2	3	8	16	24	31	
Class A	0	Net ID				Host ID			
Class B	1	0	Net ID				Host ID		
Class C	1	1	0	Net ID				Host ID	
Class D	1	1	1	0	Multicast address				
Class E	1	1	1	1	Reserved for experiments				

■ Network ID Written in form w.x.y.z/n

- n = number of bits in host address
- E.g., CMU written as 128.2.0.0/16
 - Class B address

■ Unrouted (private) IP addresses:

10.0.0.0/8 172.16.0.0/12 192.168.0.0/16

Evolution of Internet

■ Original Idea

- Every node on Internet would have unique IP address
 - Everyone would be able to talk directly to everyone
- No secrecy or authentication
 - Messages visible to routers and hosts on same LAN
 - Possible to forge source field in packet header

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

■ Shortcomings

- There aren't enough IP addresses available
- Don't want everyone to have access or knowledge of all other hosts
- Security issues mandate secrecy & authentication

Evolution of Internet: Naming

■ Dynamic address assignment

- Most hosts don't need to have known address
 - Only those functioning as servers
- DHCP (Dynamic Host Configuration Protocol)
 - Local ISP assigns address for temporary use


<https://powcoder.com>

■ Example:

Add WeChat powcoder

- Laptop at CMU (wired connection)
 - IP address 128.2.213.29 (**bryant-tp4.cs.cmu.edu**)
 - Assigned statically
- Laptop at home
 - IP address 192.168.1.5
 - Only valid within home network

Evolution of Internet: Firewalls

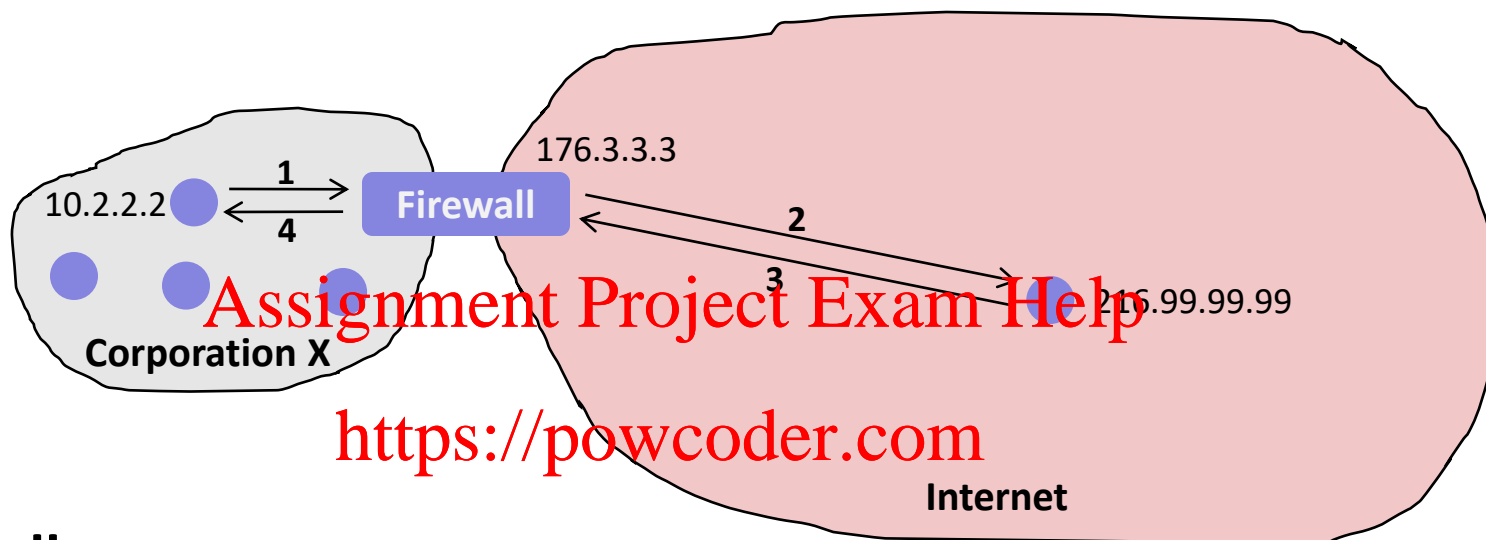

■ Firewalls

- Hides organizations nodes from rest of Internet
 - Use local IP addresses within organization
 - For external service, provides proxy service
1. Client request: src=10.2.2.2, dest=216.99.99.99
 2. Firewall forwards: src=176.3.3.3, dest=216.99.99.99
 3. Server responds: src=216.99.99.99, dest=176.3.3.3
 4. Firewall forwards response: src=216.99.99.99, dest=10.2.2.2