
CIS 471/571 (Fall 2020): Introduction to Artificial Intelligence

Assignment Project Exam Help

Lecture 16: Bayes Nets – Sampling

<https://powcoder.com>

Add WeChat powcoder

Thanh H. Nguyen

Source: <http://ai.berkeley.edu/home.html>



Bayes' Nets

- ✓ Representation
- ✓ Conditional Independences
- Assignment Project Exam Help
- Probabilistic Inference
 - ✓ <https://powcoder.com>
Enumeration (exact, exponential complexity)
 - ✓ Add WeChat powcoder
Variable elimination (exact, worst-case exponential complexity, often better)
 - ✓ Inference is NP-complete
 - Sampling (approximate)
- Learning Bayes' Nets from Data



Approximate Inference: Sampling

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



Sampling

- Sampling is a lot like repeated simulation

- Predicting the weather, basketball games, ...

- Why sample?

- Learning: get samples from a distribution you don't know
 - Inference: getting a sample is faster than computing the right answer (e.g. with variable elimination)


- Basic idea

- Draw N samples from a sampling distribution S
 - Compute an approximate posterior probability
 - Show this converges to the true probability P

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

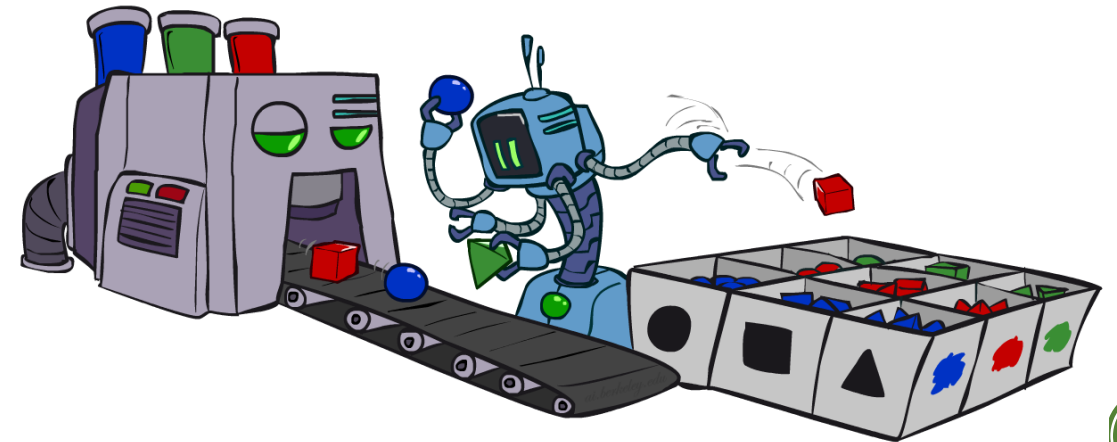

Sampling

■ Sampling from given distribution ■ Example

- Step 1: Get sample u from uniform distribution over $[0, 1)$

- E.g. `random()` in python

- Step 2: Convert this sample u into an outcome for the given distribution

- Each target outcome is associated with a sub-interval of $[0,1)$
 - Sub-interval size is equal to probability of the outcome.


C	P(C)
red	0.6
green	0.1
blue	0.3

$0 \leq u < 0.6, \rightarrow C = \text{red}$

$0.6 \leq u < 0.7, \rightarrow C = \text{green}$

$0.7 \leq u < 1, \rightarrow C = \text{blue}$

- If `random()` returns $u = 0.83$, then our sample is $C = \text{blue}$
- E.g, after sampling 8 times:



Sampling in Bayes' Nets

- Prior Sampling
- Rejection Sampling
<https://powcoder.com>
- Likelihood Weighting
<https://powcoder.com>
- Gibbs Sampling




Prior Sampling


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

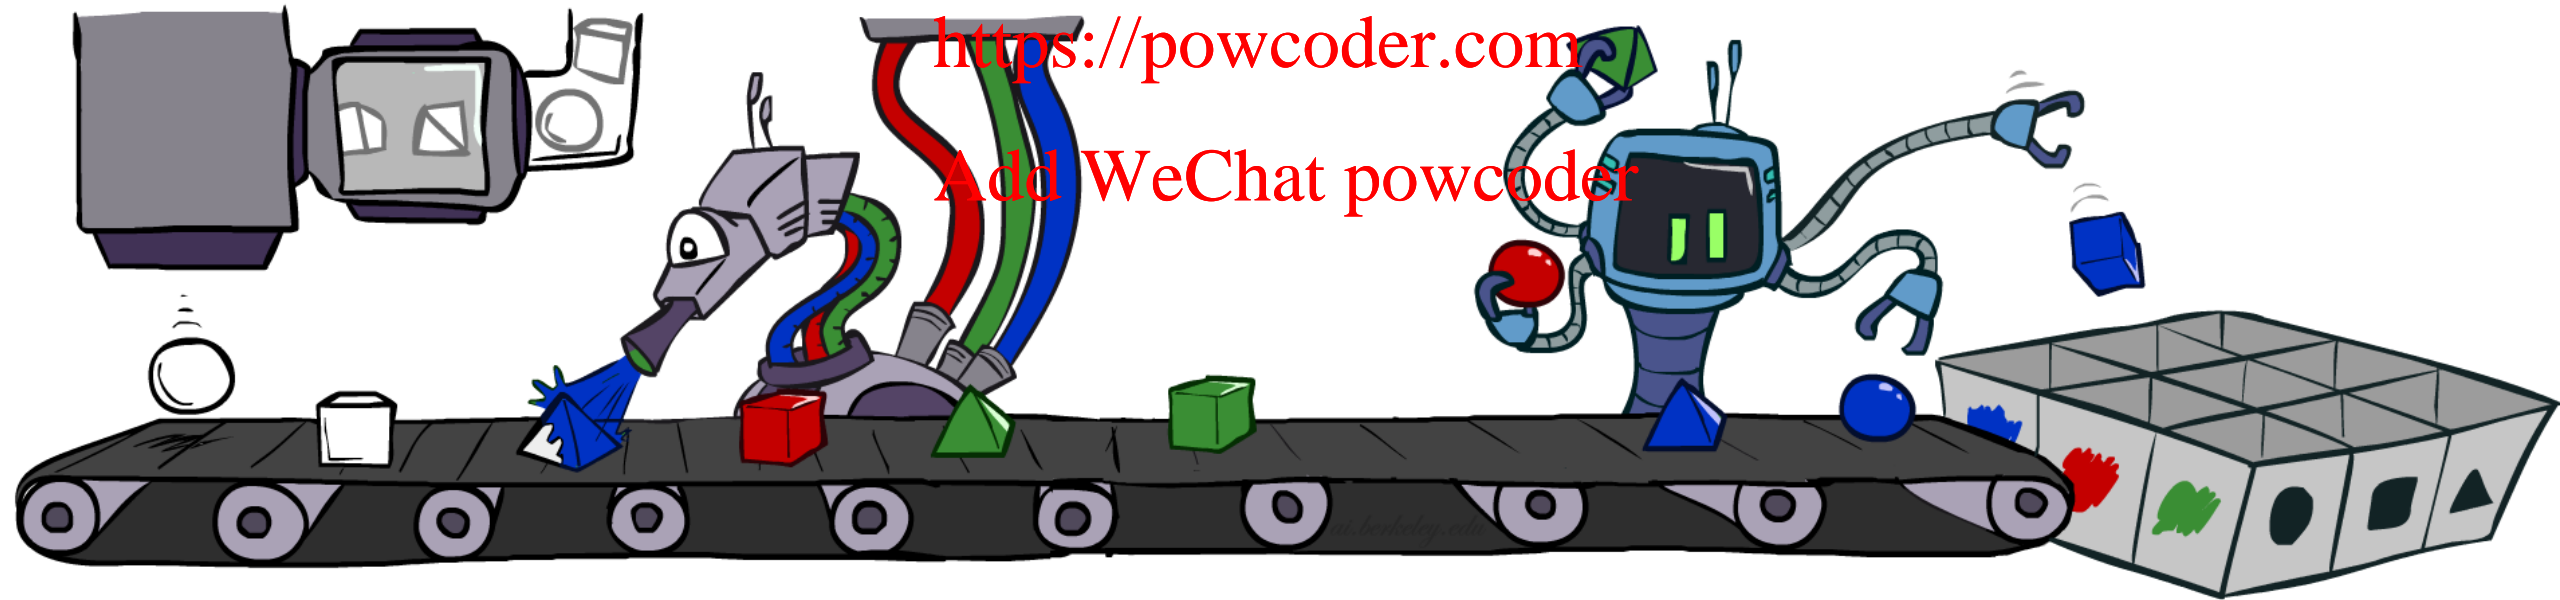

Prior Sampling

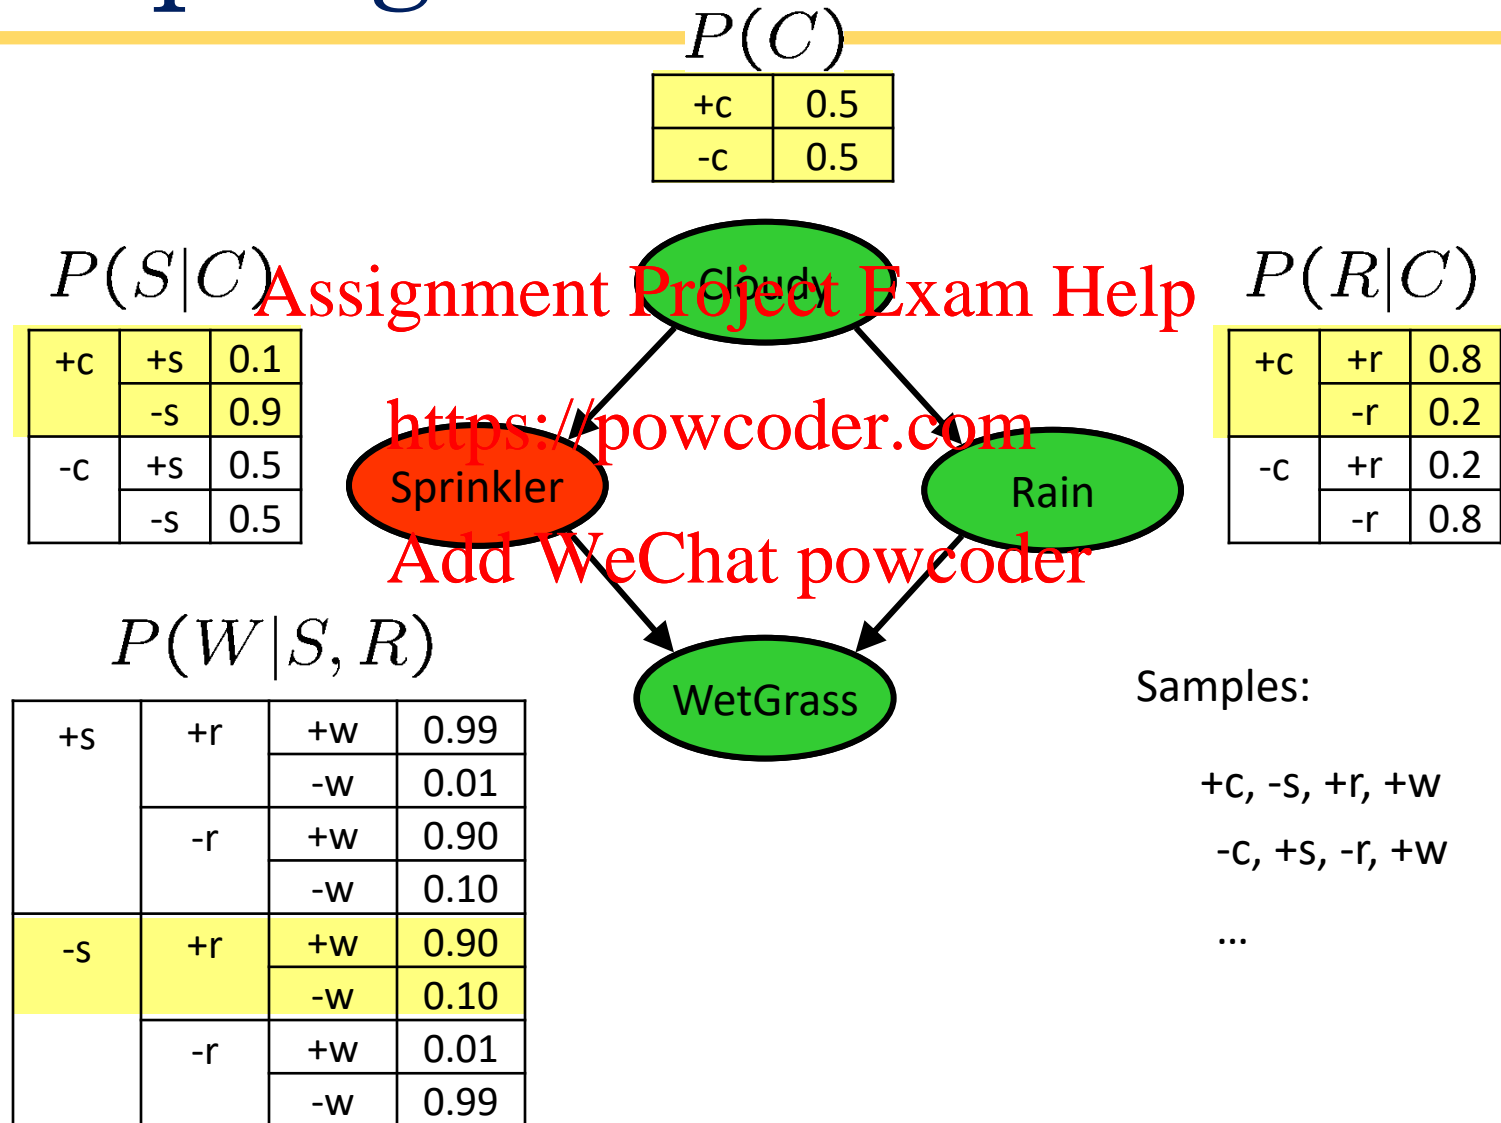


Prior Sampling

- For $i = 1, 2, \dots, n$
 - Sample x_i from $P(X_i \mid \text{Parents}(X_i))$
- Return (x_1, x_2, \dots, x_n)

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

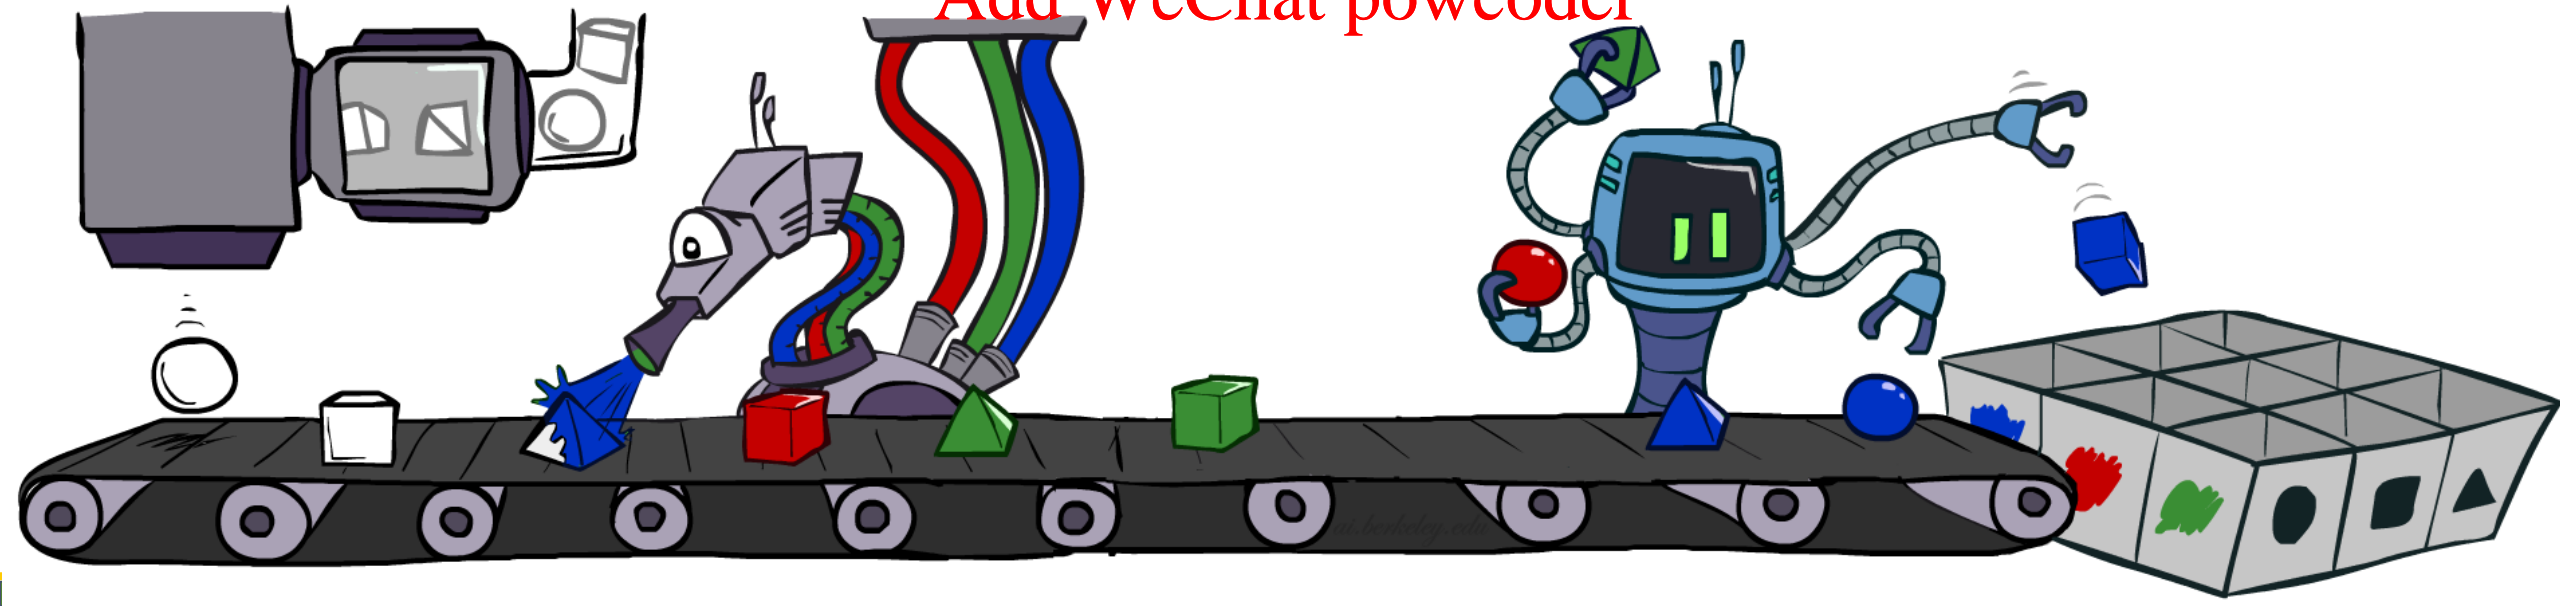

Prior Sampling

- This process generates samples with probability:

$$S_{PS}(x_1 \dots x_n) = \prod_{i=1}^n P(x_i | \text{Parents}(X_i)) = P(x_1 \dots x_n)$$

Assignment Project Exam Help
...i.e. the BN's joint probability

<https://powcoder.com>

- Let the number of samples of an event $N_{PS}(x_1 \dots x_n)$

- Then
$$\begin{aligned} \lim_{N \rightarrow \infty} \hat{P}(x_1, \dots, x_n) &= \lim_{N \rightarrow \infty} N_{PS}(x_1, \dots, x_n) / N \\ &= S_{PS}(x_1, \dots, x_n) \\ &= P(x_1 \dots x_n) \end{aligned}$$

- I.e., the sampling procedure is **consistent**



Example

- We'll get a bunch of samples from the BN:

+c, -s, +r, +w

+c, +s, +r, +w


-c, +s, +r, -w

+c, -s, +r, +w

-c, -s, -r, +w

Assignment Project Exam Help

<https://powcoder.com>

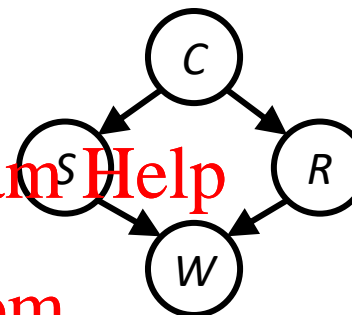

- If we want to know $P(W)$
 - We have counts $\langle +w:4, -w:1 \rangle$
 - Normalize to get $P(W) = \langle +w:0.8, -w:0.2 \rangle$
 - This will get closer to the true distribution with more samples
 - Can estimate anything else, too
 - What about $P(C \mid +w)$? $P(C \mid +r, +w)$? $P(C \mid -r, -w)$?
 - Fast: can use fewer samples if less time (what's the drawback?)

Add WeChat powcoder



Rejection Sampling

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder




Rejection Sampling

- Let's say we want $P(C)$
 - No point keeping all samples around
 - Just tally counts of C as we go

Assignment Project Exam Help

<https://powcoder.com>

- Let's say we want $P(C \mid +s)$
 - Same thing: tally C outcomes, but ignore (reject) samples which don't have $S=+s$
 - This is called rejection sampling
 - It is also consistent for conditional probabilities (i.e., correct in the limit)

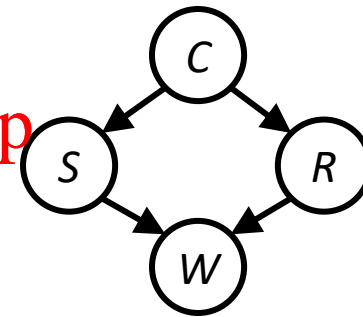


+c, -s, +r, +w
+c, +s, +r, +w
-c, +s, +r, -w
+c, -s, +r, +w
-c, -s, -r, +w



Rejection Sampling

- Input: evidence instantiation
- For $i = 1, 2, \dots, n$
 - Sample x_i from $P(X_i \mid \text{Parents}(X_i))$
 - If x_i not consistent with evidence
 - Reject: return - no sample is generated in this cycle
- Return (x_1, x_2, \dots, x_n)

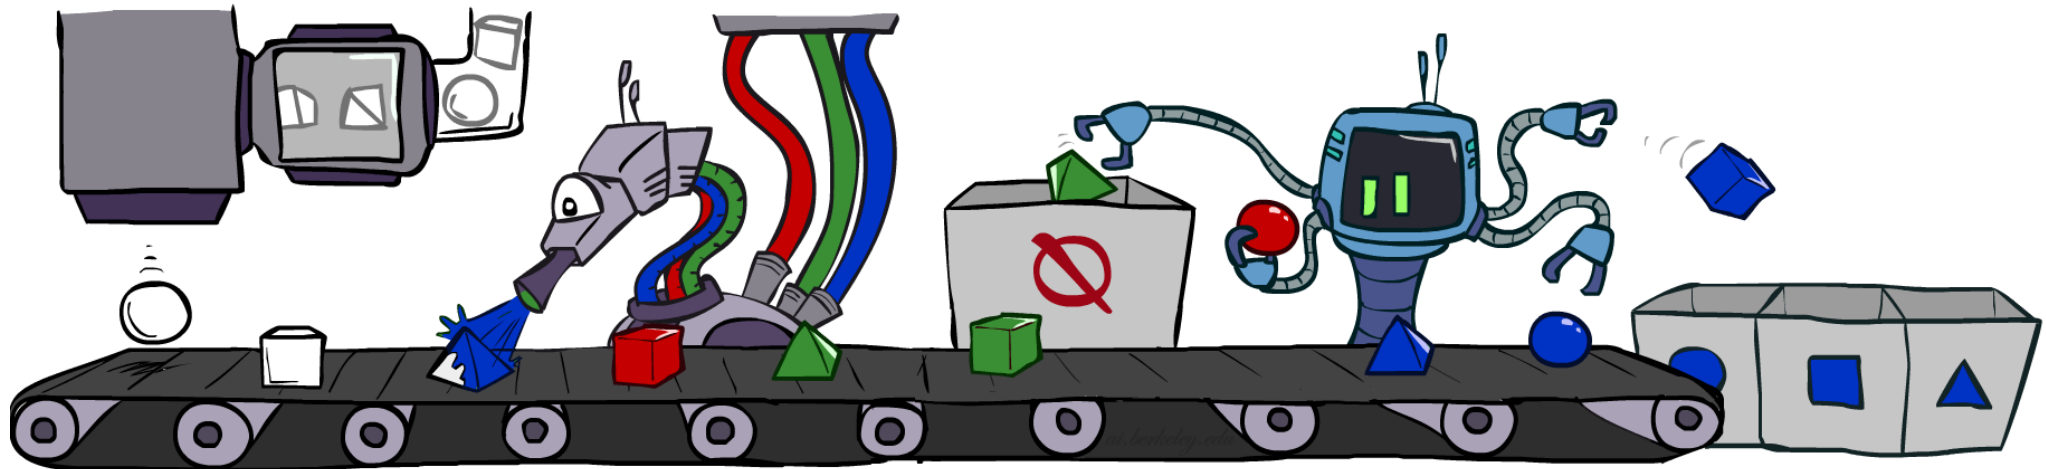


Likelihood Weighting

Assignment Project Exam Help

<https://powcoder.com>


Add WeChat powcoder

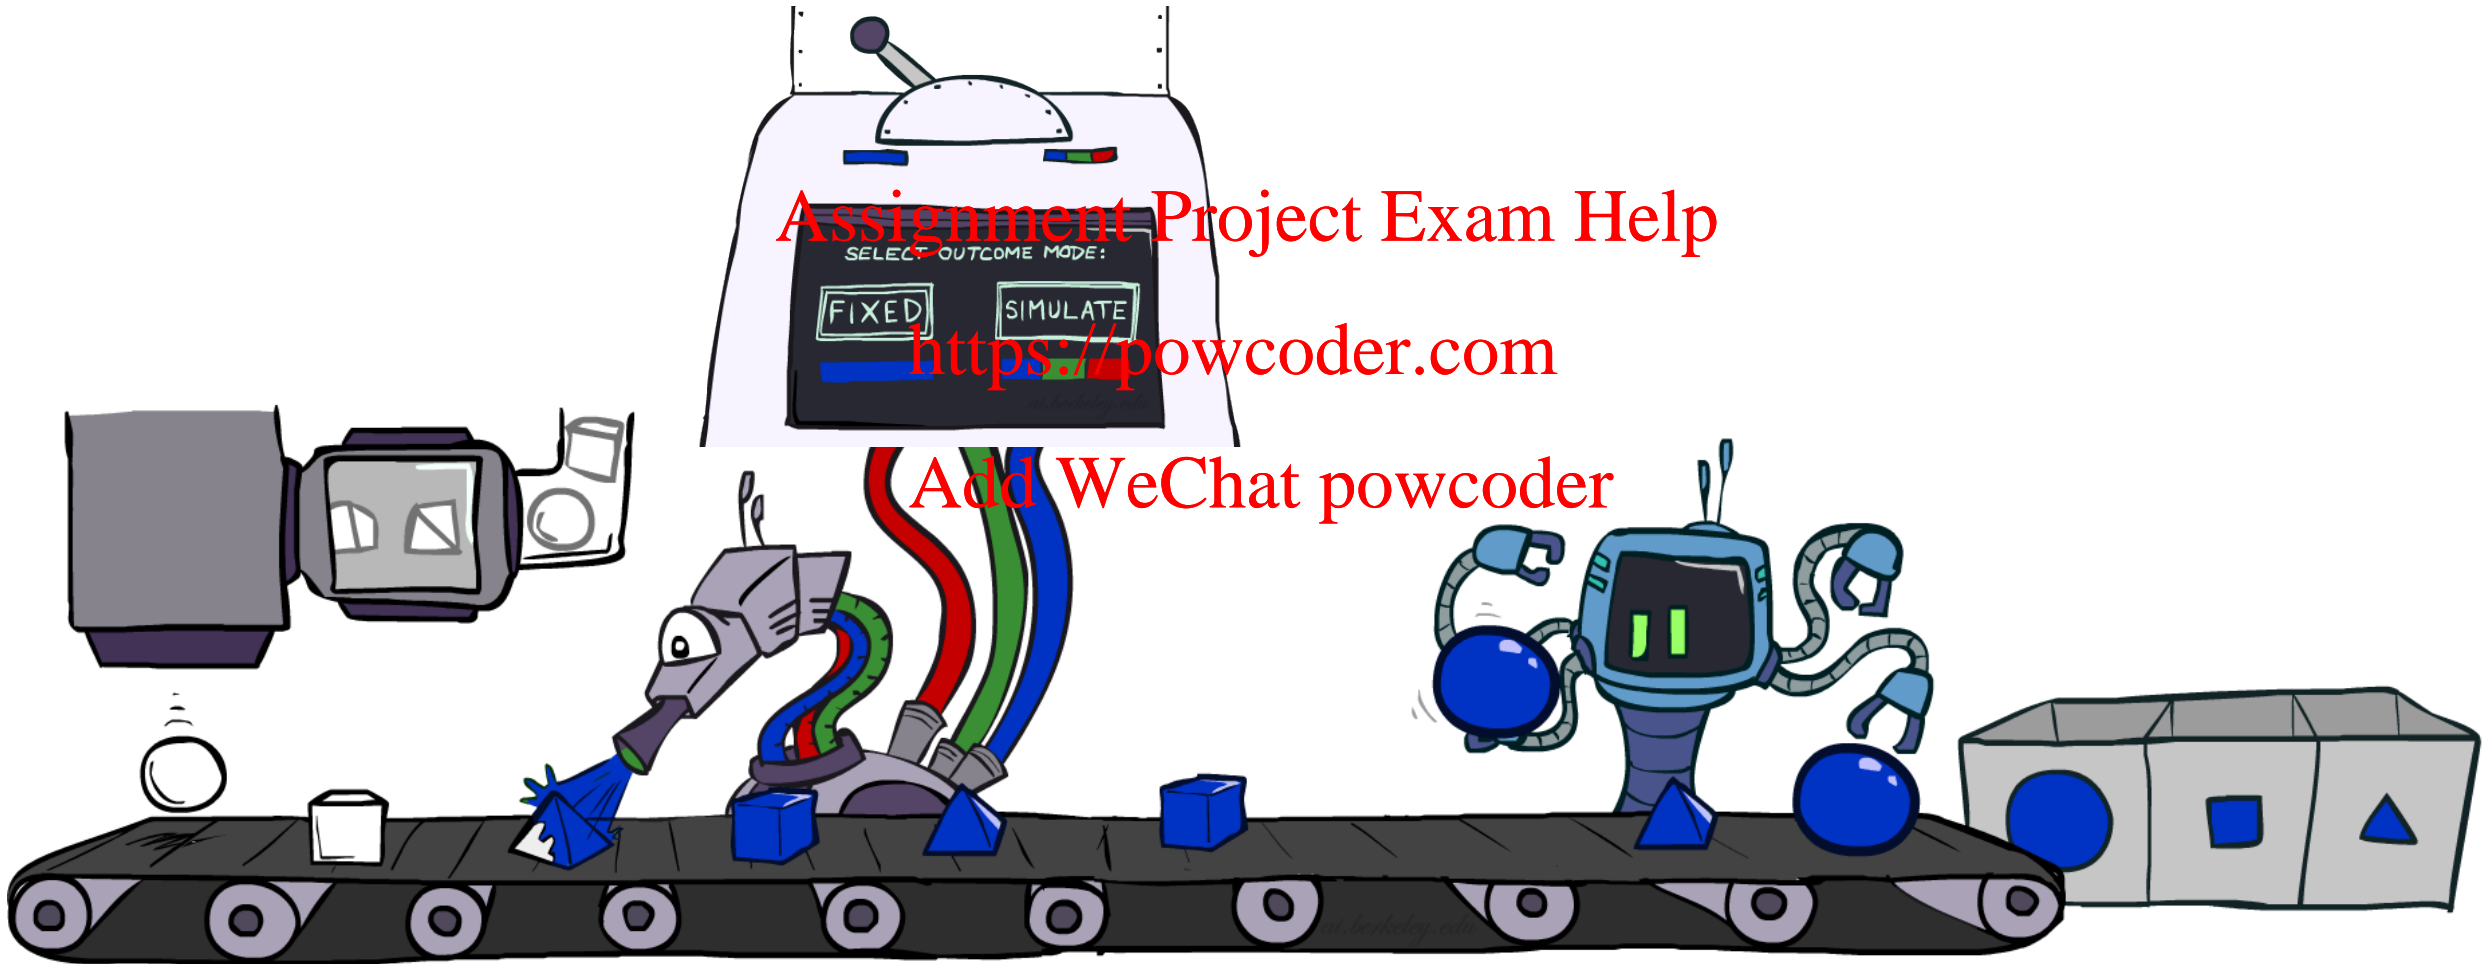


Likelihood Weighting

- Problem with rejection sampling:

- If evidence is unlikely, rejects lots of samples
- Evidence not exploited as for sample
- Consider $P(\text{Shape} \mid \text{blue})$



pyramid, green
pyramid, red
sphere, blue
cube, red
sphere, green

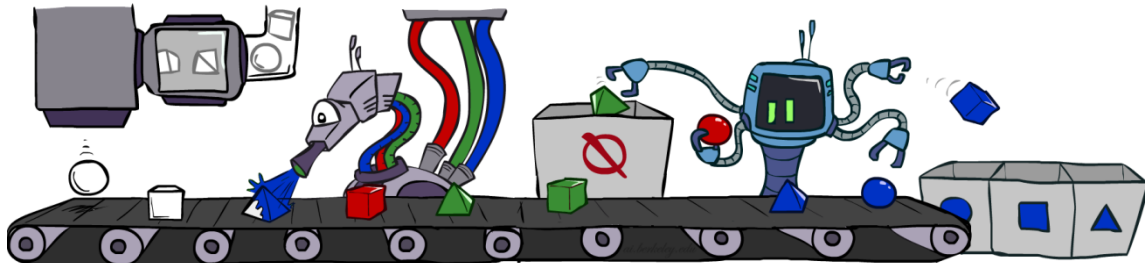


- Idea: fix evidence variables and sample the rest

- Problem: sample distribution not consistent!
- Solution: weight by probability of evidence given parents



pyramid, blue
pyramid, blue
sphere, blue
cube, blue
sphere, blue

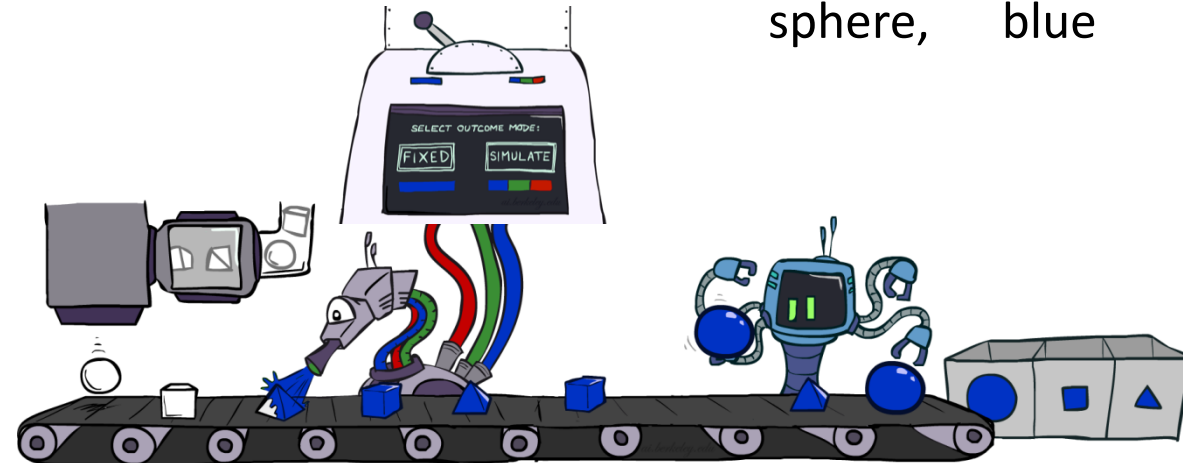

Likelihood Weighting

$$P(C)$$

+c	0.5
-c	0.5

$$P(S|C)$$

+c	+s	0.1
	-s	0.9
-c	+s	0.5
	-s	0.5

Assignment Project Exam Help

$$P(R|C)$$


+c	+r	0.8
	-r	0.2
-c	+r	0.2
	-r	0.8

<https://powcoder.com>

Add WeChat powcoder

$$P(W|S, R)$$

+s	+r	+w	0.99
		-w	0.01
	-r	+w	0.90
		-w	0.10
	+r	+w	0.90
		-w	0.10
-s	-r	+w	0.01
		-w	0.99

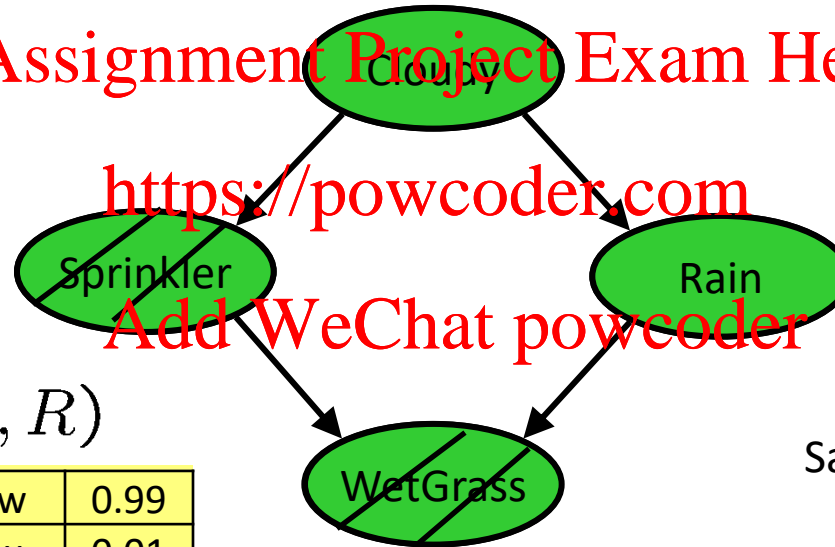

Samples:

+c, +s, +r, +w


...

$$w = 1.0 \times 0.1 \times 0.99$$



Likelihood Weighting

- Input: evidence instantiation
- $w = 1.0$
- for $i = 1, 2, \dots, n$
 - if X_i is an evidence variable
 - $X_i = \text{observation } x_i \text{ for } X_i$
 - Set $w = w * P(x_i | \text{Parents}(X_i))$
 - else
 - Sample x_i from $P(X_i | \text{Parents}(X_i))$
- return $(x_1, x_2, \dots, x_n), w$

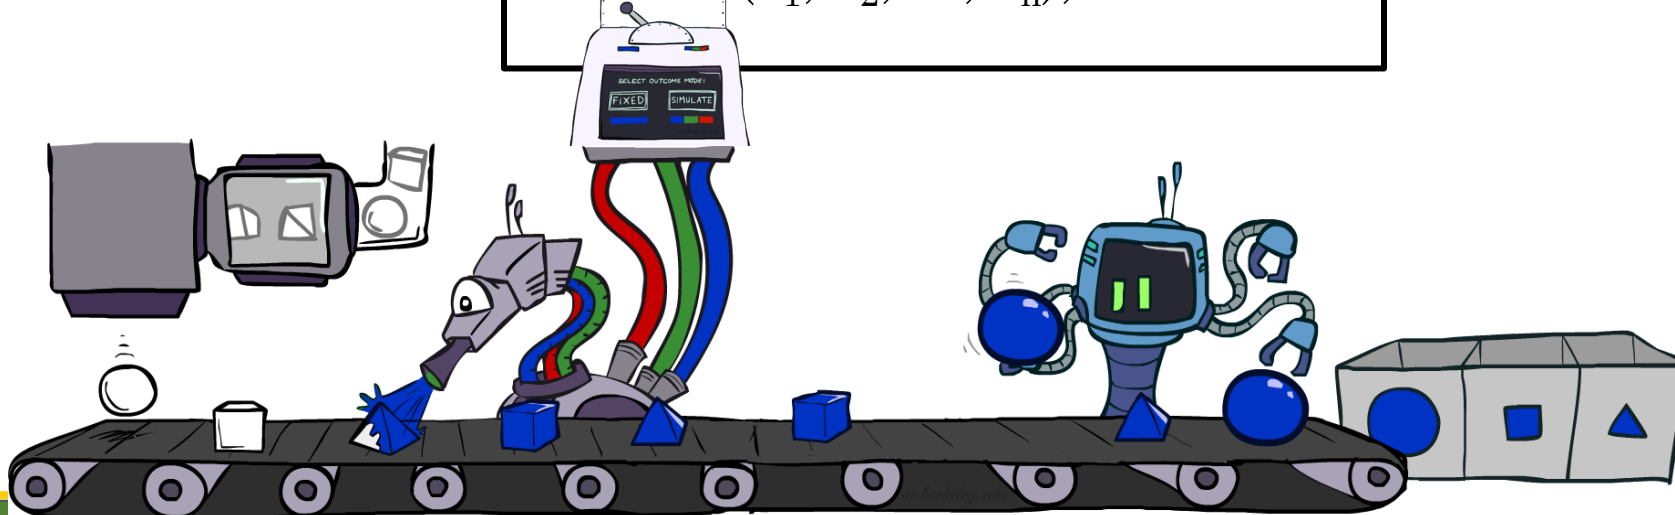


Likelihood Weighting

- Sampling distribution if z sampled and e fixed evidence

$$S_{WS}(z, e) = \prod_{i=1}^l P(z_i | \text{Parents}(Z_i))$$

- Now, samples have weights

$$w(z, e) = \prod_{i=1}^m P(e_i | \text{Parents}(e_i))$$

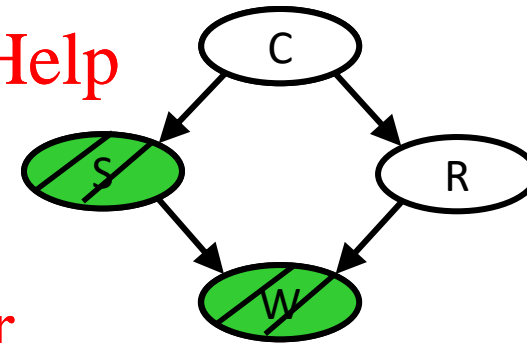



- Together, weighted sampling distribution is consistent

$$\begin{aligned}
 S_{WS}(z, e) \cdot w(z, e) &= \prod_{i=1}^l P(z_i | \text{Parents}(z_i)) \prod_{i=1}^m P(e_i | \text{Parents}(e_i)) \\
 &= P(z, e)
 \end{aligned}$$




Likelihood Weighting

- Likelihood weighting is good
 - We have taken evidence into account as we generate the sample
 - E.g. here, W's value will get pushed based on the evidence values of S, R
 - More of our samples will reflect the state of the world suggested by the evidence
 - Likelihood weighting doesn't solve all our problems
 - Evidence influences the choice of downstream variables, but not upstream ones (C isn't more likely to get a value matching the evidence)
 - We would like to consider evidence when we sample every variable (leads to Gibbs sampling)

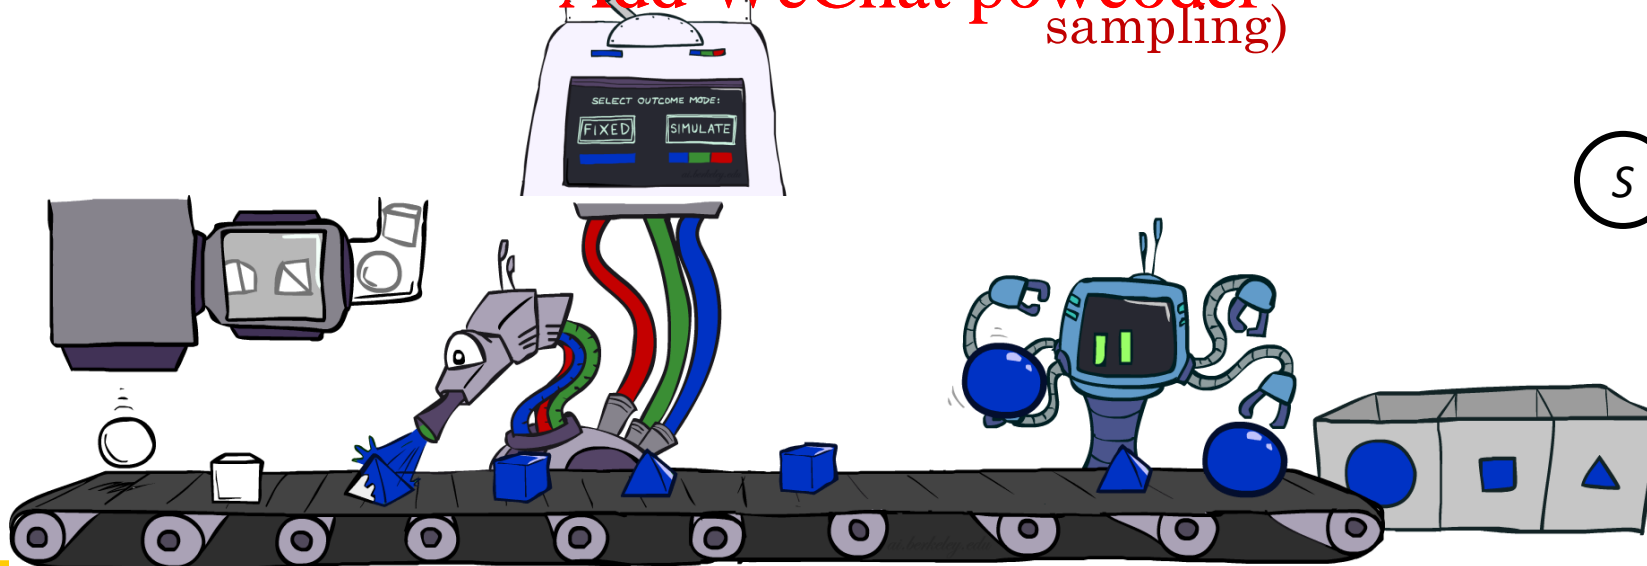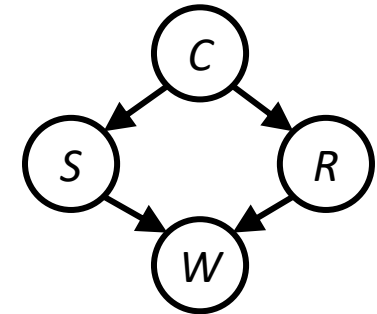

Gibbs Sampling

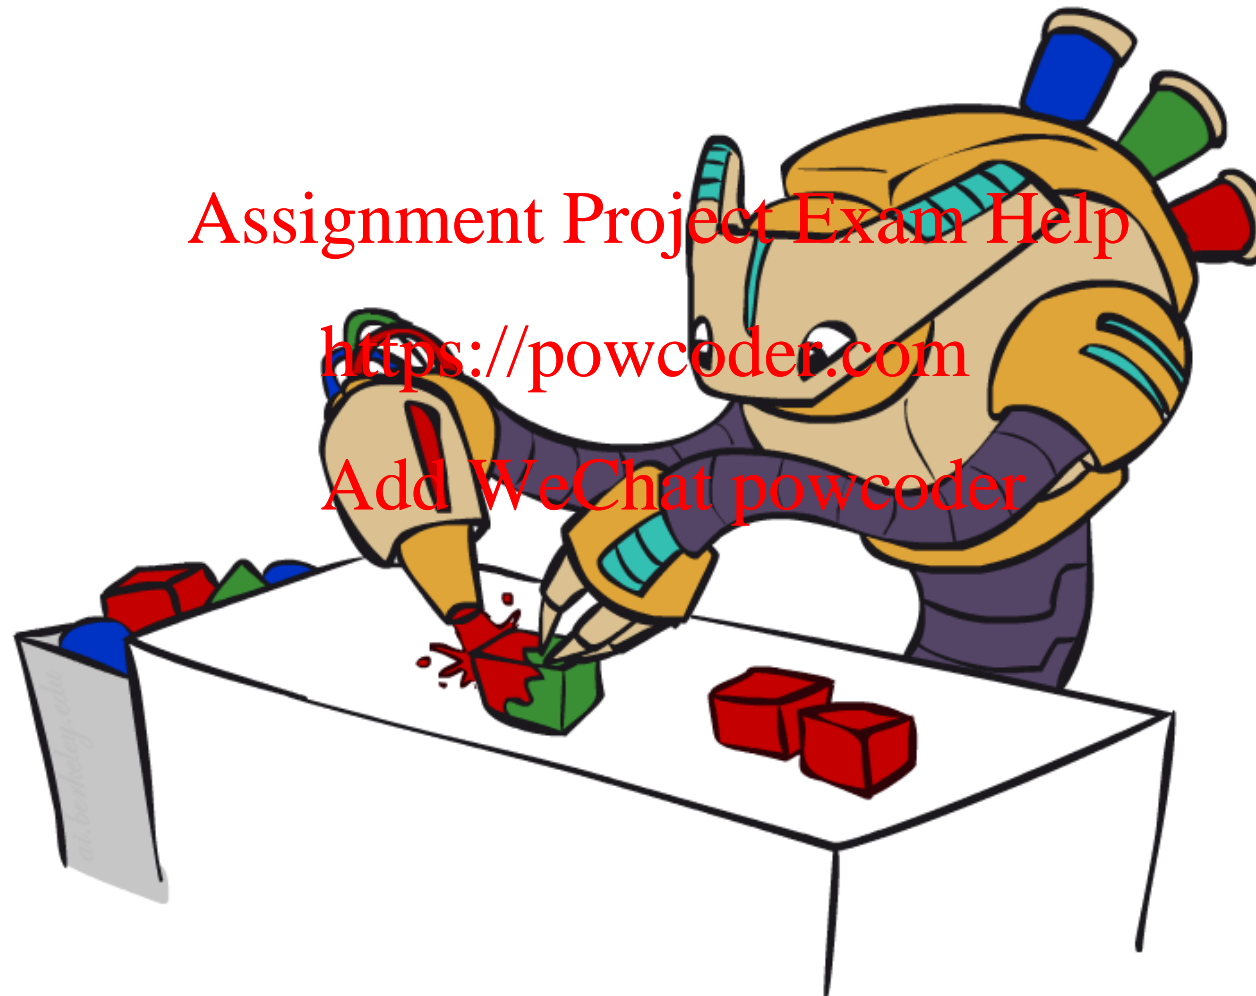

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



Gibbs Sampling


- *Procedure*: keep track of a full instantiation x_1, x_2, \dots, x_n . Start with an arbitrary instantiation consistent with the evidence. Sample one variable at a time, conditioned on all the rest, but keep evidence fixed. Keep repeating this for a long time.
- *Property*: in the limit of repeating this infinitely many times the resulting samples come from the correct distribution (i.e. conditioned on evidence).
- *Rationale*: both upstream and downstream variables condition on evidence.
- In contrast: likelihood weighting only conditions on upstream evidence, and hence weights obtained in likelihood weighting can sometimes be very small. Sum of weights over all samples is indicative of how many “effective” samples were obtained, so we want high weight.



Gibbs Sampling Example: $P(S \mid +r)$


- Step 1: Fix evidence

- $R = +r$

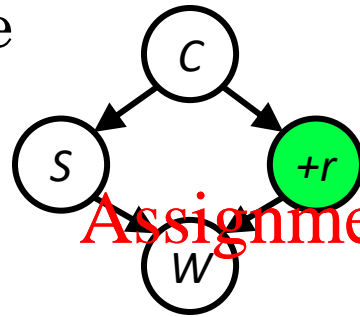

- Step 2: Initialize other variables

- Randomly

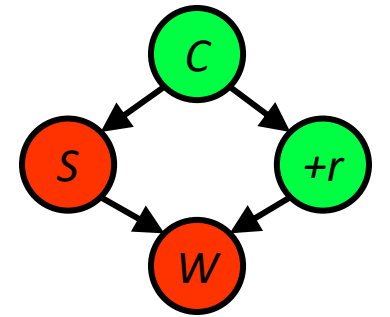


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

- Steps 3: Repeat

- Choose a non-evidence variable X
 - Resample X from $P(X \mid \text{all other variables})$

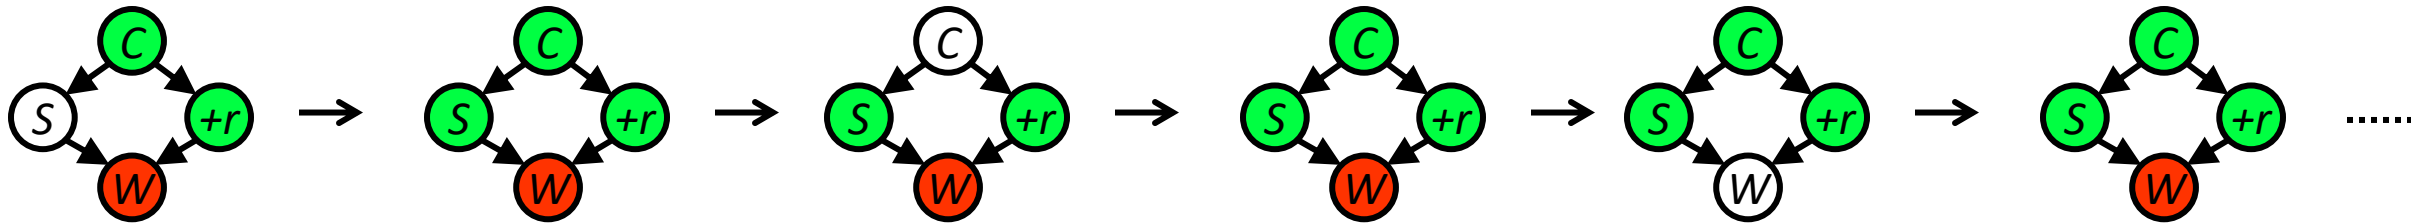

Sample from $P(S \mid +c, -w, +r)$

Sample from $P(C \mid +s, -w, +r)$


Sample from $P(W \mid +s, +c, +r)$



Efficient Resampling of One Variable

- Sample from $P(S \mid +c, +r, -w)$

$$\begin{aligned}
 P(S \mid +c, +r, -w) &= \frac{P(S, +c, +r, -w)}{P(+c, +r, -w)} \\
 &= \frac{P(S, +c, +r, -w)}{\sum_s P(s, +c, +r, -w)} \\
 &= \frac{P(+c)P(S \mid +c)P(+r \mid +c)P(-w \mid S, +r)}{\sum_s P(+c)P(s \mid +c)P(+r \mid +c)P(-w \mid s, +r)} \\
 &= \frac{P(+c)P(S \mid +c)P(+r \mid +c)P(-w \mid S, +r)}{P(+c)P(+r \mid +c) \sum_s P(s \mid +c)P(-w \mid s, +r)} \\
 &= \frac{P(S \mid +c)P(-w \mid S, +r)}{\sum_s P(s \mid +c)P(-w \mid s, +r)}
 \end{aligned}$$

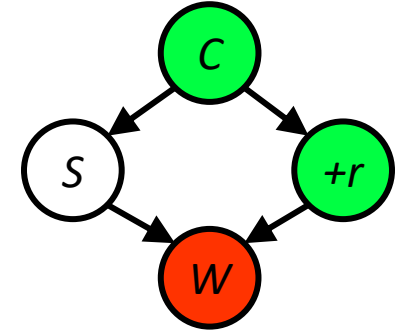


- Many things cancel out – only CPTs with S remain!
- More generally: only CPTs that have resampled variable need to be considered, and joined together




Bayes' Net Sampling Summary


- Prior Sampling $P(Q)$

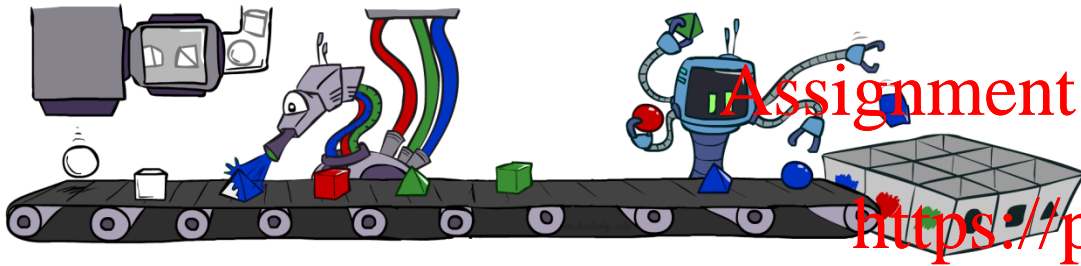

- Rejection Sampling $P(Q | e)$

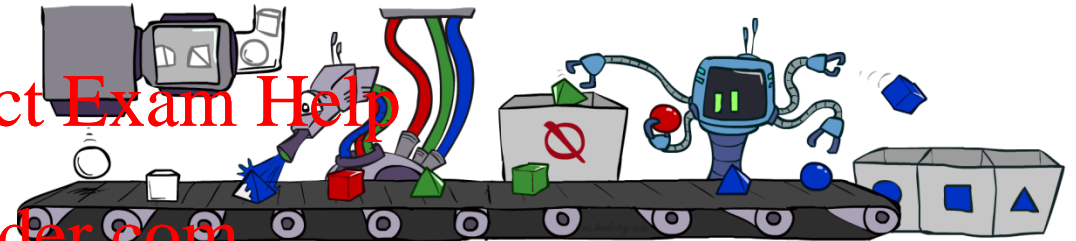


- Likelihood Weighting $P(Q | e)$

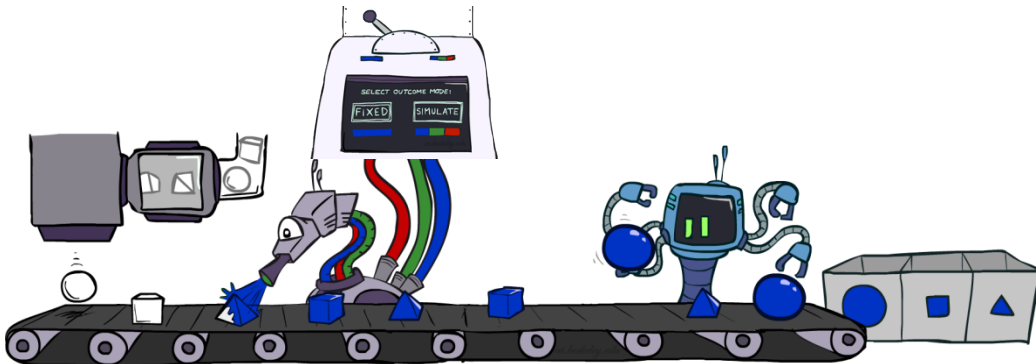

Add WeChat <https://powcoder.com>

- Gibbs Sampling $P(Q | e)$

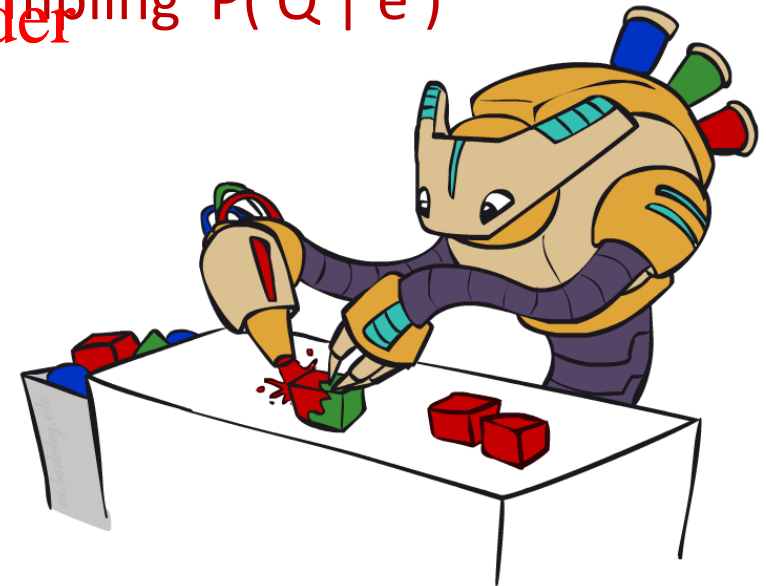

Further Reading on Gibbs Sampling*

- Gibbs sampling produces sample from the query distribution $P(Q | e)$ in limit of re-sampling infinitely often
- Gibbs sampling is a special case of more general methods called Markov chain Monte Carlo (MCMC) methods
 - Metropolis-Hastings is one of the more famous MCMC methods (in fact, Gibbs sampling is a special case of Metropolis-Hastings)
- You may read about Monte Carlo methods – they're just sampling

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

