

<https://powcoder.com>

Assignment Project Exam Help

Add WeChat powcoder

Assignment Project Exam Help

<https://powcoder.com>
Universal Traversals

Add WeChat powcoder

<https://powcoder.com>

Labeling Schemes

Assignment Project Exam Help

- How can we use port labeling schemes to improve communication?

Add WeChat powcoder

- What role do port labeling schemes play in distributed computing?

Assignment Project Exam Help

- The execution of a distributed algorithm at a node depends on the sequence of port labels that must be followed by the distributed algorithm at that node.

<https://powcoder.com>

Add WeChat powcoder

- Can we solve a problem in a way that all nodes follow identical sequences at each node?

<https://powcoder.com>

Outline

Assignment Project Exam Help

- Probabilistic Method

[Add WeChat powcoder](#)

- Universal traversals

Assignment Project Exam Help

<https://powcoder.com>

[Add WeChat powcoder](#)

<https://powcoder.com>

Probabilistic Method

Assignment Project Exam Help

- Using probability to prove the existence of a mathematical object is called the Probabilistic Method.

Add WeChat powcoder

- It has many applications, especially in graph theory.

- It uses the following principle:

Assignment Project Exam Help

If, in a given set of objects, the probability that a randomly chosen object does not have a certain property is less than 1 then then there must exist an object with this property.

<https://powcoder.com>

Add WeChat powcoder

<https://powcoder.com>

Union Form of the Probabilistic Method

Assignment Project Exam Help

- Consider n events A_1, A_2, \dots, A_n (not necessarily independent).
- The union (or Boole) Inequality states that

$$\Pr \left[\bigcup_{i=1}^n A_i \right] \leq \sum_{i=1}^n \Pr[A_i]$$

Assignment Project Exam Help

- Therefore if we want to prove that

$$\bigcap_{i=1}^n (A_i) \neq \emptyset$$

Add WeChat powcoder

it is enough to show that

$$\sum_{i=1}^n \Pr[A_i] < 1.$$

<https://powcoder.com>

Expectation Form of the Probabilistic Method

Assignment Project Exam Help

- Consider an integer valued random variable X which takes only non-negative integer values.
- Observe that

$$\Pr[X > 0] = \sum_{k>0} \Pr[X = k]$$

$$\leq \sum_{k>0} k \Pr[X = k]$$

$$= E[X]$$

Therefore

$$\Pr[X > 0] \leq E[X] \quad (1)$$

<https://powcoder.com>

Expectation Form of the Probabilistic Method

Assignment Project Exam Help

- Equation (1) is a special case of Markov's inequality which states that

Add WeChat powcoder

$$\Pr[X > kE[X]] \leq \frac{1}{k}$$

- Therefore using Equation (1) if we want to prove that

Assignment Project Exam Help

$$\Pr[X = 0] > 0$$

<https://powcoder.com>

it is enough to prove that

Add WeChat powcoder

$$E[X] < 1.$$

<https://powcoder.com>

Assignment Project Exam Help

Add WeChat powcoder

Assignment Project Exam Help

<https://powcoder.com>
Traversals

Add WeChat powcoder

<https://powcoder.com>

Explorations

Assignment Project Exam Help

- Graph traversal (also known as graph search) refers to the process of visiting (checking and/or updating) each vertex in a graph. E.g.,
 - BFS
 - DFS
- Used in Search and Exploration.
- Each starting node is equipped with a program
 - typically a sequence of port labels that it must follow from node to node) which is used to traverse the graph.
- However, the program used may depend on the starting node.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

<https://powcoder.com>

Universal Traversals

Assignment Project Exam Help

- A sequence is universal for graphs with n vertices if for every graph and every start vertex, the walk defined by the (same) sequence will visit every vertex in the graph.
- Can you produce a universal traversal program that will work for every graph and every starting node of the graph?
- To produce a walk defined by a sequence, we need some notion of graph labeling.
 - For each vertex u , label the edges adjacent to u (ports) from 1 to $\deg(u)$ (in fact any numbering will do).
 - This is what we defined as port labelings!
- Then a sequence is a string of edge labels which determines some walk through the graph.

<https://powcoder.com>

Universal Traversals on Labyrinths

Assignment Project Exam Help


- A robot is placed in a labyrinth in a $n \times n$ square grid.
- It runs a program: a sequence of commands of the form $N(orth)$, $S(outh)$, $E(ast)$, $W(est)$,

Add WeChat powcoder

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

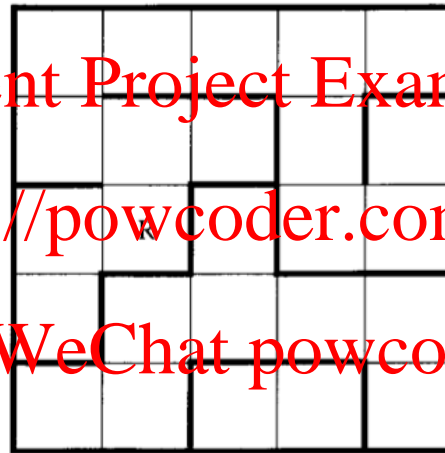

- As an example consider the program $NESW EW$ which is given to every node.
- A robot has the sequence “ $NESW EW$ ” and starting at a node makes movements following the sequence of labels.

<https://powcoder.com>

Universal Traversals

Assignment Project Exam Help


- In addition to external walls on the whole perimeter, walls are also placed between cells.
- Executing each command, the robot moves in the prescribed direction if possible (and does nothing when there is a wall in this direction).

Add WeChat powcoder

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

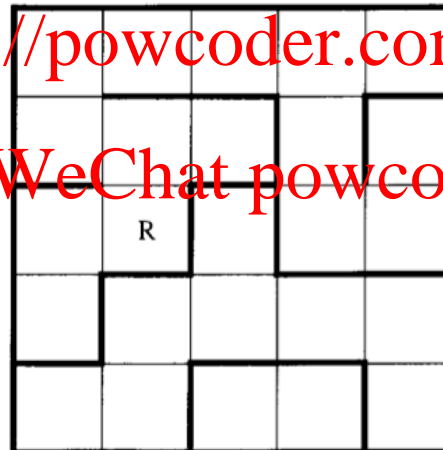

E.g., *NESWEEW*

<https://powcoder.com>

Universal Traversals

Assignment Project Exam Help

- We can show that

[Add WeChat powcoder](https://powcoder.com)

Theorem 1 (Universal Traversals) *For any n , there exists a program that works correctly for all labyrinths of size at most $n \times n$ (independently of the positions of walls inside the square and the robot's initial position).*

[Assignment Project Exam Help](https://powcoder.com)

- “Works correctly” means that the robot visits all reachable cells.

<https://powcoder.com>

- To solve the traversal problem,
we prove that a sufficiently long random program will work with positive probability.
- We will do this using the union bound.

[Add WeChat powcoder](https://powcoder.com)

<https://powcoder.com>


Preorder Traversals (1/2)

Assignment Project Exam Help

- For each $n \times n$ labyrinth, there is a program of size $4n^4$ that works for it, as each cell is reachable in at most $4n^2$ steps (round-trip) and there are at most n^2 admissible cells.
- To prove this note that for each starting cell there is a spanning tree reaching all the n^2 cells of a given labyrinth, think of it as a distributed network.

<https://powcoder.com>

Add WeChat powcoder

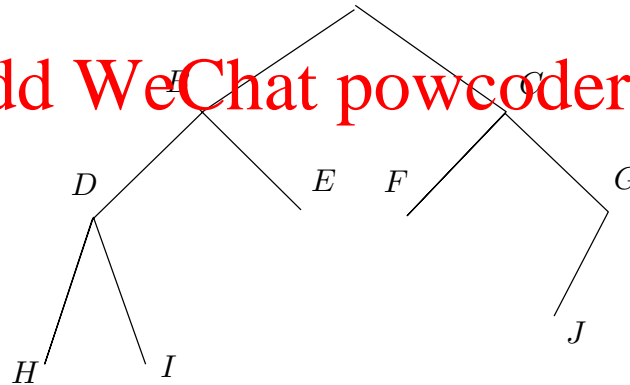

- Assign ports to each vertex (edge labels associated to the edges connected)

<https://powcoder.com>

Preorder Traversals (2/2)


Assignment Project Exam Help

- Using a pre-order traversal of this spanning tree (which has length at most $4n^2$) every cell will be visited in at most $4n^2$ steps (round trip).

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

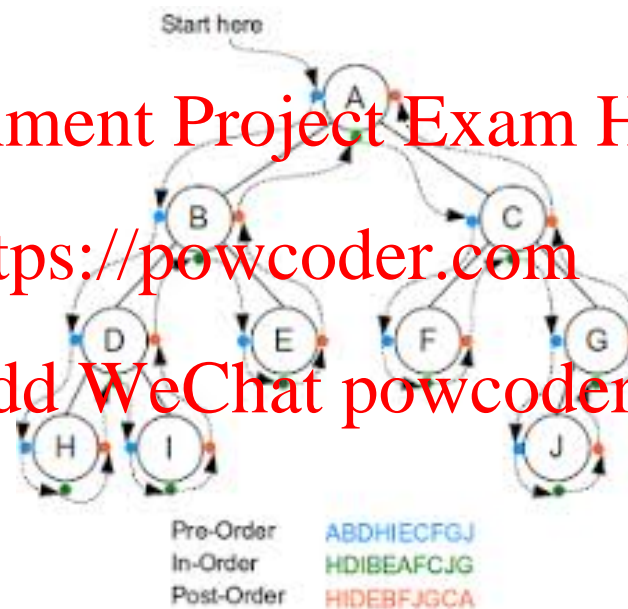

- Therefore, a random program of size $N = 4n^4$ will work with probability at least $\epsilon = (1/4)^{4n^4}$ and fail with probability at most $1 - \epsilon$.

<https://powcoder.com>

Universal Traversals

Assignment Project Exam Help

- Select among such programs of size $N = 4n^2$ independently and uniformly at random.
- Now for each k concatenate k such programs:

Assignment Project Exam Help

- By independence, a random program of size $2N$ will fail with probability at most $(1 - \epsilon)^2$.
- More generally, a random program of size kN will fail with probability at most $(1 - \epsilon)^k$.
- This probability is computed for a fixed labyrinth L .
- Let F_L be the event that a program of size kN fails for the labyrinth L .
- It follows from the above that $\Pr[F_L] \leq (1 - \epsilon)^k$.

<https://powcoder.com>

Universal Traversals

Assignment Project Exam Help

- Now take the union $\bigcup_L F_L$, where L runs over all labyrinths.

As a consequence, [Add WeChat powcoder](https://powcoder.com)

$$\Pr \left[\bigcup_L F_L \right] \leq \sum_L \Pr[F_L]$$

$$\leq \ell_n (1 - \epsilon)^k$$

where ℓ_n is the number of labyrinths in a $n \times n$ grid. <https://powcoder.com>

- However, we can choose k sufficiently large, so that [Add WeChat powcoder](https://powcoder.com)

$$\ell_n < \frac{1}{(1 - \epsilon)^k} \quad (2)$$

- So,

$$\Pr \left[\bigcup_L F_L \right] < 1$$

<https://powcoder.com>

Universal Traversals

Assignment Project Exam Help

- In particular, for a k satisfying Inequality (2), we have that

Add WeChat powcoder

$$\Pr \left[\bigcap_L \neg F_L \right] = 1 - \Pr \left[\bigcup_L F_L \right]$$

Assignment Project Exam Help

- Therefore for k sufficiently large a random program of size kN works for all labyrinths with positive probability.
- Therefore such a program must exist!

<https://powcoder.com>

Add WeChat powcoder

<https://powcoder.com>

Efficiency of Universal Traversals

Assignment Project Exam Help

- How about the length of the sequence of port labels?
 - Can we construct a universal traversal sequence of polynomial length in polynomial time (in the size n of the graph)?
- How about efficiency?
 - Can we give an algorithm to construct a universal traversal sequence?
- Can we make the construction distributed?

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

<https://powcoder.com>

Universal Traversals on Graphs

Assignment Project Exam Help

- The Universal Traversal theorem holds on graphs of a given size n . Add WeChat powcoder
- Instead of N, S, E, W used in $n \times n$ grids one now uses ports and port-labelings.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

<https://powcoder.com>

Exercises^a

Assignment Project Exam Help

1. The traversal of the labyrinth was based on a sequence that was provided to the robot and which the robot must follow. Consider the situation where the robot constructs the sequence “on the fly”: looks at the surrounding environment and based on what it sees makes its next move according to some rule. This will be a local algorithm and the moves of the robot depend on the environment. Will such an algorithm perform a successful traversal?
Add WeChat powcoder
2. (★) Use the probabilistic method to prove a Universal Traversal theorem on graphs of a given size n . **Hint:** Instead of N, S, E, W used in $n \times n$ grids one now uses ports. Consider a set of points in the plane. Form n sets A_1, A_2, \dots, A_n on the plane each of which has k points.

^aNot to submit.

<https://powcoder.com>

Assignment Project Exam Help

Add WeChat powcoder

Assignment Project Exam Help

The sets are arbitrary and may share points. Assume that $n < 2^k$. Show that if $n \leq 2^k$, then it is possible to color each point red or blue in such a way that every set A_i has both colors. **Hint:** Color each of the n points independently choosing red or blue with equal probability and use the probabilistic method.

3. A certain commodity is sold with two lottery tickets, a and b , for Prize A and Prize B , respectively. Suppose the winning probability for A and that for B are both $2/3$. Show that there

<https://powcoder.com>

must exist a commodity with two winning tickets.^b

Assignment Project Exam Help

4. (★) The sets S_1, S_2, \dots, S_k are different subsets of a set S that has $2n$ elements. $\{S_1, S_2, \dots, S_k\}$ is called a Sperner family^c if $S_i \not\subseteq S_j$, for all $i \neq j$. Use the probabilistic method to prove Spener's theorem, namely "If $\{S_1, S_2, \dots, S_k\}$ is a Sperner family then $k \leq \binom{2n}{n}$." For the proof, follow the steps below.

Assignment Project Exam Help

- (a) Consider the following process: We start with the empty set and add random elements of S one by one until (after $2n$ steps) we get the whole set S . For a fixed subset $A \subset S$ of size a show that A will appear during this process with probability $\Pr[A] = 1/\binom{2n}{a}$.
- (b) Consider k random variables X_1, X_2, \dots, X_k so that the value of X_i is equal to 1 if the given set S_i appears during the process, otherwise, it is equal to 0. Show that the

<https://powcoder.com>

Add WeChat powcoder

^bNote that the conclusion is derived without using event dependence.

^cSperner families have applications in Cryptography and elsewhere.

<https://powcoder.com>

expected value of X_i is $1/\binom{2n}{s_i}$, where s_i is the number of elements in S_i ,

- (c) Now, consider the random variable $X = X_1 + X_2 + \dots + X_k$. Show that this sum is less than 1 in expectation.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

<https://powcoder.com>

References

Assignment Project Exam Help

- Alon, N., Spencer, J. H. (2004). The probabilistic method. John Wiley & Sons.
- Hirokasu Iwasawa, Using Probability to Prove Existence, Mathematical Intelligencer, Volume 34, Number 3, 2012.
- Mathematical Intelligencer Volume 20, Number 4, 1998
- Aleliunas, R. Karp, R. Lipton, R. Lovasz, L. Rackoff, C. Random walks, universal traversal sequences, and the complexity of maze problems. 20th Annual Symposium on Foundations of Computer Science (FOCS 1979): 218?223

Add WeChat powcoder

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder