

COMP2610/6261 - Information Theory

Lecture 16: Arithmetic Coding

Assignment Project Exam Help

Robert C. Williamson

Research School of Computer Science

<https://powcoder.com>



Australian  
National  
University

Add WeChat powcoder

25 September, 2018

## 1 From SFE to Arithmetic Coding

## 2 Arithmetic Coding: Encoder

- Intervals for Sequences
- Codeword Generation
- Putting it all together

## 3 Arithmetic Coding: Decoder

## 4 Adapting Distributions On-The-Fly

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder


## Interval Codes (Recap)

**Shannon-Fano-Elias Coding** method:

- Order the alphabet  $\mathcal{A}$ .
- Represent distribution  $p$  by cumulative distribution  $F$ .
- Construct code by finding intervals of width  $\frac{p_i}{2}$  that lie in each symbol interval  $[F(a_{i-1}), F(a_i))$

<https://powcoder.com>

Add WeChat powcoder

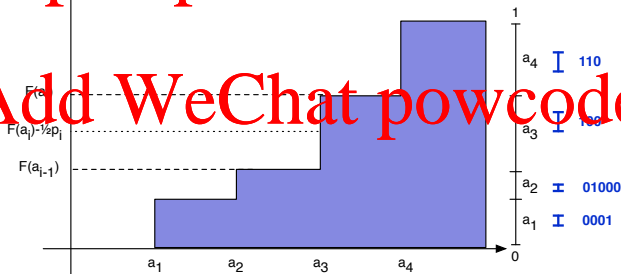

## Intervals and Prefix Codes (Recap)

The set of numbers in  $[0, 1)$  that start with a given sequence of bits

$b = b_1 \dots b_n$  form the interval

$$\left[ 0.b_1 \dots b_n, 0.b_1 \dots b_n + \frac{1}{2^n} \right) = \left[ 0.b_1 \dots b_n, 0.b_1 \dots b_n + 0.0 \dots 1 \right)$$

<https://powcoder.com>

This interval contains all binary strings for which  $b_1 b_2 \dots b_n$  is a prefix

**Prefix property (interval form):** Once you pick a codeword  $b_1 b_2 \dots b_n$ , you cannot pick any codeword in the [codeword interval](#)

$$\left[ 0.b_1 b_2 \dots b_n, 0.b_1 b_2 \dots b_n + \frac{1}{2^n} \right)$$

1 From SFE to Arithmetic Coding

2 Arithmetic Coding: Encoder

- Intervals for Sequences
- Codeword Generation
- Putting it all Together

<https://powcoder.com>

3 Arithmetic Coding: Decoder

Add WeChat powcoder

4 Adapting Distributions On-The-Fly

## Interval Coding Blocks

What if we apply SFE coding to blocks of an ensemble  $X$ ?

**Example:** Let  $\mathcal{A} = \{aa, ab, ba, bb\}$  with  $\mathbf{p} = (0.2, 0.6, 0.1, 0.1)$ .

# Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

## Interval Coding Blocks

What if we apply SFE coding to blocks of an ensemble  $X$ ?

**Example:** Let  $\mathcal{A} = \{aa, ab, ba, bb\}$  with  $\mathbf{p} = (0.2, 0.6, 0.1, 0.1)$ .

$\mathbf{x}$	$p$	$\bar{F}$	$\bar{F}_2$	$\ell$	Code
aa	0.2	0.1	$0.00011_2$	4	0001
ab	0.6	0.5	$0.1_2$	2	10
ba	0.1	0.85	$0.1101100_2$	5	11011
bb	0.1	0.95	$0.111100_2$	5	11110

<https://powcoder.com>

Extend to longer sequences


Add WeChat powcoder

# Interval Coding Blocks

What if we apply SFE coding to blocks of an ensemble  $X$ ?

**Example:** Let  $\mathcal{A} = \{aa, ab, ba, bb\}$  with  $\mathbf{p} = (0.2, 0.6, 0.1, 0.1)$ .

$\mathbf{x}$	$p$	$\bar{F}$	$\bar{F}_2$	$\ell$	Code
aa	0.2	0.1	$0.00011_2$	4	0001
ab	0.6	0.5	$0.1_2$	2	10
ba	0.1	0.85	$0.1101100_2$	5	11011
bb	0.1	0.95	$0.111100_2$	5	11110

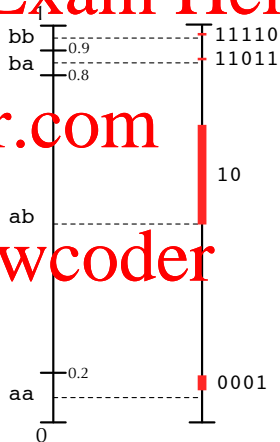

Extend to longer sequences

This works too:

- Need  $P(\mathbf{x})$  for all  $\mathbf{x}$
- Total  $|\mathcal{A}|^N$  values for length  $N$
- Huffman has similar complexity but shorter codes.



# Arithmetic Coding: A Bird's Eye View

Basic idea of arithmetic coding follows SFE coding

---

	SFE Coding	Arithmetic coding
Input	Single outcome $x_i$	Sequence of outcomes $x_1 x_2 \dots x_N$

---

Key step	Find symbol interval for $x_i$	Find symbol interval for $x_1 x_2 \dots x_N$
----------	--------------------------------	-------------------------------------------------

Output	Binary string corresponding to chosen interval	Binary string corresponding to chosen interval
--------	------------------------------------------------	------------------------------------------------

---

# Arithmetic Coding: A Bird's Eye View

Basic idea of arithmetic coding follows SFE coding

	SFE Coding	Arithmetic coding
Input	Single outcome $x_i$	Sequence of outcomes $x_1 x_2 \dots x_N$
Key step	Find symbol interval for $x_i$	Find symbol interval for $x_1 x_2 \dots x_N$
	Use $[F(x_{i-1}), F(x_i))$	?
Output	Binary string corresponding to chosen interval	Binary string corresponding to chosen interval
	Output first $\ell(x_i)$ bits of mid-point of interval	Output first $\ell(x_1 x_2 \dots x_N)$ bits of midpoint of interval

# Assignment Project Exam Help

Arithmetic coding has some important properties:

- We do **not** compute a symbol coding for  $X$  and then concatenate
  - ▶ Directly work with blocks of size  $N$
- We do not **explicitly** code all length  $N$  sequences a priori
  - ▶ Highly efficient
- We do not assume that each of the  $x_i$ 's is **independent**
  - ▶ Not restricted to extended ensembles
  - ▶ Adapts to data distribution

<https://powcoder.com>

Add WeChat powcoder

## 1 From SFE to Arithmetic Coding

## 2 Arithmetic Coding: Encoder

- Intervals for Sequences
- Codeword Generation
- Putting it all Together

<https://powcoder.com>

## 3 Arithmetic Coding: Decoder

Add WeChat powcoder

## 4 Adapting Distributions On-The-Fly

## Computing an Interval for Sequences

Say  $N = 2$  and we want to code  $x_1 x_2$

Ideally, we'd like to compute  $p(\mathbf{x})$  for all possible  $\mathbf{x}$  of length 2, and then find the interval for  $p(x_1 x_2)$

Key ideas:

- we can write  $p(x_1 x_2) = p(x_1)p(x_2|x_1)$ 
  - ▶ decompose joint into conditional probabilities

Add WeChat powcoder

## Computing an Interval for Sequences

Say  $N = 2$  and we want to code  $x_1 x_2$

Ideally, we'd like to compute  $p(\mathbf{x})$  for all possible  $\mathbf{x}$  of length 2, and then find the interval for  $p(x_1 x_2)$

Key ideas:

- we can write  $p(x_1 x_2) = p(x_1)p(x_2|x_1)$ 
  - ▶ decompose joint into conditional probabilities

- $p(\cdot|x_1)$  is just another probability distribution
  - ▶ so we can compute intervals as per SFE

# Computing an Interval for Sequences

Say  $N = 2$  and we want to code  $x_1 x_2$

Ideally, we'd like to compute  $p(\mathbf{x})$  for all possible  $\mathbf{x}$  of length 2, and then find the interval for  $p(x_1 x_2)$

Key ideas:

- we can write  $p(x_1 x_2) = p(x_1) p(x_2 | x_1)$ 
  - ▶ decompose joint into conditional probabilities
- $p(\cdot | x_1)$  is just another probability distribution
  - ▶ so we can compute intervals as per SFE
- we can find an interval for  $p(x_2 | x_1)$  **within** the interval for  $x_1$ 
  - ▶ normal SFE computes the interval within  $[0, 1)$  by default

## Computing an Interval for Sequences

**Example:** Suppose  $\mathcal{A} = \{a, b, c\}$  and  $p(a) = 0.25, p(b) = 0.5, p(c) = 0.25$

Like with SFE coding, we'd begin by slicing up  $[0, 1)$  into three subintervals:

# Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



## Computing an Interval for Sequences


**Example:** Suppose  $\mathcal{A} = \{a, b, c\}$  and  $p(a) = 0.25, p(b) = 0.5, p(c) = 0.25$

Like with SFE coding, we'd begin by slicing up  $[0, 1)$  into three subintervals:

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

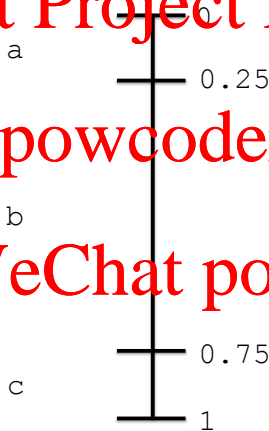

So e.g. we treat  $[0.25, 0.75)$  as the interval for  $b$

## Computing an Interval for Sequences

Suppose the first symbol is b, and  $p(a|b) = 0.25$ ,  $p(b|b) = 0.5$ ,  $p(c|b) = 0.25$

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

## Computing an Interval for Sequences

Suppose the first symbol is b, and  $p(a|b) = 0.25$ ,  $p(b|b) = 0.5$ ,  $p(c|b) = 0.25$

To code ba, bb, bc, now slice up  $[0.25, 0.75)$ , the interval for b itself:

# Assignment Project Exam Help


<https://powcoder.com>

Add WeChat powcoder

## Computing an Interval for Sequences

Suppose the first symbol is b, and  $p(a|b) = 0.25$ ,  $p(b|b) = 0.5$ ,  $p(c|b) = 0.25$

To code ba, bb, bc, now slice up  $[0.25, 0.75]$ , the interval for b itself:

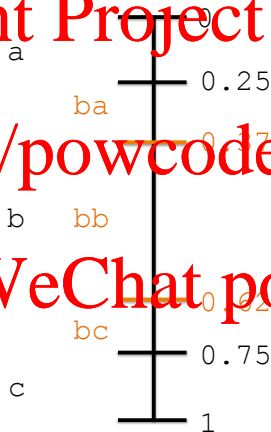

For ba we choose the interval of length  $p(a|b) = 0.25$  times the length of the enclosing interval ( $0.75 - 0.25 = 0.5$ ), i.e.  $(0.25)(0.5) = 0.125$

## Arithmetic Coding: End of Stream Symbol

# Assignment Project Exam Help

It is convenient to explicitly have a special “end of stream” symbol,  $\square$

We add this symbol to our ensemble, with some suitable probability

- e.g.  $p(\square)$  – probability of seeing empty string,  $p(\square|s)$  – probability of seeing just the string  $s$ , etc
- Implicitly we think of  $ab$  as actually being  $ab\square$

End of stream is by definition reached when we choose the sub-interval for this special symbol

## Arithmetic Coding: End of Stream Example

**Example:** Suppose  $\mathcal{A} = \{a, b, c, \square\}$  and  
 $p(a) = 0.25, p(b) = 0.5, p(c) = 0.15, p(\square) = 0.1$

Like with SFE coding, we'd begin by slicing up  $[0, 1)$  into three subintervals:

# Assignment Project Exam Help


<https://powcoder.com>

Add WeChat powcoder

## Arithmetic Coding: End of Stream Example

**Example:** Suppose  $\mathcal{A} = \{a, b, c, \square\}$  and  
 $p(a) = 0.25, p(b) = 0.5, p(c) = 0.15, p(\square) = 0.1$

Like with SFE coding, we'd begin by slicing up  $[0, 1)$  into three subintervals:

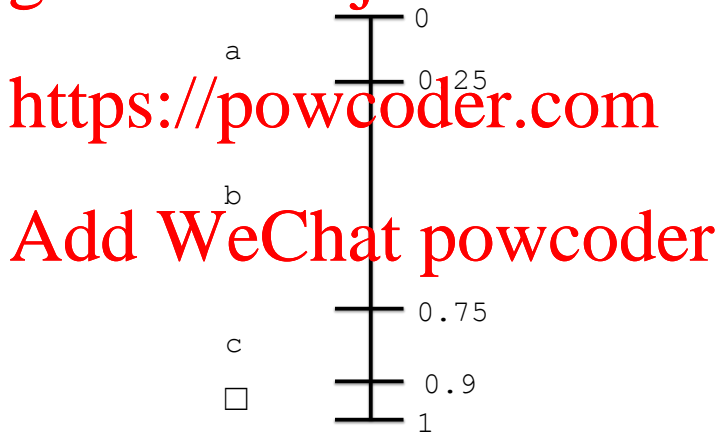

## Arithmetic Coding: End of Stream Example

Now suppose that  $p(\cdot|b)$  stays the same as  $p(\cdot)$

If the first symbol is  $b$ , we carve the interval for  $b$  into four pieces:

# Assignment Project Exam Help

<https://powcoder.com>


Add WeChat powcoder



## Arithmetic Coding: End of Stream Example

Now suppose that  $p(\cdot|b)$  stays the same as  $p(\cdot)$

If the first symbol is b, we carve the interval for b into four pieces:

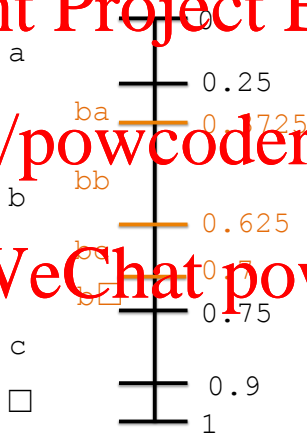

Exact same idea as before, just with special symbol  $\square$

## Arithmetic Coding for Arbitrary Sequences

These ideas generalise to arbitrary length sequences

- We don't even need to know the sequence length beforehand!

Assignment Project Exam Help

As we see more symbols, we slice the appropriate sub-interval of  $[0, 1)$  based on the probabilities

- Terminate whenever we see  $\square$

<https://powcoder.com>

Add WeChat powcoder

## 1 From SFE to Arithmetic Coding

## 2 Arithmetic Coding: Encoder

- Intervals for Sequences
- Codeword Generation
- Putting it all Together

<https://powcoder.com>

## 3 Arithmetic Coding: Decoder

Add WeChat powcoder

## 4 Adapting Distributions On-The-Fly

## Arithmetic Coding: Codeword Generation

Once we've seen the entire sequence, we end up with interval  $[l, u)$

- How to output a codeword?

<https://powcoder.com>

Add WeChat powcoder

## Arithmetic Coding: Codeword Generation

Once we've seen the entire sequence, we end up with interval  $[u, v)$

- How to output a codeword?


As per SFE coding, we can use the first  $\ell(x_1 x_2 \dots x_N)$  bits of  $(u + v)/2$

- Here,  $\ell(x_1 x_2 \dots x_N) = \lceil \log 1/p(x_1 x_2 \dots x_N) \rceil + 1$
- As before, this guarantees all strings starting with codeword are contained in the codeword interval

Generally, we can output some bits on the fly, rather than wait till we process the entire sequence


## Arithmetic Coding: Codeword Generation Example

In previous example with input b, we'd stop in the interval for  $b\Box$ , i.e.  $[0.7, 0.75)$

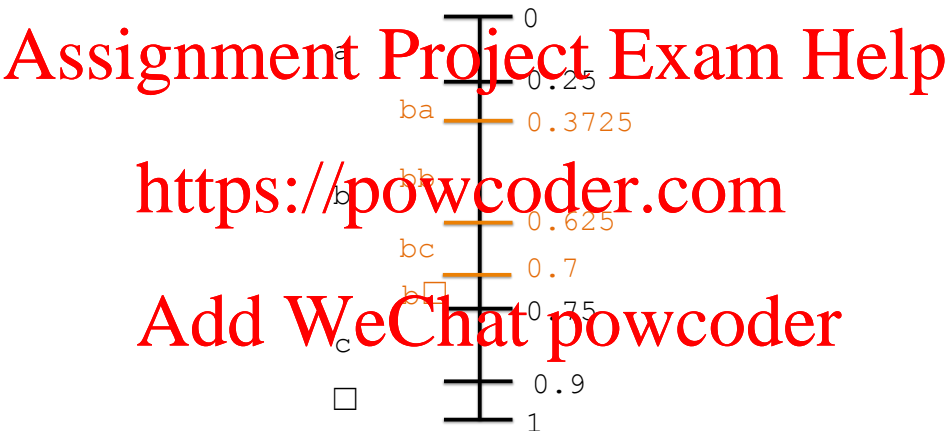

## Arithmetic Coding: Codeword Generation Example

In previous example with input  $b$ , we'd stop in the interval for  $b\Box$ , i.e.  $[0.7, 0.75)$

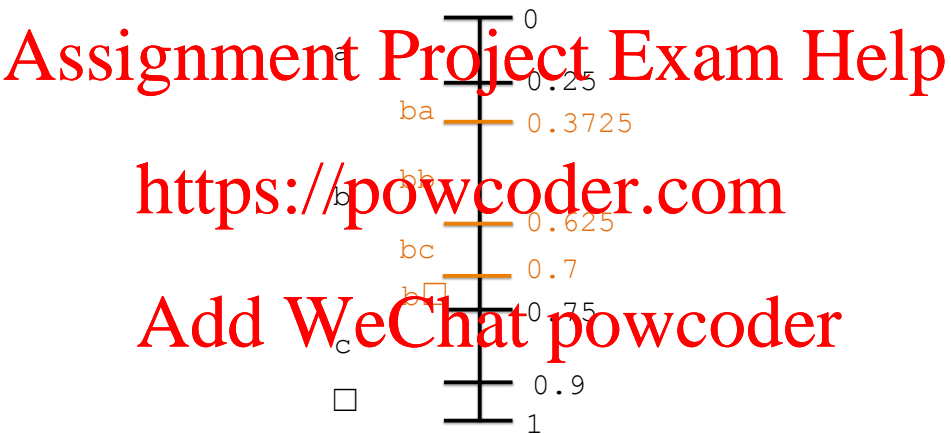

Midpoint is  $0.725 = 10111\overline{0011}$ , and  $p(b\Box) = (1/2) \cdot (0.1) = 0.05$

Output the first  $\lceil \log_2 1/0.05 \rceil + 1 = 6$  bits, i.e. 101110

## 1 From SFE to Arithmetic Coding

## 2 Arithmetic Coding: Encoder

- Intervals for Sequences
- Codeword Generation
- Putting it all together

<https://powcoder.com>

## 3 Arithmetic Coding: Decoder

Add WeChat powcoder

## 4 Adapting Distributions On-The-Fly



# Arithmetic Coding: Formal Encoder

Formally, we compute the interval  $[u, v)$  for a generic sequence as follows:

Arithmetic Coding of stream  $x_1 x_2 \dots$

$u \leftarrow 0.0$   
 $v \leftarrow 1.0$   
 $p \leftarrow v - u$

for  $n = 1, 2, \dots$

- Compute  $L_n(a_i | x_1, \dots, x_{n-1}) = \sum_{i'=1}^{i-1} p(x_n = a_{i'} | x_1, \dots, x_{n-1})$
- Compute  $U_n(a_i | x_1, \dots, x_{n-1}) = \sum_{i'=i}^N p(x_n = a_{i'} | x_1, \dots, x_{n-1})$
- $v \leftarrow u + p \cdot U_n(x_n | x_1, \dots, x_{n-1})$
- $u \leftarrow u + p \cdot L_n(x_n | x_1, \dots, x_{n-1})$
- $p \leftarrow v - u$
- if  $x_n = \square$ , terminate

Output first  $\ell(x_1 x_2 \dots x_N) = \lceil \log 1/p \rceil + 1$  bits of  $(u + v)/2$

Here,  $L_n, U_n$  just compute the appropriate lower and upper bounds, as per SFE coding

- We rescale these based on the current interval length

## 1 From SFE to Arithmetic Coding

## 2 Arithmetic Coding: Encoder

- Intervals for Sequences
- Codeword Generation
- Putting it all Together

<https://powcoder.com>

## 3 Arithmetic Coding: Decoder

Add WeChat powcoder

## 4 Adapting Distributions On-The-Fly

# Decoding

How do we **decode** a sequence of bits?

## Rough Sketch

- Carve out  $[0, 1)$  based on initial distribution
- Keep reading bits until current code interval in a symbol interval
- Output that symbol
- Carve out appropriate interval based on probabilities
- $\vdots$

We can stop once we have containment in interval for  $\square$

## Decoding: Example

Suppose  $p(a) = 0.5, p(b) = 0.125, p(c) = 0.25, p(\square) = 0.125$  for every outcome in sequence

Decode 0110111:

Sequence	Interval (Binary)	Interval (Decimal)	Comment
0	$[0, 0.5)_2$	$[0, 0.5)_{10}$	First symbol a

Add WeChat powcoder

## Decoding: Example

Suppose  $p(a) = 0.5, p(b) = 0.125, p(c) = 0.25, p(\square) = 0.125$  for every outcome in sequence

Decode 0110111:

Sequence	Interval (Binary)	Interval (Decimal)	Comment
0	$[0.0, 0.1)_2$	$[0, 0.5)_{10}$	First symbol a
01	$[0.01, 0.10)_2$	$[0.25, 0.5)_{10}$	

Add WeChat powcoder

## Decoding: Example

Suppose  $p(a) = 0.5, p(b) = 0.125, p(c) = 0.25, p(\square) = 0.125$  for every outcome in sequence

# Assignment Project Exam Help

Decode 0110111:

Sequence	Interval (Binary)	Interval (Decimal)	Comment
0	$[0.0, 0.1)_2$	$[0, 0.5)_{10}$	First symbol a
01	$[0.01, 0.10)_2$	$[0.25, 0.5)_{10}$	
011	$[0.011, 0.100)_2$	$[0.375, 0.5)_{10}$	Next symbol c

# Add WeChat powcoder

## Decoding: Example

Suppose  $p(a) = 0.5, p(b) = 0.125, p(c) = 0.25, p(\square) = 0.125$  for every outcome in sequence

# Assignment Project Exam Help

Decode 0110111:

Sequence	Interval (Binary)	Interval (Decimal)	Comment
0	$[0.0, 0.1)_2$	$[0, 0.5)_{10}$	First symbol a
01	$[0.01, 0.10)_2$	$[0.25, 0.5)_{10}$	
011	$[0.011, 0.100)_2$	$[0.375, 0.5)_{10}$	Next symbol c
0110	$[0.0110, 0.0111)_2$	$[0.375, 0.4375)_{10}$	

Add WeChat powcoder

## Decoding: Example

Suppose  $p(a) = 0.5, p(b) = 0.125, p(c) = 0.25, p(\square) = 0.125$  for every outcome in sequence

# Assignment Project Exam Help

Decode 0110111:

Sequence	Interval (Binary)	Interval (Decimal)	Comment
0	$[0.0, 0.1)_2$	$[0, 0.5)_{10}$	First symbol a
01	$[0.01, 0.10)_2$	$[0.25, 0.5)_{10}$	
011	$[0.011, 0.100)_2$	$[0.375, 0.5)_{10}$	Next symbol c
0110	$[0.0110, 0.0111)_2$	$[0.375, 0.4375)_{10}$	
01101	$[0.01101, 0.01110)_2$	$[0.40625, 0.4375)_{10}$	



## Decoding: Example

Suppose  $p(a) = 0.5, p(b) = 0.125, p(c) = 0.25, p(\square) = 0.125$  for every outcome in sequence

# Assignment Project Exam Help

Decode 0110111:

Sequence	Interval (Binary)	Interval (Decimal)	Comment
0	$[0.0, 0.1)_2$	$[0, 0.5)_{10}$	First symbol a
01	$[0.01, 0.10)_2$	$[0.25, 0.5)_{10}$	
011	$[0.011, 0.100)_2$	$[0.375, 0.5)_{10}$	Next symbol c
0110	$[0.0110, 0.0111)_2$	$[0.375, 0.4375)_{10}$	
01101	$[0.01101, 0.01110)_2$	$[0.40625, 0.4375)_{10}$	
011011	$[0.011011, 0.011100)_2$	$[0.421875, 0.4375)_{10}$	Next symbol $\square$

The last bit here is actually redundant (inherited from +1 bit in midpoint representation)

1 From SFE to Arithmetic Coding

# Assignment Project Exam Help

2 Arithmetic Coding: Encoder

- Intervals for Sequences
- Codeword Generation
- Putting it all Together

<https://powcoder.com>

3 Arithmetic Coding: Decoder

Add WeChat powcoder

4 Adapting Distributions On-The-Fly

## Adaptive Probabilities

So far we assume the sequence of probabilities are given in advance

**Assignment Project Exam Help**  
In Lecture 5, you saw Bernoulli distribution for two outcomes

<https://powcoder.com>

Add WeChat powcoder

## Adaptive Probabilities

So far we assume the sequence of probabilities are given in advance

# Assignment Project Exam Help

In Lecture 5, you saw Bernoulli distribution for two outcomes

- Beta distribution  $\text{Beta}(\theta|m_h, m_t)$  as a prior for  $\text{Bern}(x|\theta)$

- The <https://powcoder.com> posterior after observing  $n_h$  heads and  $n_t$  tails is just  $\text{Beta}(\theta|m_h + n_h, m_t + n_t)$

- The expected value of  $\theta$  under the posterior is

$$p(x = h | n_h, n_t, m_h, m_t) = \frac{m_h + n_h}{m_h + n_h + m_t + n_t}$$

## Dirichlet Model

A **Dirichlet distribution** is a generalisation of the Beta distribution to more than two outcomes. Its parameter is a vector  $\mathbf{m} \equiv (m_1, \dots, m_K)$  can be viewed as “virtual counts” for each symbol  $a_1, \dots, a_K$ .

$$P(x = a_i | x_1 \dots x_n) = \frac{\#(a_i) + m_i}{\sum_{k=1}^K \#(a_k) + m_k}$$

<https://powcoder.com>

Can implement an adaptive guesser by just counting symbol occurrences.

Add WeChat powcoder

## Dirichlet Model

A **Dirichlet distribution** is a generalisation of the Beta distribution to more than two outcomes. Its parameter is a vector  $\mathbf{m} \equiv (m_1, \dots, m_K)$  can be viewed as “virtual counts” for each symbol  $a_1, \dots, a_K$ .

$$P(x = a_i | x_1 \dots x_n) = \frac{\#(a_i) + m_i}{\sum_{k=1}^K \#(a_k) + m_k}$$

<https://powcoder.com>

Can implement an adaptive guesser by just counting symbol occurrences.

Flexible

Add WeChat powcoder

- e.g., Choose  $\mathbf{m}$  to be frequency of English letters
- $\sum_k m_k$  Large = Stable; Small = Responsive

**Example:** Start with  $m_h = m_t = 1$  and observe sequence hht.

$$p(\cdot|\epsilon) = (\frac{1}{2}, \frac{1}{2}), p(\cdot|h) = (\frac{2}{3}, \frac{1}{3}), p(\cdot|h h) = (\frac{3}{4}, \frac{1}{4}), p(\cdot|h h t) = (\frac{3}{5}, \frac{2}{5})$$

viz. Laplace's Rule, where  $\epsilon$  means empty string

Why? Because e.g.

$$p(h|h) = \frac{1 + 1}{1 + 0 + 1 + 1} = 2/3$$

$$p(t|h) = \frac{0 + 1}{1 + 0 + 1 + 1} = 1/3$$

We'll assume this learning is only for non  $\square$  symbols

- assume  $\square$  occurs with fixed probability each time

## Adaptive Probabilities: Example

Possible outcomes a, b,  $\square$

# Assignment Project Exam Help

Sequence:  $\epsilon$

Probabilities:  $p_{|\epsilon} = (0.425, 0.425, 0.15)$

Encoder:  $\epsilon$

a

0.011011...

b

.110110...

$\square$

We start off with virtual counts  $m_a = m_b = 1$



# Adaptive Probabilities: Example

Possible outcomes a, b,  $\square$

Observations: b

Probabilities:  $p_{|b} \approx (0.28, 0.57, 0.15)$

Encoder Output:  $\epsilon$

a

ba

b bb

b $\square$

$\square$

0.011011...

0.100010...

0.110010...

0.110110...

Seeing b makes us update  $p(a|b) = (0.85) \cdot (1/3) \approx 0.28$ , and  $p(b|b) = (0.85) \cdot (2/3) \approx 0.57$ . We keep  $p(\square|b) = p(\square)$ .

# Adaptive Probabilities: Example


Possible outcomes a, b,  $\square$

# Assignment Project Exam Help

**Observations:** bb

**Probabilities:**  $p_{|bb} \approx (0.21, 0.64, 0.15)$

**Encoder Output:** 1



# Add WeChat powcoder

Seeing bb makes us update  $p(a|bb) = (0.85) \cdot (1/4) \approx 0.21$ , and

$p(b|bb) = (0.85) \cdot (3/4) \approx 0.64$

Now the first bit is unambiguously 1

## Adaptive Probabilities: Example


Possible outcomes a, b,  $\square$

# Assignment Project Exam Help

Observations: bbb

Probabilities:  $p_{|bbb} \approx (0.17, 0.68, 0.15)$

Encoder Output: 1



<https://powcoder.com>

Add WeChat powcoder


# Adaptive Probabilities: Example

Possible outcomes a, b, □

Observations: bbbba

Probabilities:  $p_{|bbba} \approx (0.28, 0.57, 0.15)$

Encoder Output: 1001



On seeing a, we can fill in three further bits unambiguously

## Adaptive Probabilities: Example


Possible outcomes a, b,  $\square$

# Assignment Project Exam Help

Observations: bbbba $\square$

Probabilities: N/A

Encoder Output: 1.00111101




To terminate, we find midpoint of 0.100111100... and 0.100111110...

# Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

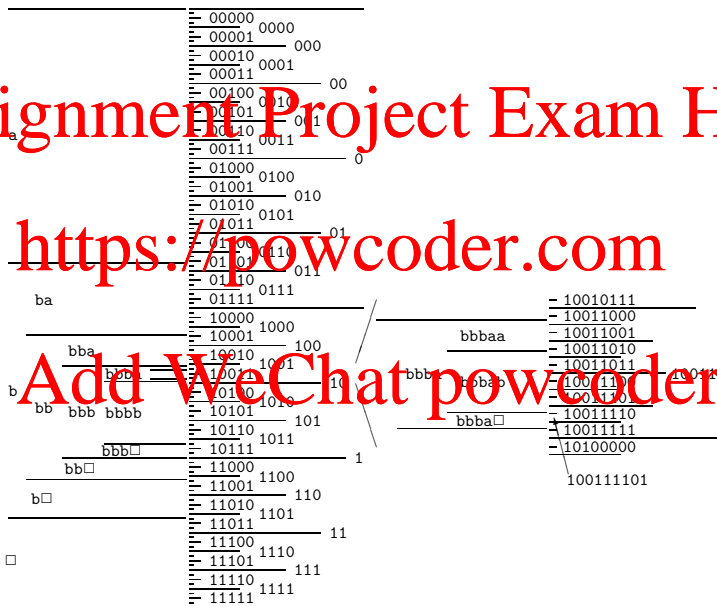

# Summary and Reading

## Main Points

- Arithmetic Coding:

- Uses interval coding and conditional probability

- Separates coding and prediction

- No need to compute every code word

- Predictive distributions:

- Update distribution after each symbol

- Beta and Dirichlet priors = virtual counts

## Reading

- Section 6.2 of MacKay