


# PROGRAMMING IN HASKELL

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

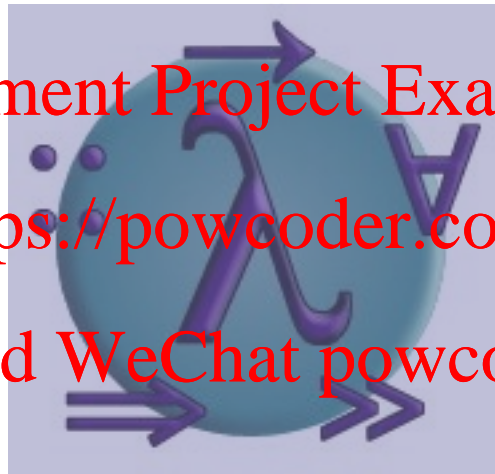

Chapter 1 and 2 - Introduction and First Steps  
(Original Slides by Graham Hutton)

# Programming in Haskell

? This course follows the Programming in Haskell book, by Prof. Graham Hutton

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



# Learn you a Haskell for Great Good

 Learn you a Haskell for Great Good is a fun and easy to read alternative

Assignment Project Exam Help

<http://learnyouahaskell.com> <https://powcoder.com>

Add WeChat powcoder

... there are two ways of constructing a software design: One way is to make it so simple that there are obviously no deficiencies and the other way is to make it so complicated that there are no obvious deficiencies. The first method is far more difficult.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Tony Hoare, 1980 ACM Turing Award Lecture

# The Software Crisis

? How can we cope with the size and complexity of modern computer programs?

Assignment Project Exam Help

? How can we reduce the time and cost of program development?

<https://powcoder.com>


Add WeChat powcoder

? How can we increase our confidence that the finished programs work correctly?

# Programming Languages

One approach to the software crisis is to design new programming languages that:

Assignment Project Exam Help

 Allow programs to be written clearly, concisely, and at a high-level of abstraction;

<https://powcoder.com>  
Add WeChat powcoder

 Support reusable software components;

 Encourage the use of formal verification;

❑ Permit rapid prototyping;

❑ Provide powerful problem-solving tools.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



Functional languages provide a particularly elegant framework in which to address these goals.

# What is a Functional Language?

Opinions differ, and it is difficult to give a precise definition, but generally speaking:

Assignment Project Exam Help

<https://powcoder.com>

❓ Functional programming is style of programming in which the basic method of computation is the application of functions to arguments;

Add WeChat powcoder

❓ A functional language is one that supports and encourages the functional style.



# Computing in Imperative Programming

Summing the integers 1 to 10 in Java:

Assignment Project Exam Help

```
total = 0;
for (i = 1; i ≤ 10; ++i)
    total = total+i;
```

<https://powcoder.com>  
Add WeChat powcoder

The computation method is variable assignment.

# Computing in Functional Programming

Summing the integers 1 to 10 in Haskell:

Assignment Project Exam Help

`sum [1..10]` <https://powcoder.com>

Add WeChat powcoder

The computation method is function application.

# Example

Double function

Assignment Project Exam Help

`double x = x + x` <https://powcoder.com>

Add WeChat powcoder

How to compute the result of double 3?

# Example

double 3

{by definition of double}

3 + 3

{arithmetic}

6

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Example

How about?

Assignment Project Exam Help

`double (double 2)` <https://powcoder.com>

Add WeChat powcoder

# Example

double (double 2)  
= {by definition of double}  
double (2 + 2)  
= {arithmetic}  
double 4  
= {by definition of double}  
4 + 4  
= {arithmetic}  
8

Assignment Project Exam Help  
<https://powcoder.com>  
Add WeChat powcoder

# Example

Summing a list of integers:

Assignment Project Exam Help

`sum [] = 0` <https://powcoder.com>

`sum (x:xs) = x + sum xs`  
Add WeChat powcoder

# Example

Calculate the result of:

Assignment Project Exam Help

sum [1,2,3] <https://powcoder.com>

Add WeChat powcoder



## Example

$\text{sum } [] = 0$

$\text{sum } (x:xs) = x + \text{sum } xs$

$\text{sum } [1,2,3]$

$= \{\text{by definition of sum}\}$

$1 + \text{sum } [2,3]$

$= \{\text{by definition of sum}\}$

$1 + 2 + \text{sum } [3]$

$= \{\text{by definition of sum}\}$

$1 + 2 + 3 + \text{sum } []$

$= \{\text{by definition of sum}\}$

$1 + 2 + 3 + 0$

$= \{\text{arithmetic}\}$

6

# Historical Background

1930s:

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



Alonzo Church develops the lambda calculus, a simple but powerful theory of functions.

# Historical Background

1950s:

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



John McCarthy develops Lisp, the first functional language, with some influences from the lambda calculus, but retaining variable assignments.

# Historical Background

1960s:

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



Peter Landin develops ISWIM, the first pure functional language, based strongly on the lambda calculus, with no assignments.


# Historical Background

1970s:

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

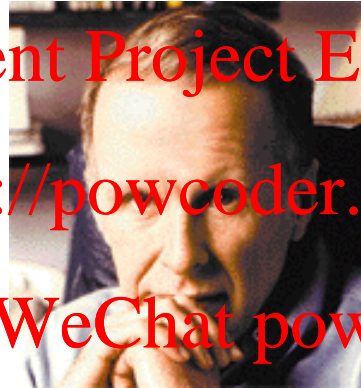

John Backus develops FP, a functional language that emphasizes higher-order functions and reasoning about programs.

# Historical Background

1970s:

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



Robin Milner and others develop ML, the first modern functional language, which introduced type inference and polymorphic types.

# Historical Background

1970s - 1980s:

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



David Turner develops a number of lazy functional languages, culminating in the Miranda system.

# Historical Background

1987:

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

An international committee of researchers initiates the development of Haskell, a standard lazy functional language.




# Historical Background

2003:

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

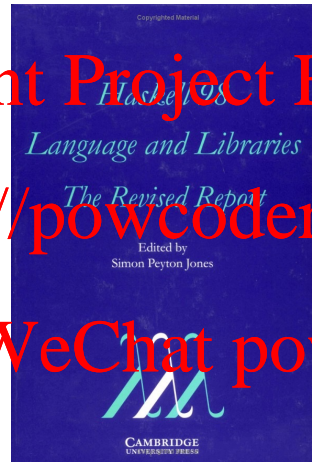

The committee publishes the Haskell 98 report, defining a stable version of the language.

# Historical Background

2003-date:



Standard distribution, library support, new language features, development tools, use in industry, influence on other languages, etc.

# A Taste of Haskell

```
f [] = []
```

```
f (x:xs) = f ys ++ [x] ++ f zs
```

where

```
ys = [a | a ← xs, a ≤ x]
```

```
zs = [b | b ← xs, b > x]
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder


?

# PROGRAMMING IN HASKELL

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

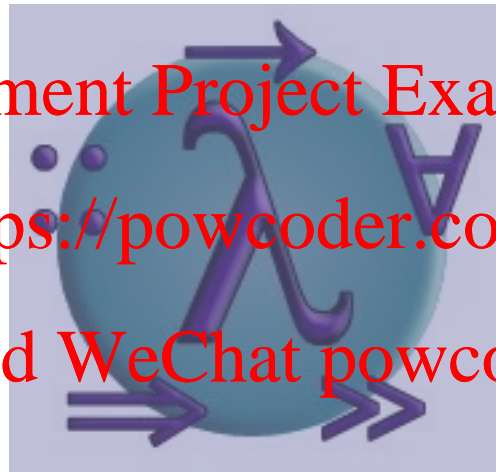

## Chapter 2 - First Steps

# Glasgow Haskell Compiler

? GHC is the leading implementation of Haskell, and comprises a compiler and interpreter;

Assignment Project Exam Help

? The interactive nature of the interpreter makes it well suited for teaching and prototyping;

<https://powcoder.com>

Add WeChat powcoder

? GHC is freely available from:

[www.haskell.org/platform](http://www.haskell.org/platform)

# Starting GHC

The GHC interpreter can be started from the Unix command prompt % by simply typing ghci:

Assignment Project Exam Help

% ghci

<https://powcoder.com>

GHCi, version 7.4.1: <http://www.haskell.org/ghc/> :? for help

Prelude>

The GHCi prompt `>` means that the interpreter is ready to evaluate an expression.

For example:

Assignment Project Exam Help

```
> 2+3*4  
14
```

Add WeChat powcoder

```
> (2+3)*4  
20
```

```
> sqrt (3^2 + 4^2)  
5.0
```

# The Standard Prelude

Haskell comes with a large number of standard library functions. In addition to the familiar numeric functions such as  $+$  and  $*$ , the library also provides many useful functions on lists.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

 Select the first element of a list:

```
> head [1,2,3,4,5]
```

```
1
```



? Remove the first element from a list:

```
> tail [1,2,3,4,5]  
[2,3,4,5]
```

? Select the *nth* element of a list:

```
> [1,2,3,4,5] !! 2  
3
```

<https://powcoder.com>  
Add WeChat powcoder

? Select the first n elements of a list:

```
> take 3 [1,2,3,4,5]  
[1,2,3]
```

? Remove the first n elements from a list:

```
> drop 3 [1,2,3,4,5]  
[4,5]
```

? Calculate the length of a list:

```
> length [1,2,3,4,5]  
5
```

<https://powcoder.com>  
Add WeChat powcoder

? Calculate the sum of a list of numbers:

```
> sum [1,2,3,4,5]  
15
```

? Calculate the product of a list of numbers:

```
> product [1,2,3,4,5]  
120
```

? Append two lists.

<https://powcoder.com>  
Add WeChat powcoder

```
> [1,2,3] ++ [4,5]  
[1,2,3,4,5]
```

? Reverse a list:

```
> reverse [1,2,3,4,5]  
[5,4,3,2,1]
```

# Function Application

In mathematics, function application is denoted using parentheses, and multiplication is often denoted using juxtaposition or space.

Assignment Project Exam Help

<https://powcoder.com>

$f(a,b) + c \cdot d$  Add WeChat powcoder

Apply the function  $f$  to  $a$  and  $b$ , and add the result to the product of  $c$  and  $d$ .

In Haskell, function application is denoted using space, and multiplication is denoted using `*`.

Assignment Project Exam Help

`f a b + c*d` <https://powcoder.com>

Add WeChat powcoder

As previously, but in Haskell syntax.

Moreover, function application is assumed to have higher priority than all other operators.

Assignment Project Exam Help

$f\ a + b$  <https://powcoder.com>

Add WeChat powcoder

Means  $(f\ a) + b$ , rather than  $f\ (a + b)$ .

# Examples

Mathematics

Haskell

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

$f(x)$

$f\ x$

$f(x,y)$

$f\ x\ y$

$f(x)g(y)$

$f\ x\ * \ g\ y$

# Haskell Scripts

? As well as the functions in the standard library, you can also define your own functions;

Assignment Project Exam Help

? New functions are defined within a script, a text file comprising a sequence of definitions;

<https://powcoder.com>  
Add WeChat powcoder

? By convention, Haskell scripts usually have a .hs suffix on their filename. This is not mandatory, but is useful for identification purposes.



# My First Script

When developing a Haskell script, it is useful to keep two windows open, one running an editor for the script, and the other running GHCi.

Assignment Project Exam Help

<https://powcoder.com>

Start an editor, type in the following two function definitions, and save the script as Test.hs:

Add WeChat powcoder

```
double x    = x + x
```

```
quadruple x = double (double x)
```

Leaving the editor open, in another window start up GHCi with the new script:

```
% ghci Test.hs
```

Assignment Project Exam Help

Now both the standard library and the file test.hs are loaded, and functions from both can be used:

<https://powcoder.com>

Add WeChat powcoder

```
> quadruple 10  
40
```

```
> take (double 2) [1,2,3,4,5,6]  
[1,2,3,4]
```

Leaving GHCi open, return to the editor, add the following two definitions, and resave:

```
factorial n = product [1..n]
```

Assignment Project Exam Help  

```
average ns = sum ns `div` length ns
```

  
<https://powcoder.com>

Note: Add WeChat powcoder

 div is enclosed in back quotes, not forward;

 `x `f` y` is just syntactic sugar for `f x y`.

GHCi does not automatically detect that the script has been changed, so a reload command must be executed before the new definitions can be used:

```
> :reload
```

```
Reading file "test.hs"
```

<https://powcoder.com>

```
> factorial 10
```

```
3628800
```

```
> average [1,2,3,4,5]
```

```
3
```

# Naming Requirements

- ? Function and argument names must begin with a lower-case letter. For example:

Assignment Project Exam Help

myFun https://powcoder.com arg\_2 x'

Add WeChat powcoder

- ? By convention, list arguments usually have an s suffix on their name. For example:

xs ns nss

# The Layout Rule

In a sequence of definitions, each definition must begin in precisely the same column:

Assignment Project Exam Help

```
a = 10  
b = 20  
c = 30
```



```
https://powcoder.com  
Add WeChat powcoder  
a = 10  
b = 20  
c = 30
```



```
a = 10  
b = 20  
c = 30
```



The layout rule avoids the need for explicit syntax to indicate the grouping of definitions.

```
a = b + c
  where
    b = 1
    c = 2
  d = a * 2
```

implicit grouping

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



```
a = b + c
  where
    {b = 1;
     c = 2}
  d = a * 2
```

explicit grouping

# Useful GHCi Commands

<u>Command</u>	<u>Meaning</u>
:load name	load script name
:reload	reload current script
:edit name	edit script name
:edit	edit current script
:type expr	show type of expr
:?	show all commands
:quit	quit GHCi

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



# Exercises

- (1) Try out slides 2-8 and 14-17 (Chapter 2) using GHCi.
- (2) Fix the syntax errors in the program below, and test your solution using GHCi.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

$N = a \text{ 'div' length } xs$

where

$a = 10$

$xs = [1,2,3,4,5]$

- (3) Show how the library function last that selects the last element of a list can be defined using the functions introduced in this lecture.

- (4) Can you think of another possible definition?

<https://powcoder.com>

- (5) Add WeChat powcoder

Similarly, show how the library function init that removes the last element from a list can be defined in two different ways.