



THE UNIVERSITY OF  
MELBOURNE

# COMP90038

# Algorithms and Complexity

Assignment Project Exam Help

Lecture 3: Growth Rate and Algorithm Efficiency  
(with thanks to Harald Søndergaard)

<https://powcoder.com>

Add WeChat powcoder

Toby Murray



toby.murray@unimelb.edu.au



DMD 8.17 (Level 8, Doug McDonnell Bldg)



<http://people.eng.unimelb.edu.au/tobym>




@tobycmurray

# Update

- Compulsory Quizzes (first one closes Tuesday Week 3)
- Tutorials start this week
- Background knowledge catch-up tutorials:
  - Weeks 2 and 3 <https://powcoder.com>
  - Thursday 1-2pm and 2:15-3:15pm  
Alice Hoy, Room 101
- Consultation Hours
- Discussion Board

# Algorithm Efficiency

Two **algorithms** for computing gcd:

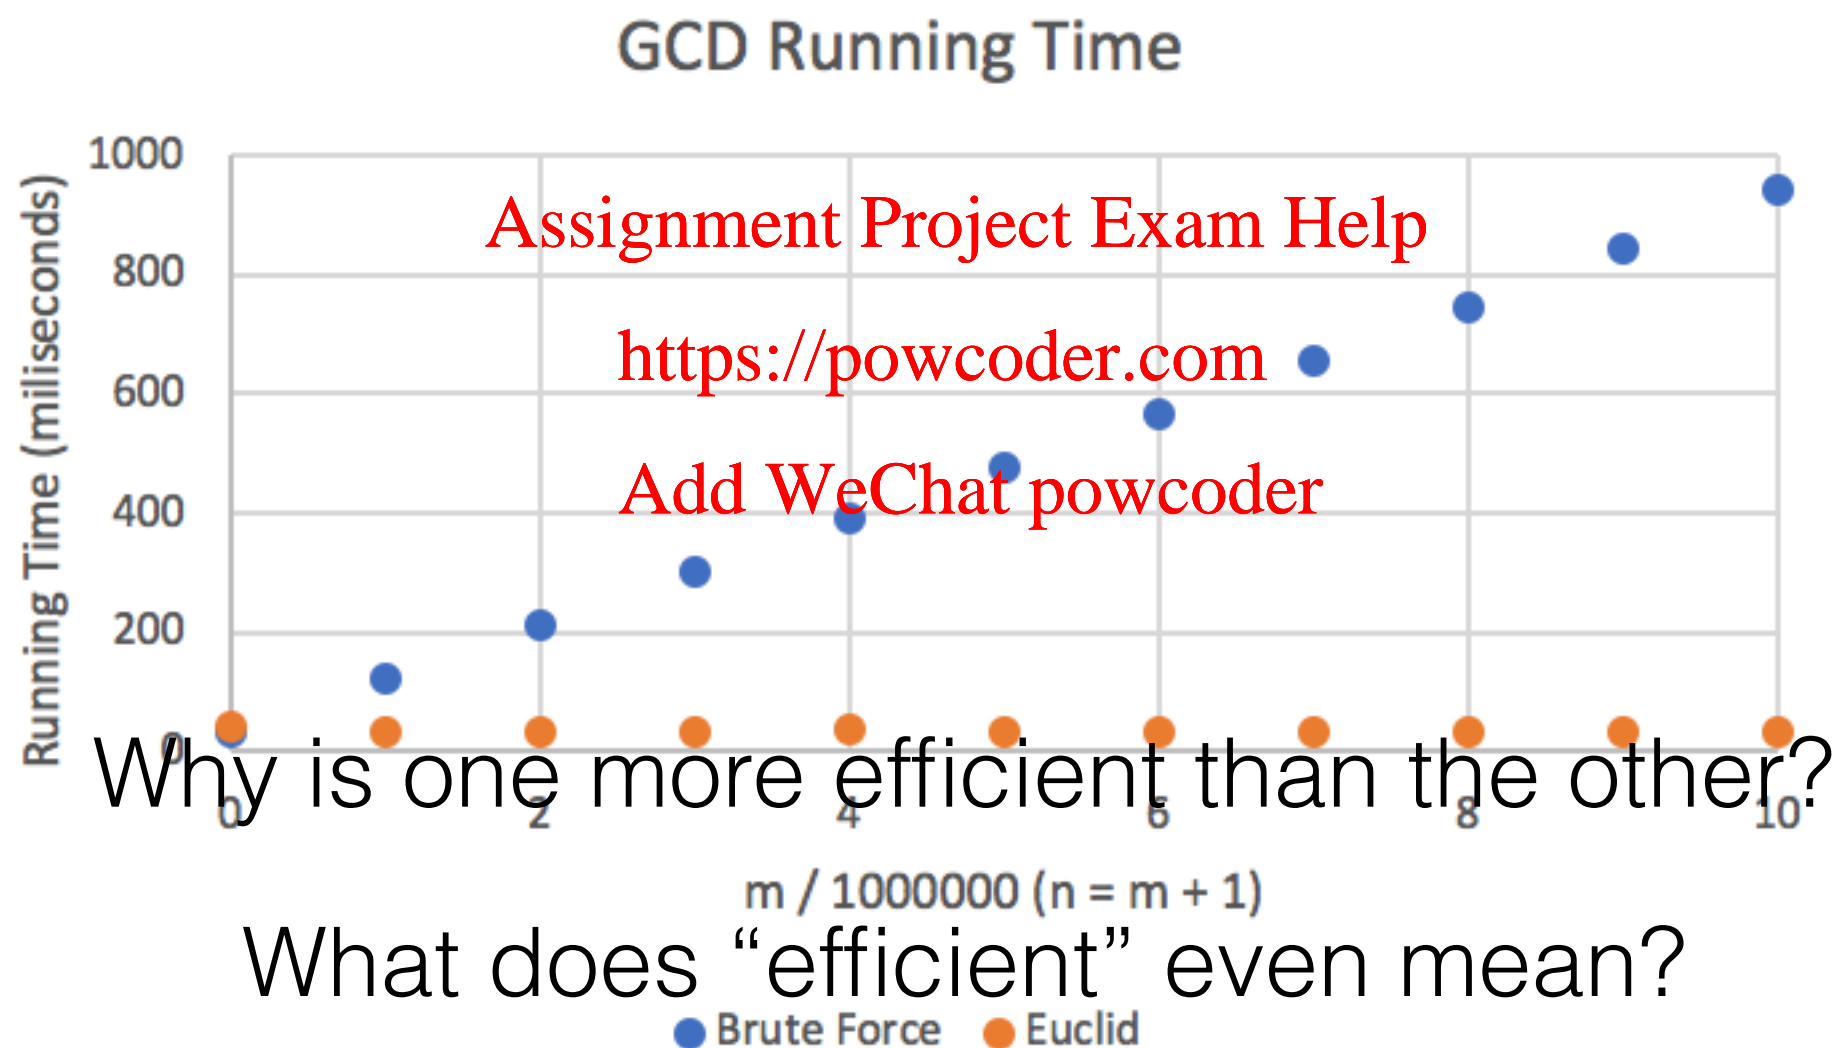

How can we talk about these things precisely?

# Linear Search Example

A: Y    x: 7    n: 7    j: 0

**function** find(A,x,n)

  j ← 0

**while** j < n

**if** A[j] = x

**return** j

    j ← j+1

**return** -1

A[j]

Assignment Project Exam Help

<https://powcoder.com>

Y:

6	9	2	3	7	5	8
0	1	2	3	4	5	6

Add WeChat powcoder

Let's trace the execution of find(Y,7,7)

(returns 4)

# Linear Search Example

```
function find(A,x,n)
```

```
  j ← 0
```

```
  while j < n
```

```
    if A[j] = x
```

```
      return j
```

```
    j ← j+1
```

```
  return -1
```

6	9	2	3	7	5	8
0	1	2	3	4	5	6

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

How many times does the loop  
run to find 7?

5.

How many times does the loop run to find 6? 1.

How many times does the loop run to find 99? 7.

(the length of the array)



# Assessing Algorithm “Efficiency”

- Resources consumed: **time** and **space**
- We want to assess efficiency as a function of input size
- Mathematical vs empirical assessment
- Average case vs worst case
- Knowledge about input peculiarities may affect the choice of algorithm
- The right choice of algorithm may also depend on the programming language used for implementation

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Running Time Dependencies



THE UNIVERSITY OF  
MELBOURNE

- There are many things that a program's running time depends on:
  1. Complexity of the algorithms used
  2. Input to the program
  3. Underlying machine, including memory architecture
  4. Language/compiler/operating system
- Since we want to compare **algorithms** we ignore (3) and (4); just consider **units of time**
- Use a natural number  $n$  to quantify (2)—size of the input
- Express (1) as a function of  $n$

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Linear Search Example

```
function find(A,x,n)
```

```
  j  $\leftarrow$  0
```

```
  while j < n
```

```
    if A[j] = x
```

```
      return j
```

```
    j  $\leftarrow$  j+1
```

```
  return -1
```

6	9	2	3	7	5	8
0	1	2	3	4	5	6

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

How should we measure the size,  $n$ ,  
of the input to this algorithm?

$n$  = the length of the array

How should we quantify the cost to run this algorithm?

roughly, number of times the loop runs  
(later in this lecture we will be more precise)



# Linear Search Example

```
function find(A,x,n)
```

```
  j ← 0
```

```
  while j < n
```

```
    if A[j] = x
```

```
      return j
```

```
    j ← j+1
```

```
  return -1
```

6	9	2	3	7	5	8
0	1	2	3	4	5	6

Assignment Project Exam Help

What is the **worst case** input?  
<https://powcoder.com>

Add WeChat powcoder

an array that doesn't contain the  
item, x, we are searching for

Worst case time complexity:  $n$   
(since the loop runs  $n$  times in that case)

# Linear Search Example

```
function find(A,x,n)
```

```
  j  $\leftarrow$  0
```

```
  while j < n
```

```
    if A[j] = x
```

```
      return j
```

```
    j  $\leftarrow$  j+1
```

```
  return -1
```

6	9	2	3	7	5	8
0	1	2	3	4	5	6

Assignment Project Exam Help

What is the **best case** input?  
<https://powcoder.com>

Add WeChat powcoder

an array that has the item, x,  
we are searching for in the first position

Best case time complexity: 1  
(since the loop runs once in that case)

# Estimating Time Consumption



- Number of loop iterations is not a good estimate of running time.
- Better is to identify the algorithm's **basic operation** and how many times it is performed
- If  $c$  is the cost of a **basic operation** and  $g(n)$  is the number of times the operation is performed for input size  $n$ ,

then running time  $t(n) \approx c \cdot g(n)$

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Linear Search Example

```
function find(A,x,n)
```

```
  j ← 0
```

```
  while j < n
```

```
    if A[j] = x
```

```
      return j
```

```
    j ← j+1
```

```
  return -1
```

6	9	2	3	7	5	8
0	1	2	3	4	5	6

Assignment Project Exam Help

What is the **basic operation** here?  
<https://powcoder.com>

Add WeChat powcoder

the comparison  $A[j] = x$

**Rule of thumb:** the most expensive operation executed each time in the inner-most loop of the program

# Examples:

## Input Size and Basic Operation

Problem	Size Measure	Basic Operation
Search in a list of $n$ items	$n$	Key comparison
Multiply two matrices of floats	Matrix size (rows x columns)	Float multiplication
Compute $a^n$	$\log n$	Float multiplication
Graph problem	Number of nodes and edges	Visiting a node

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Best, Average and Worst Case




THE UNIVERSITY OF  
MELBOURNE

- The running time  $t(n)$  may well depend on more than just  $n$
- **Worse case:** analysis makes the most pessimistic assumptions about the input
- **Best case:** analysis makes the most optimistic assumptions about the input  
<https://powcoder.com>
- **Average case:** analysis aims to find the **expected** running time across all possible input of size  $n$   
(Note: **not** an average of the worst and best cases)
- **Amortised** analysis takes context of running an algorithm into account, calculates cost **spread over many runs**. Used for “self-organising” data structures that adapt to their usage

# Large Input is what Matters



- Small input does not properly stress an algorithm

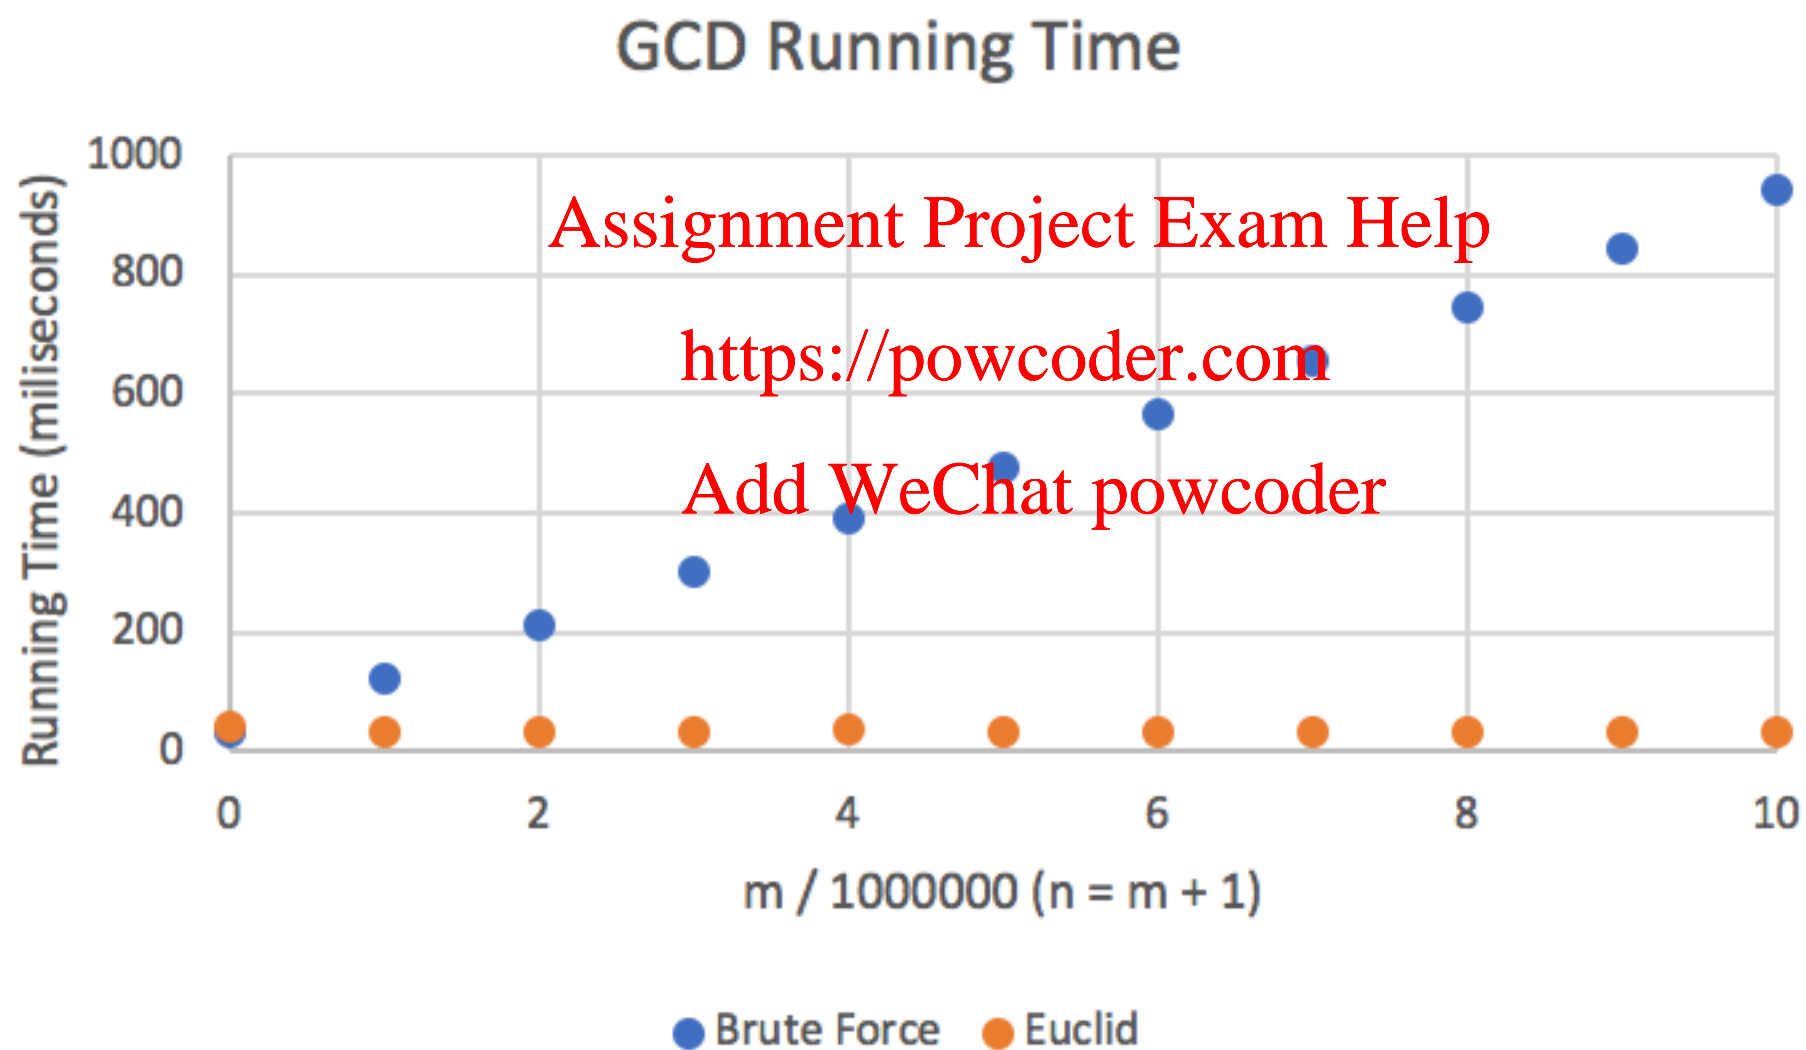

# Guessing Game Example



- Guess which number I am thinking of, between 1 and  $n$  (inclusive). I will tell you if it is higher or lower than each guess.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Wrong. My number is higher than 50.

We are **halving** the search space each time.

Basic operation:

(Worse case) complexity:  $\log n$



# The Tyranny of Growth Rate



$n$	$\log_2 n$	$n$	$n \log_2 n$	$n^2$	$n^3$	$2^n$	$n!$
$10^1$	3	$10^1$	$3 \cdot 10^1$	$10^2$	$10^3$	$10^3$	$4 \cdot 10^6$
$10^2$	7	$10^2$	$7 \cdot 10^2$	$10^4$	$10^6$	$10^{30}$	$9 \cdot 10^{157}$
$10^3$	10	$10^3$	$1 \cdot 10^4$	$10^6$	$10^9$	-	-

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

$10^{30}$  is 1,000 times the number of nano-seconds since the Big Bang.


At a rate of a trillion ( $10^{12}$ ) operations per second, executing  $2^{100}$  operations would take a computer in the order of  $10^{10}$  years.

That is more than the estimated age of the Earth

# The Tyranny of Growth Rate



THE UNIVERSITY OF  
MELBOURNE

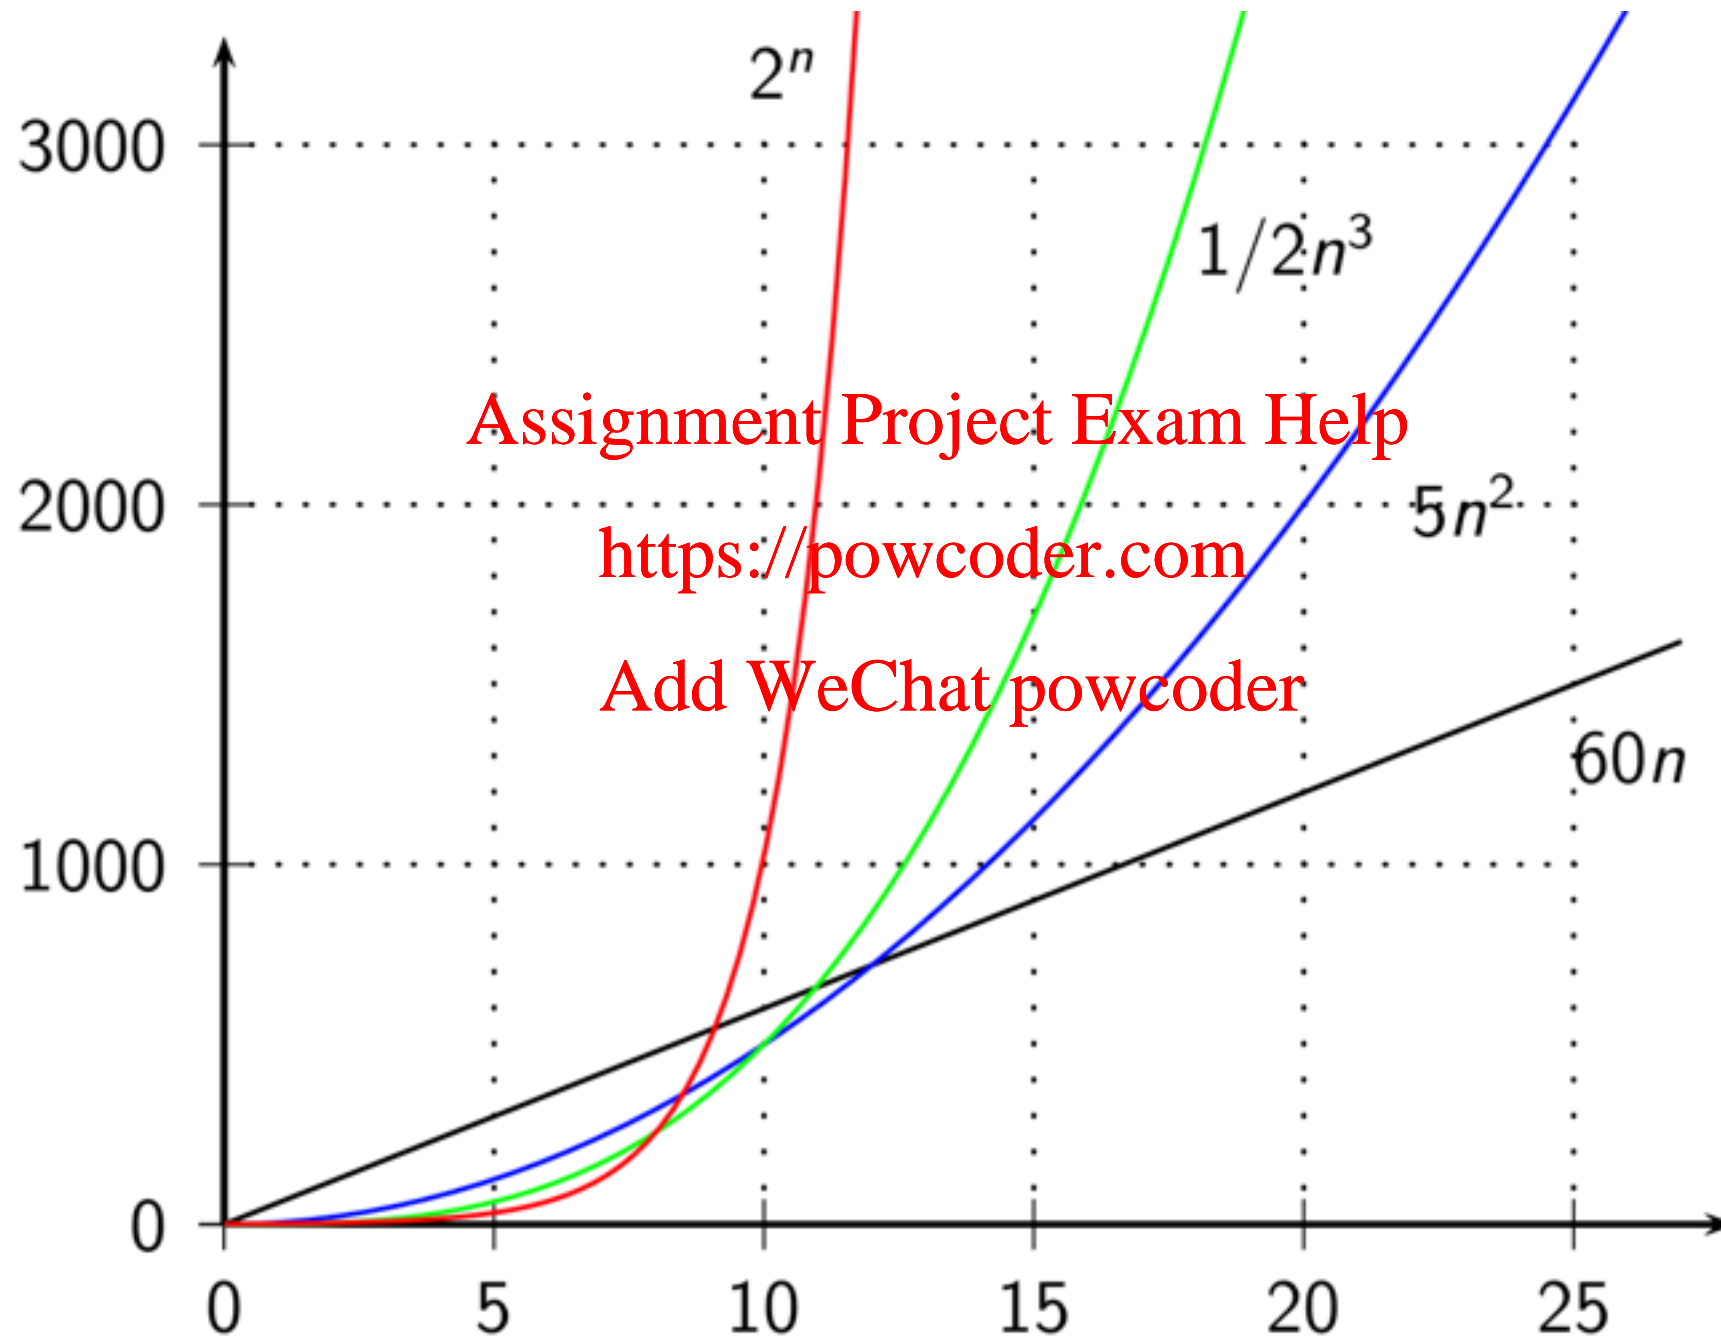

# Functions Often Met in Algorithm Classification

- **1**: Running time independent of input
- **log n**: typical for “divide and conquer” solutions, for example lookup in a balanced search tree
- **Linear (n)**: When each input must be processed once
- **n log n**: Each input element processed once and processing involves other elements too, for example, sorting.
- **n<sup>2</sup>, n<sup>3</sup>**: Quadratic, cubic. Processing all pairs (triples) of elements.
- **2<sup>n</sup>**: Exponential. Processing all subsets of elements.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Asymptotic Analysis

- We are interested in the **growth rate** of functions
- Ignore constant factors
- Ignore small input sizes

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Asymptotics

- $f(n) < g(n)$  iff  $\lim_{n \rightarrow \infty} \frac{f(n)}{g(n)} = 0$
- That is,  $g$  approaches infinity faster than  $f$
- $1 < \log n < n^\varepsilon < n^\rho < n \log n < c^n < n^n$   
where  $0 < \varepsilon < 1 < \rho < 1$   
<https://powcoder.com>  
Add WeChat powcoder
- In asymptotic analysis, **think big!**
  - e.g.,  $\log n < n^{0.0001}$ , even though for  $n = 10^{100}$ ,  $100 > 1.023$ .
  - Try it for  $n = 10^{1000000}$

# Big-Oh Notation

- $O(g(n))$  denotes the set of functions that grow no faster than  $g$ , asymptotically.

- **Formal definition:** We write

Assignment Project Exam Help

<https://powcoder.com>


Add WeChat powcoder

when, **for some  $c$  and  $n_0$**

$$n > n_0 \Rightarrow t(n) < c \cdot g(n)$$

- For example:  $1 + 2 + \dots + n \in O(n^2)$

# Big-Oh: What $t(n) \in O(g(n))$ Means

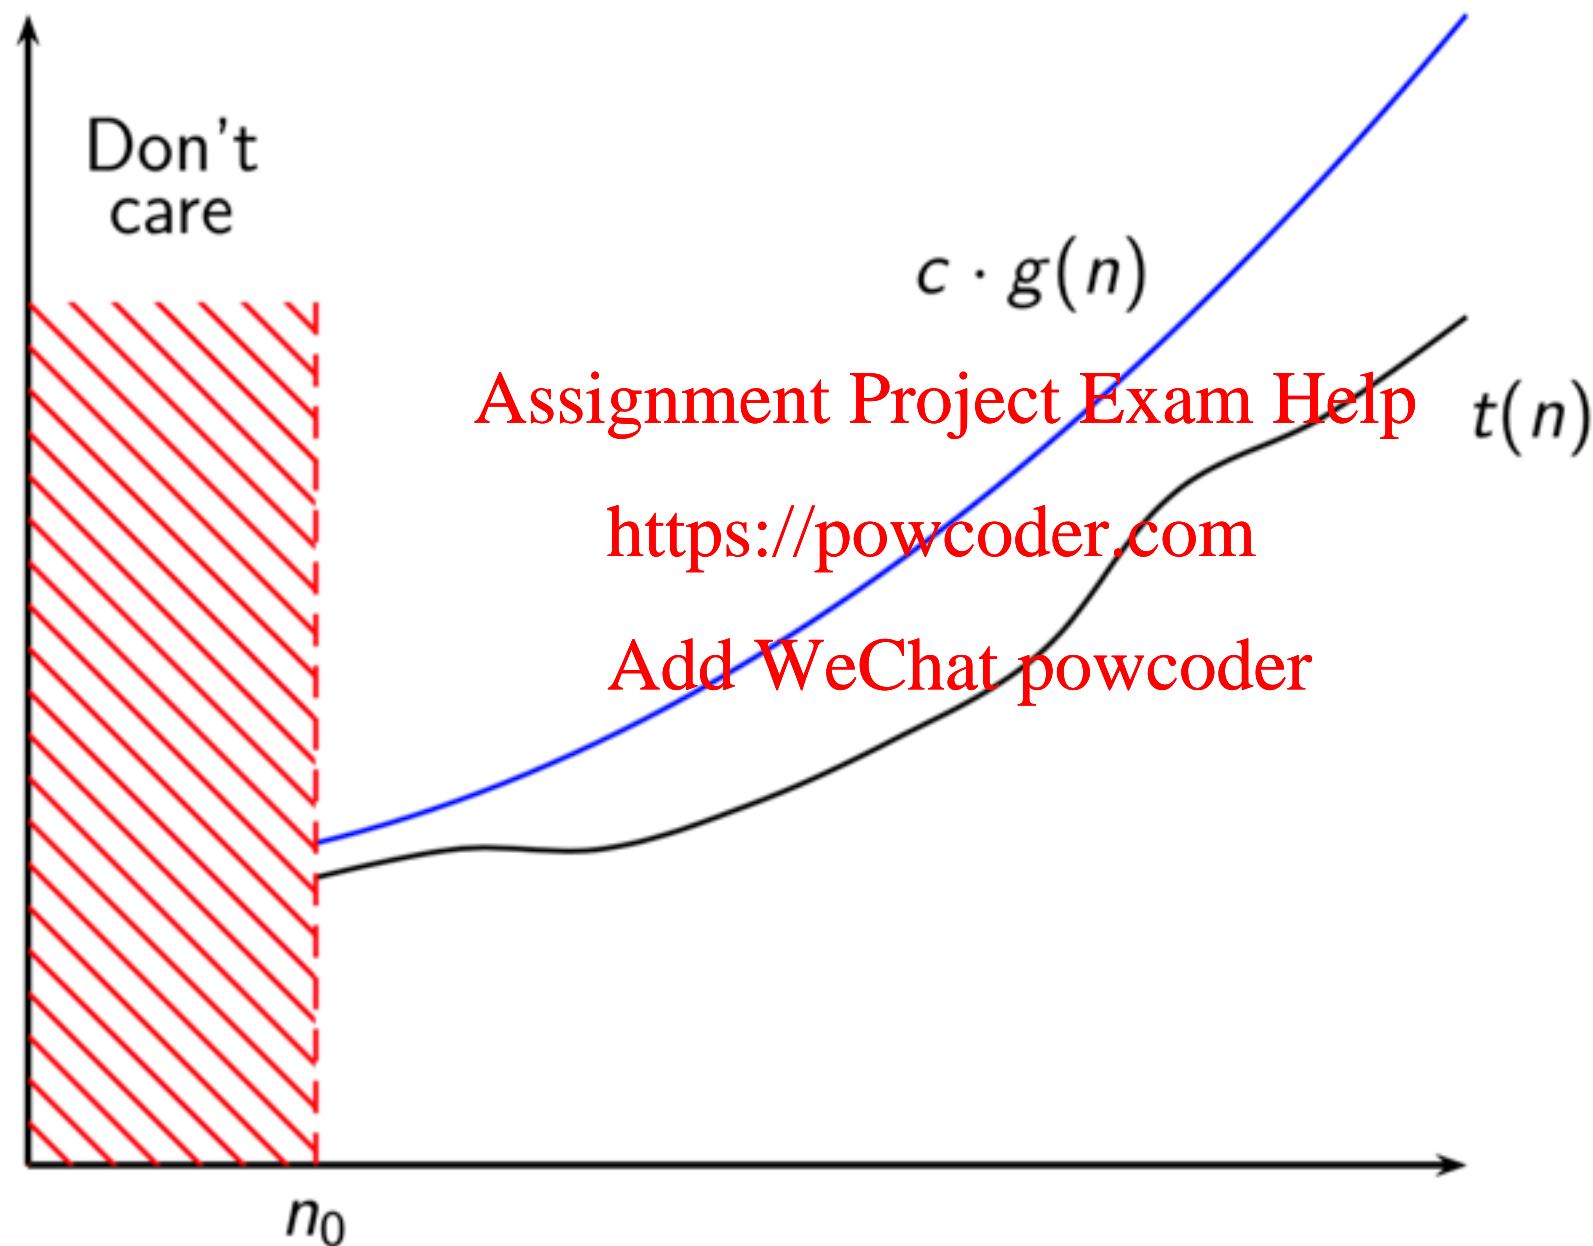

# Big-Oh Pitfalls

- Levitin's notation  $t(n) \in O(g(n))$  is meaningful, but not standard.
- Other authors use  $t(n) = O(g(n))$  for the same thing.  
[Assignment Project Exam Help](https://powcoder.com)
- As  $O$  provides an upper bound, it is correct to say both  $3n \in O(n^2)$  and  $3n \in O(n)$  (so you can see why using '=' is confusing); the latter,  $3n \in O(n)$ , is of course more precise and useful.  
<https://powcoder.com>  
[Add WeChat powcoder](https://powcoder.com)
- Note that  $c$  and  $n_0$  may be large.




# Big-Omega and Big-Theta



- **Big Omega:**  $\Omega(g(n))$  denotes the set of functions that grow no slower than  $g$ , asymptotically, so  $\Omega$  is for **lower bounds**  
[Assignment Project Exam Help](https://powcoder.com)
- $t(n) \in \Omega(g(n))$  iff  $n > n_0 \Rightarrow t(n) > c \cdot g(n)$ ,  
for some  $n_0$  and  $c$ .  
[Add WeChat powcoder](https://powcoder.com)
- **Big Theta:**  $\Theta$  is for **exact** order of growth.
- $t(n) \in \Theta(g(n))$  iff  $t(n) \in O(g(n))$  and  $t(n) \in \Omega(g(n))$ .

# Big-Omega: What $t(n) \in \Omega(g(n))$ Means

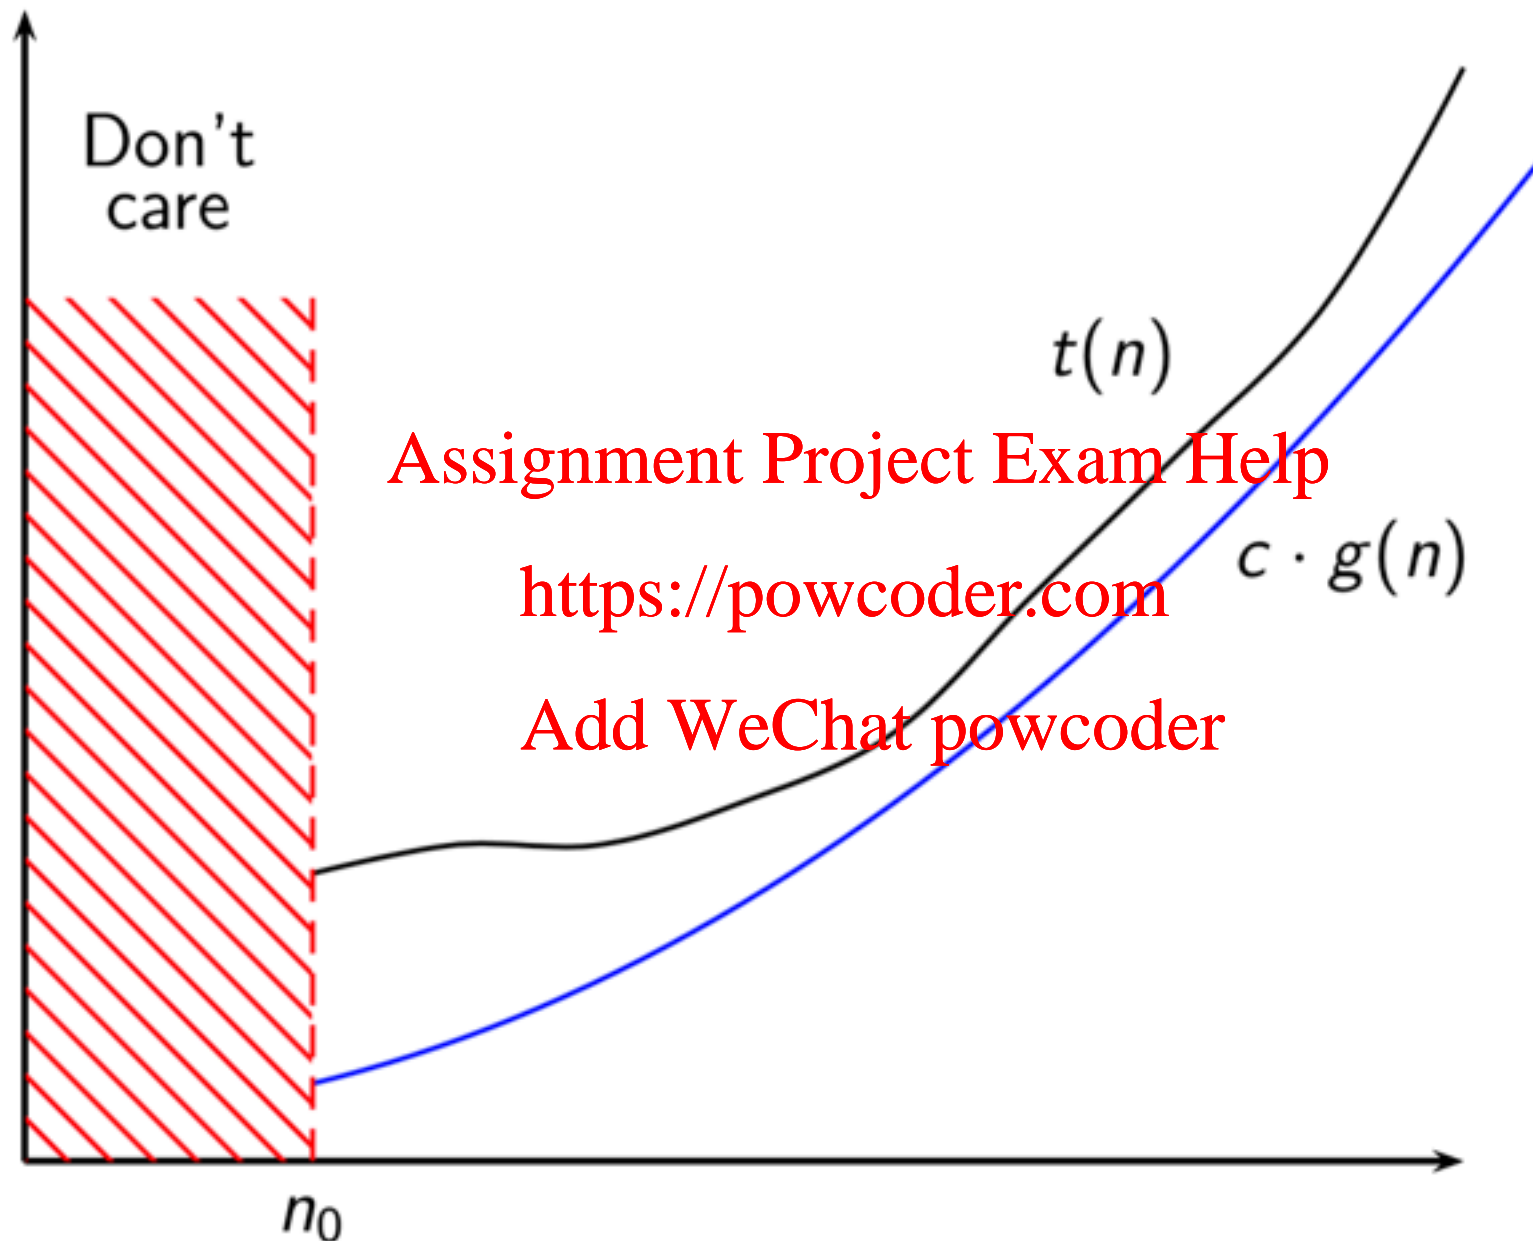


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Big-Theta: What $t(n) \in \Theta(g(n))$ Means

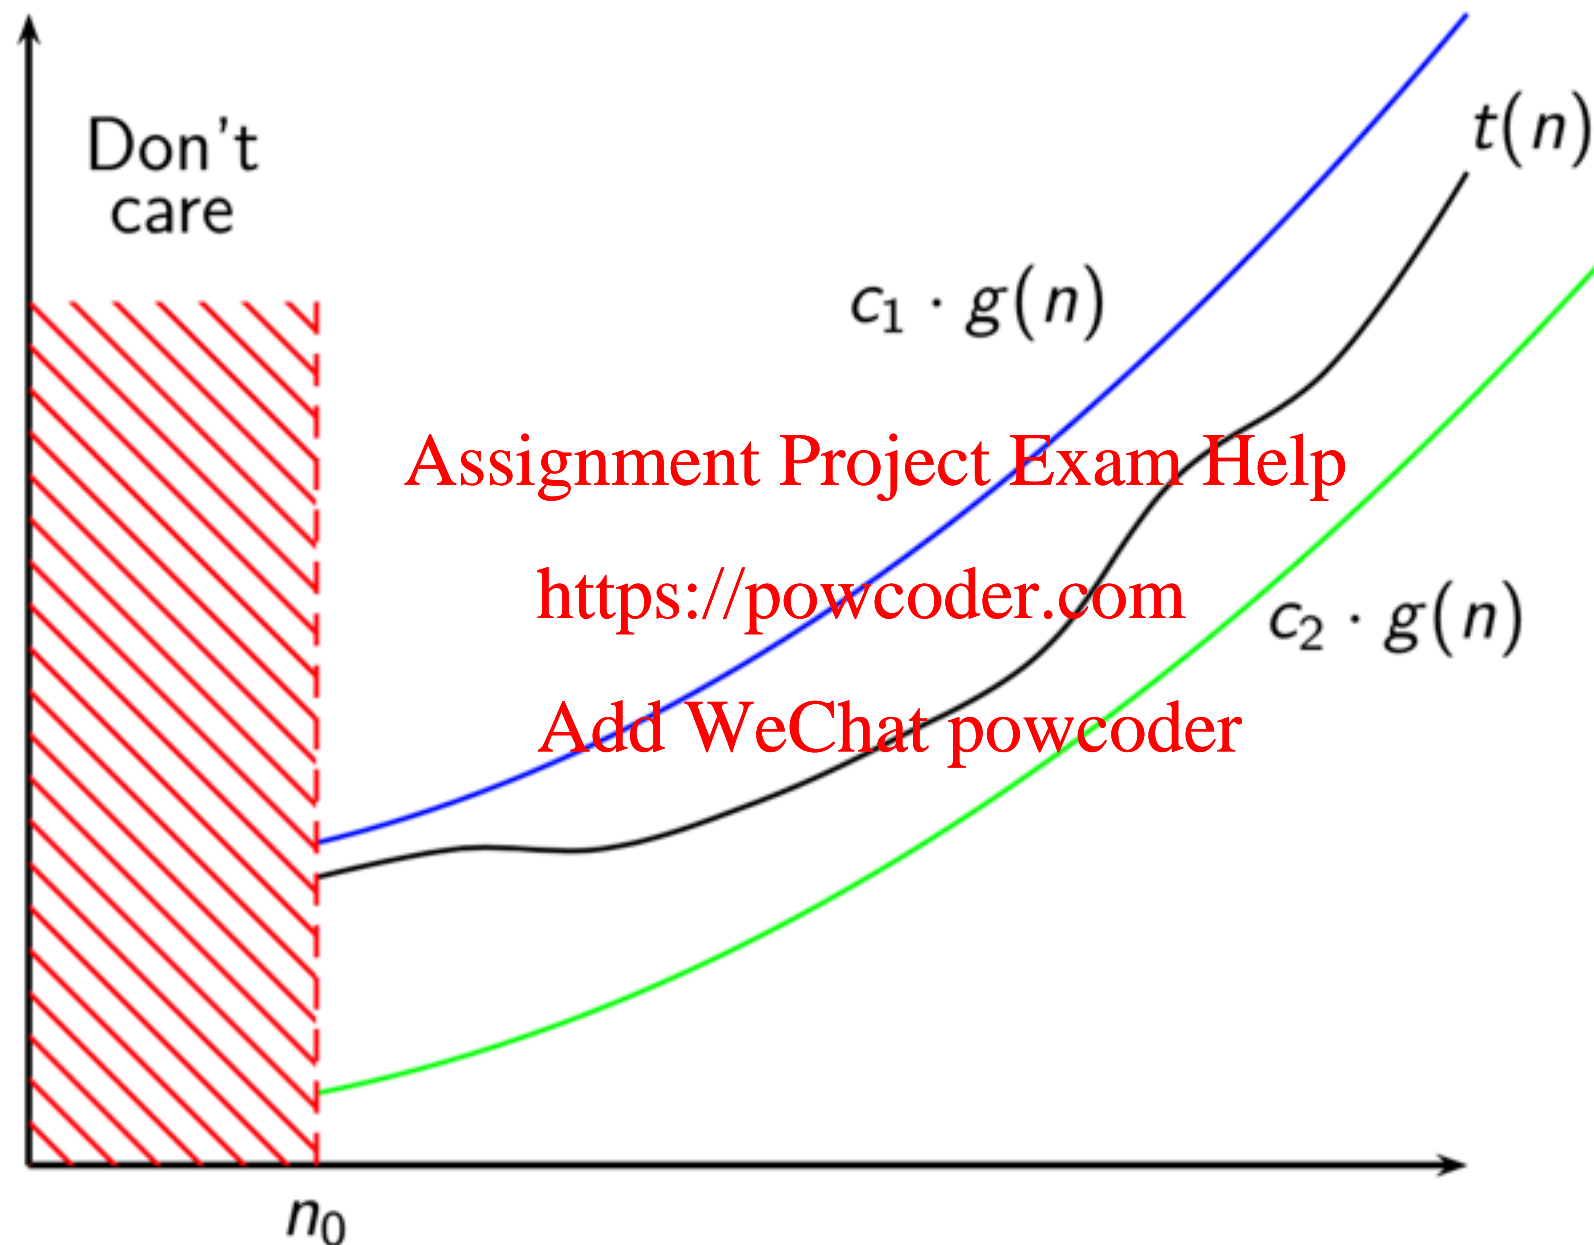

# Establishing Growth Rate

- We can use the definition of  $O$  directly.

$$t(n) \in O(g(n)) \text{ iff: } n > n_0 \Rightarrow t(n) < c \cdot g(n)$$

Assignment Project Exam Help

<https://powcoder.com>

- **Exercise:** use this to show that  
 $1 + 2 + \dots + n \in O(n^2)$

Add WeChat powcoder

- Also show that:  
 $17n^2 + 85n + 1024 \in O(n^2)$

$$1 + 2 + \dots + n \in O(n^2)$$

Find some  $c$  and  $n_0$  such that, for all  $n > n_0$

$$1 + 2 + \dots + n < c \cdot n^2$$

$$1 + 2 + \dots + n$$

$$= \frac{n(n+1)}{2}$$

$$= \frac{n^2 + n}{2}$$

$$< n^2 + n \quad (\text{for } n > 0)$$

$$< n^2 + n^2 \quad (\text{for } n > 1)$$

$$= 2n^2$$

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

#### APPENDIX A

### Useful Formulas for the Analysis of Algorithms

$$\sum_{i=1}^n i = 1 + 2 + \dots + n = \frac{n(n+1)}{2} \approx \frac{1}{2}n^2$$

**Choose  $n_0 = 1$ ,  $c = 2$**

$$17n^2 + 85n + 1024 \in O(n^2)$$



Find some  $c$  and  $n_0$  such that, for all  $n > n_0$

$$17n^2 + 85n + 1024 < c \cdot n^2$$

Guess  $c = 18$       Need to prove:

$$17n^2 + 85n + 1024 < 18n^2$$

i.e.  $85n + 1024 < n^2$

<https://powcoder.com>  
Add WeChat powcoder

Guess  $n_0 = 1024$       Check if:  $85n_0 + 1024 < n_0^2$

$$85 \cdot 1024 + 1024 < 1024 \cdot 1024$$

i.e.  $86 \cdot 1024 < 1024 \cdot 1024$       Clearly true.

**Choose  $c = 18$ ,  $n_0 = 1024$**

$$17n^2 + 85n + 1024 \in O(n^2)$$



Find some  $c$  and  $n_0$  such that, for all  $n > n_0$

$$17n^2 + 85n + 1024 < c \cdot n^2$$

Alternative: Let  $c = 17 + 85 + 1024$

$$17n^2 + 85n + 1024$$

$$< 17n^2 + 85n^2 + 1024n^2 \quad (\text{for } n > 1)$$

$$= (17 + 85 + 1024)n^2$$

**Choose  $c = 17 + 85 + 1024$ ,  $n_0 = 1$**

**Of course, this works for *any* polynomial.**