

External Sorting

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Why Sort?


- A classic problem in computer science!
- Data requested in sorted order
 - e.g., find students in increasing *gpa* order
- Sorting is first step in *bulk loading* B+ tree index.
- Sorting useful for *eliminating duplicate copies* in a collection of records (Why?)
- *Sort-merge* join algorithm involves sorting.
- Problem: sort 1Gb of data with 1Mb of RAM.
- What is the minimum number of buffer pages needed to sort a file with arbitrary size?
 - Three.

2-Way Sort: Requires 3 Buffers

- Pass 1: Read a page, sort it, write it.
 - only one buffer page is used
- Pass 2, 3, ..., etc.:
 - three buffer pages used.

Assignment Project Exam Help

<https://powcoder.com>

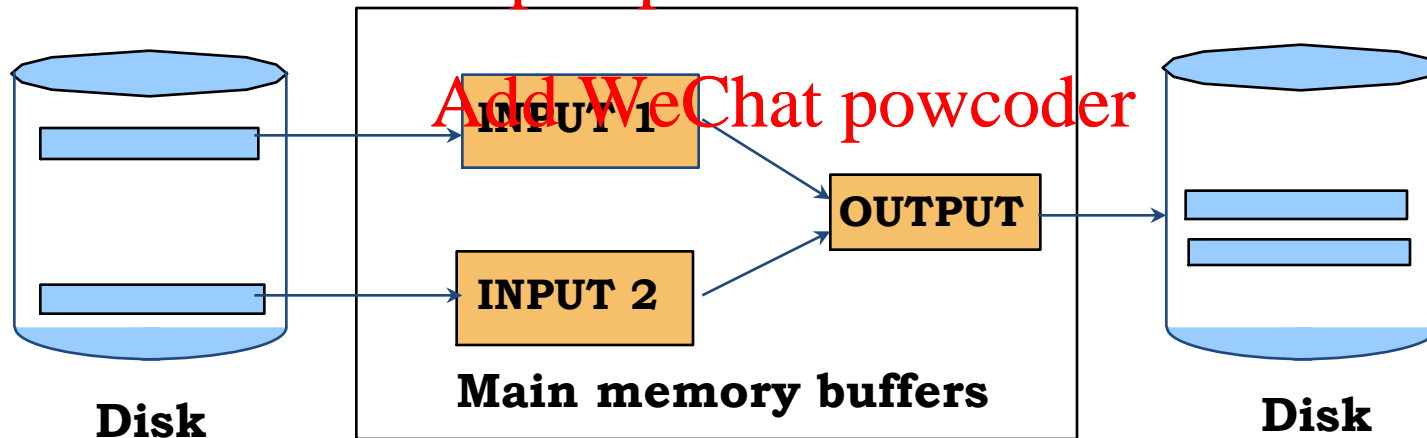


Two-Way External Merge Sort

- Each pass we read + write each page in file.
- N pages in the file => the number of passes

$$= \lceil \log_2 N \rceil + 1$$
- So total cost is:

$$2N(\lceil \log_2 N \rceil + 1)$$
- Idea: **Divide and conquer**:
sort subfiles and merge

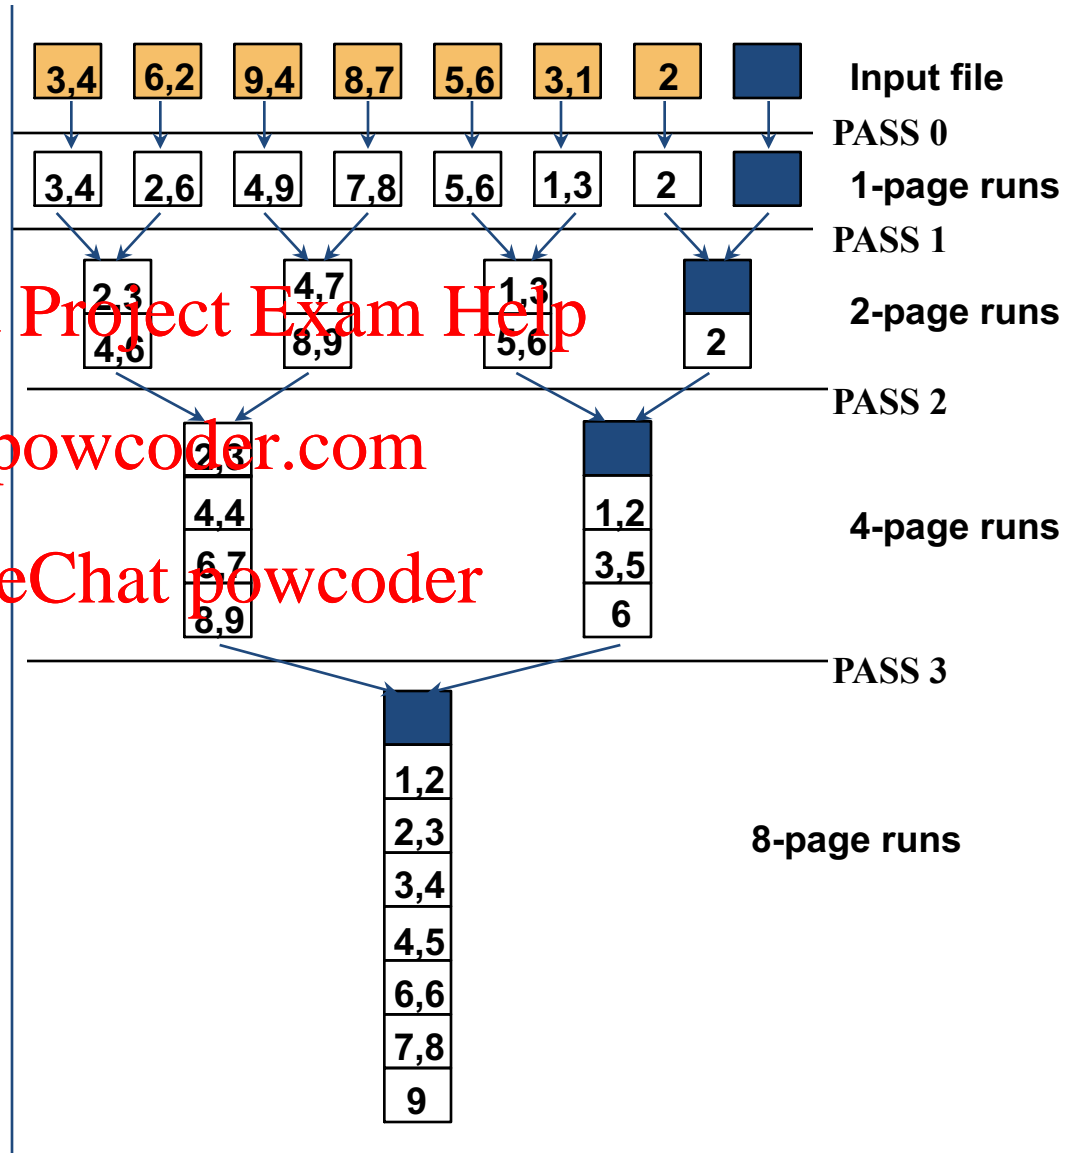

General External Merge Sort


➡ *More than 3 buffer pages. How can we utilize them?*

- To sort a file with N pages using B buffer pages:
 - Pass 0: use B buffer pages. Produce $\lceil N / B \rceil$ sorted runs of B pages each.
 - Pass 2, ..., etc.: merge $B-1$ runs.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

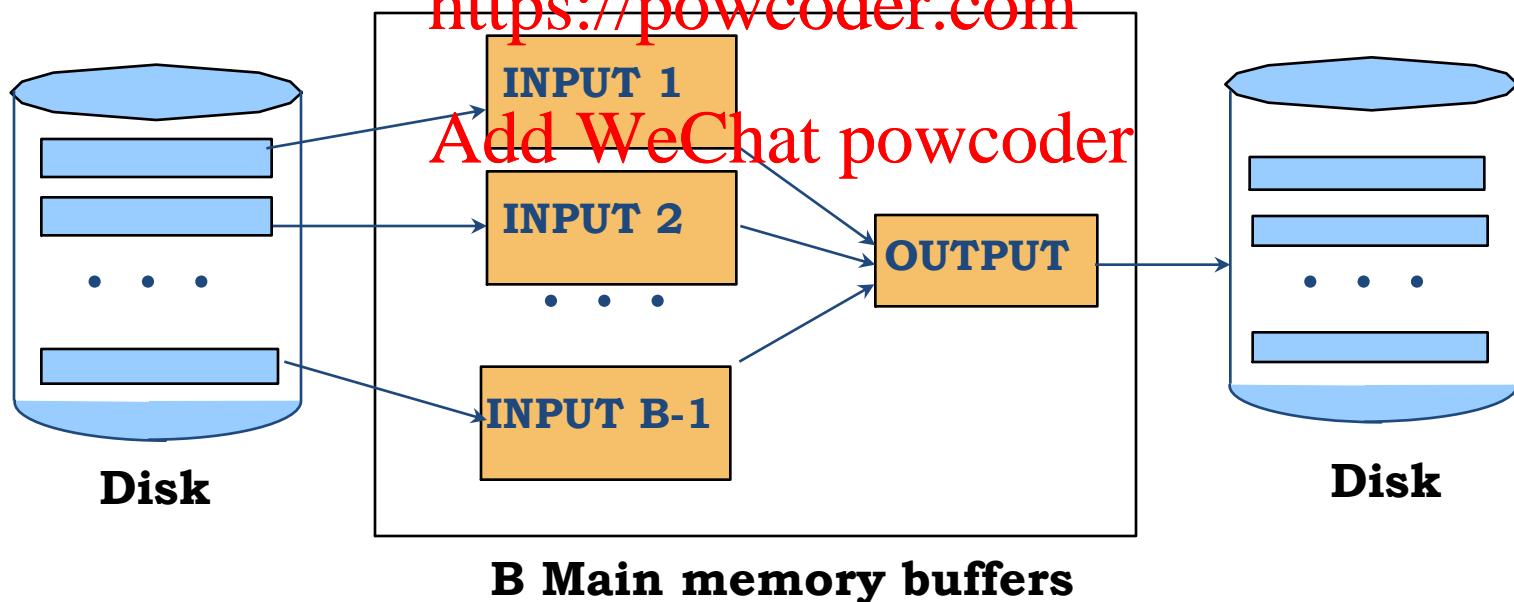

4, 3

6, 2

9, 4

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

4

6

9, 4

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

3, 2

Cost of External Merge Sort

- Number of passes:
- $\text{Cost} = 2N * (\# \text{ of passes})$ $1 + \lceil \log_{B-1} \lceil N / B \rceil \rceil$
- E.g., with 5 buffer pages, to sort 108 page file:
 - Pass 0: $\lceil 108 / 5 \rceil = 22$ sorted runs of 5 pages each (last run is only 3 pages)
 - Pass 1: $\lceil 22 / 4 \rceil = 6$ sorted runs of 20 pages each (last run is only 8 pages)
 - Pass 2: 2 sorted runs, 80 pages and 28 pages
 - Pass 3: Sorted file of 108 pages

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Number of Passes of External Sort

N	B=3	B=5	B=9	B=17	B=129	B=257
100	7	4	3	2	1	1
1,000	10	5	4	3	2	2
10,000	13	7	5	4	2	2
100,000	17	9	6	5	3	3
1,000,000	20	10	7	5	3	3
10,000,000	23	12	8	6	4	3
100,000,000	26	14	9	7	4	4
1,000,000,000	30	15	10	8	5	4

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Speed-up: Internal Sort Algorithm

Quicksort is a fast way to sort in memory.

An alternative is “tournament sort” (a.k.a. “heapsort”): average run length is $2B$.

- **Top:** Read in B blocks
 - **Output:** move smallest record to output buffer
 - Read in a new record r
 - insert r into “heap”
 - if r not smallest,
 - then **GOTO Output**
 - else
 - remove r from “heap”
 - output “heap” in order; **GOTO Top (next run)**

This can be only effectively used in the first pass. Virtually, make B be $2B$.

I/O for External Merge Sort

- ... longer runs often means fewer passes!
- Actually, do I/O a page at a time
- In fact, read a *block* of pages sequentially!
- Suggests we should make each buffer (input/output) be a *block* of pages.
 - But this will reduce fan-out during merge passes!
 - In practice, most files still sorted in 2-3 passes.

Number of Passes of Optimized Sort


N	B=1,000	B=5,000	B=10,000
100	1	1	1
1,000	1	1	1
10,000	2	2	1
100,000	3	2	2
1,000,000	3	2	2
10,000,000	4	3	3
100,000,000	5	3	3
1,000,000,000	5	4	3

➡ Block size = 32, initial pass produces runs of size $2B$.

Double Buffering

To reduce wait time for I/O request to complete, can *prefetch* into 'shadow block'.

- Potentially, more passes; in practice, most files still sorted in 2-3 passes.

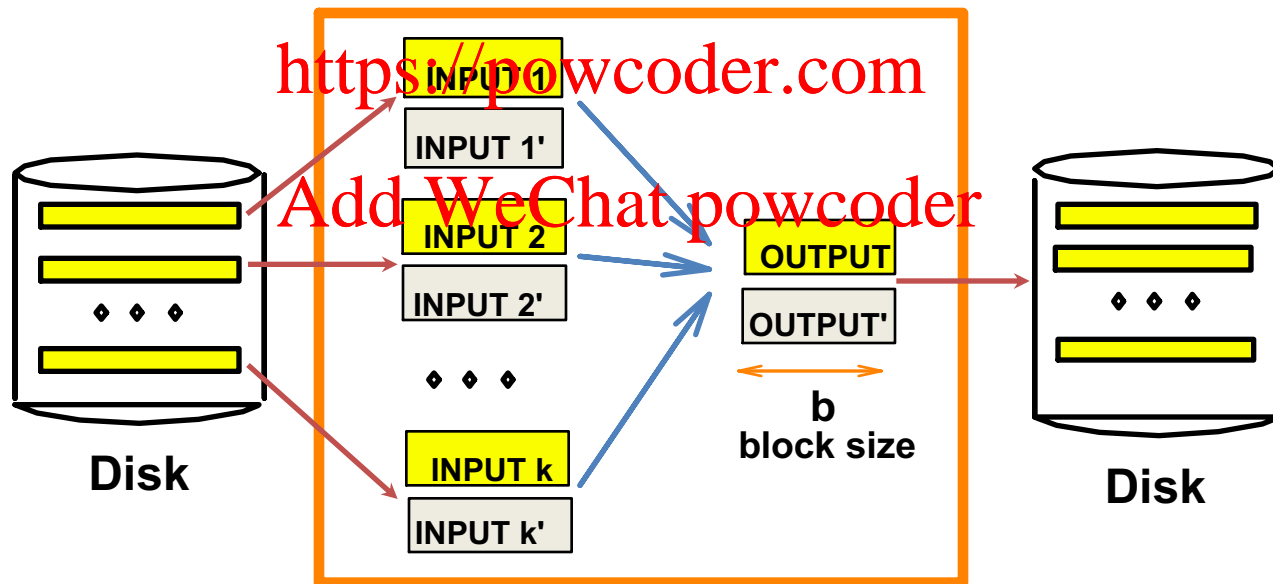

Sorting Records!

- Sorting has become a blood sport!
 - Parallel sorting is the name of the game ...
- Datamation: Sort 1M records of size 100 bytes
 - Typical DBMS: several minutes
 - World record: several *seconds*
 - 12-CPU SGI machine, 96 disks, 2GB of RAM
- New benchmarks proposed:
 - Minute Sort: How many can you sort in 1 minute?

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Using B+ Trees for Sorting

- Scenario: Table to be sorted has B+ tree index on sorting column(s).
- **Idea:** Can retrieve records in order by traversing leaf pages.
- ***Is this a good idea?***
- Cases to consider:
 - B+ tree is clustered ***Good idea!***
 - B+ tree is not clustered ***Could be a very bad idea!***

Assignment Project Exam Help


<https://powcoder.com>

Add WeChat powcoder

Clustered B+ Tree Used for Sorting

- Cost: root to the left-most leaf, then retrieve all leaf pages (Alternative 1)


- If Alternative 2 is used? Additional cost of retrieving data records: each page fetched just once.

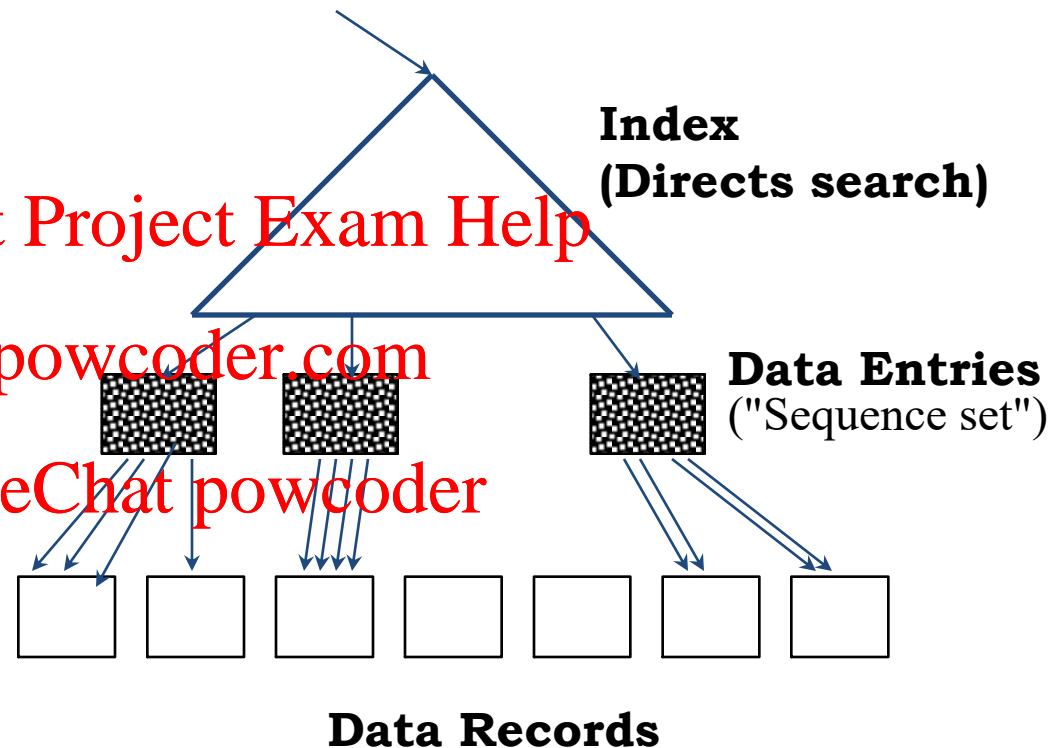

➡ *Always better than external sorting!*

Unclustered B+ Tree Used for Sorting

Alternative (2) for data entries; each data entry contains *rid* of a data record. In general, one I/O per data record!

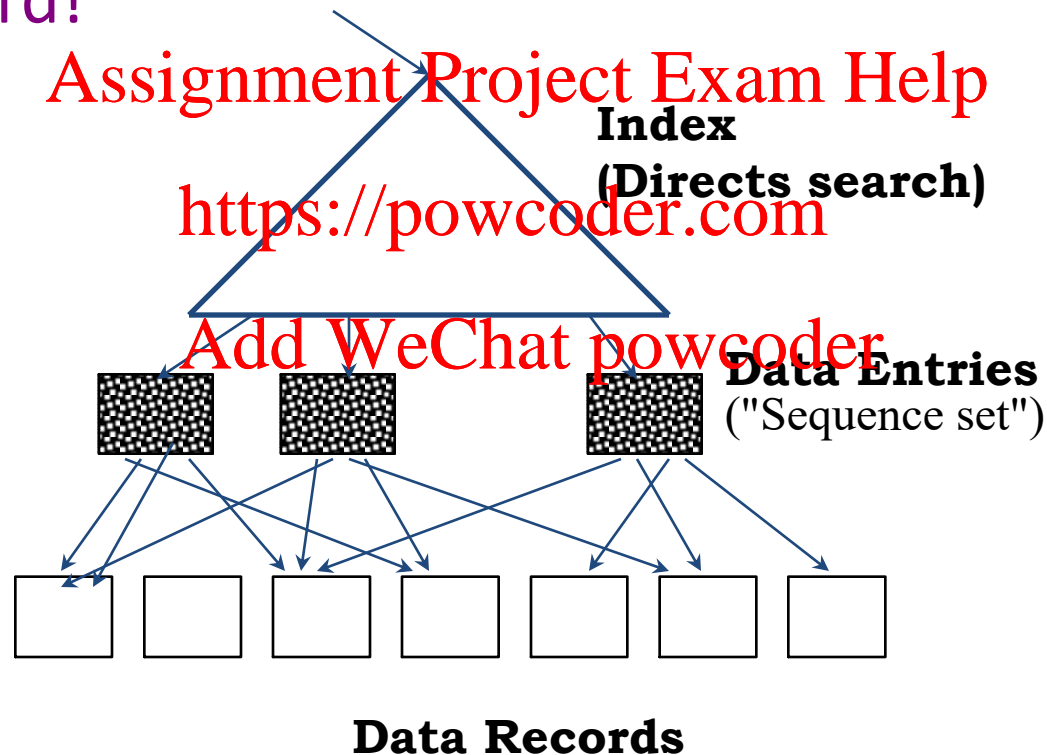

External Sorting vs. Unclustered Index

N	Sorting	p=1	p=10	p=100
100	200	100	1,000	10,000
1,000	2,000	1,000	10,000	100,000
10,000	40,000	10,000	100,000	1,000,000
100,000	600,000	100,000	1,000,000	10,000,000
1,000,000	8,000,000	1,000,000	10,000,000	100,000,000
10,000,000	80,000,000	10,000,000	100,000,000	1,000,000,000

☛ p : # of records per page

☛ $B=1,000$ and block size=32 for sorting

☛ $p=100$ is the more realistic value.

Summary

- External sorting is important; DBMS may dedicate part of buffer pool for sorting!
- External merge sort minimizes disk I/O cost:
 - Pass 0: Produces sorted runs of size B (# buffer pages). Later passes: *merge* runs.
 - # of runs merged at a time depends on B , and *block size*.
 - Larger block size means less I/O cost per page.
 - Larger block size means smaller # runs merged.
 - In practice, # of passes rarely more than 2 or 3.

Summary, cont.

- Choice of internal sort algorithm may matter:
 - Quicksort: Quick!
 - Heap/tournament sort: slower (2x), longer runs
- The best sorts are wildly fast:
 - Despite 40+ years of research, we're still improving!
- Clustered B+ tree is good for sorting; unclustered tree is usually very bad.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder