

COMS 4771  
Assignment Project Exam Help  
Introduction to Machine Learning  
<https://powcoder.com>

Add WeChat powcoder

Nakul Verma

# Machine learning: what?

Study of making machines **learn** a concept **without** having to explicitly **program** it.

## Assignment Project Exam Help

- Constructing algorithms that can:
  - learn from input data, and be able to make predictions.
  - find interesting patterns in data.
- Analyzing these algorithms to understand the limits of 'learning'

<https://powcoder.com>

Add WeChat powcoder


# Machine learning: why?

We are smart programmers, why can't we just write some code with a set of rules to solve a particular problem?

Write down a set of rules to code to distinguish these two faces:



What if we don't even know the explicit task we want to solve?



# Machine learning: problems in the real world

- Recommendation systems (Netflix, Amazon, Overstock)

- Stock prediction (Goldman Sachs, Morgan Stanley)

Assignment Project Exam Help

- Risk analysis (Credit card, Insurance)

<https://powcoder.com>

- Face and object recognition (Cameras, Facebook, Microsoft)

Add WeChat powcoder

- Speech recognition (Siri, Cortana, Alexa, Dragon)

- Search engines and content filtering (Google, Yahoo, Bing)

# Machine learning: how?

so.... how do we do it?

Assignment Project Exam Help

This is <https://powcoder.com> what we will focus on in this class!

Add WeChat powcoder

# This course

We will learn:

- Study a prediction problem in an **abstract manner** and come up with a solution which is **applicable to many problems** simultaneously.

<https://powcoder.com>

- Different types of paradigms and algorithms that have been successful in prediction tasks.
- How to systematically **analyze** how good an algorithm is for a prediction task.

# Prerequisites

## Mathematical prerequisites

- Basics of probability and statistics

- Linear algebra

- Calculus

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

## Computational prerequisites

- Basics of algorithms and datastructure design
- Ability to program in a high-level language.

# Administrivia

Website:

`http://www.cs.columbia.edu/~verma/classes/ml/`

The team:

Instructor: Nakul Verma (me)

TAs <https://powcoder.com>

Students: you!

Add WeChat powcoder

Evaluation:

- Homeworks (40%)
- Exam 1 (30%)
- Exam 2 (30%)



# Policies

## Homeworks:

- No late homework
  - **Must** type your homework (no handwritten homework)
  - Please include your name and UNI
  - Submit a pdf copy of the assignment via gradescope
- Assignment Project Exam Help**  
**<https://powcoder.com>**  
**Add WeChat powcoder**
- We encourage discussing the problems (piazza/groups/etc), but  
**please don't copy.**

# Announcement!

- Visit the course website

- Review the basics (prerequisites) **Assignment Project Exam Help**

**<https://powcoder.com>**

- HW0 is out! **Add WeChat powcoder**

- Sign up on Piazza & Gradescope

Assignment Project Exam Help  
Let's get started!

<https://powcoder.com>

Add WeChat powcoder

# Machine Learning: the basics...

A closer look at some prediction problems...

- Handwritten character recognition:

 Assignment Project Exam Help { 0, 1, 2, ..., 9 }

- Spam filtering: <https://powcoder.com>

murdered during the recent civil war in Libya in March 2011, before his death my late father was a strong supporter and a member of late Muammar Gadhafi Government in Tripoli. Meanwhile before the incident, my late Father came to Cotonou Benin republic with the sum of USD4, 200,000.00 (US\$4.2M) which he deposited in a Bank here in Cotonou Benin Republic West Africa for safe keeping.

Add WeChat powcoder

{ spam, not spam }


- Object recognition:



{ building, tree, car, road, sky, ... }

# Machine Learning: the basics...

Commonalities in a prediction problem:

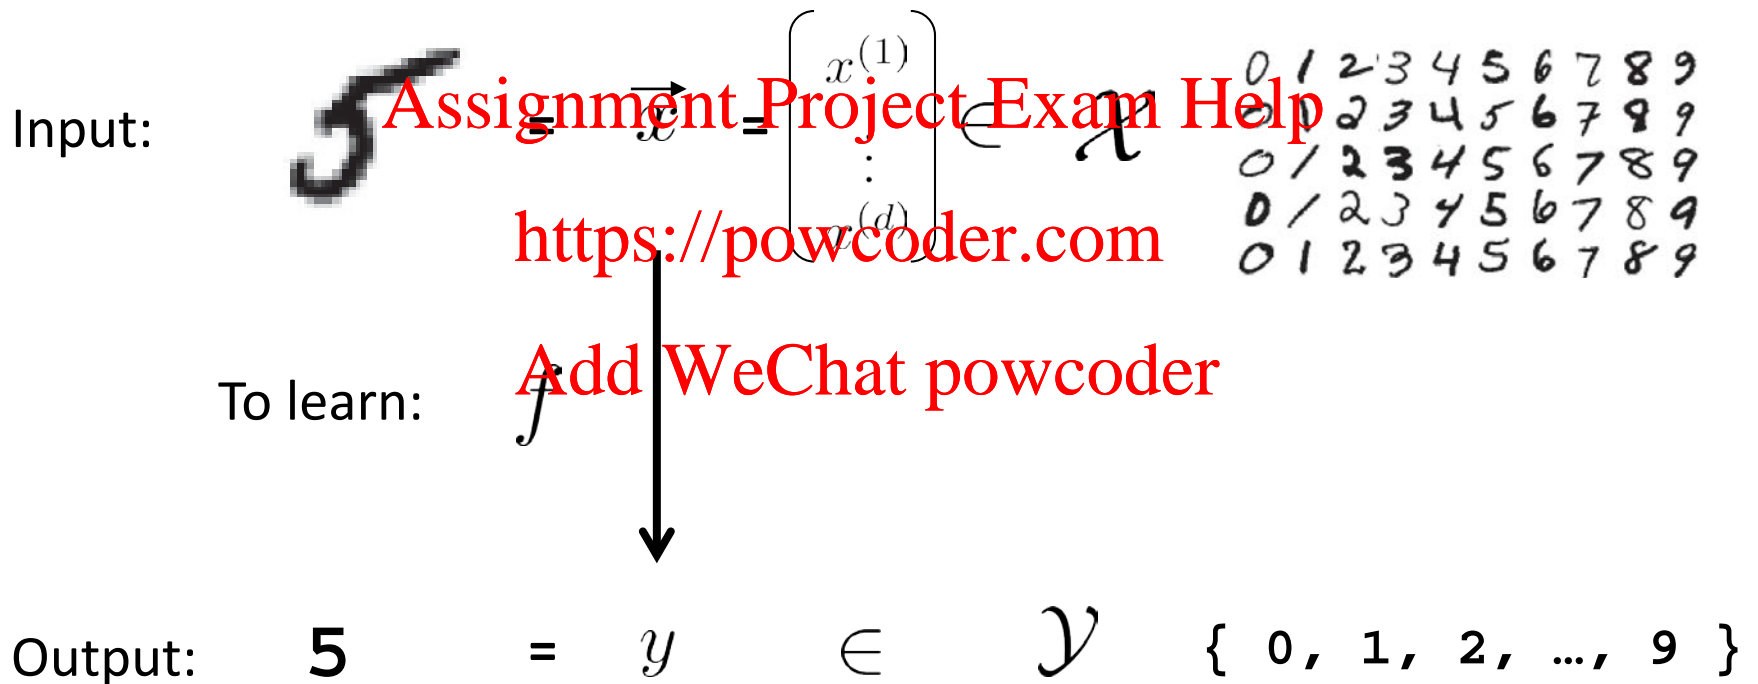

# Machine Learning: the basics...

Data:  $(\vec{x}_1, y_1), (\vec{x}_2, y_2), \dots \in \mathcal{X} \times \mathcal{Y}$


**Supervised learning**

Assumption: there is a (relatively simple) function  $f^* : \mathcal{X} \rightarrow \mathcal{Y}$

such that  $f^*(\vec{x}_i) = y_i$  for most  $i$

Learning task: given  $n$  examples from the data, find an approximation  $\hat{f} \approx f^*$

Goal:  $\hat{f}$  gives mostly correct prediction on unseen examples

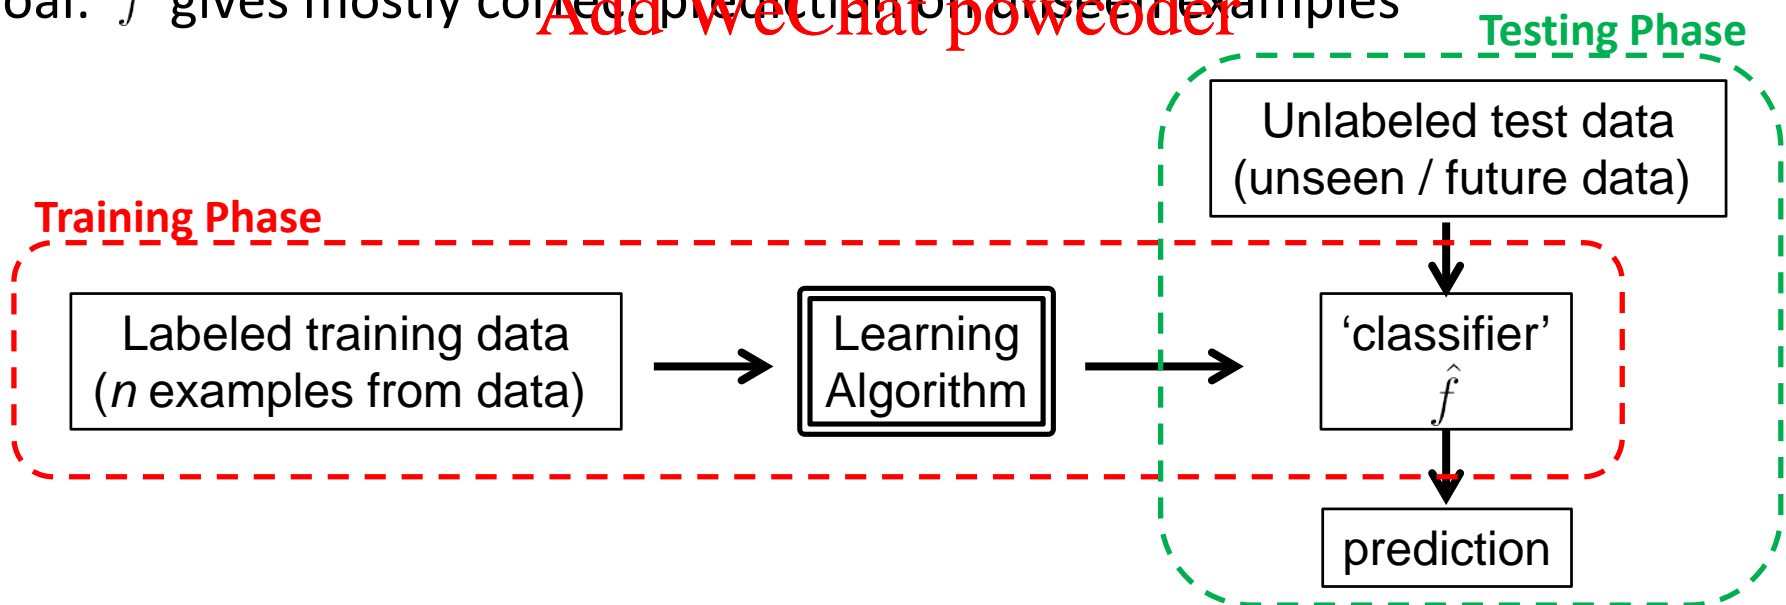

# Machine Learning: the basics...

Data:  $\vec{x}_1, \vec{x}_2, \dots \in \mathcal{X}$

**Unsupervised learning**

Assumption: there is an underlying structure in  $\mathcal{X}$

Learning task: discover the structure given  $n$  examples from the data

Goal: come up with the summary of the data using the discovered structure

**Assignment Project Exam Help**


**<https://powcoder.com>**

**Add WeChat powcoder**

More later in the course...

# Supervised Machine Learning

Statistical modeling approach:

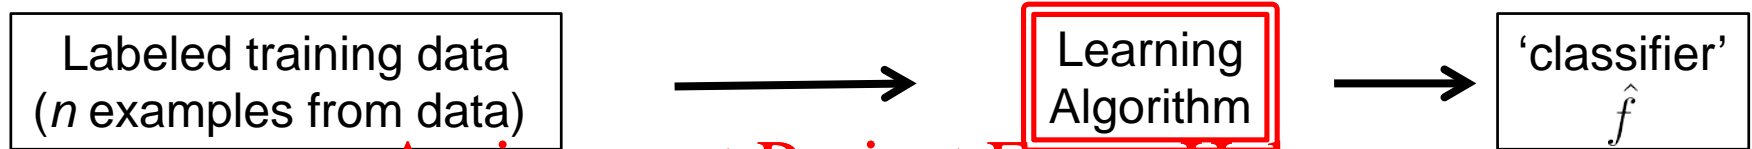

$(\vec{x}_1, y_1), (\vec{x}_2, y_2), \dots, (\vec{x}_n, y_n)$   
drawn **independently** from  
a fixed underlying distribution  
(also called the *i.i.d.* assumption)

select  $\hat{f}$  from...?  
from a pool of **models**  $\mathcal{F}$   
that **maximizes**  
label agreement of the  
training data

How to select  $\hat{f} \in \mathcal{F}$  ?

- Maximum likelihood (best fits the data)
- Maximum a posteriori (best fits the data but incorporates prior assumptions)
- Optimization of 'loss' criterion (best discriminates the labels)
- ...



# Maximum Likelihood Estimation (MLE)

Given some data  $\vec{x}_1, \vec{x}_2, \dots, \vec{x}_n \in \mathcal{X}$  i.i.d. *(Let's forget about the labels for now)*

Say we have a model class  $\mathcal{P} = \{p_\theta \mid \theta \in \Theta\}$  *ie, each model  $p$  can be described by a set of parameters  $\theta$*

*find* the parameter settings  $\theta$  that *best fits* the data

If each model  $p$ , is a **probability model** then we can find the best fitting probability model via the **likelihood estimation!**

Likelihood  $\mathcal{L}(\theta|X) := P(X|\theta) = P(\vec{x}_1, \dots, \vec{x}_n|\theta)$  *i.i.d.*  $= \prod_{i=1}^n P(\vec{x}_i|\theta) = \prod_{i=1}^n p_\theta(\vec{x}_i)$

Interpretation: How **probable** (or how likely) is the data given the model  $p_\theta$ ?

Parameter setting  $\theta$  that maximizes  $\mathcal{L}(\theta|X)$

$$\arg \max_{\theta} \mathcal{L}(\theta|X) = \arg \max_{\theta} \prod_{i=1}^n p_\theta(\vec{x}_i)$$

# MLE Example

Fitting a statistical probability model to heights of females


Height data (in inches): 60, 62, 53, 58, ...  $\in \mathbf{R}$

$x_1, x_2, \dots, x_n \in \mathcal{X}$   
Assignment Project Exam Help

Model class: Gaussian models in  $\mathbf{R}$

<https://powcoder.com>

Add WeChat powcoder

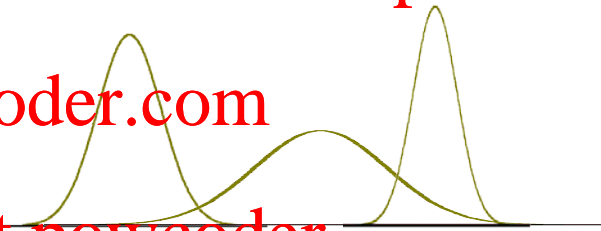

$$p_{\theta}(x) = p_{\{\mu, \sigma^2\}}(x) := \frac{1}{\sqrt{2\pi\sigma^2}} \exp\left(-\frac{(x - \mu)^2}{2\sigma^2}\right) \quad \begin{array}{l} \mu = \text{mean parameter} \\ \sigma^2 = \text{variance parameter} > 0 \end{array}$$

So, what is the MLE for the given data  $X$  ?

# MLE Example (contd.)


Height data (in inches):  $x_1, x_2, \dots, x_n \in \mathcal{X} = \mathbf{R}$

Model class: Gaussian models in  $\mathbf{R}$   $p_{\{\mu, \sigma^2\}}(x) := \frac{1}{\sqrt{2\pi\sigma^2}} \exp\left(-\frac{(x - \mu)^2}{2\sigma^2}\right)$

MLE:  $\arg \max_{\theta} \mathcal{L}(\theta|X) = \arg \max_{\mu, \sigma^2} \prod_{i=1}^n p_{\{\mu, \sigma^2\}}(x_i)$  *Good luck!*  
<https://powcoder.com>

Trick #1:  $\arg \max_{\theta} \mathcal{L}(\theta|X) = \arg \max_{\theta} \log \mathcal{L}(\theta|X)$  *"Log" likelihood*

Trick #2: finding max (or other extreme values) of a function is simply analyzing the '**stationary points**' of a function. That is, values at which the **derivative** of the function is zero !

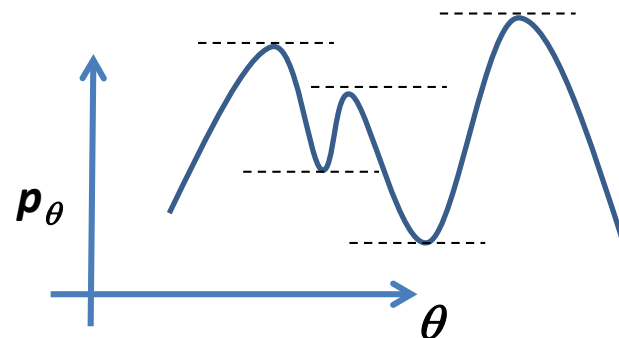

# MLE Example (contd. 2)

Let's calculate the best fitting  $\theta = \{\mu, \sigma^2\}$

$$\arg \max_{\theta} \mathcal{L}(\theta|X) = \arg \max_{\theta} \log \mathcal{L}(\theta|X) \quad \text{"Log" likelihood}$$

$$= \arg \max_{\mu, \sigma^2} \log \left( \prod_{i=1}^n p_{\{\mu, \sigma^2\}}(x_i) \right) \quad \text{i.i.d.}$$

$$= \arg \max_{\mu, \sigma^2} \sum_{i=1}^n \log(p_{\{\mu, \sigma^2\}}(x_i))$$

$$= \arg \max_{\mu, \sigma^2} \sum_{i=1}^n \left[ \underbrace{-\frac{1}{2} \log(2\pi\sigma^2) - \frac{(x_i - \mu)^2}{2\sigma^2}}_{g_i(\mu, \sigma^2)} \right]$$

Maximizing  $\mu$ :

$$0 = \nabla_{\mu} \left( \sum_{i=1}^n g_i(\mu, \sigma^2) \right) \implies \mu_{\text{ML}} = \frac{1}{n} \sum_{i=1}^n x_i$$

Maximizing  $\sigma^2$ :

$$\sigma_{\text{ML}}^2 = \frac{1}{n} \sum_{i=1}^n (x_i - \mu)^2$$

# MLE Example

So, the best fitting **Gaussian model**  $p_{\{\mu, \sigma^2\}}(x) := \frac{1}{\sqrt{2\pi\sigma^2}} \exp\left(-\frac{(x - \mu)^2}{2\sigma^2}\right)$

Female height data: 60, 62, 53, 58, ...  $\in \mathbf{R}$

**Assignment Project Exam Help**

Is the one with parameters:  $\mu = \frac{1}{n} \sum_{i=1}^n x_i$  and  $\sigma^2 = \frac{1}{n} \sum_{i=1}^n (x_i - \mu)^2$

**<https://powcoder.com>**  
**Add WeChat powcoder**

What about other model classes?

# Other popular probability models

Bernoulli model (coin tosses)

*Scalar valued*

Multinomial model (dice rolls)

*Scalar valued*

Poisson model (rare counting events)

*Scalar valued*

Gaussian model (most common phenomenon)

*Scalar valued*

Most machine learning data is vector valued!

Multivariate Gaussian Model

*Vector valued*

Multivariate version available of other scalar valued models


# Multivariate Gaussian

## Univariate $\mathbf{R}$

$$p_{\{\mu, \sigma^2\}}(x) := \frac{1}{\sqrt{2\pi\sigma^2}} \exp\left(-\frac{(x - \mu)^2}{2\sigma^2}\right)$$

$\mu$  = mean parameter

$\sigma^2$  = variance parameter  $> 0$

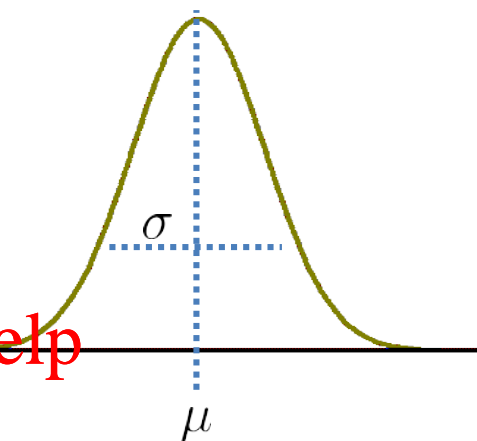

Assignment Project Exam Help

<https://powcoder.com>


## Multivariate $\mathbf{R}^d$

Add WeChat powcoder

$$p_{\{\vec{\mu}, \Sigma\}}(\vec{x}) := \frac{1}{\sqrt{(2\pi)^d \det(\Sigma)}} \exp\left(-\frac{1}{2}(\vec{x} - \vec{\mu})^T \Sigma^{-1}(\vec{x} - \vec{\mu})\right)$$

$\vec{\mu}$  = mean vector

$\Sigma$  = Covariance matrix (positive definite)

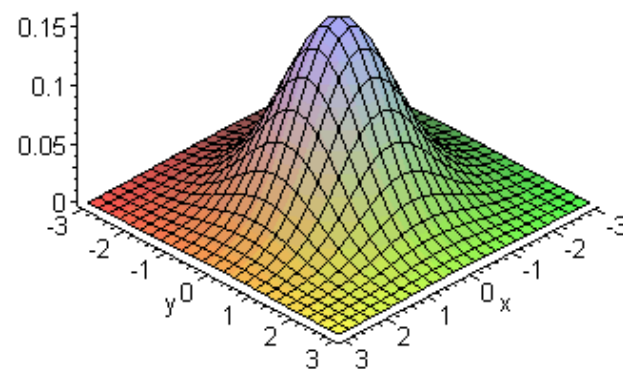

# From MLE to Classification

MLE sounds great, how do we use it to do **classification** using **labelled** data?

$$\hat{f}(\vec{x}) = \arg \max_{y \in \mathcal{Y}} P[Y = y | X = \vec{x}]$$

Why? More later...

$$= \arg \max_{y \in \mathcal{Y}} \frac{P[X = \vec{x} | Y = y] \cdot P[Y = y]}{P[X = \vec{x}]}$$

Bayes rule

indep. of y

<https://powcoder.com>

$$= \arg \max_{y \in \mathcal{Y}} P[X = \vec{x} | Y = y] \cdot P[Y = y]$$

Add WeChat powcoder

Class conditional

Class Prior

probability model

## Class prior:

Simply the probability of data sample occurring from a category

## Class conditional:

Use a separate probability model individual categories/class-type

We can find the appropriate parameters for the model using MLE!



# Classification via MLE Example

Task: learn a classifier to distinguish **males** from **females**  
based on say height and weight measurements

Classifier:  $f(x) = \arg \max_{y \in \{\text{male}, \text{female}\}} P[X = x | Y = y] \cdot P[Y = y]$

<https://powcoder.com>

Using **labelled** training data, learn all the parameters:

Learning **class priors**: **Add WeChat powcoder**

$$P[Y = \text{male}] = \frac{\text{fraction of training data labelled as male}}{\text{fraction of training data labelled as male}}$$

$$P[Y = \text{female}] = \frac{\text{fraction of training data labelled as female}}{\text{fraction of training data labelled as female}}$$

Learning **class conditionals**:

$$P[X | Y = \text{male}] = p_{\theta(\text{male})}(X)$$


$\theta(\text{male})$  = **MLE** using only male data

$$P[X | Y = \text{female}] = p_{\theta(\text{female})}(X)$$

$\theta(\text{female})$  = **MLE** using only female data



# What are we doing geometrically?

Data geometry:

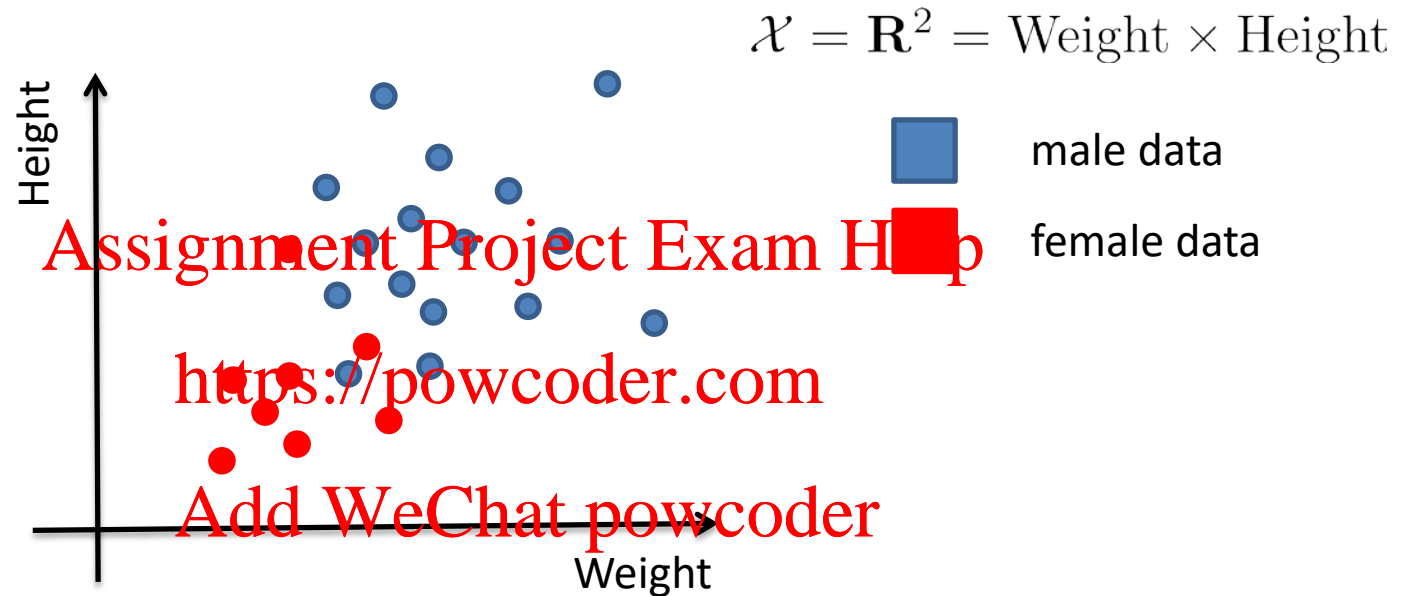

# What are we doing geometrically?

Data geometry:

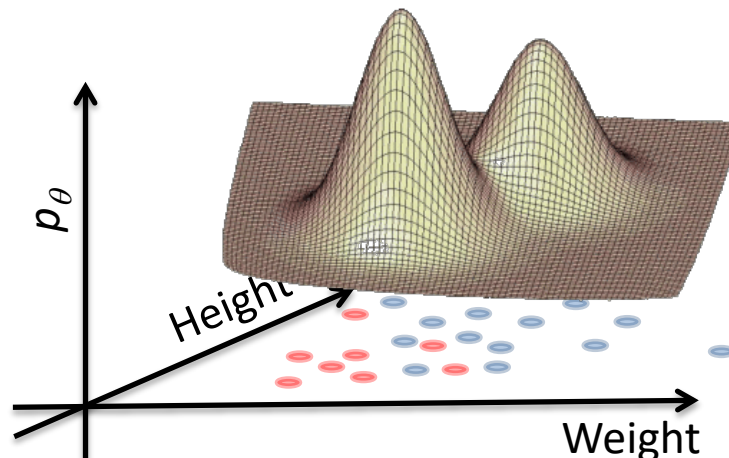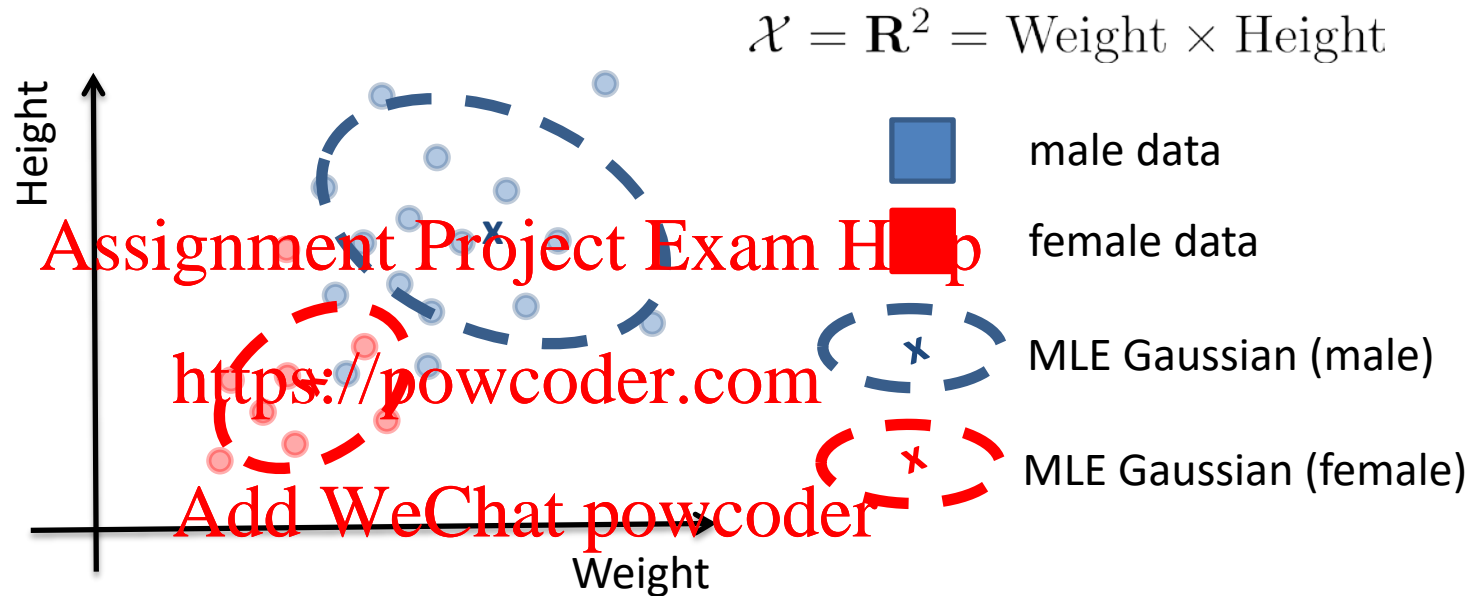

# Classification via MLE Example

Task: learn a classifier to distinguish **males** from **females**  
based on say height and weight measurements

Classifier:  $f(x) = \arg \max_{y \in \{\text{male}, \text{female}\}} P[X = x | Y = y] \cdot P[Y = y]$

<https://powcoder.com>

Using **labelled** training data, learn all the parameters:

Learning **class priors**: **Add WeChat powcoder**

$$P[Y = \text{male}] = \frac{\text{fraction of training data labelled as male}}{\text{fraction of training data labelled as male}} \quad P[Y = \text{female}] = \frac{\text{fraction of training data labelled as female}}{\text{fraction of training data labelled as female}}$$

Learning **class conditionals**:

$$P[X | Y = \text{male}] = p_{\theta(\text{male})}(X)$$

$\theta(\text{male})$  = **MLE** using only male data

$$P[X | Y = \text{female}] = p_{\theta(\text{female})}(X)$$

$\theta(\text{female})$  = **MLE** using only female data

# Classification via MLE Example

We just made our first predictor  $\hat{f}$  !

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

But why:  $\hat{f}(\vec{x}) = \arg \max_{y \in \mathcal{Y}} P[Y = y | X = \vec{x}]$

# Why the particular $f = \operatorname{argmax}_y P[Y|X]$ ?

Accuracy of a classifier  $f$ :  $P_{(\vec{x}, y)}[f(\vec{x}) = y] = \mathbb{E}_{(\vec{x}, y)}[\mathbf{1}[f(\vec{x}) = y]]$

Assume binary classification (for simplicity):  $\mathcal{Y} = \{0, 1\}$

**Assignment Project Exam Help**

Let:  $f(\vec{x}) = \operatorname{arg} \max_{y \in \{0, 1\}} P[Y = y | X = \vec{x}]$  Bayes classifier

<https://powcoder.com>

$g(\vec{x}) = \mathcal{X} \rightarrow \{0, 1\}$  any classifier

**Add WeChat powcoder**

**Theorem:**  $P_{(\vec{x}, y)}[g(\vec{x}) = y] \leq P_{(\vec{x}, y)}[f(\vec{x}) = y]$

**!!! Bayes classifier is optimal !!!**

# Optimality of Bayes classifier

**Theorem:**  $P_{(\vec{x}, y)}[g(\vec{x}) = y] \leq P_{(\vec{x}, y)}[f(\vec{x}) = y]$

**Observation:** For any classifier  $h$

$$\begin{aligned} P[h(\vec{x}) = y | X = \vec{x}] &= P[h(\vec{x}) = 0, Y = 0 | X = \vec{x}] + P[h(\vec{x}) = 1, Y = 1 | X = \vec{x}] \\ &= \mathbf{1}[h(\vec{x}) = 1] \cdot P[Y = 1 | X = \vec{x}] + \mathbf{1}[h(\vec{x}) = 0] \cdot P[Y = 0 | X = \vec{x}] \\ &= \mathbf{1}[h(\vec{x}) = 1] \eta(\vec{x}) + \mathbf{1}[h(\vec{x}) = 0] (1 - \eta(\vec{x})) \end{aligned}$$

**So:**

$$\begin{aligned} &P[f(\vec{x}) = y | X = \vec{x}] - P[g(\vec{x}) = y | X = \vec{x}] \\ &= \eta(\vec{x}) [\mathbf{1}[f(\vec{x}) = 1] - \mathbf{1}[g(\vec{x}) = 1]] + (1 - \eta(\vec{x})) [\mathbf{1}[f(\vec{x}) = 0] - \mathbf{1}[g(\vec{x}) = 0]] \\ &= (2\eta(\vec{x}) - 1) [\mathbf{1}[f(\vec{x}) = 1] - \mathbf{1}[g(\vec{x}) = 1]] \\ &\geq 0 \quad \text{By the choice of } f \end{aligned}$$

Integrate over  $X$  to remove the conditional



# So... is classification a solved problem?

We know that Bayes classifier is optimal.

So have we solved all classification problems?

Not even close!

Assignment Project Exam Help

Why?

$$\begin{aligned} f(\vec{x}) &= \arg \max_{y \in \mathcal{Y}} P[Y = y | X = \vec{x}] && \text{How to estimate } P[Y|X] ? \\ &= \arg \max_{y \in \mathcal{Y}} P[X = \vec{x} | Y = y] \cdot P[Y = y] && \text{How to estimate } P[X|Y] ? \end{aligned}$$

<https://powcoder.com>

Add WeChat powcoder

- How good is the model class?
- Quality of estimation degrades with increase in the dimension of  $X$ !
- Active area of research!



# Classification via Prob. Models: Variation

Naïve Bayes classifier:

$$\hat{f}(\vec{x}) = \arg \max_{y \in \mathcal{Y}} P[X = \vec{x} | Y = y] \cdot P[Y = y]$$

$$= \arg \max_{y \in \mathcal{Y}} \prod_j P[X^{(j)} = x^{(j)} | Y = y] \cdot P[Y = y]$$

$$\vec{x} = \begin{pmatrix} x^{(1)} \\ \vdots \\ x^{(d)} \end{pmatrix}$$

Naïve Bayes assumption: The individual feature measurements are **independent** given the class label

Advantages:

Computationally very simple model. Quick to code.

Disadvantages:

Does not properly capture the interdependence between features, giving bad estimates.

# How to evaluate the quality of a classifier?

Your friend claims: “My classifier is better than yours”

How can you evaluate this statement?

Given a classifier  $f$ , we essentially need to compute:

$$P_{(\vec{x}, y)} [f(\vec{x}) = y] = \mathbb{E}_{(\vec{x}, y)} [\mathbf{1}[f(\vec{x}) = y]]$$

Accuracy of  $f$

Add WeChat powcoder

But... we **don't know** the underlying distribution

We can use **training data** to estimate...

$$\frac{1}{n} \sum_{i=1}^n \mathbf{1}[f(\vec{x}_i) = y_i]$$

**Severely** overestimates the accuracy!

**Why?** Training data is already used to construct  $f$ , so it is NOT an unbiased estimator

# How to evaluate the quality of a classifier?


General strategy:

- Divide the labelled data into **training** and **test** FIRST
- **Only use** the training data for learning  $f$
- Then the test data can be used as an **unbiased estimator** for gauging the predictive accuracy of  $f$

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

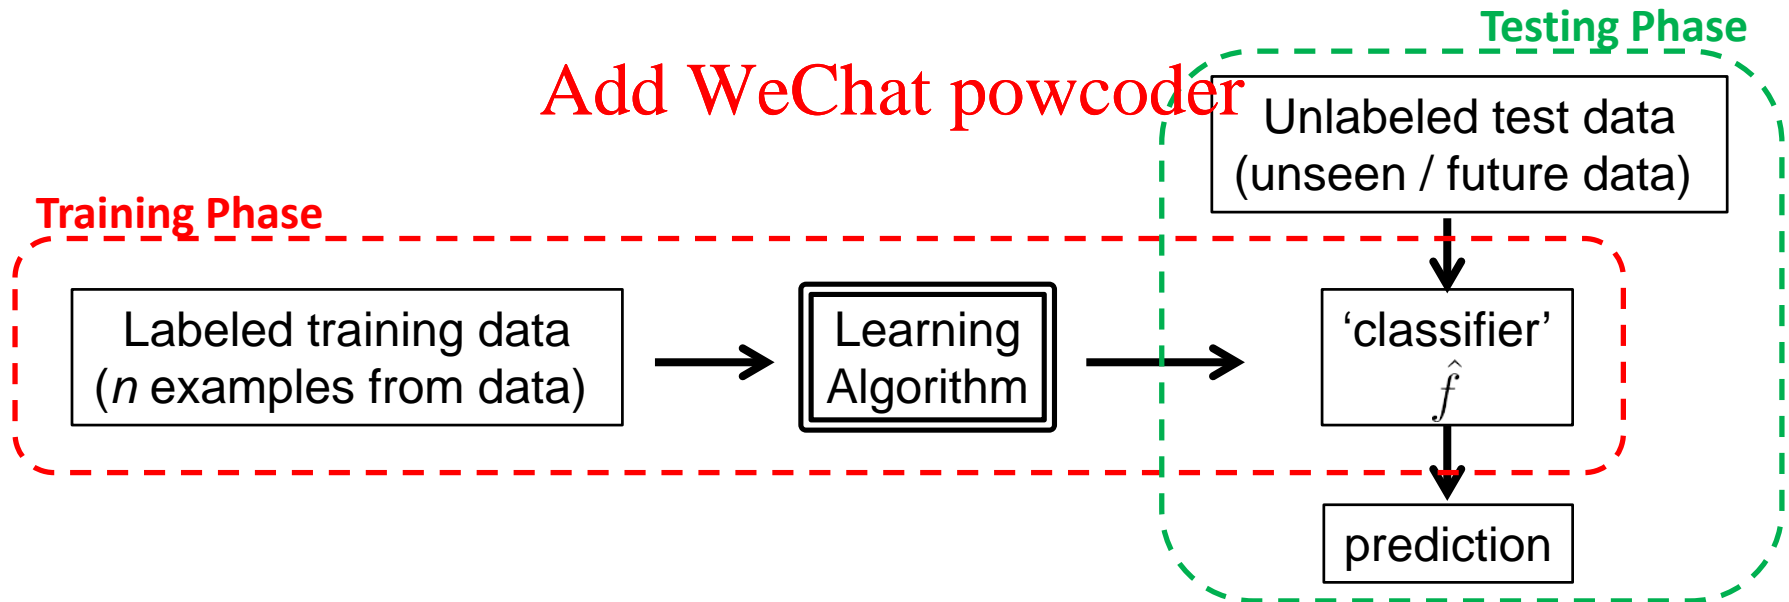

# What we learned...

- Why machine learning
- Basics of Supervised Learning
- Maximum Likelihood Estimation
- Learning a classifier via probabilistic modelling
- Optimality of Bayes classifier
- Naïve Bayes classifier
- How to evaluate the quality of a classifier

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Questions?

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Next time...

Direct ways of finding the discrimination boundary

**Assignment Project Exam Help**

**<https://powcoder.com>**

**Add WeChat powcoder**

# Remember

- Visit the course website

`http://www.cs.columbia.edu/~verma/classes/ml/`

Assignment Project Exam Help

- Review the basics (prerequisites)

<https://powcoder.com>

- HW0 is out

Add WeChat powcoder

- Sign up on Piazza & Gradescope