

Assignment Project Exam Help

Announcements

Add WeChat powcoder

Reminder: pset5 self-grading form and pset6 out today, due 11/19 (1 week)


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Assignment Project Exam Help

Add WeChat powcoder

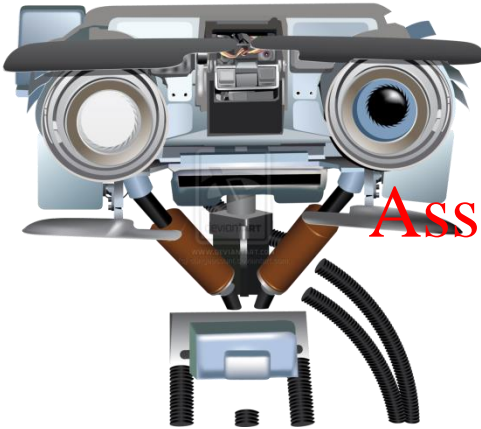

Unsupervised Learning II:

Assignment Project Exam Help

Anomaly Detection

<https://powcoder.com>

Add WeChat powcoder

Machine Learning

Assignment Project Exam Help

Anomaly detection

Add WeChat powcoder

- What is anomaly detection?

- Methods:

Assignment Project Exam Help

- Density estimation

<https://powcoder.com>

- Detection by reconstruction

- One-class SVM

Add WeChat powcoder

Assignment Project Exam Help

What is an anomaly?

Add WeChat powcoder



Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Assignment Project Exam Help

Anomaly Detection is

Add WeChat powcoder

- An unsupervised learning problem (data unlabeled)

Assignment Project Exam Help

<https://powcoder.com>


- About the identification of **new or unknown** data or signal that a machine learning system is not aware of during training
- Add WeChat powcoder

Assignment Project Exam Help

Example 1

Add WeChat powcoder

“Normal”

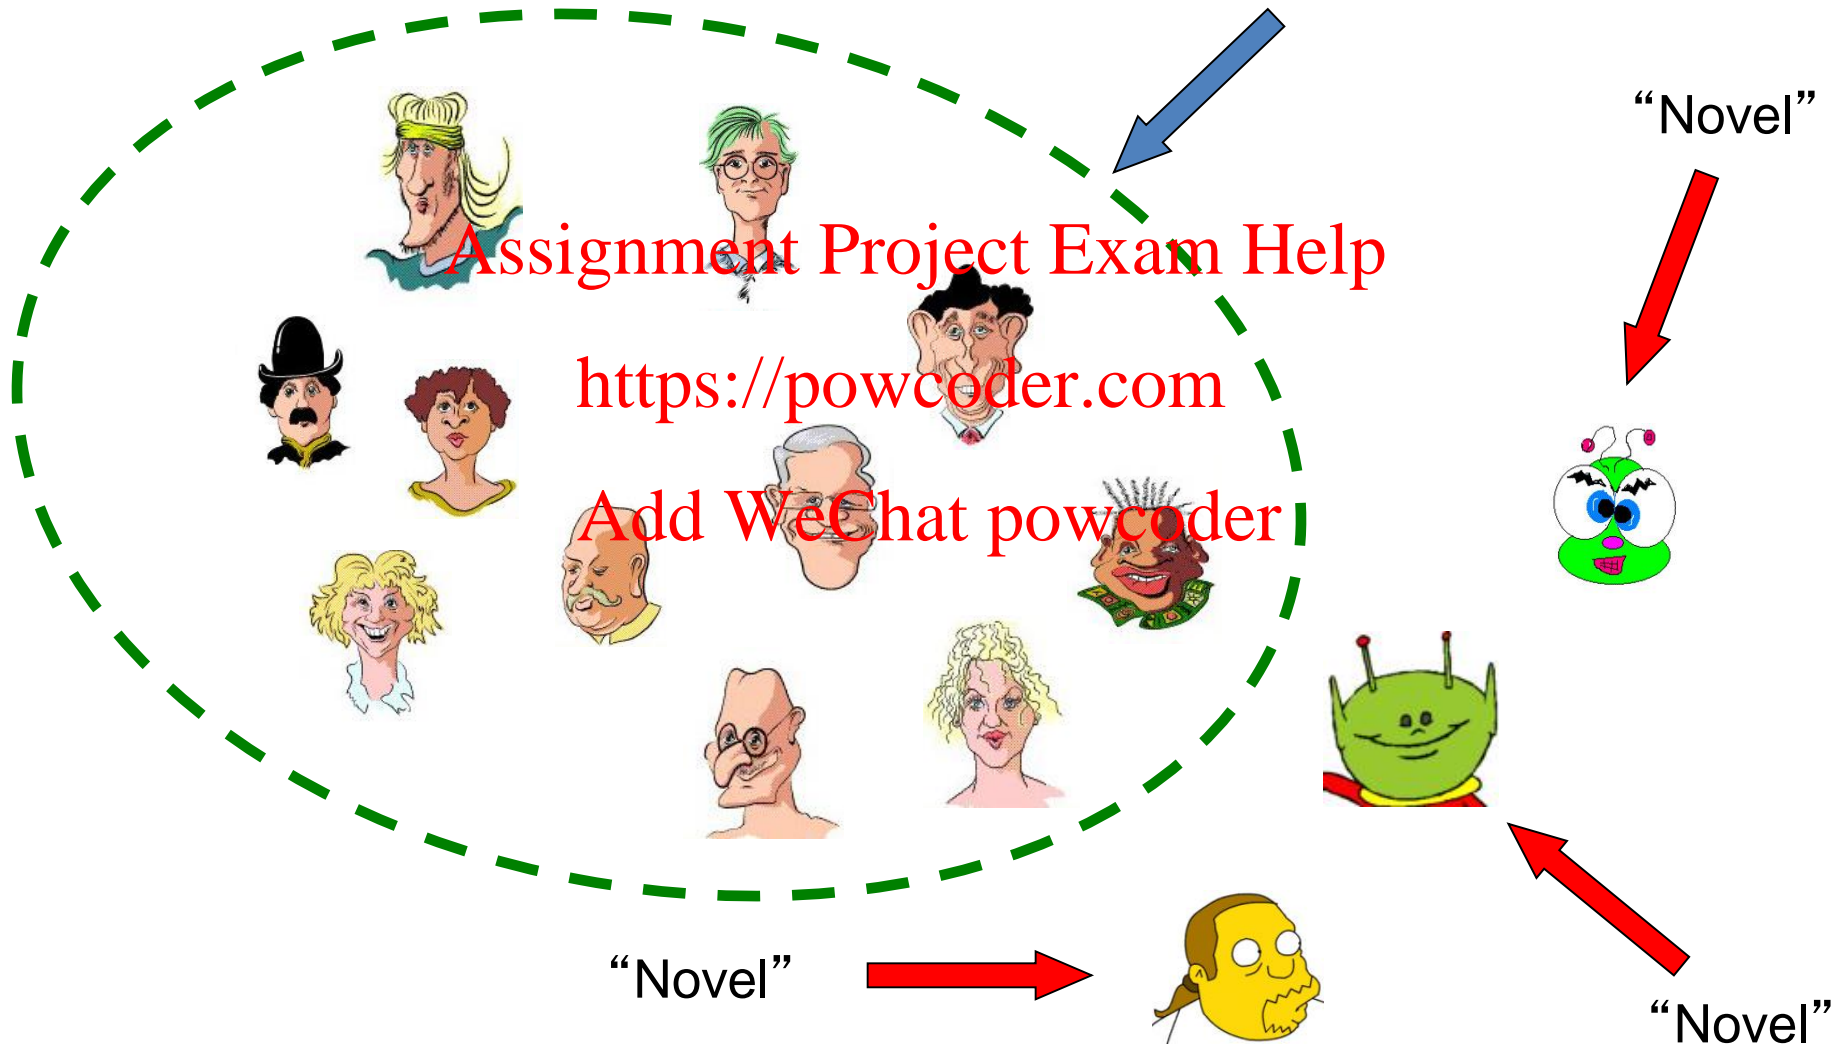

Assignment Project Exam Help

Add WeChat powcoder

So what seems to be the problem?

Assignment Project Exam Help

<https://powcoder.com>

It's a 2-Class problem.

“Normal” vs. “Novel”

Assignment Project Exam Help

Add WeChat powcoder

So what seems to be the problem?

Assignment Project Exam Help

<https://powcoder.com>

It's a WeChat problem.
“Normal’s level”
Wrong!

Assignment Project Exam Help


The Problem is
Add WeChat powcoder

That “All positive examples are alike but each negative example is negative in its own way”.

Assignment Project Exam Help

<https://powcoder.com>


Add WeChat powcoder

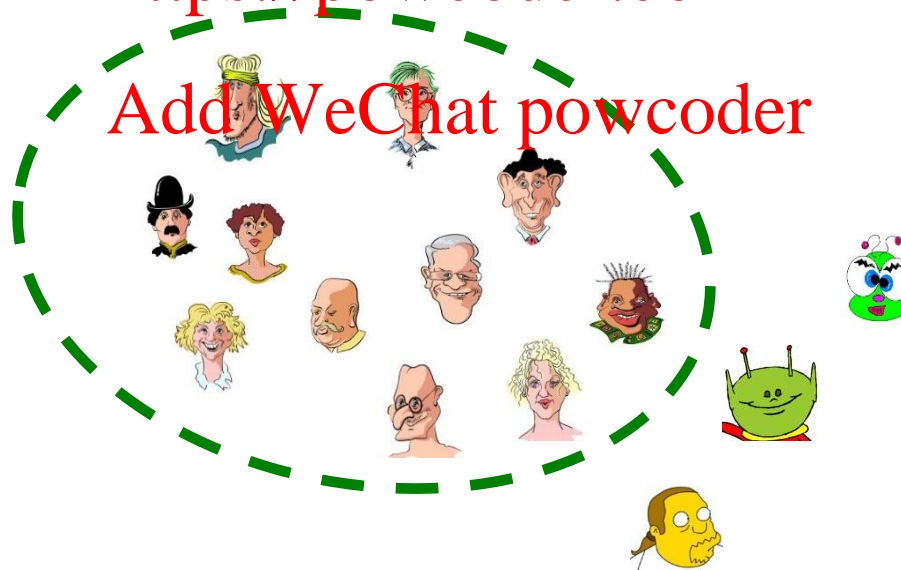

Assignment Project Exam Help

One-class recognition

- Suppose we want to build a classifier that recognizes anomalous activities in an airport
- How can we collect a training data?
 - We easily assemble videos of normal airport activities like walking, checking in, etc., as **positive examples**.
- What about **negative examples**?
 - The negative examples are... all other activities!!
- So the **negative examples** come from an unknown # of negative classes.

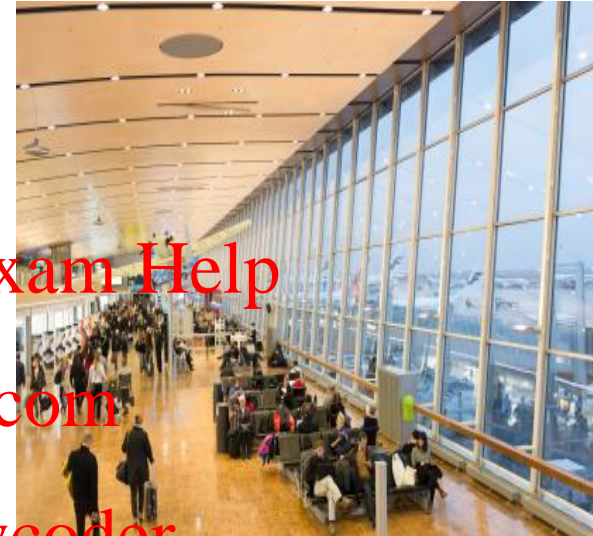


Importance of Anomaly Detection

Add WeChat powcoder

Ozone Depletion History

- In 1985 three researchers (Farman, Gardinar and Shanklin) were puzzled by data gathered by the British Antarctic Survey showing that ozone levels for Antarctica had dropped 10% below normal levels
- Why did the Nimbus 7 satellite, which had instruments aboard for recording ozone levels, not record similarly low ozone concentrations?
- The ozone concentrations recorded by the satellite were so low they were being treated as outliers by a computer program and discarded!

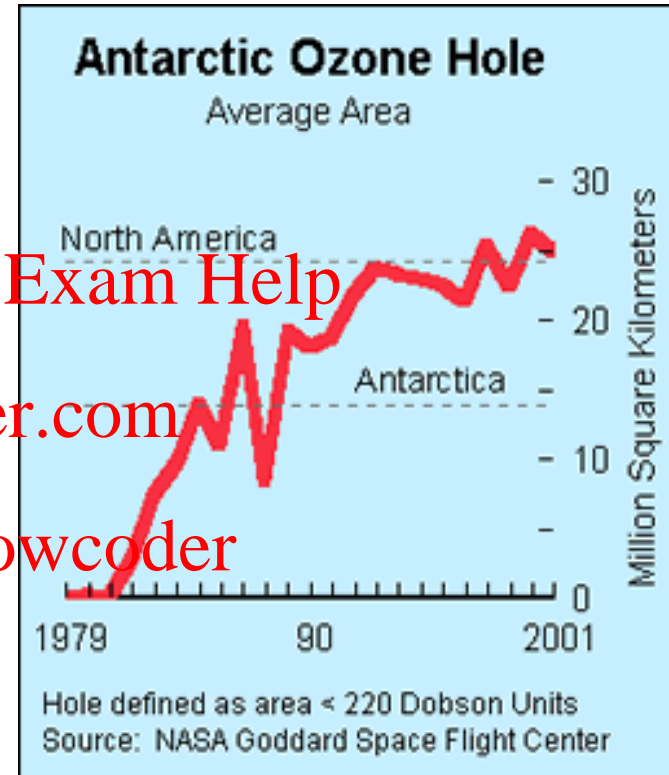

Sources:

<http://exploringdata.cqu.edu.au/ozone.html>

<http://www.epa.gov/ozone/science/hole/size.html>

Assignment Project Exam Help

Real World Anomalies

Add WeChat powcoder

- Credit Card Fraud
 - An abnormally high purchase made on a credit card



<https://powcoder.com>

- Cyber Intrusions
 - A web server involved in *ftp* traffic



Assignment Project Exam Help

Fraud Detection

Add WeChat powcoder

- Fraud detection refers to detection of criminal activities occurring in commercial organizations
 - Malicious users might be the actual customers of the organization or might be posing as a customer (also known as identity theft).
- Types of fraud
 - Credit card fraud
 - Insurance claim fraud
 - Mobile / cell phone fraud
 - Insider trading
- Challenges
 - Fast and accurate real-time detection
 - Misclassification cost is very high

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



Assignment Project Exam Help

Healthcare Informatics

Add WeChat powcoder

- Detect anomalous patient records
 - Indicate disease outbreaks, instrumentation errors, etc.
- Key Challenges
 - Only normal labels available
 - Misclassification cost is very high
 - Data can be complex: spatio-temporal

[outbreaks from 2006 to today](#) preventable by vaccinations [Article](#)



Industrial Damage Detection

Add WeChat powcoder

- Industrial damage detection refers to detection of different faults and failures in complex industrial systems, structural damages, intrusions in electronic security systems, suspicious events in video surveillance, abnormal energy consumption, etc.

– Example: Aircraft safety

- Anomalous Aircraft (Engine) / Fleet Usage
- Anomalies in engine combustion data
- Total aircraft health and usage management

<https://powcoder.com>

Add WeChat powcoder

• Key Challenges

- Data is extremely huge, noisy and unlabelled
- Most of applications exhibit temporal behavior
- Detecting anomalous events typically require immediate intervention




Assignment Project Exam Help

Image Processing

Add WeChat powcoder


- Detecting outliers in a image monitored over time
- Detecting anomalous regions within an image
- Used in
 - mammography image analysis
 - video surveillance
 - satellite image analysis
- Key Challenges
 - Detecting collective anomalies
 - Data sets are very large

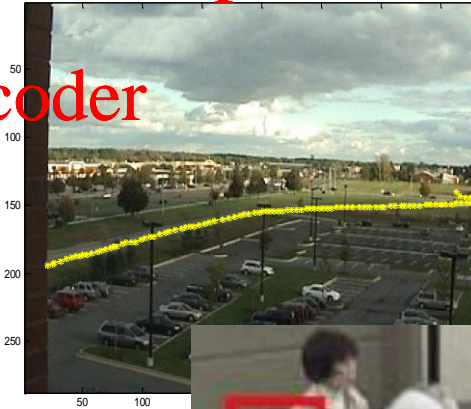

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

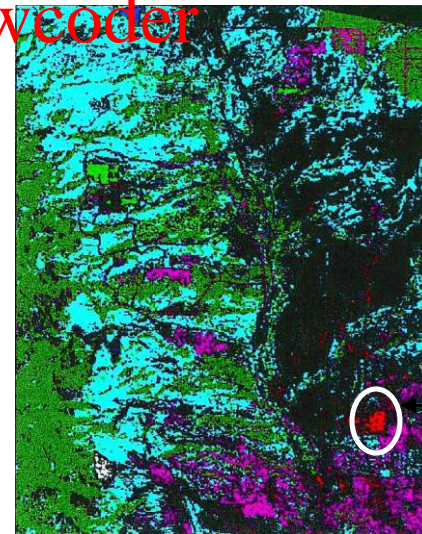

Anomaly

Assignment Project Exam Help


Video Surveillance

Add WeChat powcoder



Assignment Project Exam Help

Add WeChat powcoder

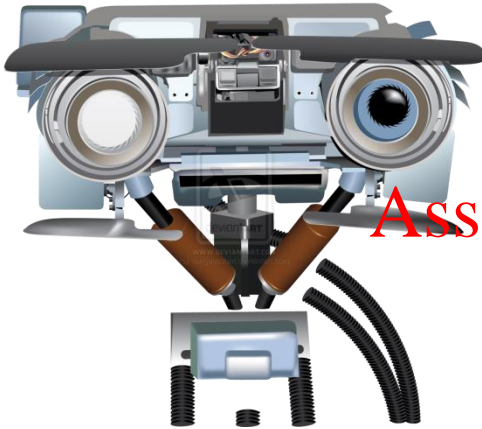

Density Estimation Method

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Anomaly Detection

Assignment Project Exam Help

Add WeChat powcoder

Anomaly detection example

Aircraft engine features:


x_1 = heat generated

x_2 = vibration intensity

...

Dataset: $\{x^{(1)}, x^{(2)}, \dots, x^{(m)}\}$

New engine: x_{test}

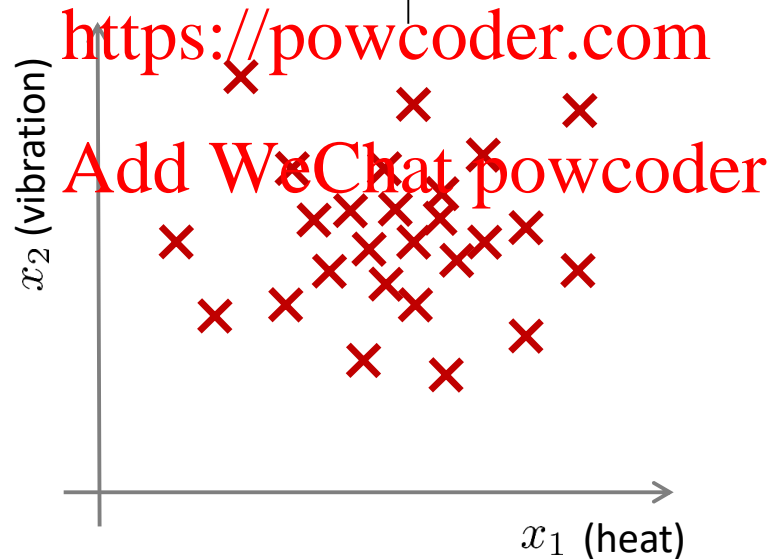

Assignment Project Exam Help


Add WeChat powcoder

Density estimation

Dataset: $\{x^{(1)}, x^{(2)}, \dots, x^{(m)}\}$

Is x_{test} anomalous?

Assignment Project Exam Help

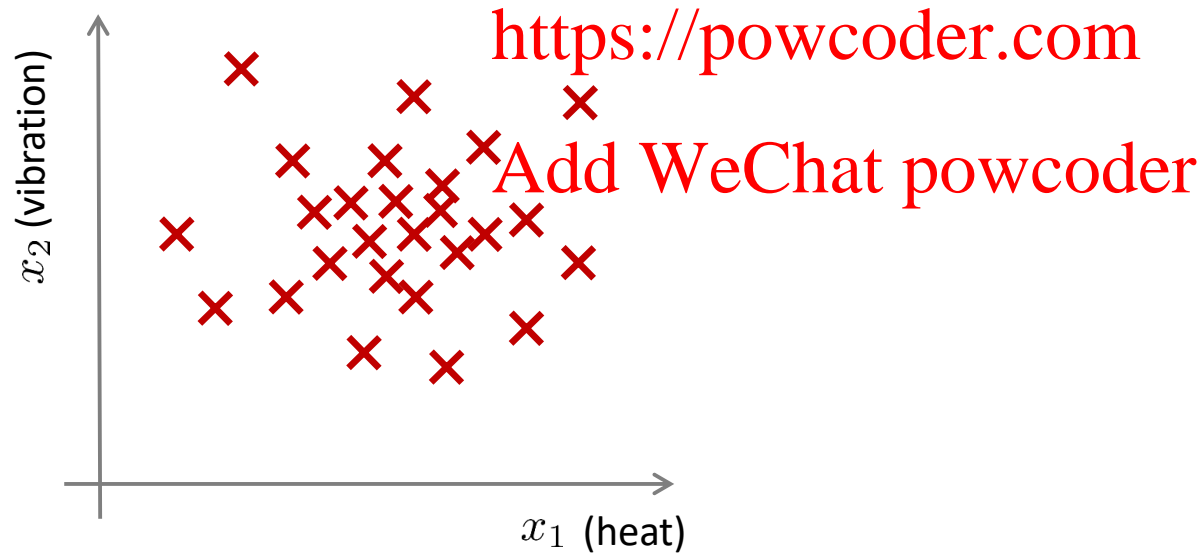

Assignment Project Exam Help

Add WeChat powcoder

Anomaly detection example

Fraud detection:

$x^{(i)}$ = features of user i 's activities

Model $p(x)$ from data

Identify unusual users by checking which have $p(x) < \varepsilon$

Manufacturing <https://powcoder.com>

Monitoring computers in a data center.

$x^{(i)}$ = features of machine i

x_1 = memory use, x_2 = number of disk accesses/sec,

x_3 = CPU load, x_4 = CPU load/network traffic.




...

Assignment Project Exam Help

Example density estimation method:
Multivariate Gaussian (Normal) distribution

Parameters μ, Σ

$$p(x; \mu, \Sigma) = \frac{1}{(2\pi)^{\frac{n}{2}} |\Sigma|^{\frac{1}{2}}} \exp \left(-\frac{1}{2} (x - \mu)^T \Sigma^{-1} (x - \mu) \right)$$



Parameter fitting:

Given training set $\{x^{(1)}, x^{(2)}, \dots, x^{(m)}\}$

$$\mu = \frac{1}{m} \sum_{i=1}^m x^{(i)} \quad \Sigma = \frac{1}{m} \sum_{i=1}^m (x^{(i)} - \mu)(x^{(i)} - \mu)^T$$

Assignment Project Exam Help

Add WeChat powcoder

Anomaly detection with the multivariate Gaussian

1. Fit model $p(x)$ by setting


$$\mu = \frac{1}{m} \sum_{i=1}^m x^{(i)}$$

$$\Sigma = \frac{1}{m} \sum_{i=1}^m (x^{(i)} - \mu)(x^{(i)} - \mu)^T$$

2. Given a new example x , compute


$$p(x) = \frac{1}{(2\pi)^{\frac{n}{2}} |\Sigma|^{\frac{1}{2}}} \exp \left(-\frac{1}{2} (x - \mu)^T \Sigma^{-1} (x - \mu) \right)$$

Flag an anomaly if $p(x) < \varepsilon$

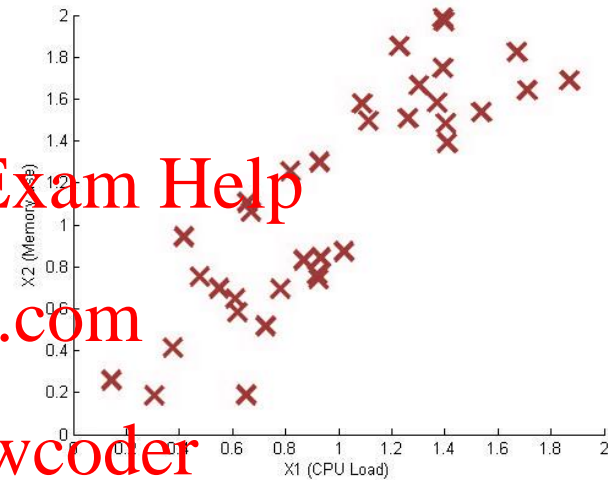

Assignment Project Exam Help

Add WeChat powcoder

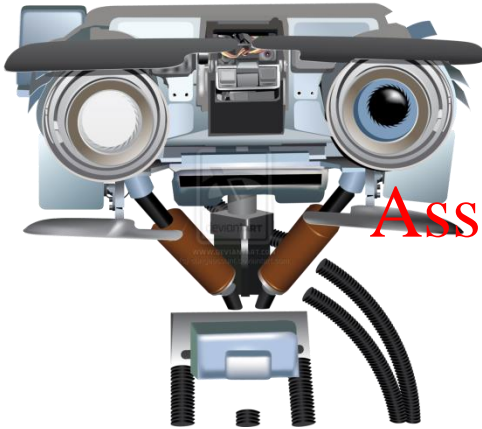

Assignment Project Exam Help

Evaluation

<https://powcoder.com>

Add WeChat powcoder

Anomaly Detection

Assignment Project Exam Help

Add WeChat powcoder

Evaluating an anomaly detection model

When developing a learning algorithm (choosing features, etc.), making decisions is much easier if we have a way of evaluating our learning algorithm

Assignment Project Exam Help

Assume we have some labeled data, of anomalous and non-anomalous examples. ($y = 0$ if normal, $y = 1$ if anomalous).

<https://powcoder.com>

Training set: $x^{(1)}, x^{(2)}, \dots, x^{(m)}$ (assume normal examples/not anomalous)

Add WeChat powcoder

Cross validation set: $(x_{cv}^{(1)}, y_{cv}^{(1)}), \dots, (x_{cv}^{(m_{cv})}, y_{cv}^{(m_{cv})})$

Test set: $(x_{test}^{(1)}, y_{test}^{(1)}), \dots, (x_{test}^{(m_{test})}, y_{test}^{(m_{test})})$

Assignment Project Exam Help

Add WeChat powcoder

Aircraft engines motivating example

10000 good (normal) engines

20 flawed engines (anomalous)

Training set: 6000 good engines

CV: 2000 good engines ($y = 0$), 10 anomalous ($y = 1$)

Test: 2000 good engines ($y = 0$), 10 anomalous ($y = 1$)

Add WeChat powcoder

Assignment Project Exam Help

Add WeChat powcoder

Algorithm evaluation

Fit model $p(x)$ on training set $\{x^{(1)}, \dots, x^{(m)}\}$

On a cross validation/test example x , predict

$$y = \begin{cases} 1 & \text{if } p(x) < \varepsilon \text{ (anomaly)} \\ 0 & \text{if } p(x) \geq \varepsilon \text{ (normal)} \end{cases}$$

<https://powcoder.com>

Possible evaluation metrics:


- True positive, false positive, false negative, true negative
- Precision/Recall
- F_1 -score

Can also use cross validation set to choose parameter ε

Assignment Project Exam Help

Precision/Recall/F1

Add WeChat powcoder

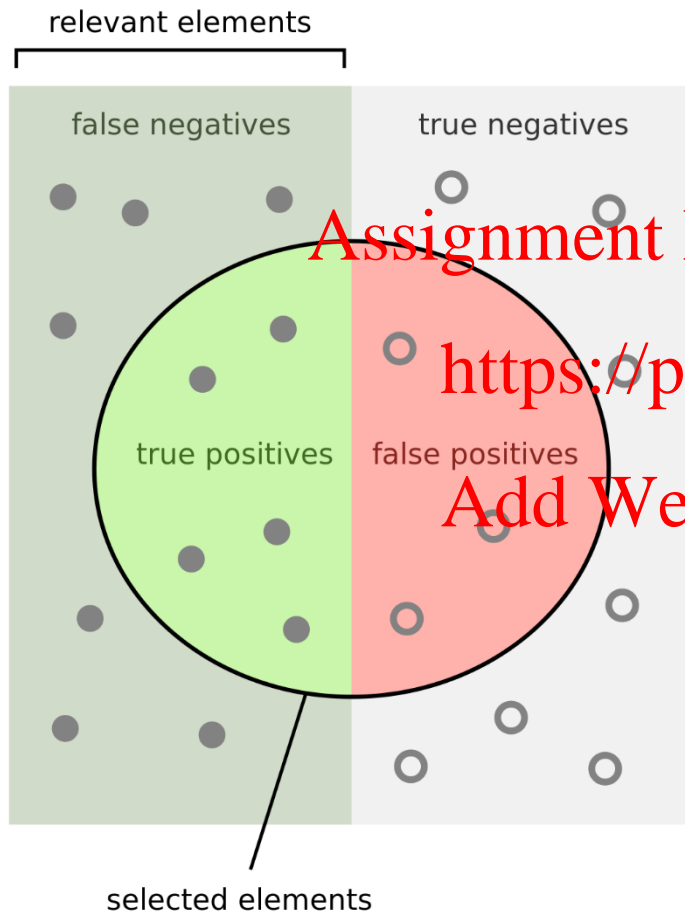

How many selected items are relevant?

Precision =



How many relevant items are selected?

Recall =



Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

$$precision = \frac{TP}{TP + FP}$$

$$recall = \frac{TP}{TP + FN}$$

$$F1 = \frac{2 \times precision \times recall}{precision + recall}$$

$$accuracy = \frac{TP + TN}{TP + FN + TN + FP}$$

Assignment Project Exam Help

Anomaly detection vs. Supervised learning

- Very small number of positive examples ($y=1$)
 - Large number of negative ($y=0$) examples
 - Many different “types” of anomalies. Hard for any algorithm to learn from positive examples what the anomalies look like; future anomalies may look nothing like any of the anomalous examples we’ve seen so far.
- Large number of positive and negative examples.
 - Enough positive examples for algorithm to get a sense of what positive examples are like, future positive examples likely to be similar to ones in training set.


Assignment Project Exam Help

Anomaly detection vs. Supervised learning

- | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none">• Fraud detection• Manufacturing (e.g. aircraft engines)• Monitoring machines in a data center• | <ul style="list-style-type: none">• Email spam classification• Weather prediction (sunny/rainy/etc).• Cancer classification• |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Assignment Project Exam Help

Add WeChat powcoder

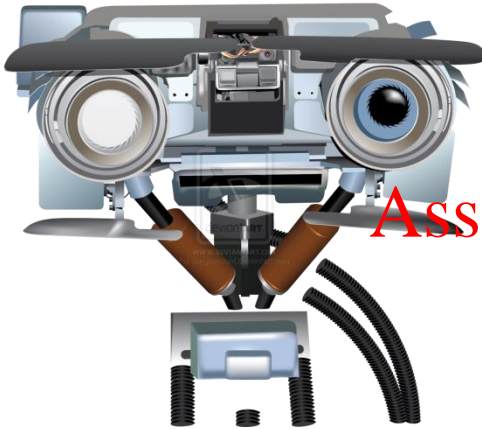

Assignment Project Exam Help
Anomaly Detection by
Reconstruction
<https://powcoder.com>

Add WeChat powcoder

Assignment Project Exam Help

Add WeChat powcoder

Online Detection of Unusual Events in Videos via Dynamic Sparse Coding

<https://powcoder.com>

Bin Zhao, Li Fei-Fei, Eric Xing

Add WeChat powcoder

Proceedings of the International Conference on Computer Vision and Pattern Recognition
(CVPR 2011), Colorado Springs, CO, USA, June 2011

Assignment Project Exam Help


Goal: Detect Unusual Events in Videos

Add WeChat powcoder

- Example unusual event:
entering subway via exit
- Videos are described as
spatio-temporal features

Assignment Project Exam Help

<https://powcoder.com>

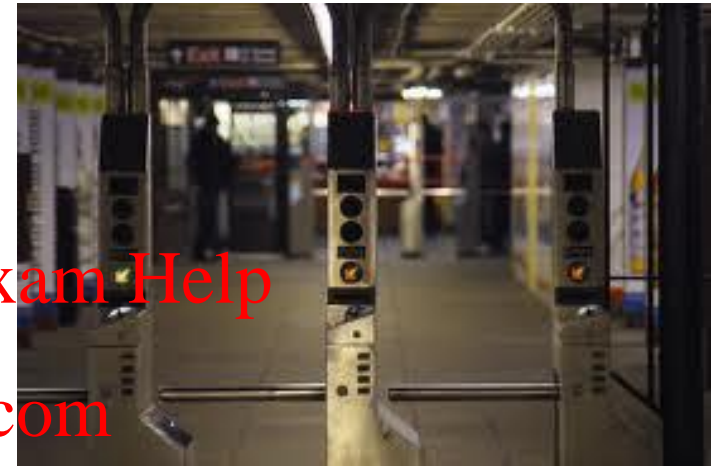

Add WeChat powcoder



Figure 2. Example spatio-temporal interest points detected with the method in [5].

Assignment Project Exam Help

Dictionary-based Anomaly Detection

Add WeChat powcoder

- Learn a dictionary of bases corresponding to usual events:
 - a usual event should be reconstructible from a small number of such bases, and
 - the reconstruction weights should change smoothly over space/time across actions in such events.
 - an unusual event is either not reconstructible from the dictionary of usual events with small error, or,
 - Needs a large number of bases, in a temporal-spatially non-smooth fashion.
- Must: Learn a good dictionary of bases representing usual events
- Must: Update the dictionary online to adapt to changing content of the video

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Assignment Project Exam Help

Algorithm: Look for High Reconstruction Error

Add WeChat powcoder


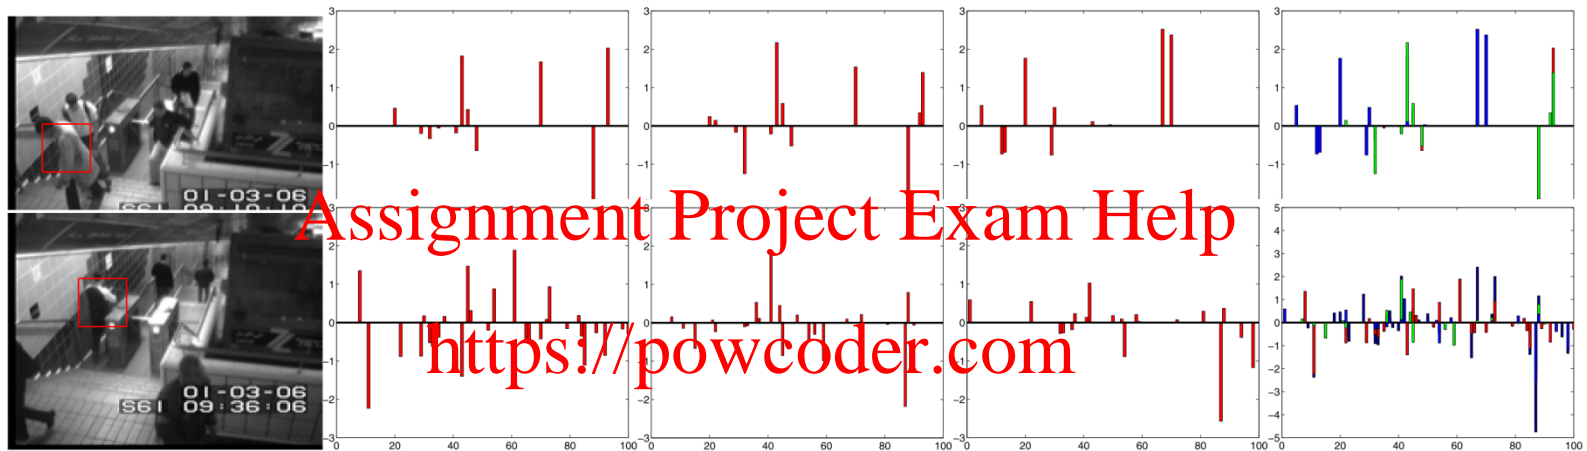


Figure 3. First row: usual event (leaving subway exit); second row: unusual event (entering subway exit). From left to right: example frame and sliding window, reconstruction vectors for 3 cuboids, plot all 3 reconstruction vectors on the same figure.

Assignment Project Exam Help

Algorithm

Add WeChat powcoder

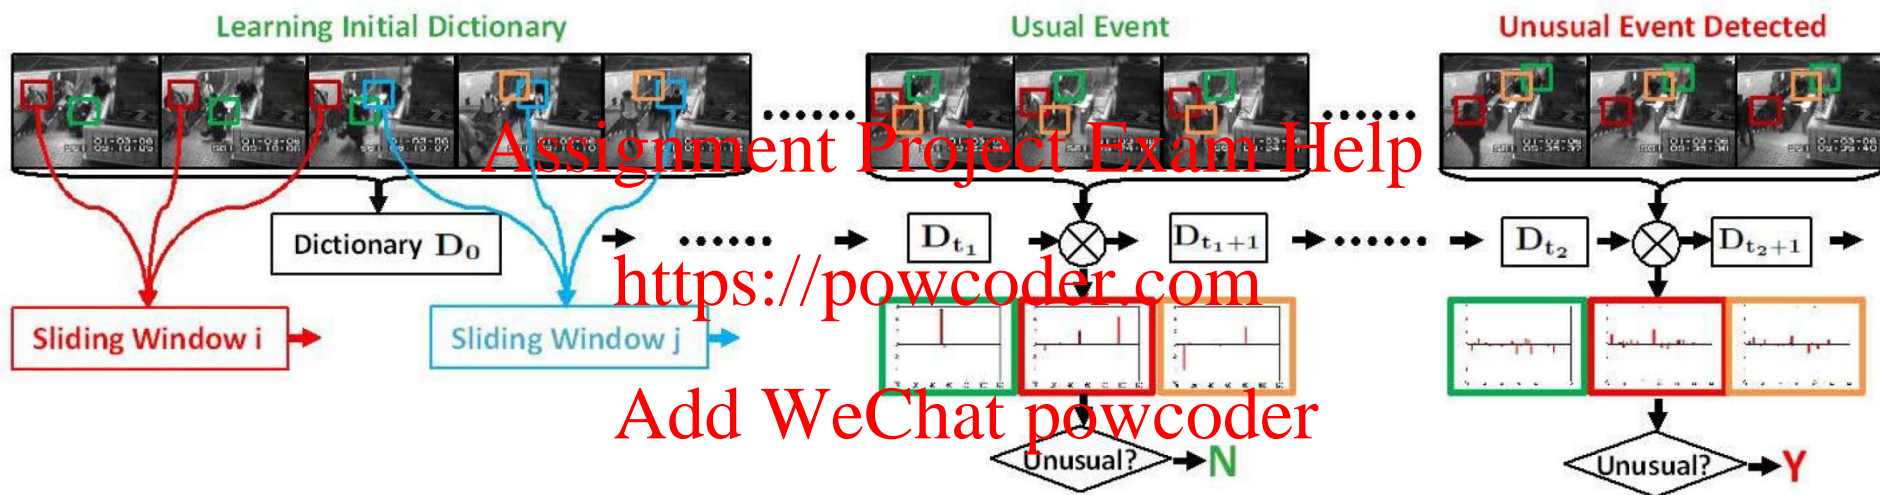

Assignment Project Exam Help

Add WeChat powcoder

Assignment Project Exam Help
Results on YouTube Videos

<https://powcoder.com>

Add WeChat powcoder

Assignment Project Exam Help

Add WeChat powcoder

Online Detection of Unusual Events
in Videos via Dynamic Sparse Coding


(Youtube Videos)
Assignment Project Exam Help

<https://powcoder.com>

Paper ID 883
Add WeChat powcoder

Assignment Project Exam Help

Add WeChat powcoder

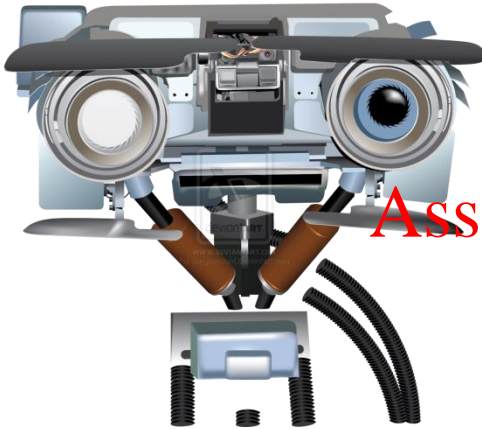

Assignment Project Exam Help One-Class SVM

<https://powcoder.com>

Add WeChat powcoder

Anomaly Detection

Assignment Project Exam Help

Add WeChat powcoder

Support Vector Method for Novelty Detection

Add WeChat powcoder

Bernhard Schölkopf, Robert Williams, Alex
Smola, John Shawe-Taylor, John Platt

Assignment Project Exam Help

Problem Formulation

Add WeChat powcoder

- Suppose we are given a training sample drawn from an underlying distribution P

Assignment Project Exam Help

- We want to estimate a “simple” subset $S \subset X$ such that for a test point x drawn from the distribution P ,
<https://powcoder.com>
Add WeChat powcoder

$$\Pr(x \notin S) = \nu, \nu \in (0,1]$$

- We approach the problem by trying to estimate a function f which is positive on S and negative on the complement

Assignment Project Exam Help

One-Class SVM

Add WeChat powcoder

- Given a feature space F (via kernel k)

- Define the class to be

Assignment Project Exam Help

<https://powcoder.com>

$$C_w = \{x \mid f_w(x) \geq \rho\}$$

Add WeChat powcoder

- (w, ρ) are respectively a weight vector and an offset parameterizing a hyperplane in F

Assignment Project Exam Help

Add WeChat powcoder

“Hey, Just a second”

If we use hyperplanes & offsets, doesn't it mean we separate the “positive” sample?

Assignment Project Exam Help

<https://powcoder.com>

But, separate from what?


Add WeChat powcoder

From the Origin

Assignment Project Exam Help

OCSVM

Add WeChat powcoder

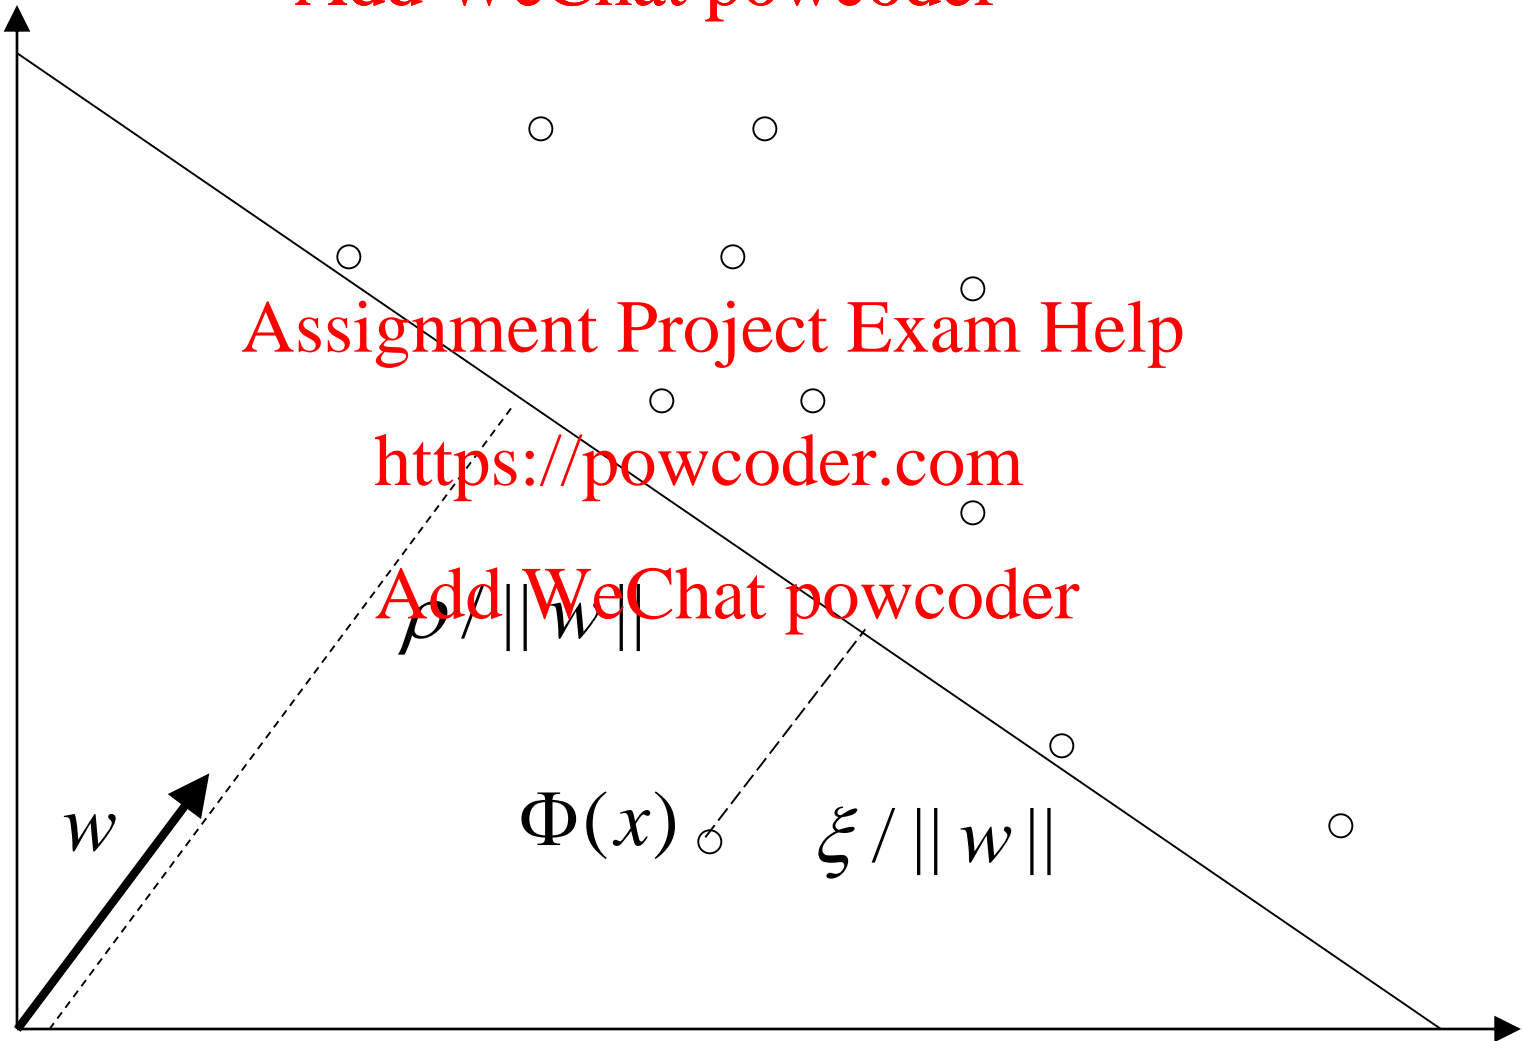


Assignment Project Exam Help

Example

Add WeChat powcoder

Novelty Detection

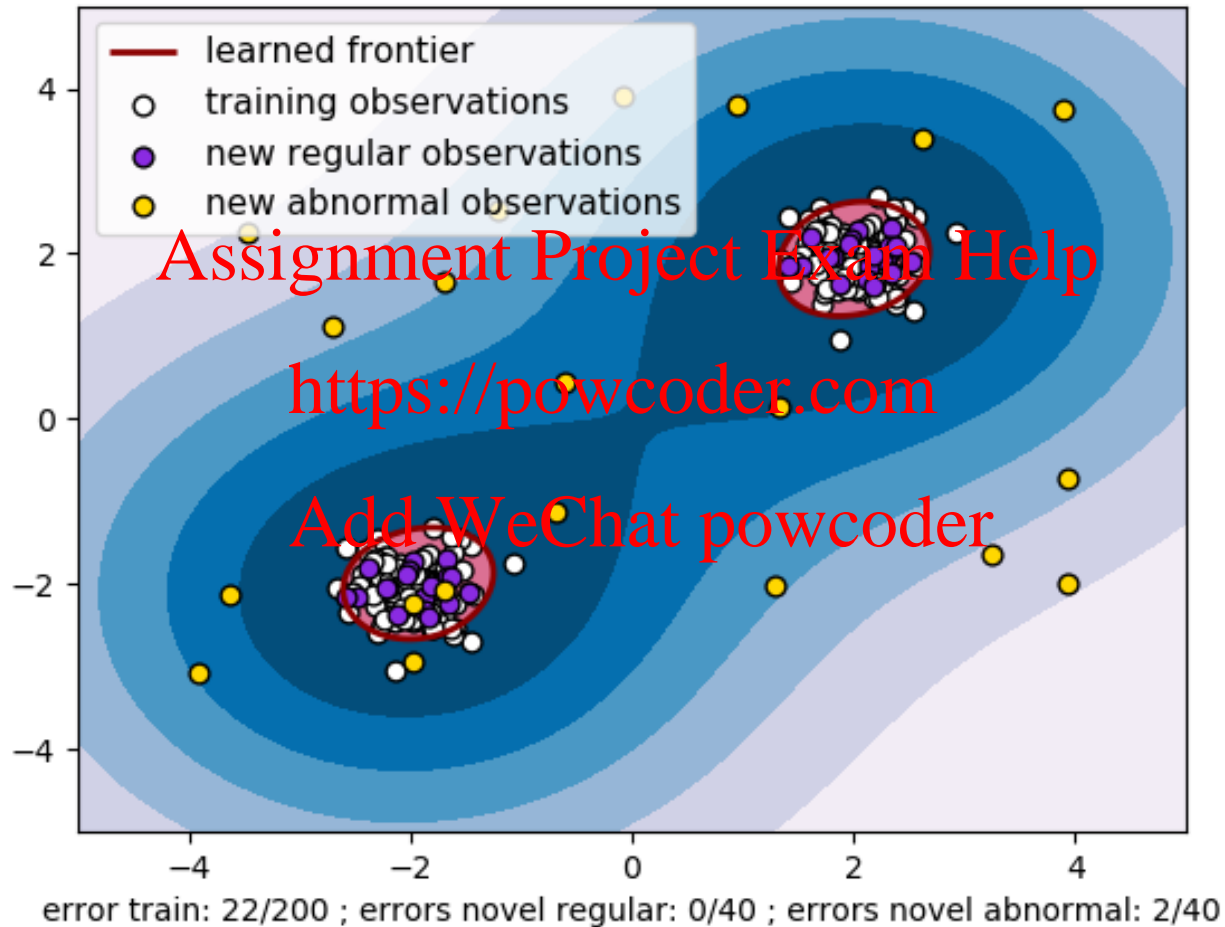

`sklearn.svm.OneClassSVM`

Assignment Project Exam Help

OneClassSVM - Shortcomings

Add WeChat powcoder

- Implicitly assumes that the “negative” data lies around the origin.

Assignment Project Exam Help

<https://powcoder.com>

- Ignores completely “negative” data even if such data partially exist.

Add WeChat powcoder

Assignment Project Exam Help

Next Class

Add WeChat powcoder

Unsupervised Learning IV: Generative Adversarial Networks (GANs)

Assignment Project Exam Help

Implicit generative models; adversarial methods;

Generative Adversarial Nets (GANs)

<https://powcoder.com>

Add WeChat powcoder