

Assignment Project Exam Help

Announcements

Add WeChat powcoder

Reminder: ps2 due tonight at midnight (Boston)

Assignment Project Exam Help

- Self-Grading form for ps1 out tomorrow 9/25 (1 week to turn in)


<https://powcoder.com>

Add WeChat powcoder

- Self-Grading form for ps2 out Monday 9/28 (1 week to turn in)

Assignment Project Exam Help

Add WeChat powcoder

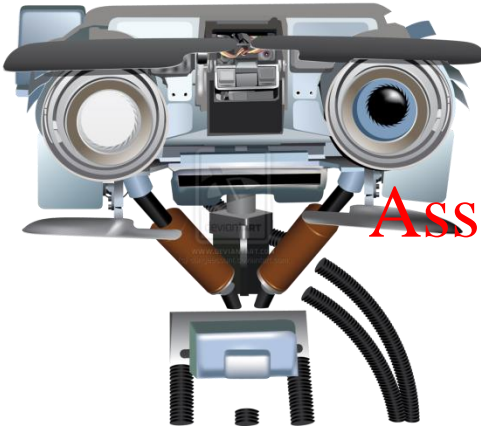

Assignment Project Exam Help


Unsupervised Learning II

Add WeChat powcoder

Agglomerative Clustering


Assignment Project Exam Help

Add WeChat powcoder

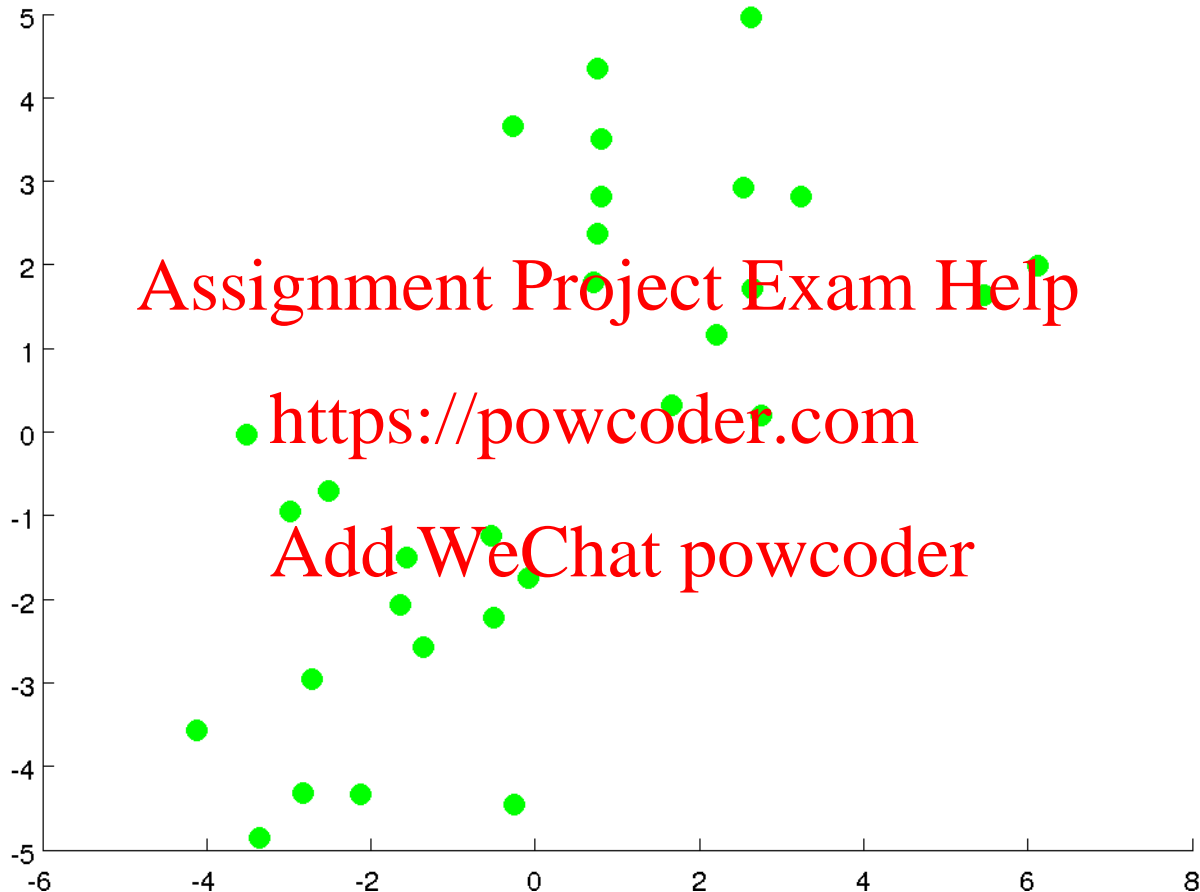


Assignment Project Exam Help

Add WeChat powcoder

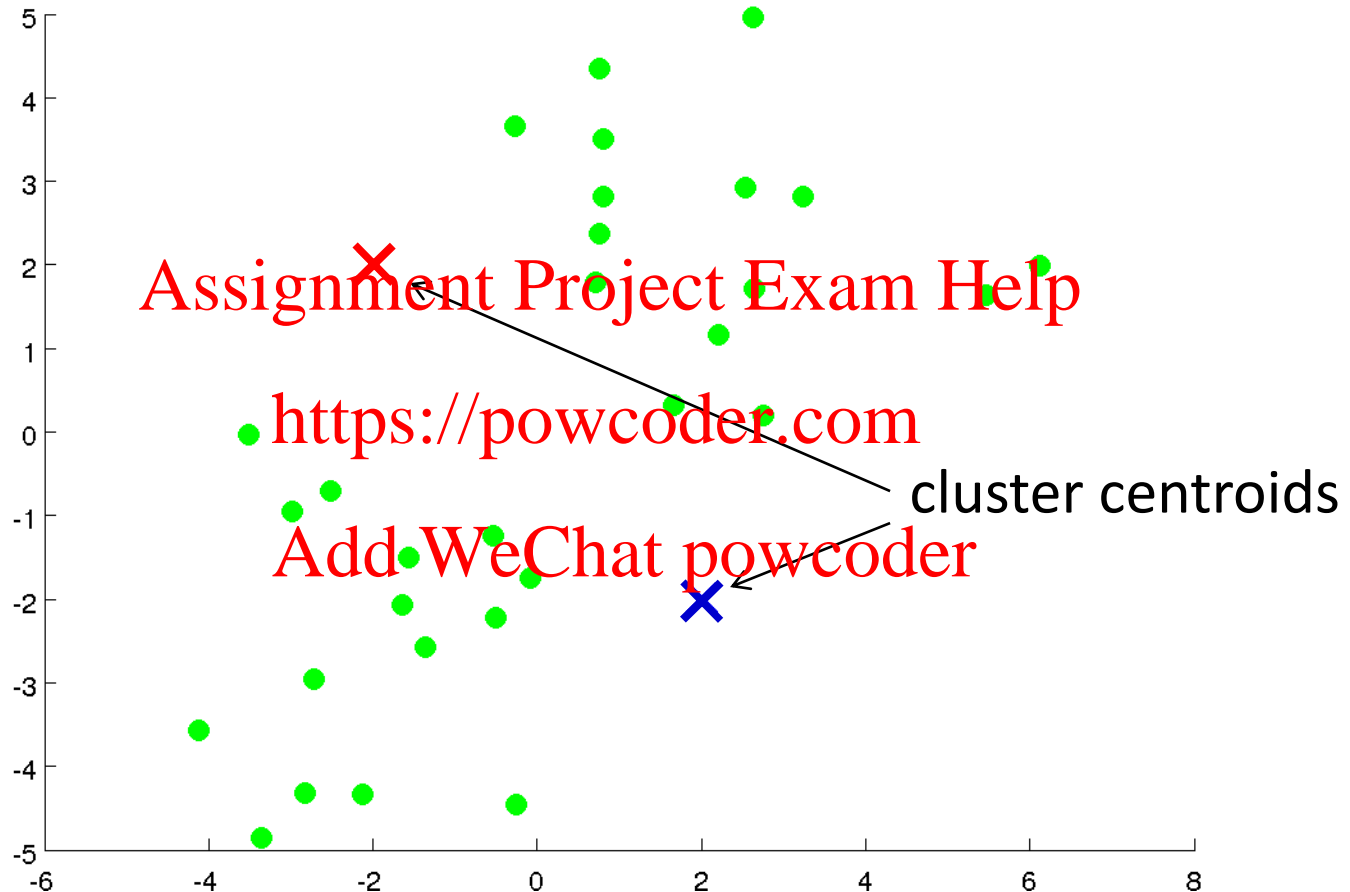


Assignment Project Exam Help

Add WeChat powcoder

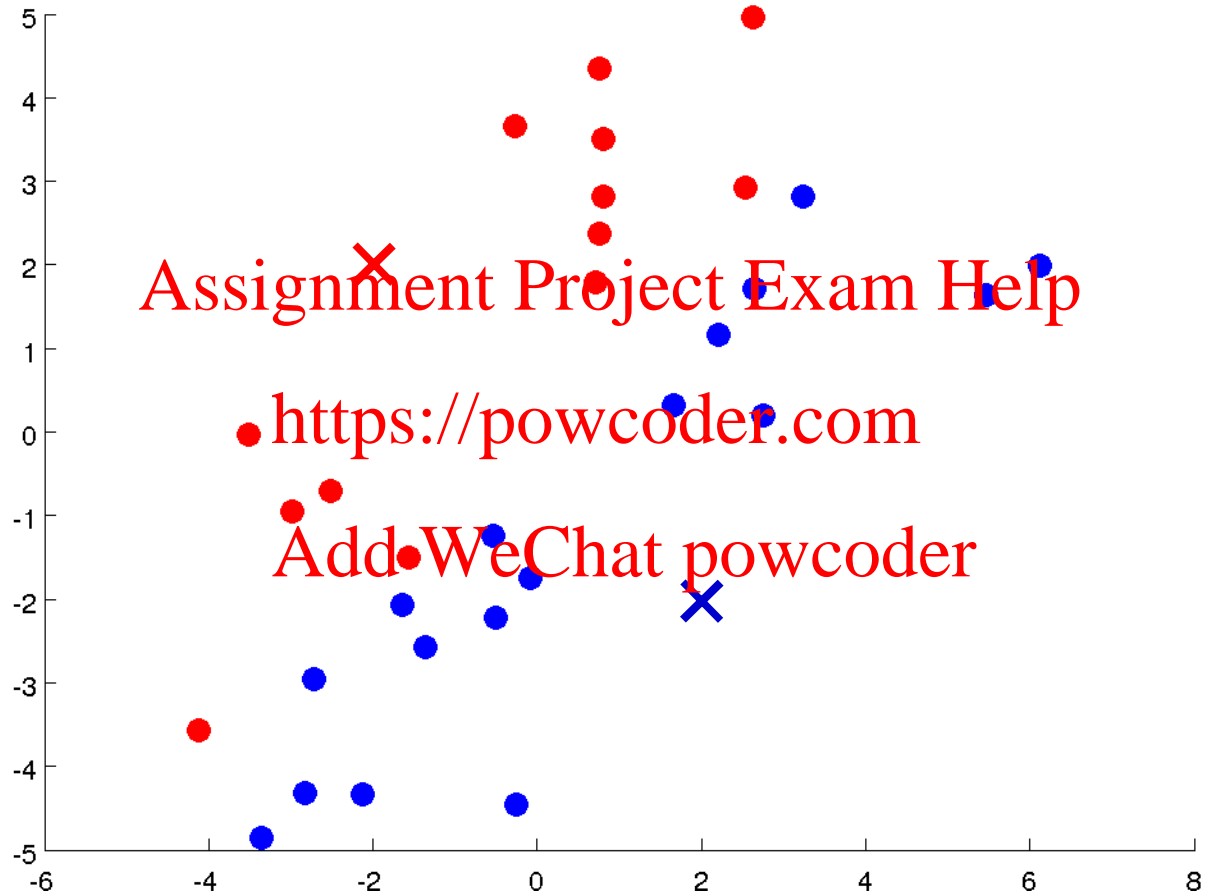


Assignment Project Exam Help

Add WeChat powcoder

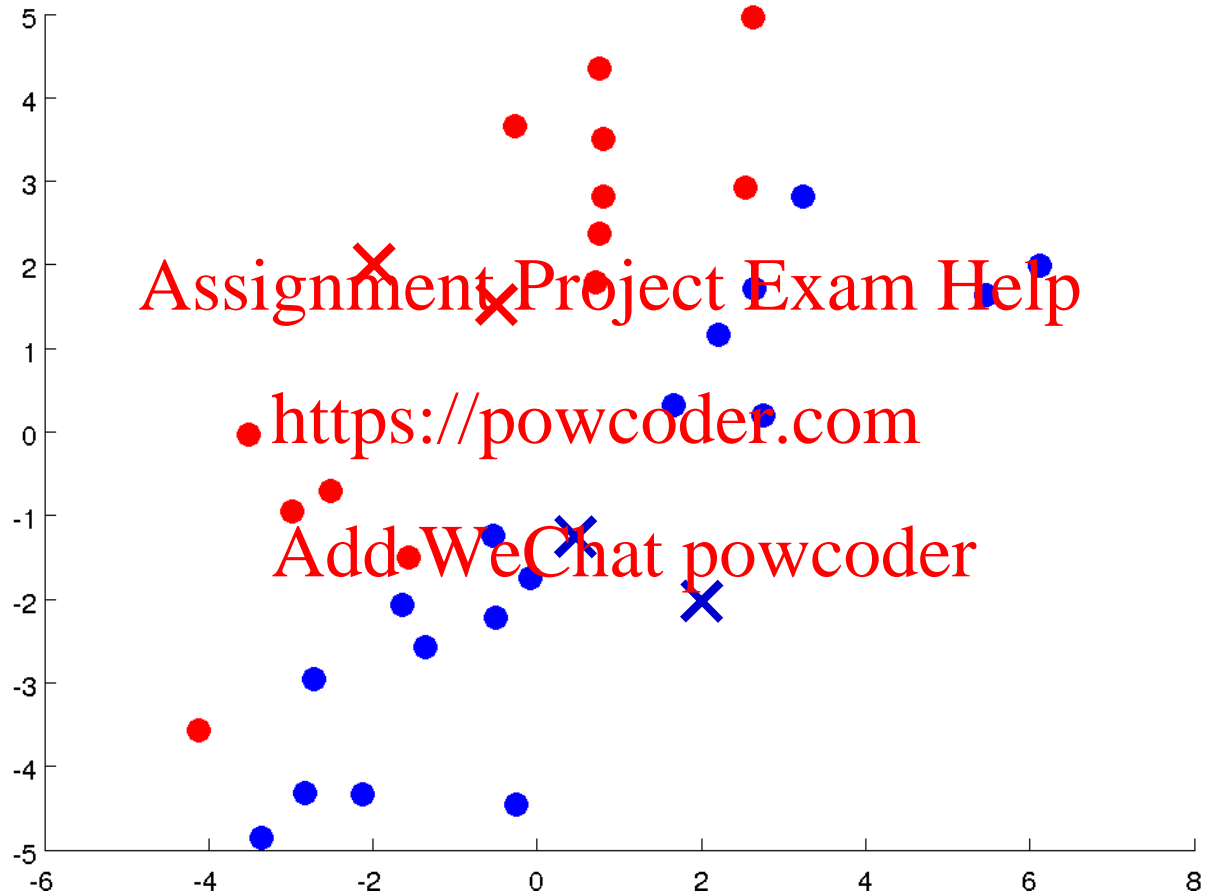


Assignment Project Exam Help

Add WeChat powcoder

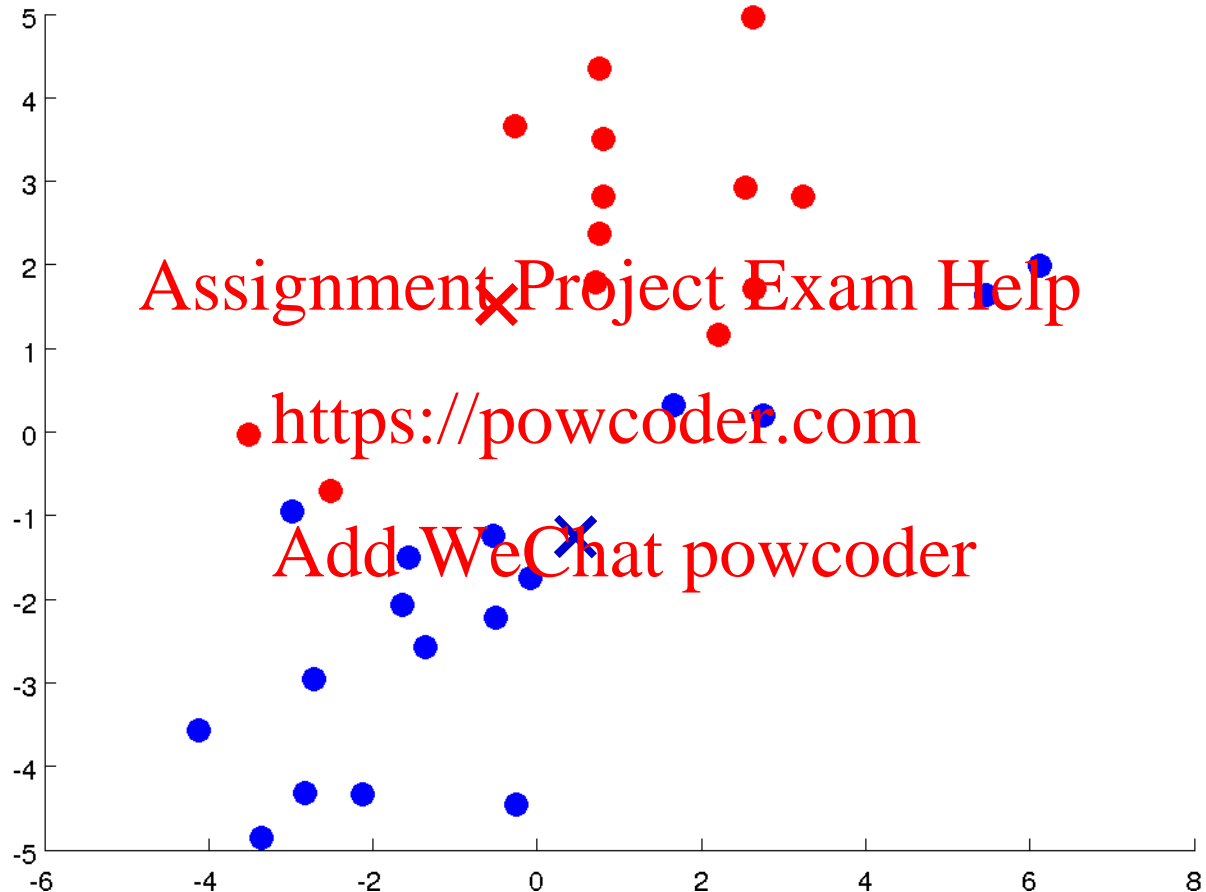


Assignment Project Exam Help

Add WeChat powcoder

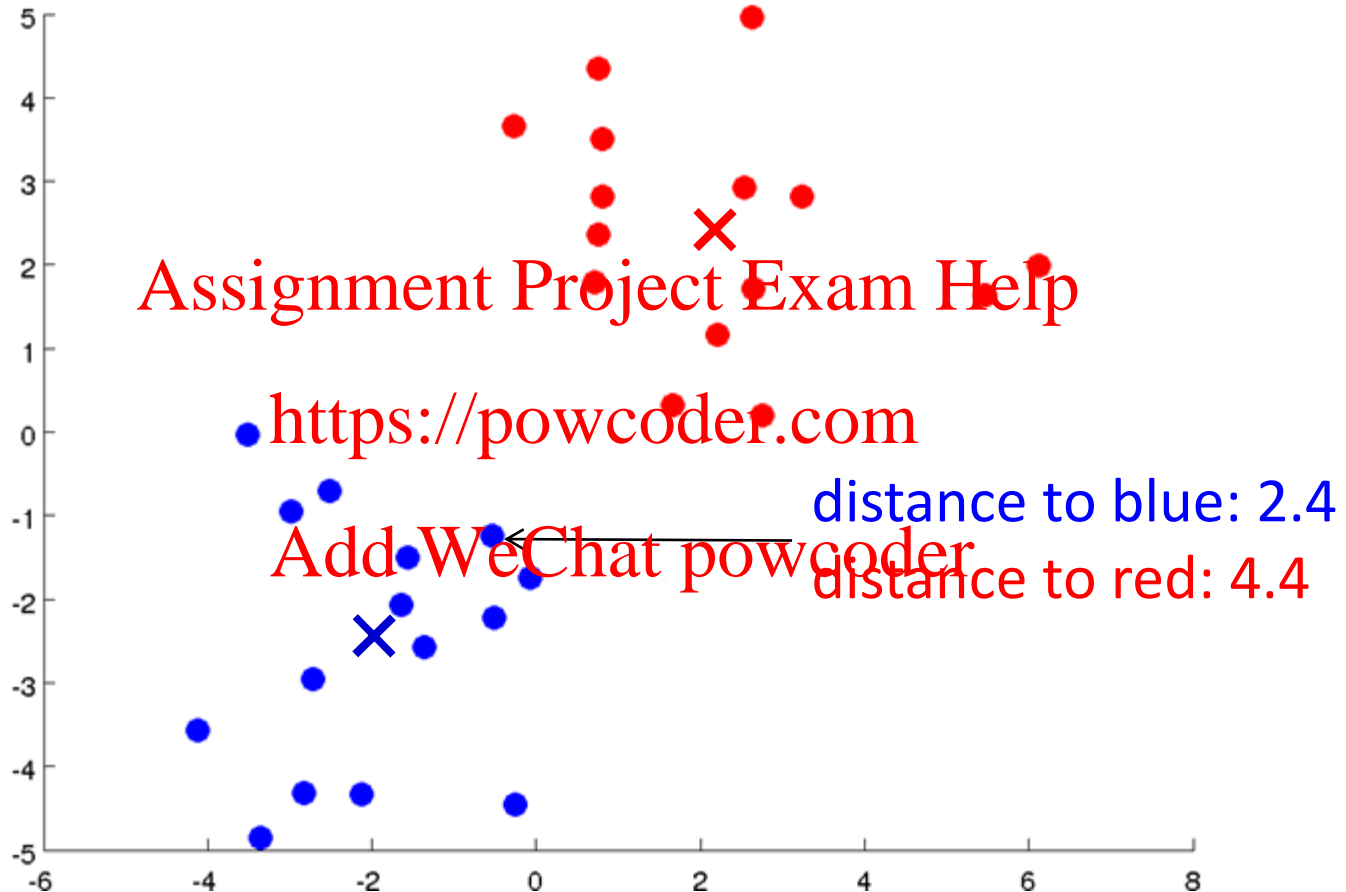


Assignment Project Exam Help

Add WeChat powcoder

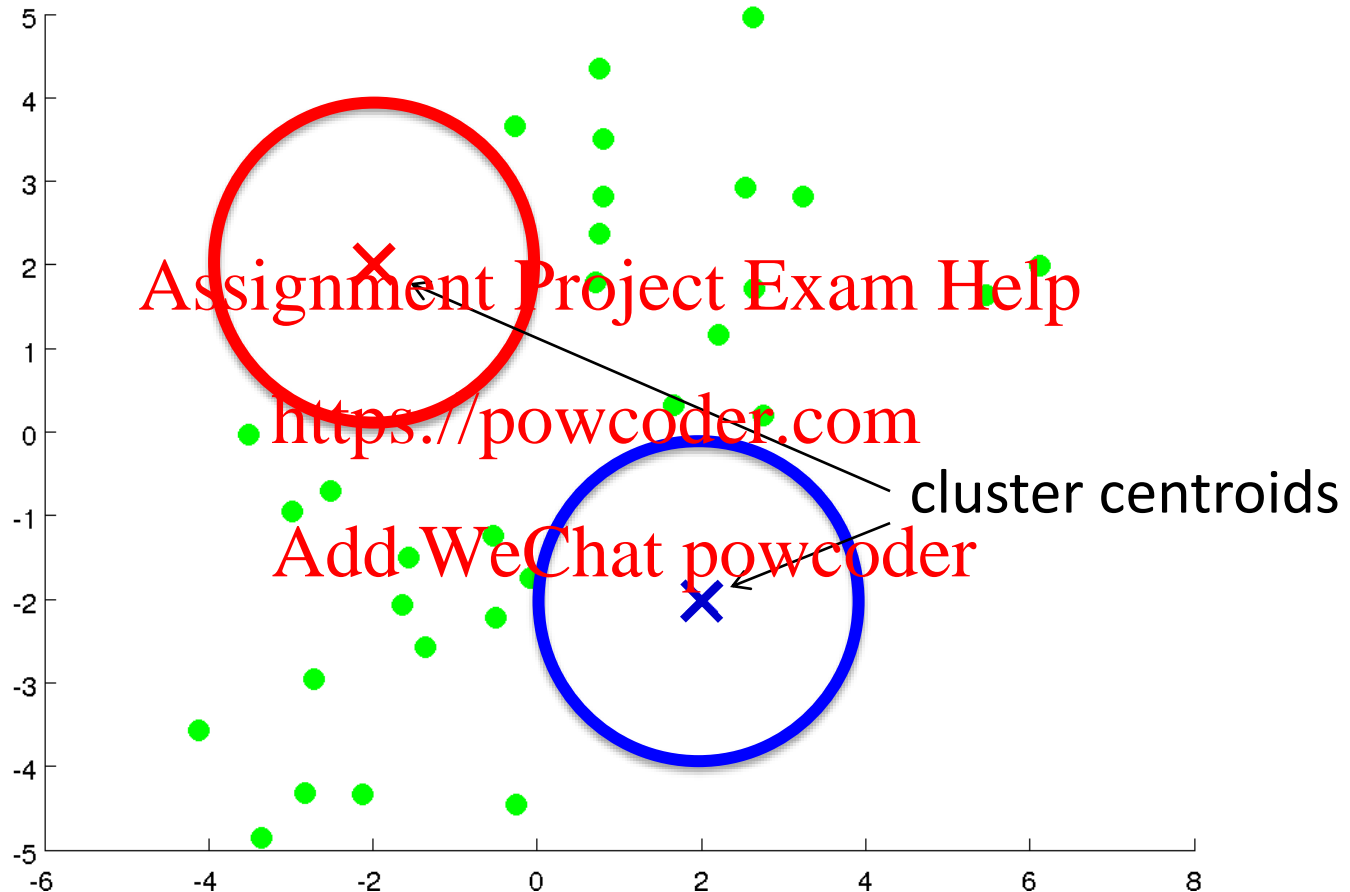


Assignment Project Exam Help

Add WeChat powcoder

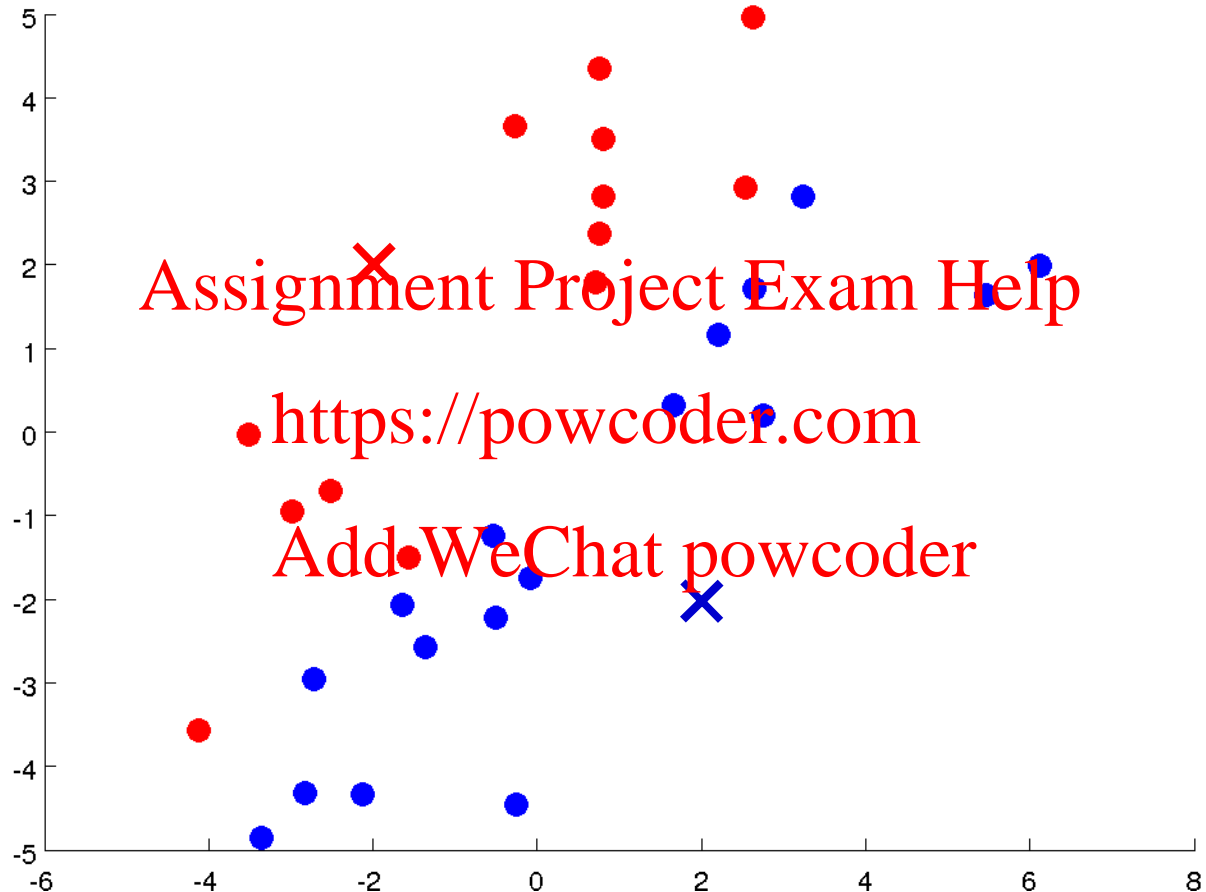


Assignment Project Exam Help

Add WeChat powcoder

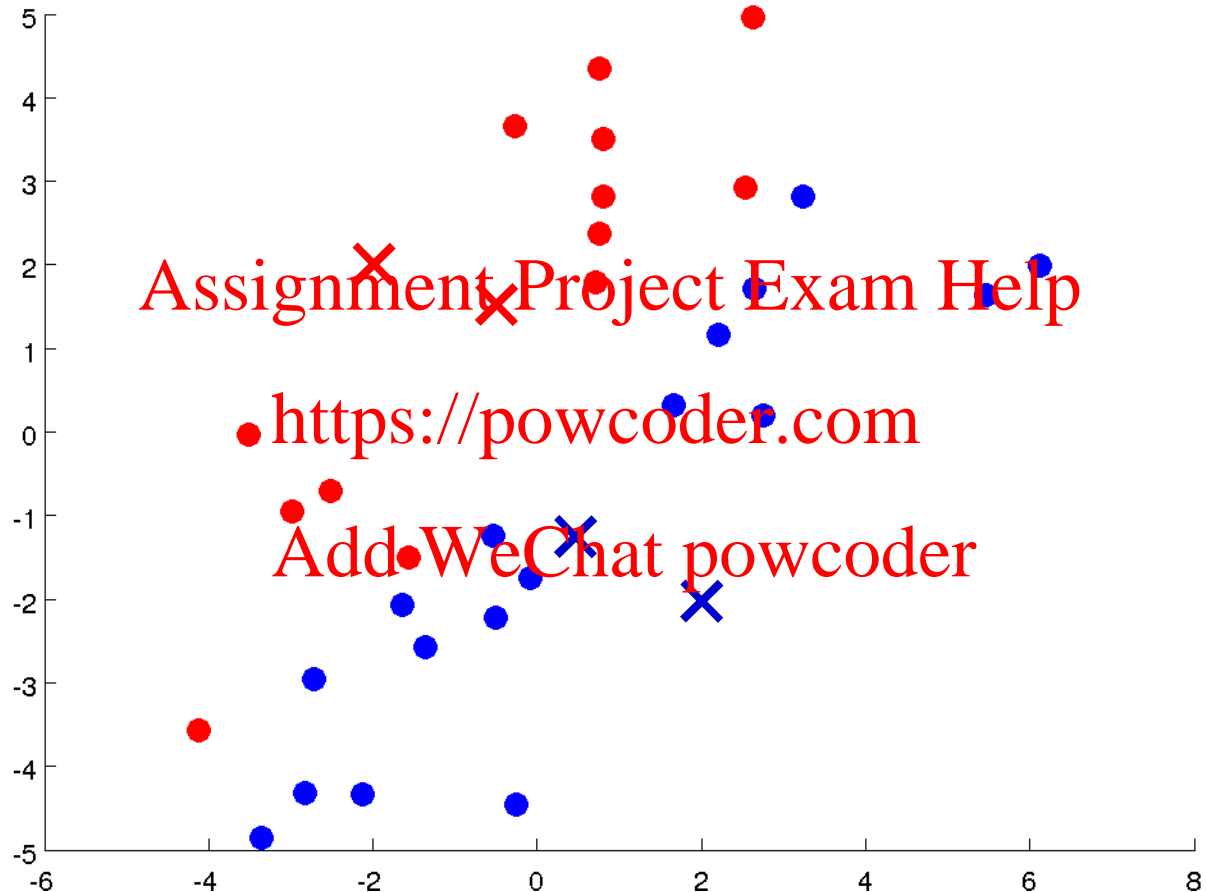


Assignment Project Exam Help

Iteratively combine the two closest points
Add WeChat powcoder

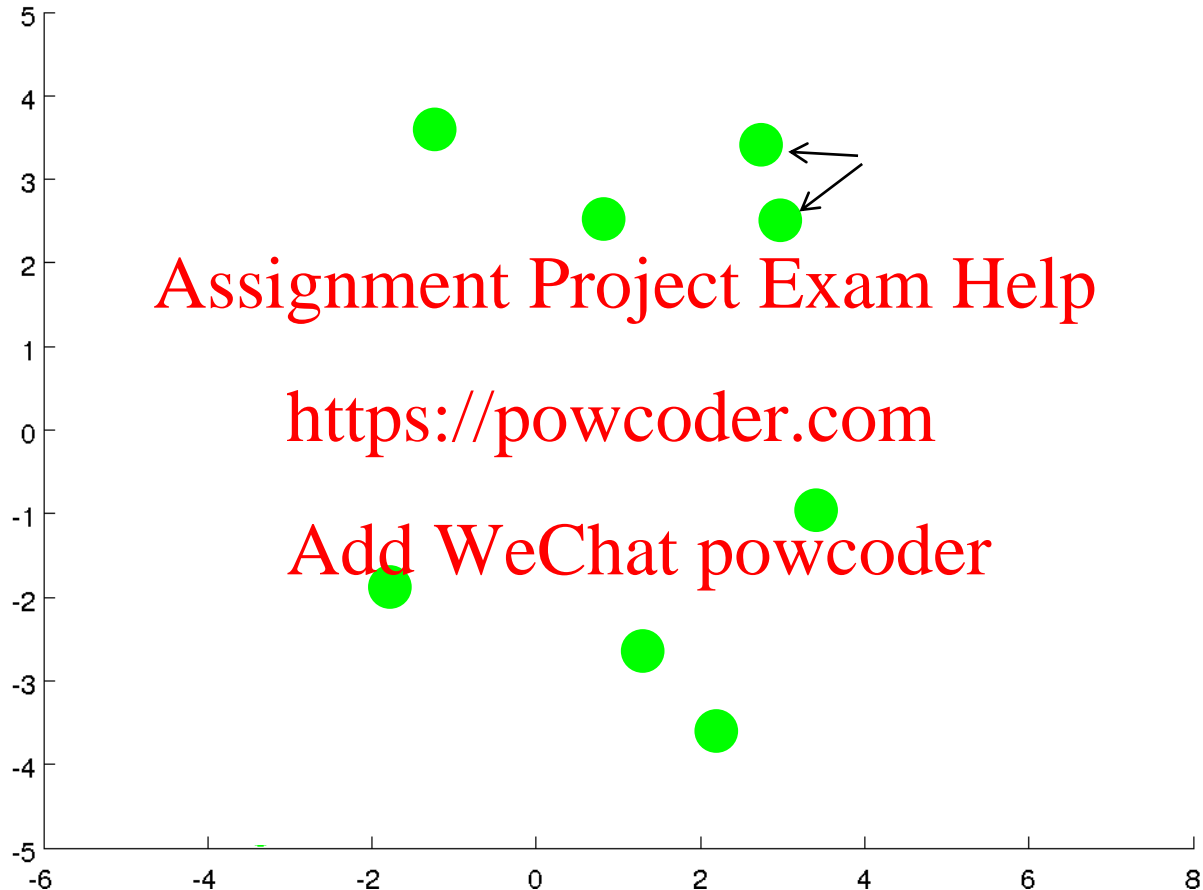


Assignment Project Exam Help

Iteratively combine the two closest points
Add WeChat powcoder

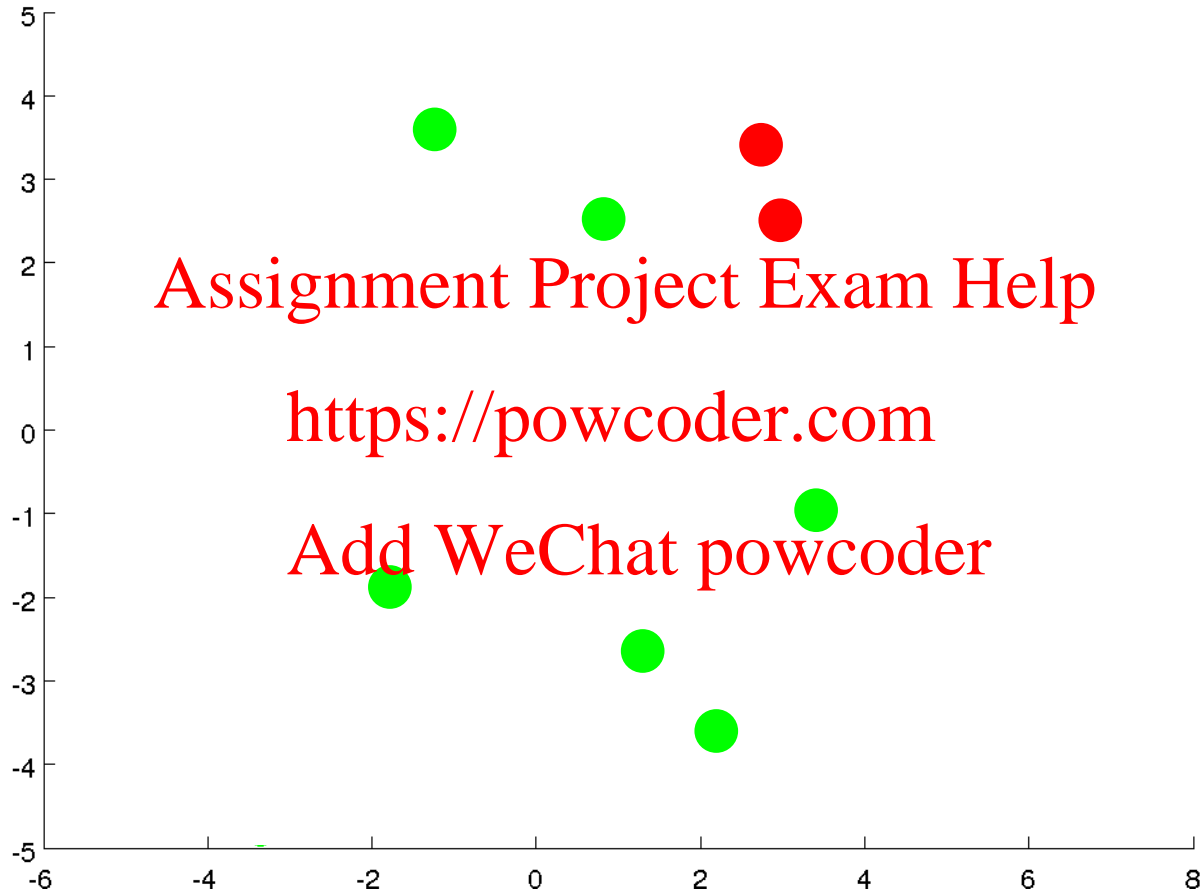


Assignment Project Exam Help

Iteratively combine the two closest points
Add WeChat powcoder

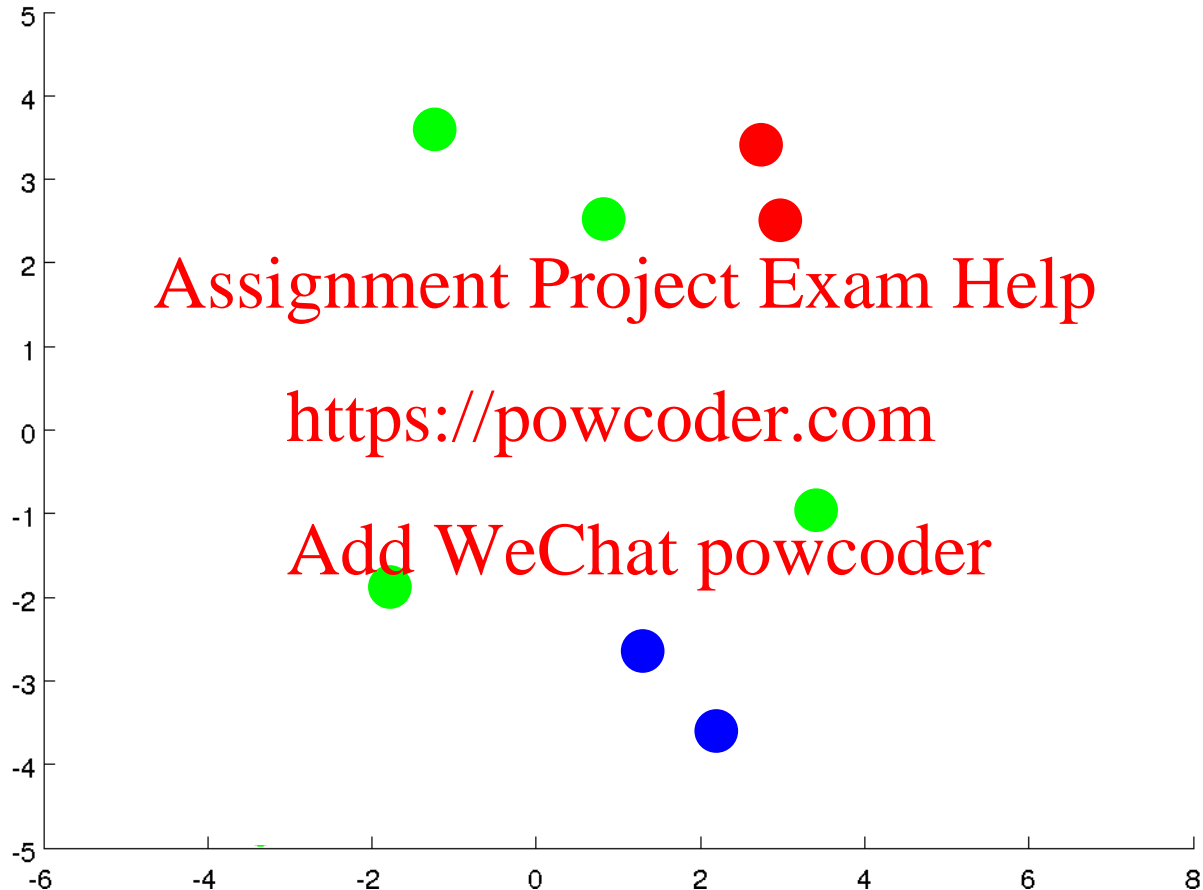


Assignment Project Exam Help

Iteratively combine the two closest points
Add WeChat powcoder

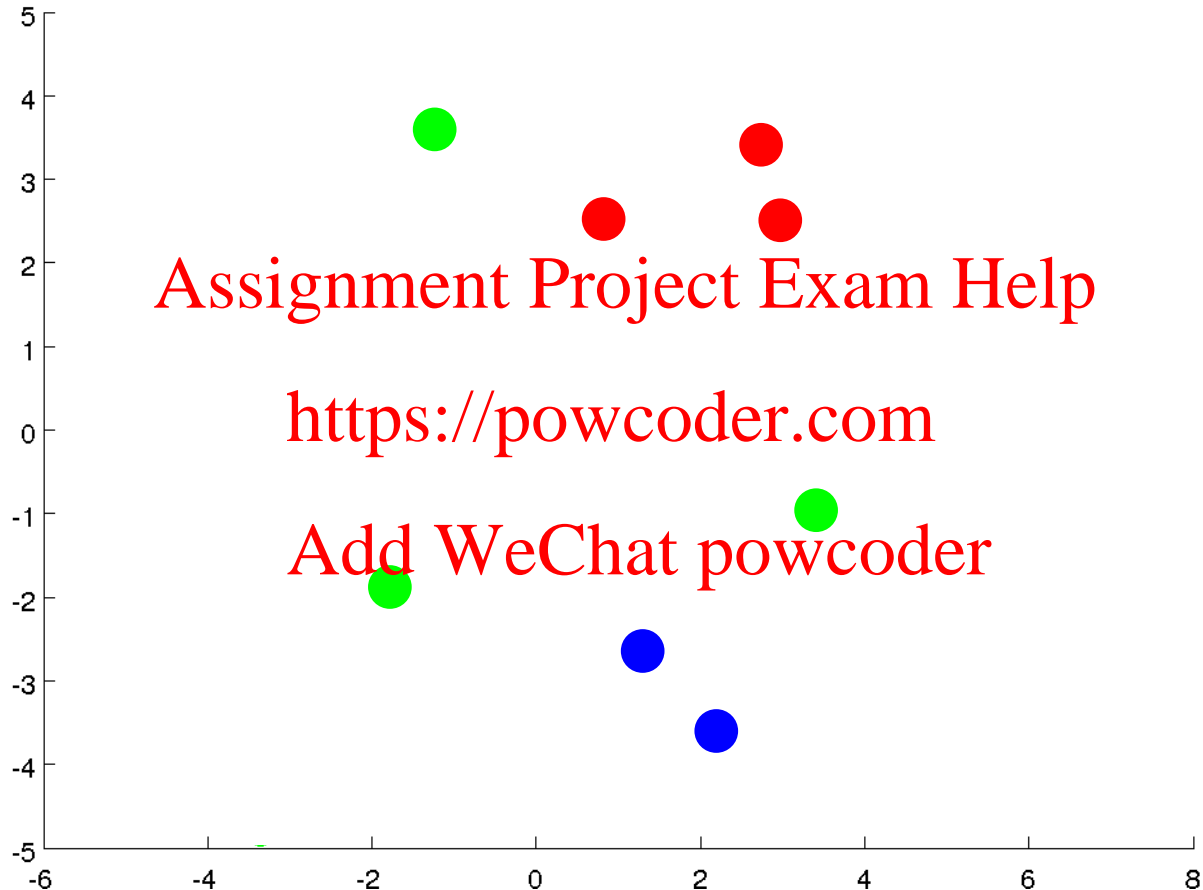


Assignment Project Exam Help

Iteratively combine the two closest points
Add WeChat powcoder

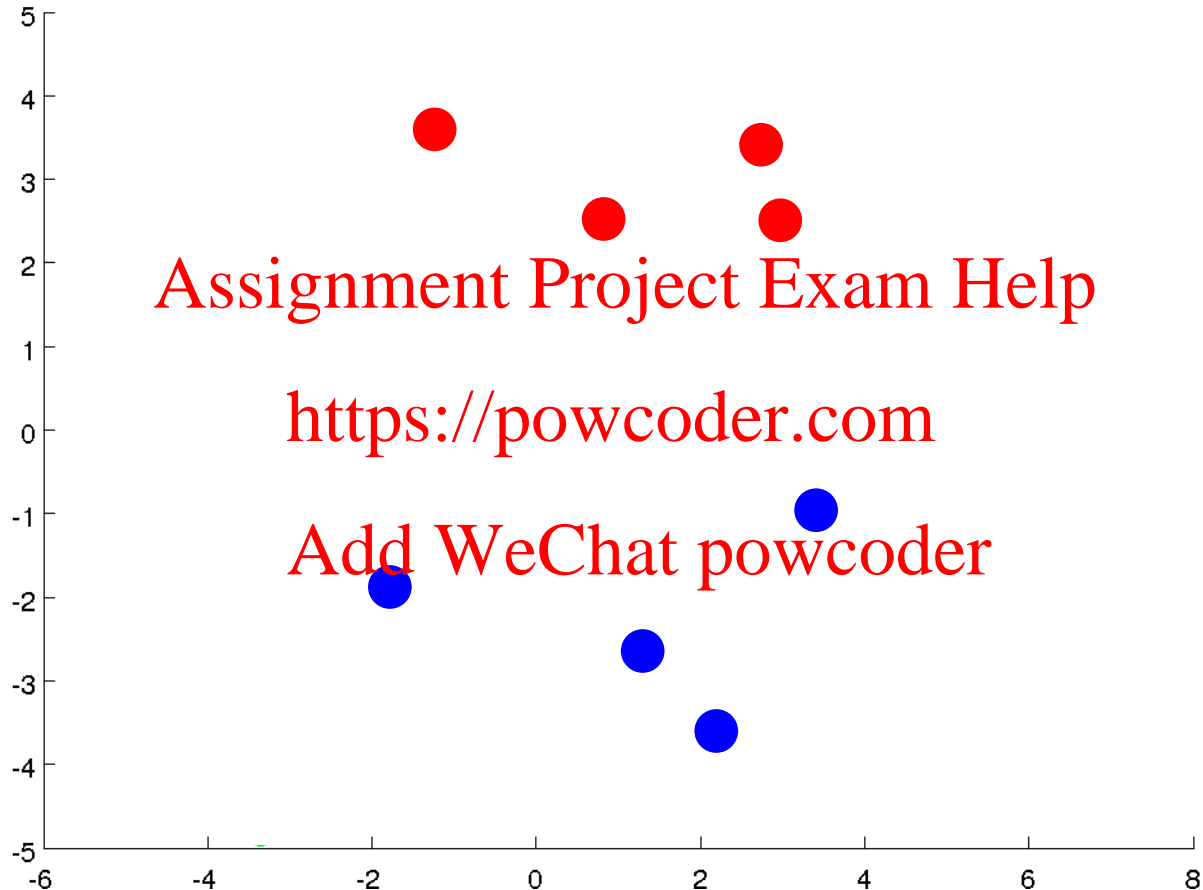

Assignment Project Exam Help

Iteratively combine the two closest points
Add WeChat powcoder

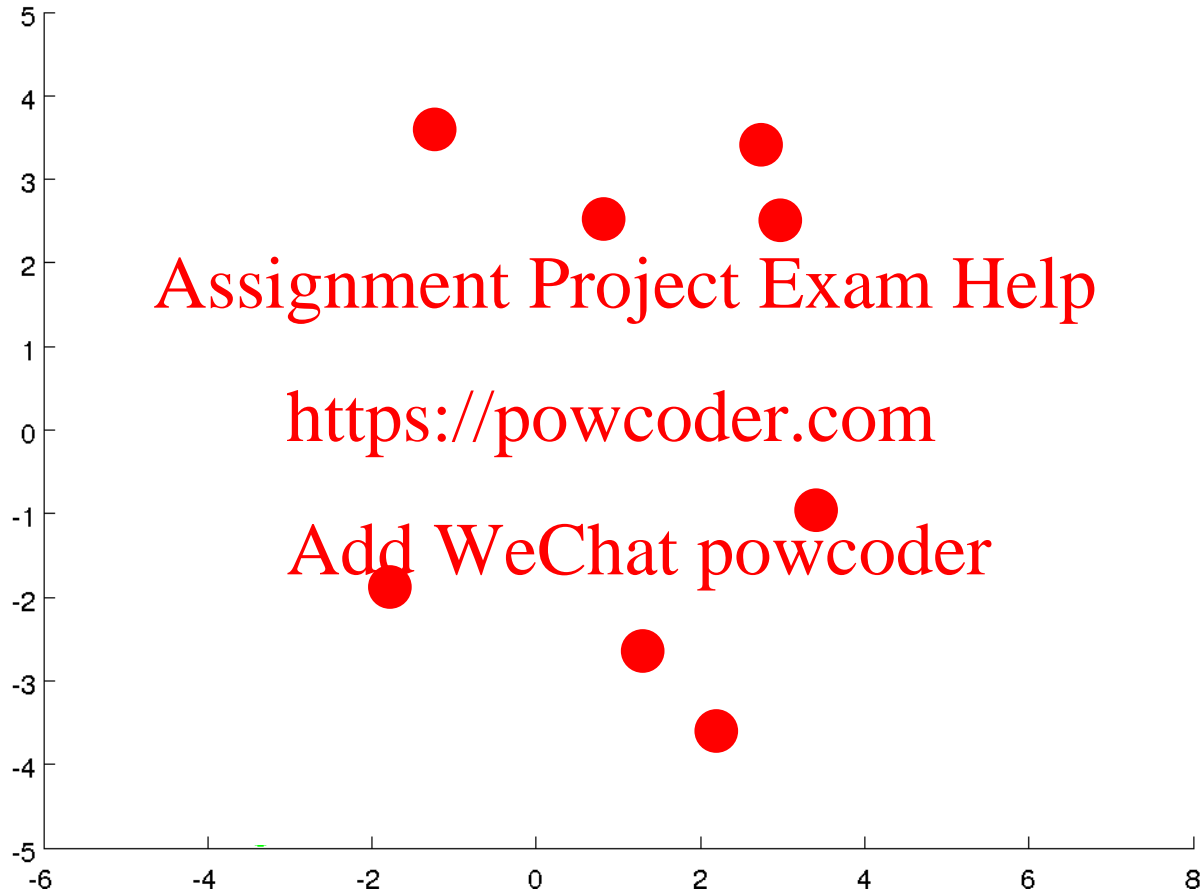

Agglomerative Clustering Example

(bottom-up clustering)

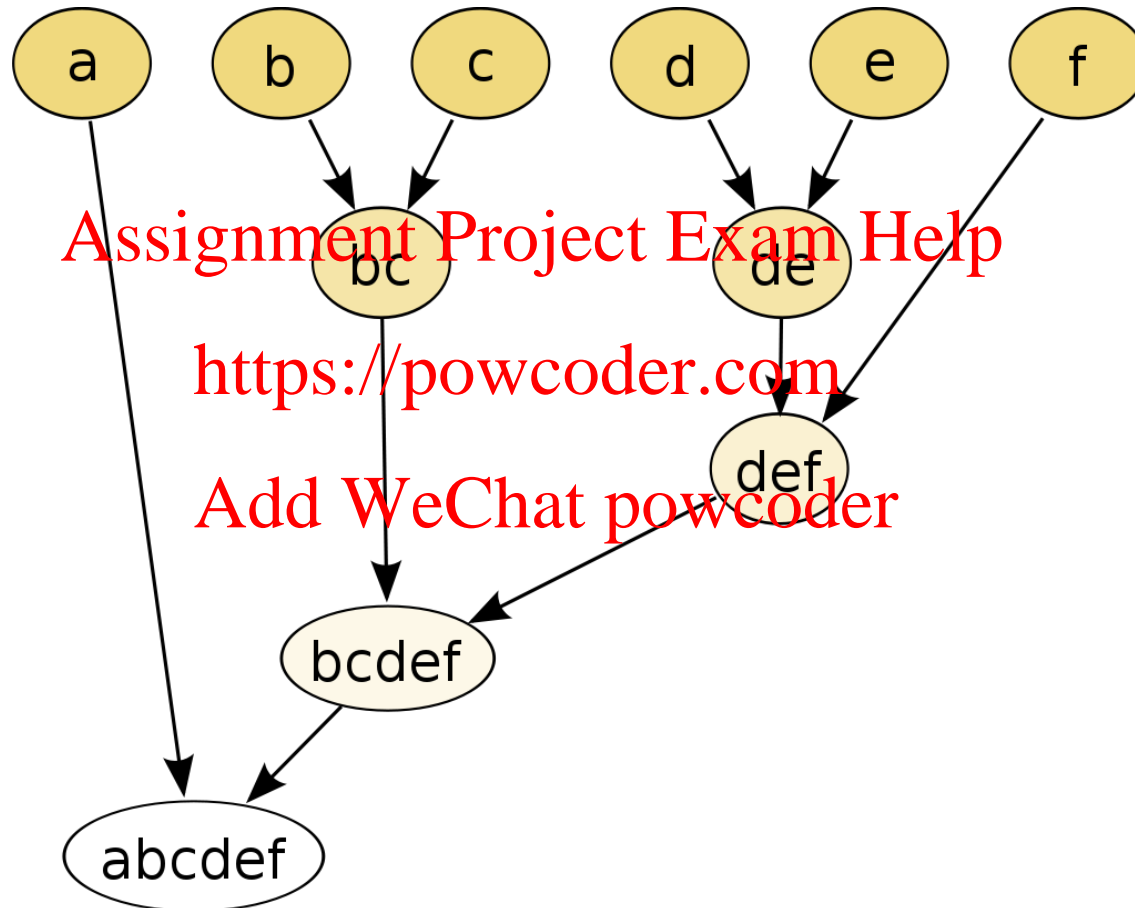


Image source: https://en.wikipedia.org/wiki/Hierarchical_clustering

When do we stop combining?


Add WeChat powcoder

- Select based on prior knowledge or task performance (e.g. you know there are two categories of data)

Assignment Project Exam Help

<https://powcoder.com>


Add WeChat powcoder

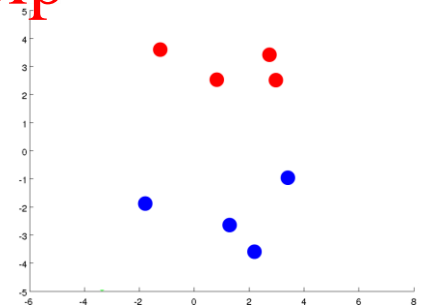

- Choose cost threshold to stop combining

Assignment Project Exam Help

Add WeChat powcoder

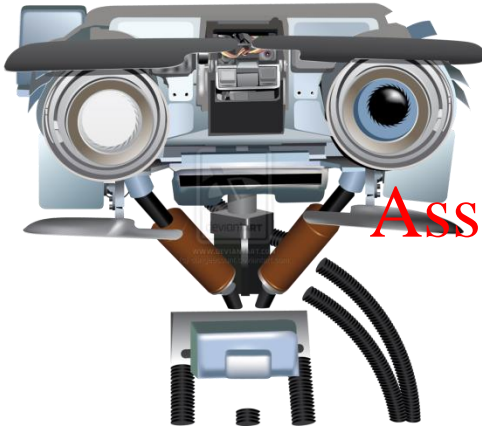

Assignment Project Exam Help

Unsupervised Learning II

Add WeChat powcoder

Continuous Latent Variables

Assignment Project Exam Help

Today

Add WeChat powcoder

- **Applications of clustering:** vector quantization, data compression

Assignment Project Exam Help


<https://powcoder.com>

- **Continuous latent variables:** principal component analysis

Add WeChat powcoder

Assignment Project Exam Help

Add WeChat powcoder

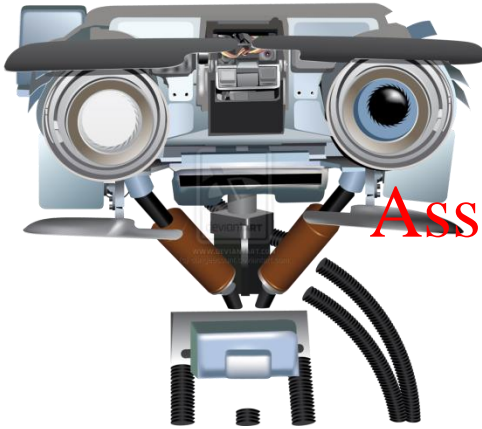

Assignment Project Exam Help Unsupervised Learning II

<https://powcoder.com>

Add WeChat powcoder
Applications of Clustering

Assignment Project Exam Help

Application of Clustering:

Add WeChat powcoder

Vector Quantization

Original image

$K = 3$



$$x^{(i)} = \begin{bmatrix} 138 \\ 80 \\ 79 \end{bmatrix}$$

$$\rightarrow \mu_{c^i}$$

- Compress an image using clustering
- Each $\{R, G, B\}$ pixel value is an input vector $x^{(i)}$ (255 x 255 x 255 possible values)
- Cluster into K clusters (using k-means)
- Replace each vector by its cluster's index $c^{(i)}$ (K possible values)
- For display, show the mean μ_{c^i}

Assignment Project Exam Help

Vector quantization: color values

Add WeChat powcoder

Example: R, G, B vectors


... $\begin{bmatrix} 138 \\ 80 \\ 79 \end{bmatrix}$ $\begin{bmatrix} 155 \\ 64 \\ 65 \end{bmatrix}$ $\begin{bmatrix} 156 \\ 76 \\ 76 \end{bmatrix}$...



Assignment Project Exam Help


<https://powcoder.com>

Add WeChat powcoder

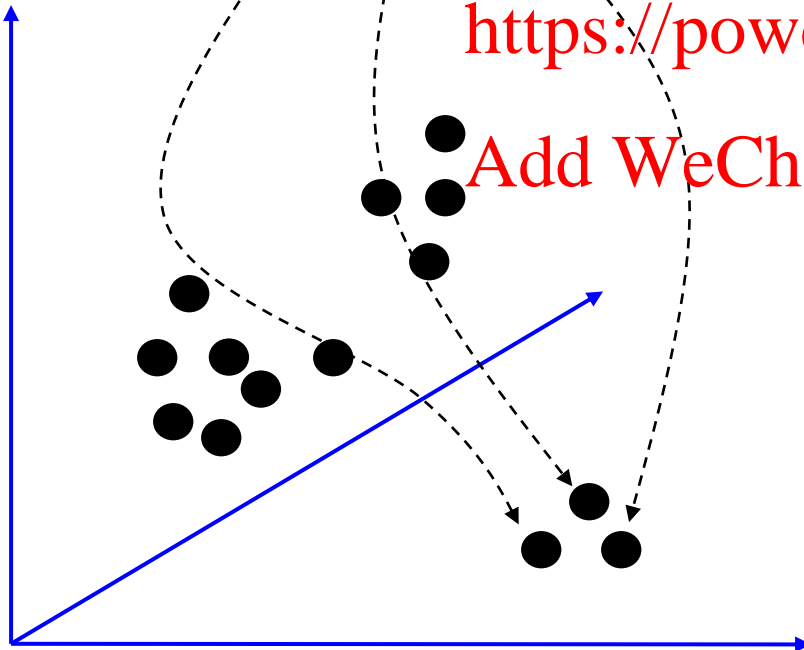

Vector quantization: color values


Add WeChat powcoder

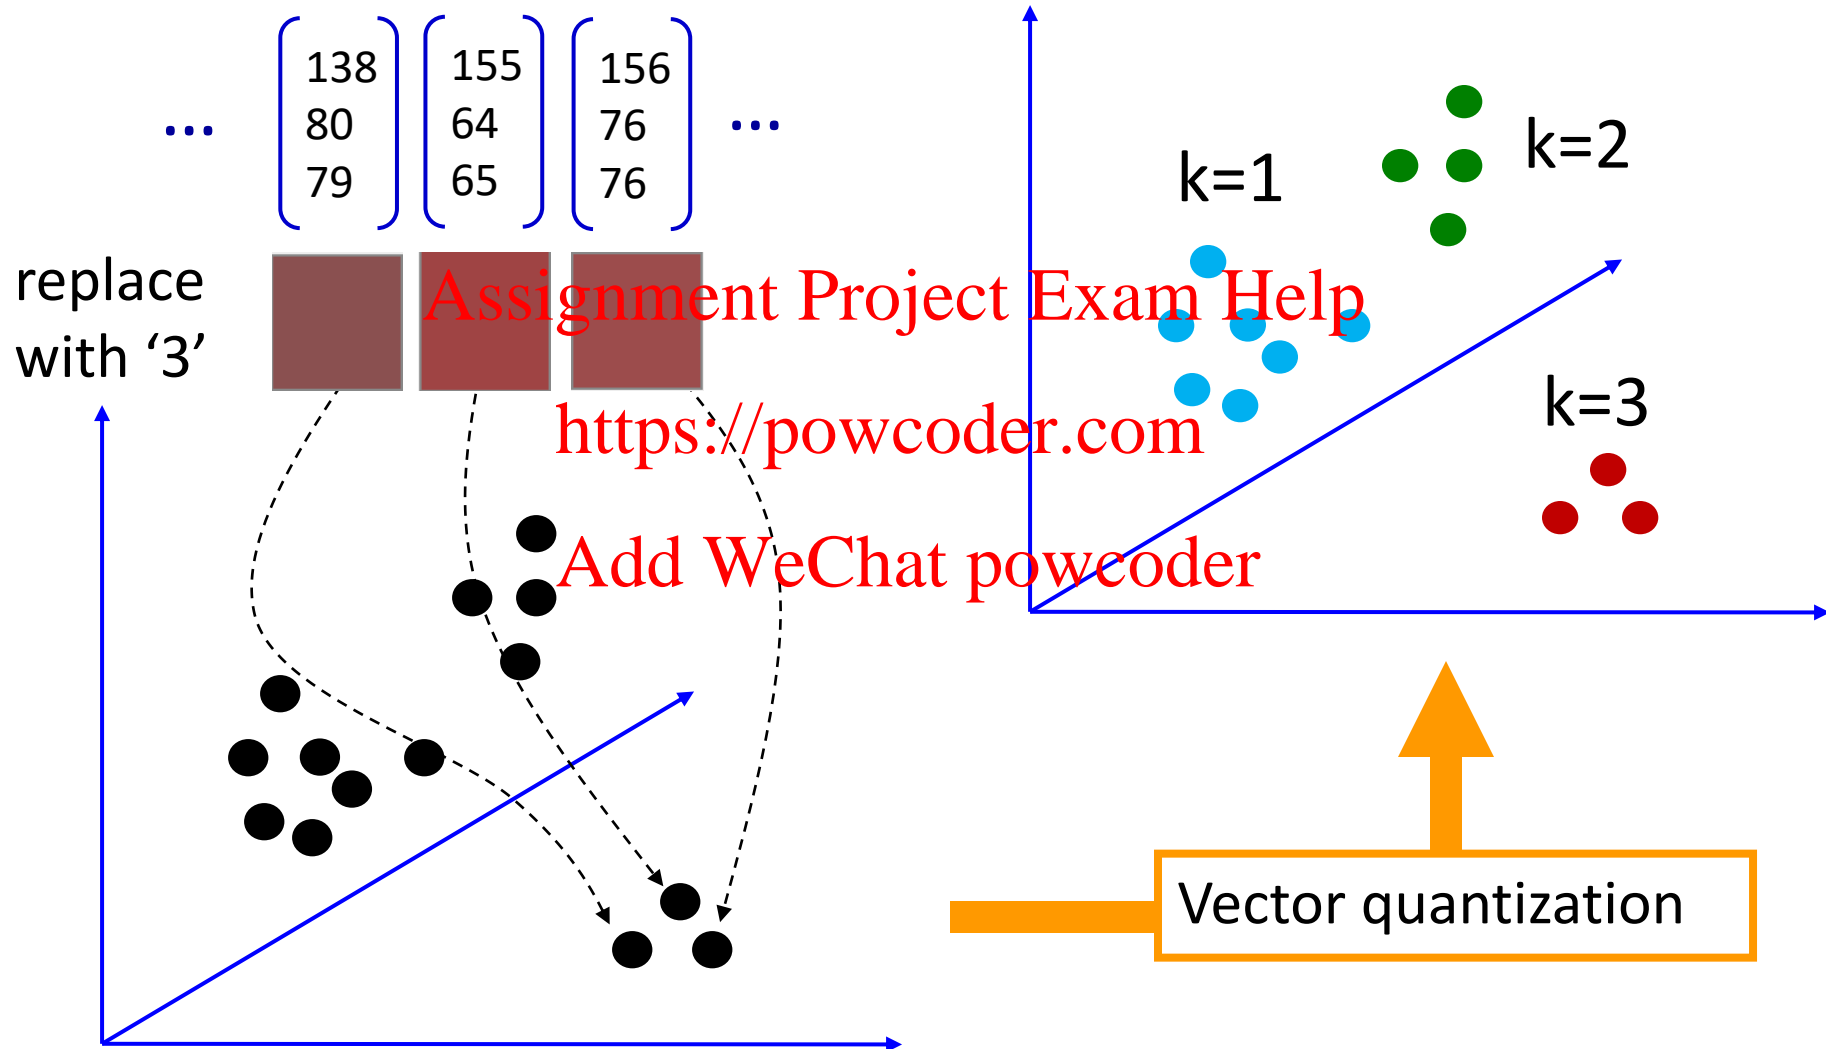

Assignment Project Exam Help

Vector quantization: general case


Add WeChat powcoder

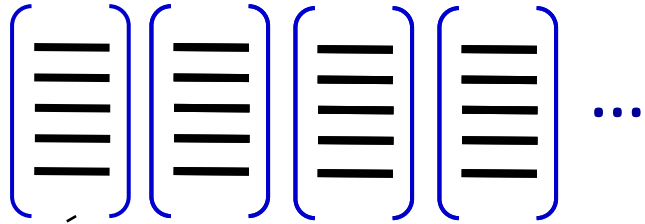

Assignment Project Exam Help

<https://powcoder.com>


Add WeChat powcoder

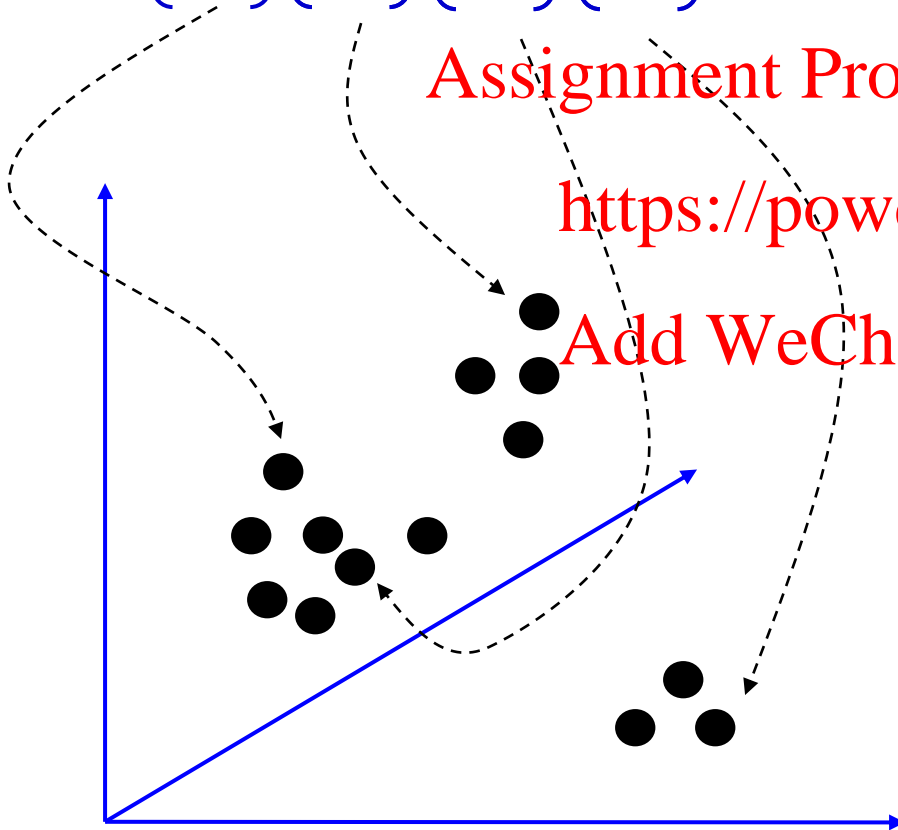

Assignment Project Exam Help

Vector quantization: general case



Add WeChat powcoder

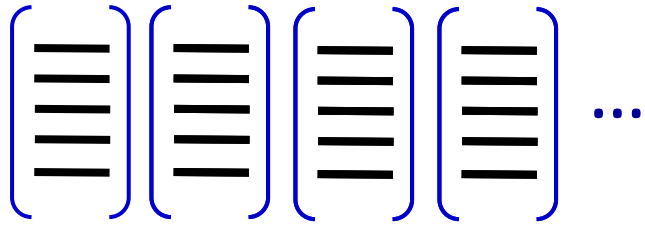

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

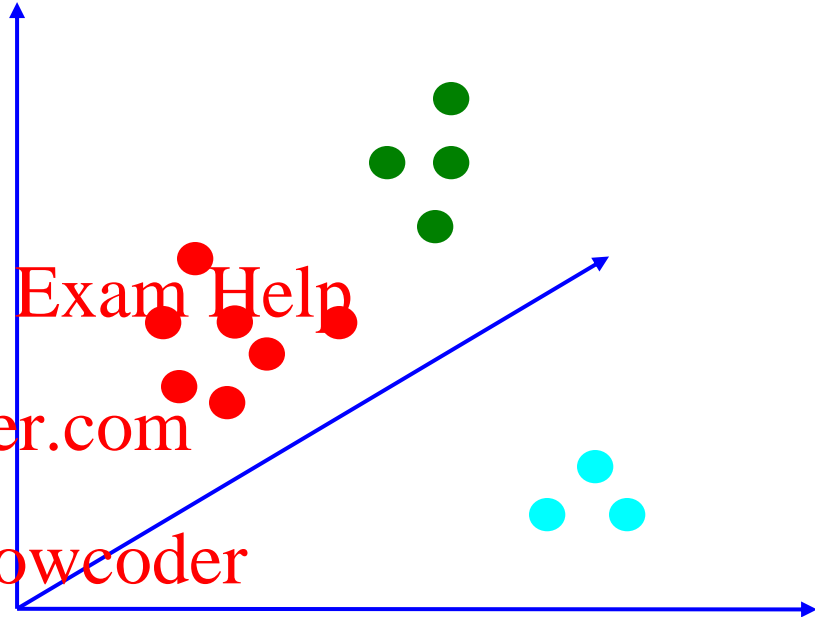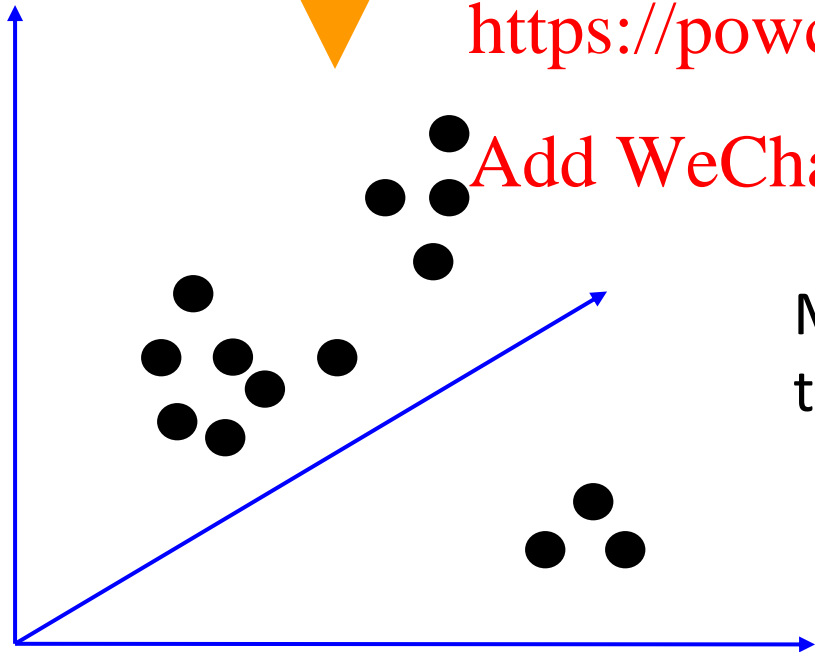

Map from N-dim
to 1-dim

Vector quantization

Assignment Project Exam Help

K-Means for Image Compression


Add WeChat powcoder



Figure 9.3 Two examples of the application of the K -means clustering algorithm to image segmentation showing the initial images together with their K -means segmentations obtained using various values of K . This also illustrates of the use of vector quantization for data compression, in which smaller values of K give higher compression at the expense of poorer image quality.

Assignment Project Exam Help

Add WeChat powcoder

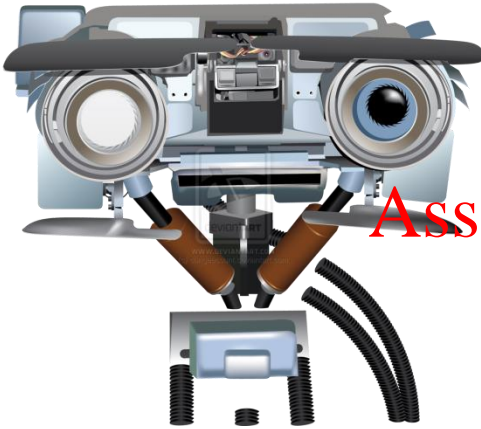

Assignment Project Exam Help

Unsupervised Learning II

<https://powcoder.com>


Add WeChat powcoder

Continuous Latent Variables

Assignment Project Exam Help

Add WeChat powcoder


Data Compression

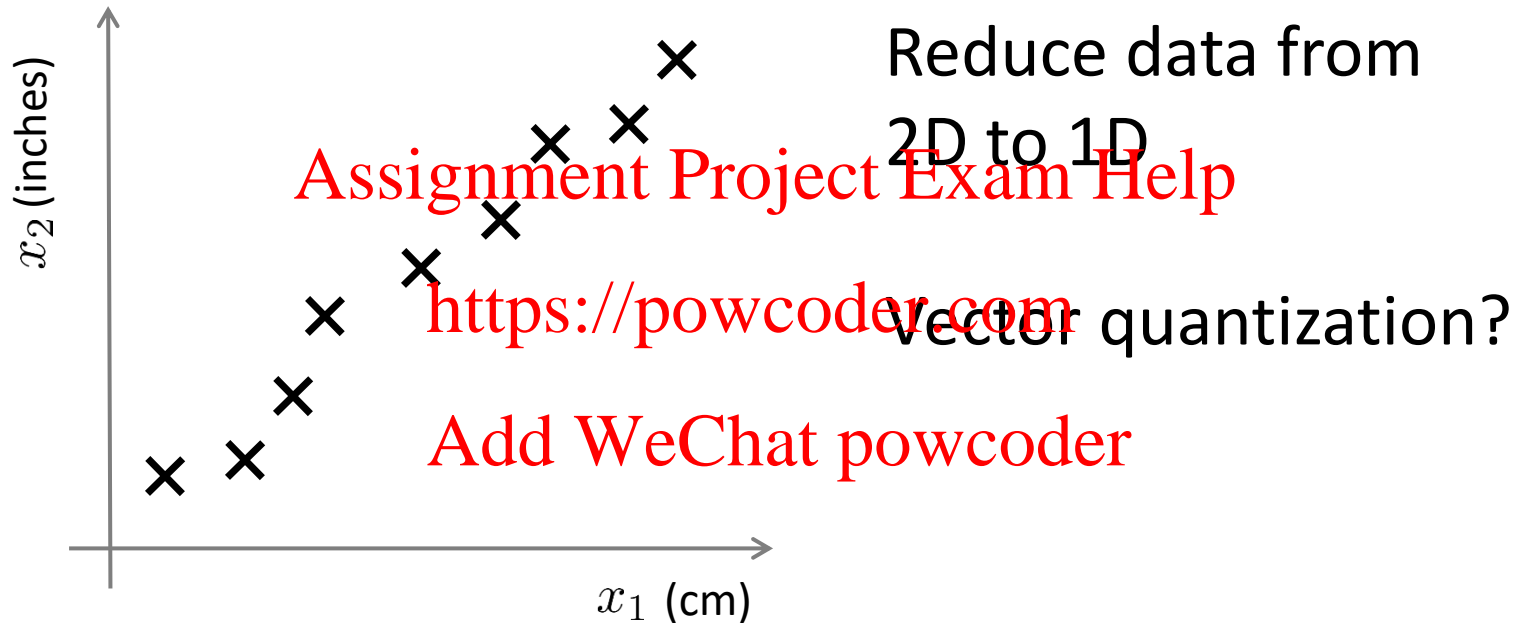

Assignment Project Exam Help

Add WeChat powcoder

Data Compression: hidden dimension

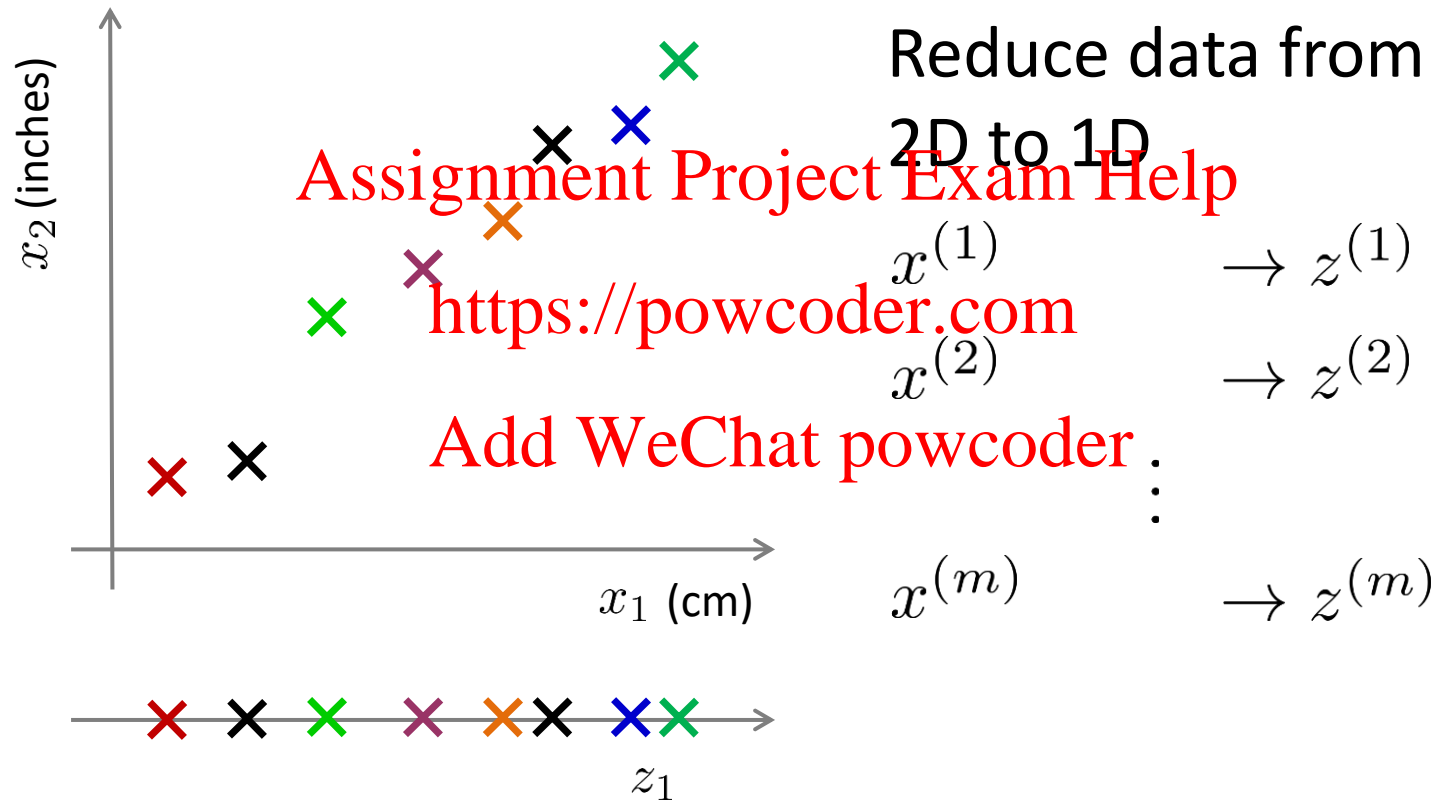


Assignment Project Exam Help

Add WeChat powcoder

Data Compression

Reduce data from 3D to 2D

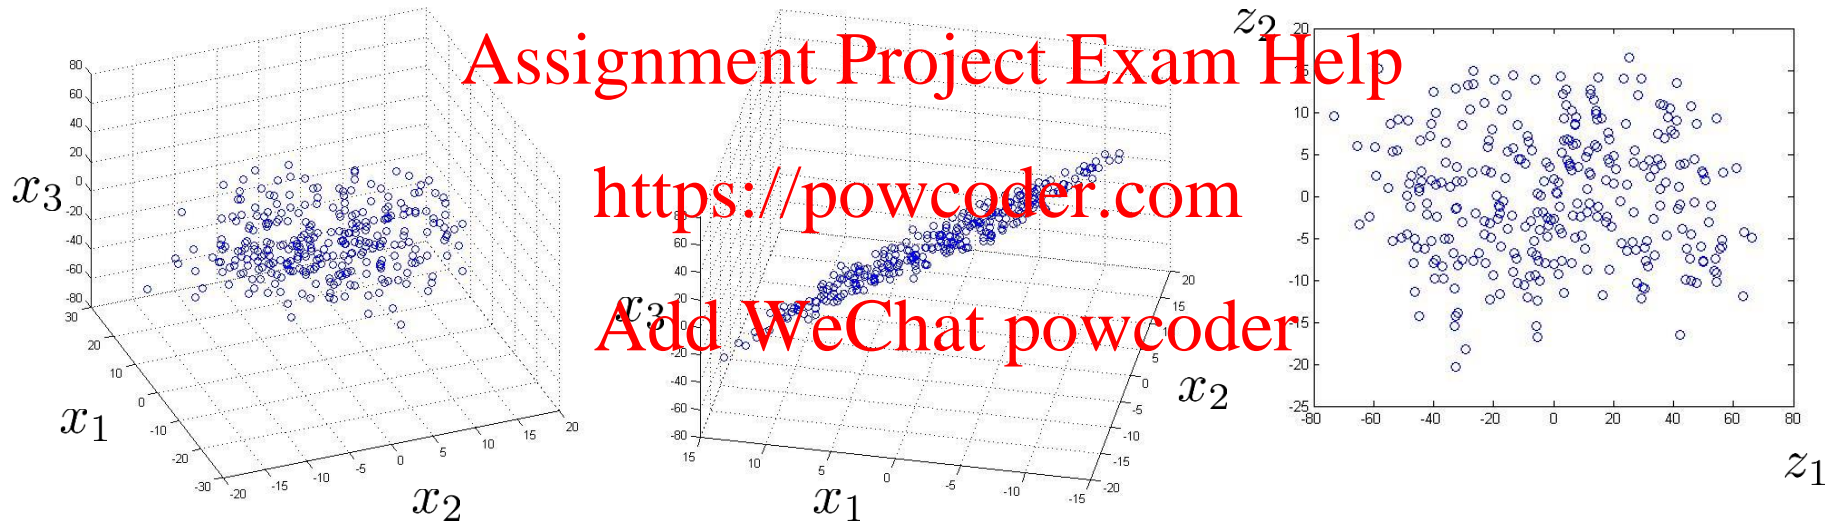

Assignment Project Exam Help

Add WeChat powcoder

Data Visualization

Country	GDP (trillions of US\$)	Per capita GDP (thousands of intl. \$)	Human Development Index	Life expectancy	Poverty Index (Gini as percentage)	Mean household income (thousands of US\$)	...
Canada	1.577	39.17	0.908	80.7	32.6	67.293	...
China	5.878	7.54	0.687	73	46.9	10.22	...
India	1.632	8.41	0.547	64.7	36.8	0.735	...
Russia	1.48	19.84	0.755	65.5	39.9	0.72	...
Singapore	0.223	56.69	0.866	80	42.5	67.1	...
USA	14.527	46.86	0.91	78.3	40.8	84.3	...
...

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

[resources from en.wikipedia.org]

Assignment Project Exam Help


Add WeChat powcoder

Data Visualization

Country	z_1	z_2
Canada	1.6	1.2
China	1.7	0.3
India	1.6	0.2
Russia	1.4	0.5
Singapore	0.5	1.7
USA	2	1.5
...

Assignment Project Exam Help


Data Visualization Add WeChat powcoder

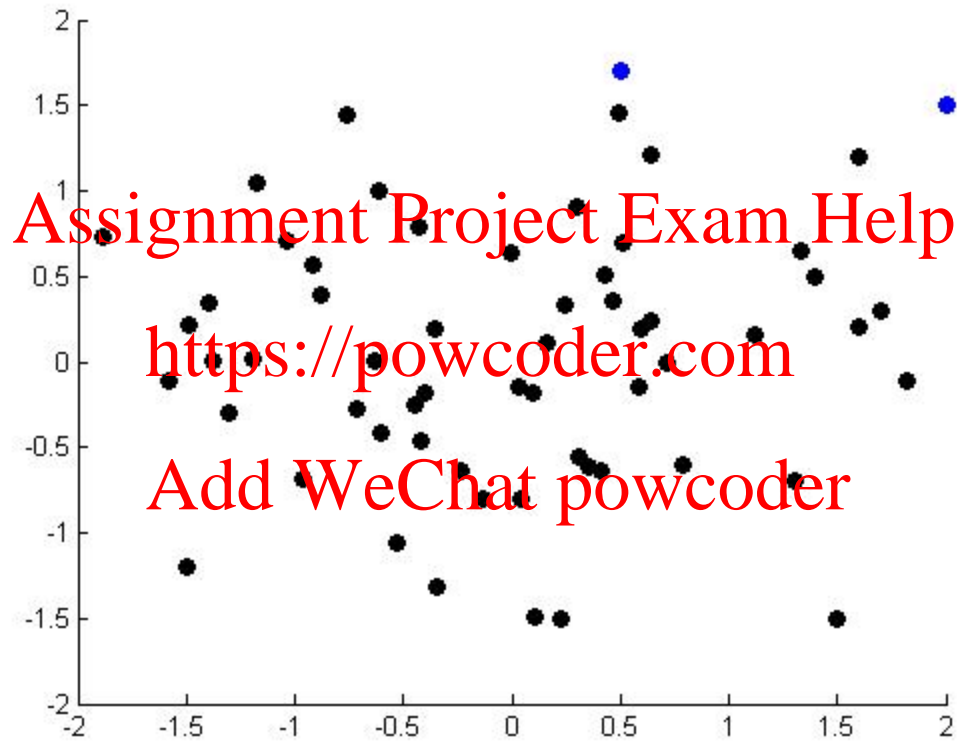

1

Assignment Project Exam Help

Add WeChat powcoder

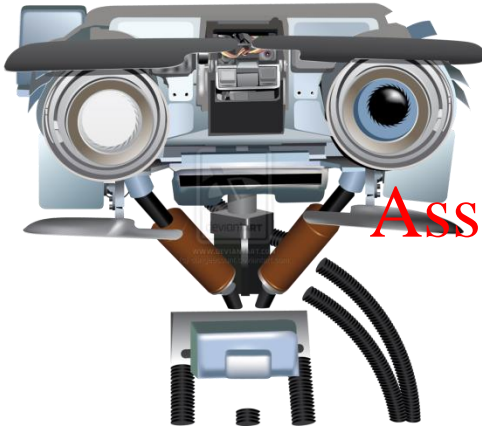

Assignment Project Exam Help

Unsupervised Learning II

<https://powcoder.com>


Add WeChat powcoder

Principal Component Analysis

Assignment Project Exam Help

How to choose lower-dim subspace?


Add WeChat powcoder

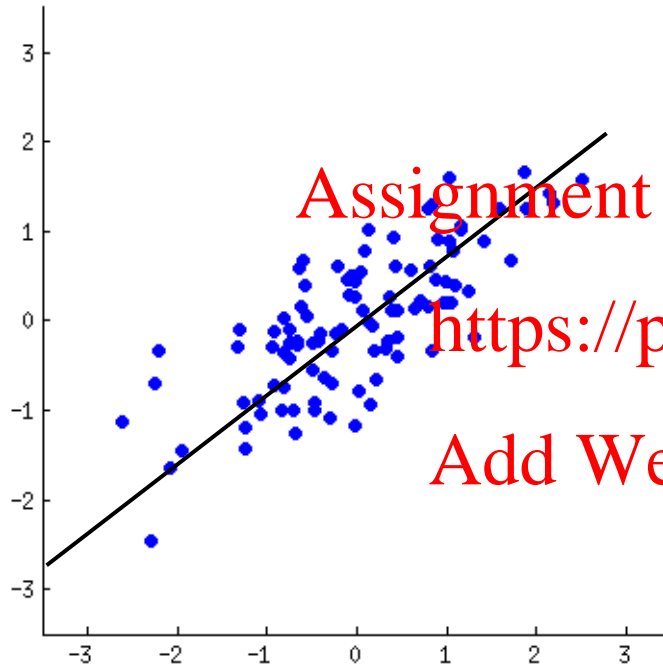

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

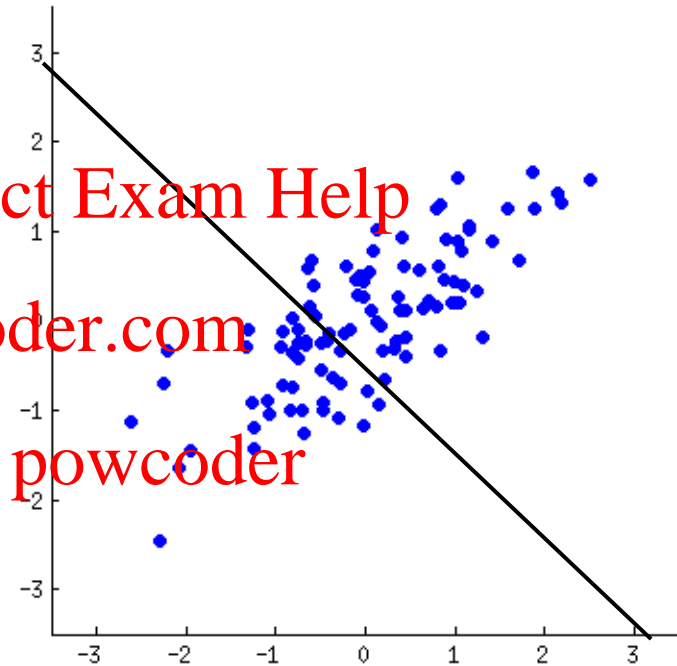


Assignment Project Exam Help

Minimize “error”

Assignment Project Exam Help

<https://powcoder.com>


Add WeChat powcoder

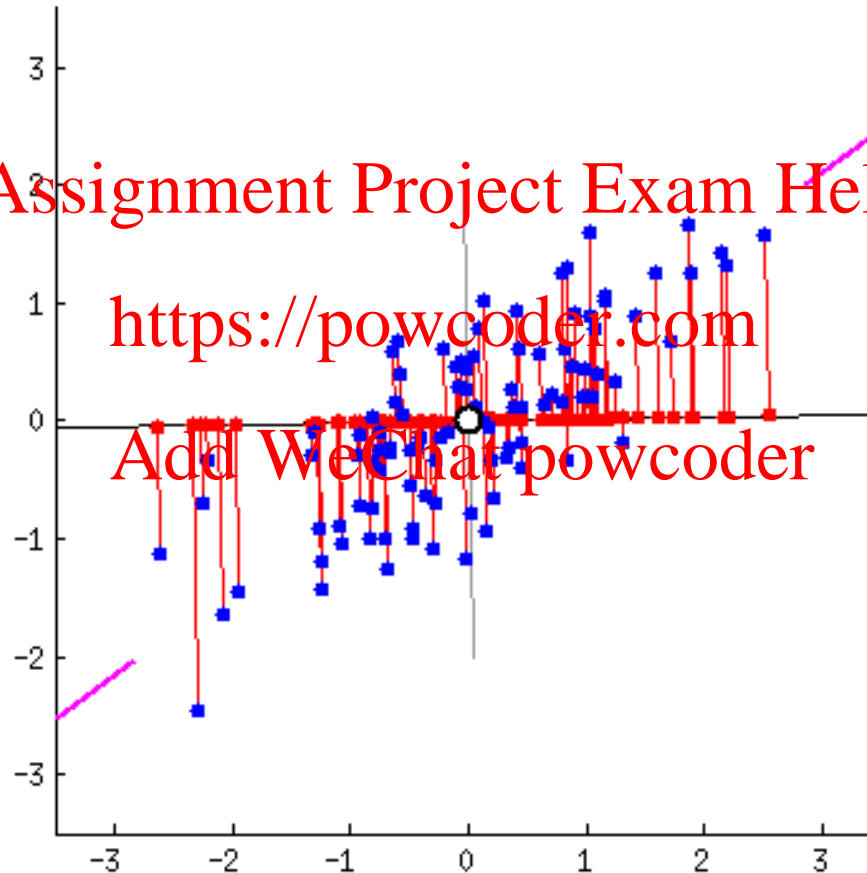

Assignment Project Exam Help

Choose subspace with minimal “information loss”

Add WeChat powcoder

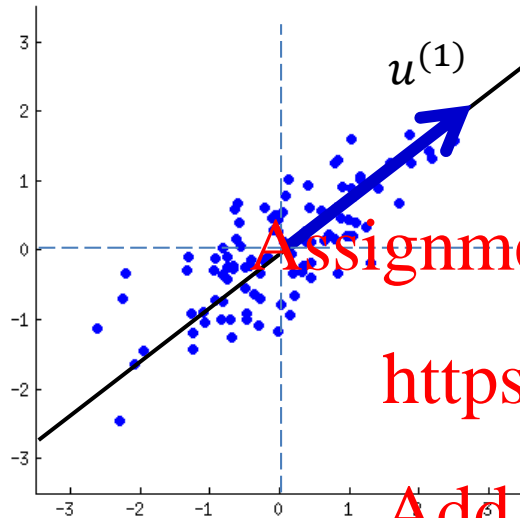

Assignment Project Exam Help

<https://powcoder.com>


Add WeChat powcoder

Reduce from 2-dimension to 1-dimension: Find a direction (a vector $u^{(1)}$) onto which to project the data, so as to minimize the projection error.

Assignment Project Exam Help

Choose subspace with minimal “information loss”

Add WeChat powcoder

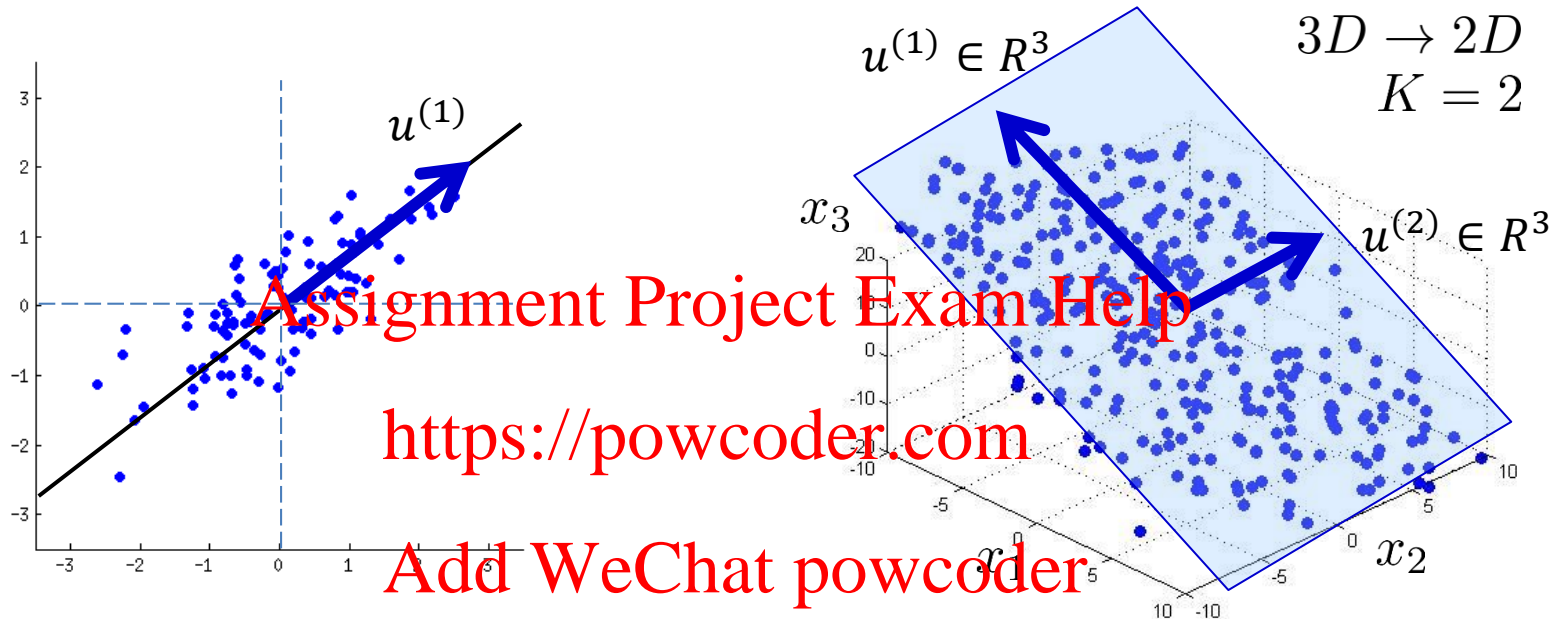

Reduce from 2-dimension to 1-dimension: Find a direction (a vector $u^{(1)}$) onto which to project the data, so as to minimize the projection error.

Reduce from n-dimension to K-dimension: Find K vectors $u^{(1)}, u^{(2)}, \dots, u^{(K)}$ onto which to project the data so as to minimize the projection error.

Principal Components Analysis

Assignment Project Exam Help

Add WeChat powcoder

Find orthonormal basis vectors


$$U = [u^{(1)} \quad \dots \quad u^{(K)}], \text{ where } K \ll n$$

$$z = U^T x, \quad z_k = u^{(k)T} x$$


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

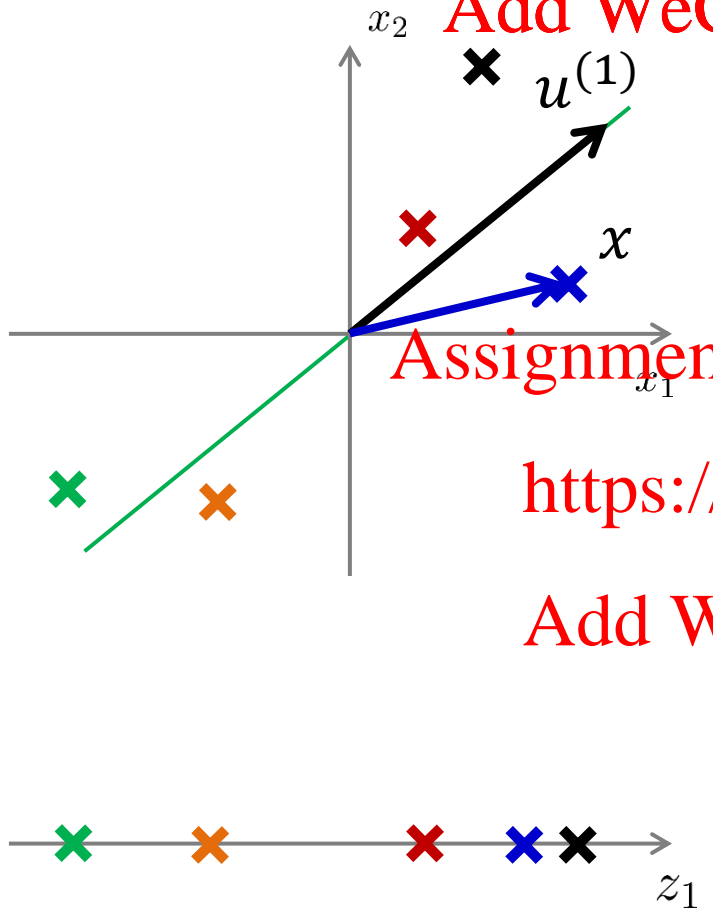

Principal Components Analysis

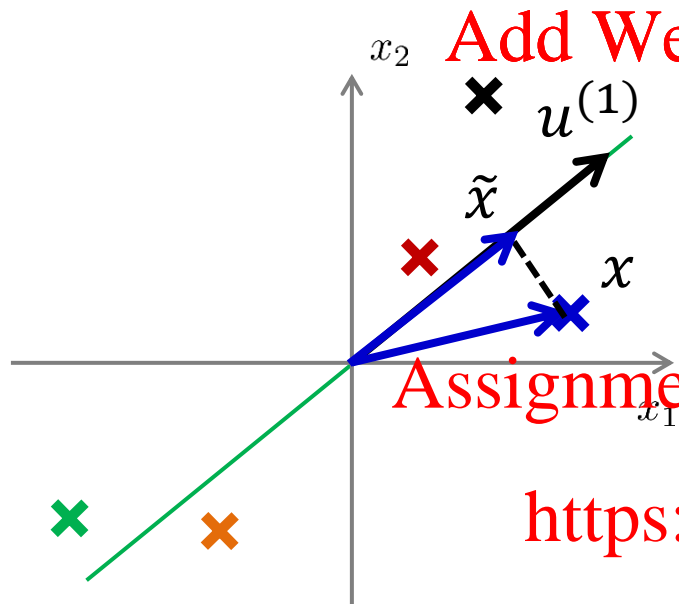

Add WeChat powcoder

Find orthonormal basis vectors

$$U = [u^{(1)} \quad \dots \quad u^{(K)}], \text{ where } K \ll n$$

$$z = U^T x, \quad z_k = u^{(k)T} x$$

Assignment Project Exam Help

Reconstructed data point

<https://powcoder.com>

$$\tilde{x} = \sum_{k=1}^K z_k u^{(k)}$$

Add WeChat powcoder

Cost function: reconstruction error



$$J = \frac{1}{m} \sum_{i=1}^m \|\tilde{x}^i - x^i\|^2$$

Want: $\min_U J$

Assignment Project Exam Help

PCA Solution

Add WeChat powcoder

- The solution turns out to be the first K eigenvectors of the data covariance matrix (see Bishop 12.1 for details)

Assignment Project Exam Help

- Closed-form, use Singular Value Decomposition (SVD) on covariance matrix

<https://powcoder.com>

Add WeChat powcoder

- Other PCA formulations
 - can derive via maximizing variance of projected data
 - probabilistic formulation of PCA possible, or the similar *factor analysis*, see Bishop 8.1.4

PCA Algorithm

Normalize features (ensure every feature has zero mean) and optionally scale feature

Compute “covariance matrix” Σ :

$$\text{Sigma} = \frac{1}{m} \sum_{i=1}^m (x^{(i)} - \bar{x})(x^{(i)} - \bar{x})^T$$

Compute its “eigenvectors”:

$$[U, S, V] = \text{svd}(\text{Sigma}); \quad U = \begin{bmatrix} | & | & & | \\ u^{(1)} & u^{(2)} & \dots & u^{(n)} \\ | & | & & | \end{bmatrix} \in \mathbb{R}^{n \times n}$$

Keep first K eigenvectors and project to get new features \mathbf{z}

```
Ureduce = U(:, 1:K);  
z = Ureduce' * x;
```

PCA Algorithm

Add WeChat powcoder

Data preprocessing

Training set: $x^{(1)}, x^{(2)}, \dots, x^{(m)}$

Preprocessing (feature scaling/mean normalization):

$$\mu_j = \frac{1}{m} \sum_{i=1}^m x_j^{(i)}$$

<https://powcoder.com>


Replace each $x_j^{(i)}$ with $x_j - \mu_j$.

If different features on different scales (e.g., x_1 = size of house, x_2 = number of bedrooms), scale features to have comparable range of values.

Assignment Project Exam Help

PCA is not linear regression

- There is no “output” in PCA, all dimensions are equal

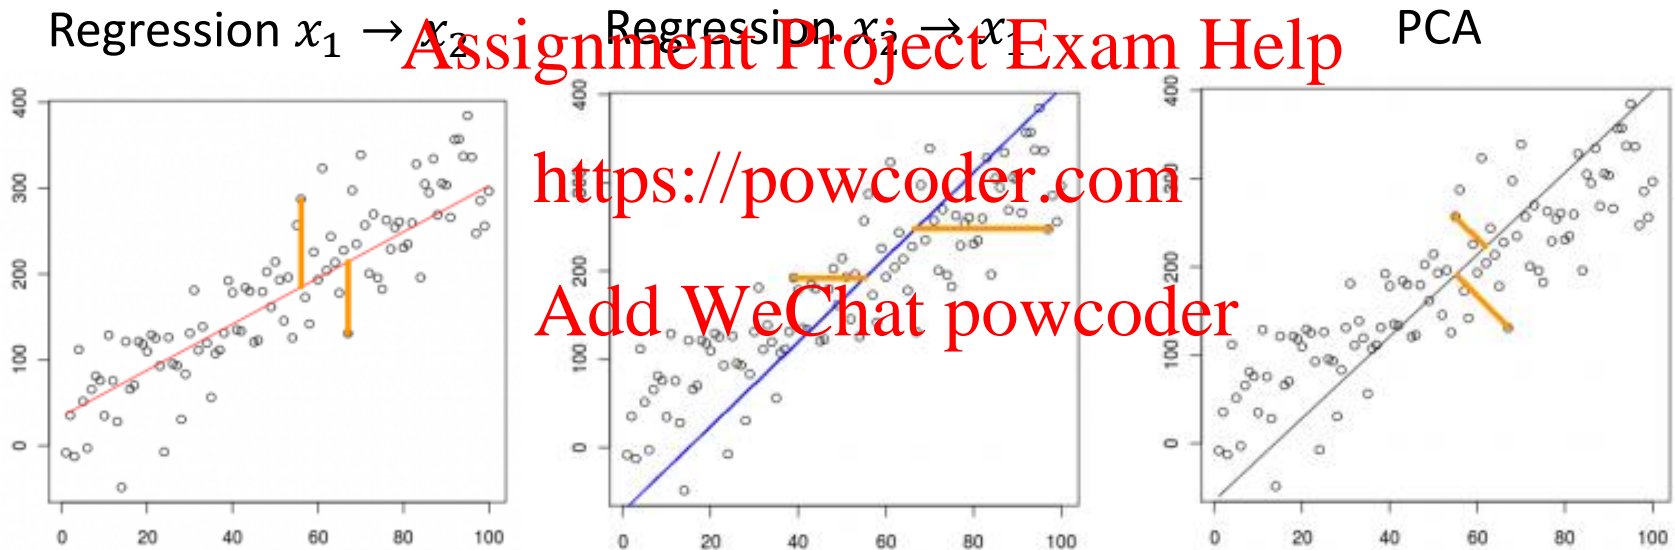

Assignment Project Exam Help

Add WeChat powcoder

Choosing k (number of principal components)

Average squared projection error:

Total variation in the data:

Assignment Project Exam Help

Typically, choose k to be smallest value so that

$$\frac{\frac{1}{m} \sum_{i=1}^m \|x^{(i)} - x_{approx}\|^2}{\frac{1}{m} \sum_{i=1}^m \|x^{(i)}\|^2} \leq 0.01 \quad (1\%)$$

<https://powcoder.com>

Add WeChat powcoder

“99% of variance is retained”

Assignment Project Exam Help

Add WeChat powcoder

Choosing k (number of principal components)

`[U,S,V] = svd(Sigma)`

Pick smallest value of k for which

$$\frac{\sum_{i=1}^k S_{ii}}{\sum_{i=1}^m S_{ii}} \geq 0.99$$

Assignment Project Exam Help

<https://powcoder.com>

(99% of variance retained)

Add WeChat powcoder

Assignment Project Exam Help

Add WeChat powcoder

Good use of PCA

- Compression
 - Reduce memory/disk needed to store data
 - Speed up learning algorithm

Add WeChat powcoder

- Visualization

Assignment Project Exam Help

Add WeChat powcoder

Bad use of PCA: To prevent overfitting

Use $z^{(i)}$ instead of $x^{(i)}$ to reduce the number of features to $k < n$.

Thus, fewer features, less likely to overfit.

<https://powcoder.com>


This might work OK, but isn't a good way to address overfitting. Use regularization instead.

$$\min_{\theta} \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2 + \frac{\lambda}{2m} \sum_{j=1}^n \theta_j^2$$

Assignment Project Exam Help

When does PCA fail?

Add WeChat powcoder

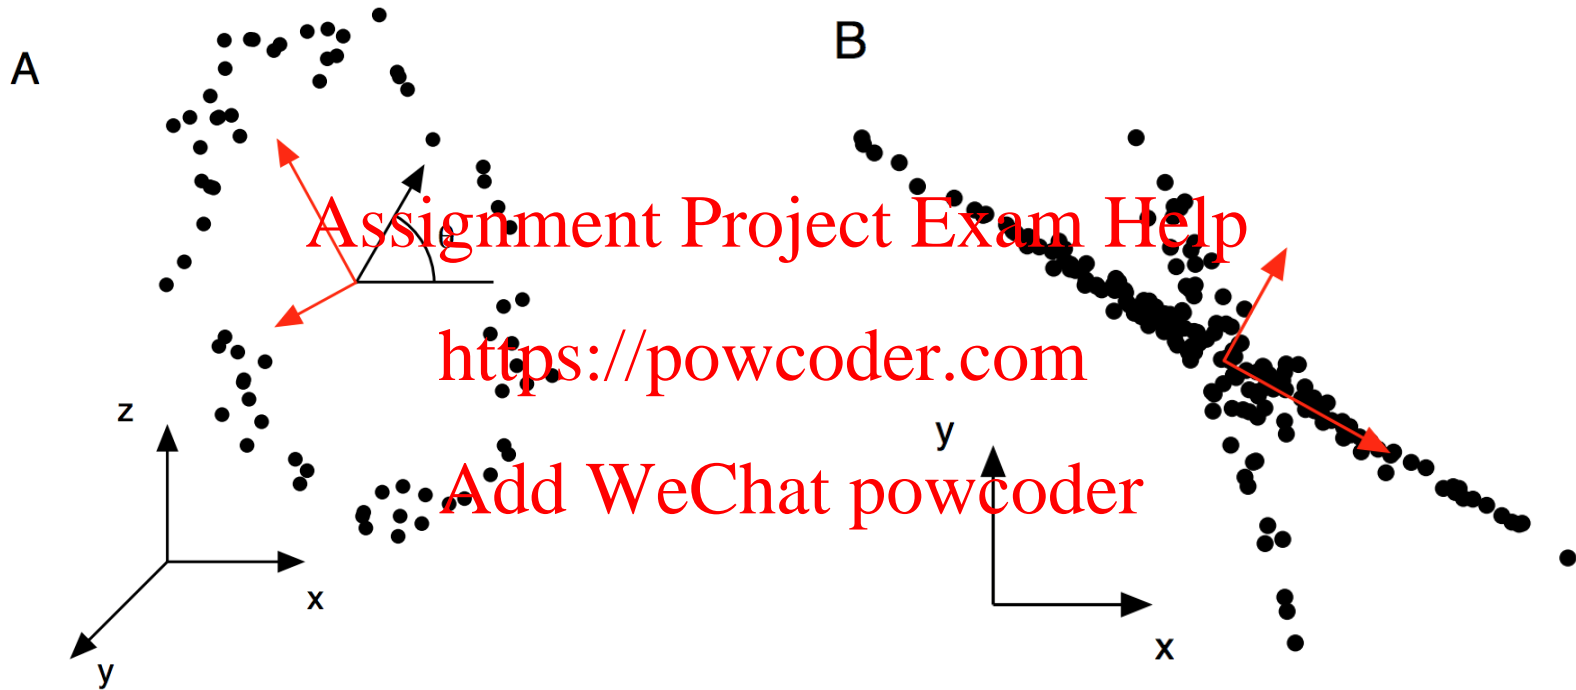

(a) Tracking a person on a ferris wheel (black dots). All dynamics can be described by the phase of the wheel θ , a non-linear combination of the naïve basis.

(b) Non-Gaussian distributed data and non-orthogonal axes cause PCA to fail. The axes with the largest variance do not correspond to the appropriate answer.

Assignment Project Exam Help

Next Class

Add WeChat powcoder

Neural Networks I: Feed-forward Nets:

artificial neuron, MLP, sigmoid units;
neuroscience inspiration; output vs hidden
layers; linear vs nonlinear networks; feed-
forward neural networks

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Reading: Bishop 5.1-5.3