

Assignment Project Exam Help

<https://powcoder.com>

Normal Forms: BCNF and 3NF
Decompositions

CS430/630
Lecture 17

Decomposition of a Relation Schema

- ▶ A decomposition of R replaces it by two or more relations
 - ▶ Each new relation schema contains a subset of the attributes of R
 - ▶ Every attribute of R appears in one of the new relations
 - ▶ E.g., SNLRVW decomposed into SNLRH and RVW
- ▶ Decompositions should be used only when needed
 - ▶ Cost of join will be incurred at query time
- ▶ Problems may arise with (improper) decompositions
 - ▶ Reconstruction of initial relation may not be possible
 - ▶ Dependencies cannot be checked on smaller tables

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



Lossless Join Decompositions

- ▶ Decomposition of R into X and Y is lossless-join if:

- ▶ $\pi_X(r) \bowtie \pi_Y(r) = r$

- ▶ It is always true that $r \subseteq \pi_X(r) \bowtie \pi_Y(r)$

- ▶ In general, the other direction does not hold!
 - ▶ If it does, the decomposition is lossless-join.


Add WeChat powcoder

- ▶ *It is essential that all decompositions used to deal with redundancy be lossless!*




Incorrect Decomposition

A	B	C
1	2	3
4	5	6
7	2	8



A	B
1	2
4	5
7	2

B	C
2	3
5	6
2	8



A	B	C
1	2	3
4	5	6
7	2	8
1	2	8
7	2	3

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Natural
Join

Condition for Lossless-join

- ▶ The decomposition of R into X and Y is **lossless-join wrt F if and only if** the closure of F contains:
 - ▶ $X \cap Y \rightarrow X$, or
 - ▶ $X \cap Y \rightarrow Y$
- ▶ In particular, the decomposition of R into UV and R - V is lossless-join if $U \rightarrow V$ holds over R.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Dependency Preserving Decomposition

- ▶ Consider CSJDPQV, C is key, $JP \rightarrow C$ and $SD \rightarrow P$.
 - ▶ Consider decomposition: CSJDQV and SDP
 - ▶ Problem: Checking $JP \rightarrow C$ requires a join!
- ▶ **Assignment Project Exam Help**
Dependency preserving decomposition (Intuitive):
 - ▶ If R is decomposed into X and Y , and we enforce the FDs that hold on X, Y then all FDs that were given to hold on R must also hold
- ▶ **Projection of set of FDs F :** If R is decomposed into X, \dots projection of F onto X (denoted F_X) is the set of FDs $U \rightarrow V$ in F^+ (closure of F) such that U, V are in X .



Dependency Preserving Decompositions

- ▶ Decomposition of R into X and Y is dependency preserving if $(F_X \cup F_Y)^+ = F^+$
 - ▶ Dependencies that can be checked in X without considering Y, and in Y without considering X, together represent all dependencies in F^+

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

- ▶ Dependency preserving does not imply lossless join:
 - ▶ ABC, $A \rightarrow B$, decomposed into AB and BC.



Normal Forms

- ▶ If a relation is in a certain *normal form* (BCNF, 3NF etc.), it is known that certain kinds of problems are avoided/minimized.

Assignment Project Exam Help

- ▶ Role of FDs in detecting redundancy:

- ▶ Consider a relation R with attributes AB

- ▶ No FDs hold: There is no redundancy

- ▶ Given $A \rightarrow B$:

- ☐ Several tuples could have the same A value
- ☐ If so, they'll all have the same B value!

<https://powcoder.com>
Add WeChat powcoder

Boyce-Codd Normal Form (BCNF)

- ▶ Relation R with FDs F is in **BCNF** if, for all $X \rightarrow A$ in F^+
 - ▶ $A \subseteq X$ (called a *trivial* FD), or
 - ▶ X contains a key for R
- ▶ The only non-trivial FDs allowed are key constraints
- ▶ BCNF guarantees no anomalies occur

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



Decomposition into BCNF

- ▶ Consider relation R with FDs F. If $X \rightarrow Y$ violates BCNF, decompose R into R - Y and XY.
- ▶ Repeated application of this idea will give us a collection of relations that are in BCNF, lossless join decomposition, and guaranteed to terminate.
- ▶ e.g., CSJDPQV, key C, $JP \rightarrow C$, $SD \rightarrow P$, $J \rightarrow S$
- ▶ To deal with $SD \rightarrow P$, decompose into SDP, CSJDQV.
- ▶ To deal with $J \rightarrow S$, decompose CSJDQV into JS and CJDQV


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



Decomposition into BCNF

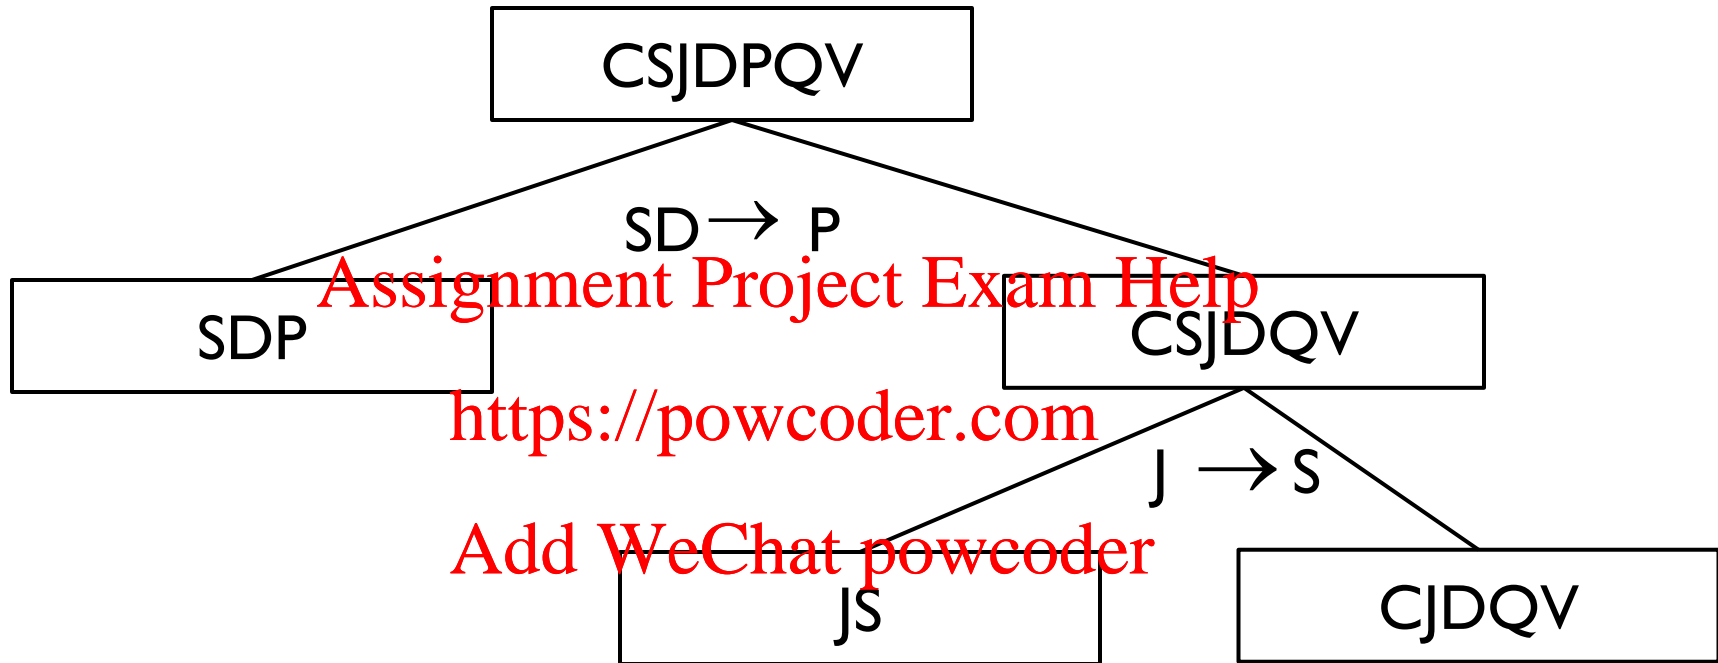

- ▶ In general, several dependencies may cause violation of BCNF. The order in which we “deal with” them could lead to very different sets of relations!
-

BCNF and Dependency Preservation

- ▶ In general, there may not be a dependency preserving decomposition into BCNF
 - ▶ e.g., \underline{ABC} , $AB \rightarrow C$, $C \rightarrow A$
 - ▶ Can't decompose while preserving first FD; not in BCNF

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



Third Normal Form (3NF)

- ▶ Relation R with FDs F is in **3NF** if, for all $X \rightarrow A$ in F^+
 - ▶ $A \in X$ (called a *trivial* FD), or
 - ▶ X contains a key for R , or
 - ▶ A is part of some key for R (A here is a single attribute)
- ▶ **Minimality** of a key is crucial in third condition above!
<https://powcoder.com>
- ▶ If R is in BCNF, it is also in 3NF.
- ▶ If R is in 3NF, some redundancy is possible
 - ▶ compromise used when BCNF not achievable
 - ▶ e.g., no “good” decomposition, or performance considerations
 - ▶ *Lossless-join, dependency-preserving decomposition of R into a collection of 3NF relations always possible.*



Decomposition into 3NF

- ▶ Lossless join decomposition algorithm also applies to 3NF
- ▶ To ensure dependency preservation, one idea:
 - ▶ If $X \rightarrow Y$ is not preserved, add relation XY
 - ▶ Refinement: Instead of the given set of FDs F , use a *minimal cover for F* <https://powcoder.com>
- ▶ Example: $\underline{CSJDPQV}, JP \rightarrow C, SD \rightarrow P, J \rightarrow S$
 - ▶ Choose $SD \rightarrow P$, result is SDP and $CSJDQV$
 - ▶ Choose $J \rightarrow S$, result is JS and $CJDQV$, all 3NF
 - ▶ Add CJP relation



Summary of Schema Refinement

- ▶ **BCNF: relation is free of FD redundancies**
 - ▶ Having only BCNF relations is desirable
 - ▶ If relation is not in BCNF, it can be decomposed to BCNF
 - ▶ Lossless join property guaranteed
 - ▶ But some FD may be lost
- ▶ **3NF is a relaxation of BCNF**
 - ▶ Guarantees both lossless join and FD preservation
- ▶ **Decompositions may lead to performance loss**
 - ▶ *performance requirements* must be considered when using decomposition

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

