
ER Model

Assignment Project Exam Help

CSC 343

<https://powcoder.com>

Winter 2021

Add WeChat powcoder

MICHAEL LIUT (MICHAEL.LIUT@UTORONTO.CA)

ILIR DEMI (ILIR.DEMI@UTORONTO.CA)

DEPARTMENT OF MATHEMATICAL AND COMPUTATIONAL SCIENCES
UNIVERSITY OF TORONTO MISSISSAUGA



UNIVERSITY OF
TORONTO
MISSISSAUGA



Overview of Database Design

Conceptual Designs

Assignment Project Exam Help

What are the **entities** and **relationships** in the enterprise?

<https://powcoder.com>

What information about these entities and relationships should we store in our database?

Add WeChat powcoder

What are the *integrity constraints* and *business rules* that hold?

i.e. We need to think about “Data Governance”

Purpose of Entity-Relationship (ER) Model



UNIVERSITY OF
TORONTO
MISSISSAUGA

Allows us to create a visual representation of the database schema design.

- These are called entity-relationship diagrams.
- This visual also allows us to depict some constraints imposed in our schema.

Add WeChat powcoder

Conversion of ER designs to relational database designs.

- This will come later!



Framework for ER Model

Design is a serious business! You are the architect of the database!

Assignment Project Exam Help

Business and management know they want/need a database, but they usually don't have sufficient background or expertise to tell you what they want in it.

<https://powcoder.com>

Add WeChat powcoder

Sketching the key components is a great way to view the hierarchal structure, as well as an efficient way to develop a “good” working database.



Entity Sets

Entity → a “thing” or object.

Assignment Project Exam Help

Entity Set → a collection of similar entities.

<https://powcoder.com>

- For those programmers out there; it's similar to a class in an OO language.
- Each entity set has a **key**.

Add WeChat powcoder

Attribute → property of an entity set.

- Attributes are simple values. e.g. int, char, or str, NOT struct, sets, etc...
- Each attribute has a **domain**.



ER Diagrams

Technicalities for drawing Diagrams (in this course):

- **Entity Set** → a rectangle.
- **Attribute** → an oval.
 - Requires a line to the oval, from the rectangle, representing its Entity Set.

This is an
attribute

<https://powcoder.com>

Add WeChat powcoder

NOTE: Notation varies! Some textbooks represent attributes within the (entity) rectangle.




Example

Entity Set **Beers** has two attributes.

1. name
2. manf (manufacturer).

Each **Beers** entity has values for these two attributes (**entities**).
e.g. (Bud, Anheuser-Busch)

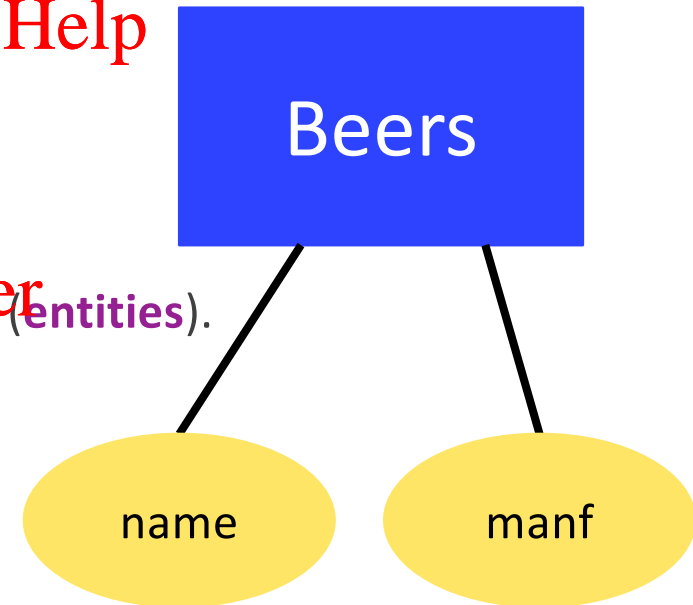



Relationships

A **relationship** is a connection between two or more entity sets.

Assignment Project Exam Help

It is represented by a diamond on an E/R diagram.


<https://powcoder.com>

- Lines connecting it to each of the entity sets involved is required.

Add WeChat powcoder



Example

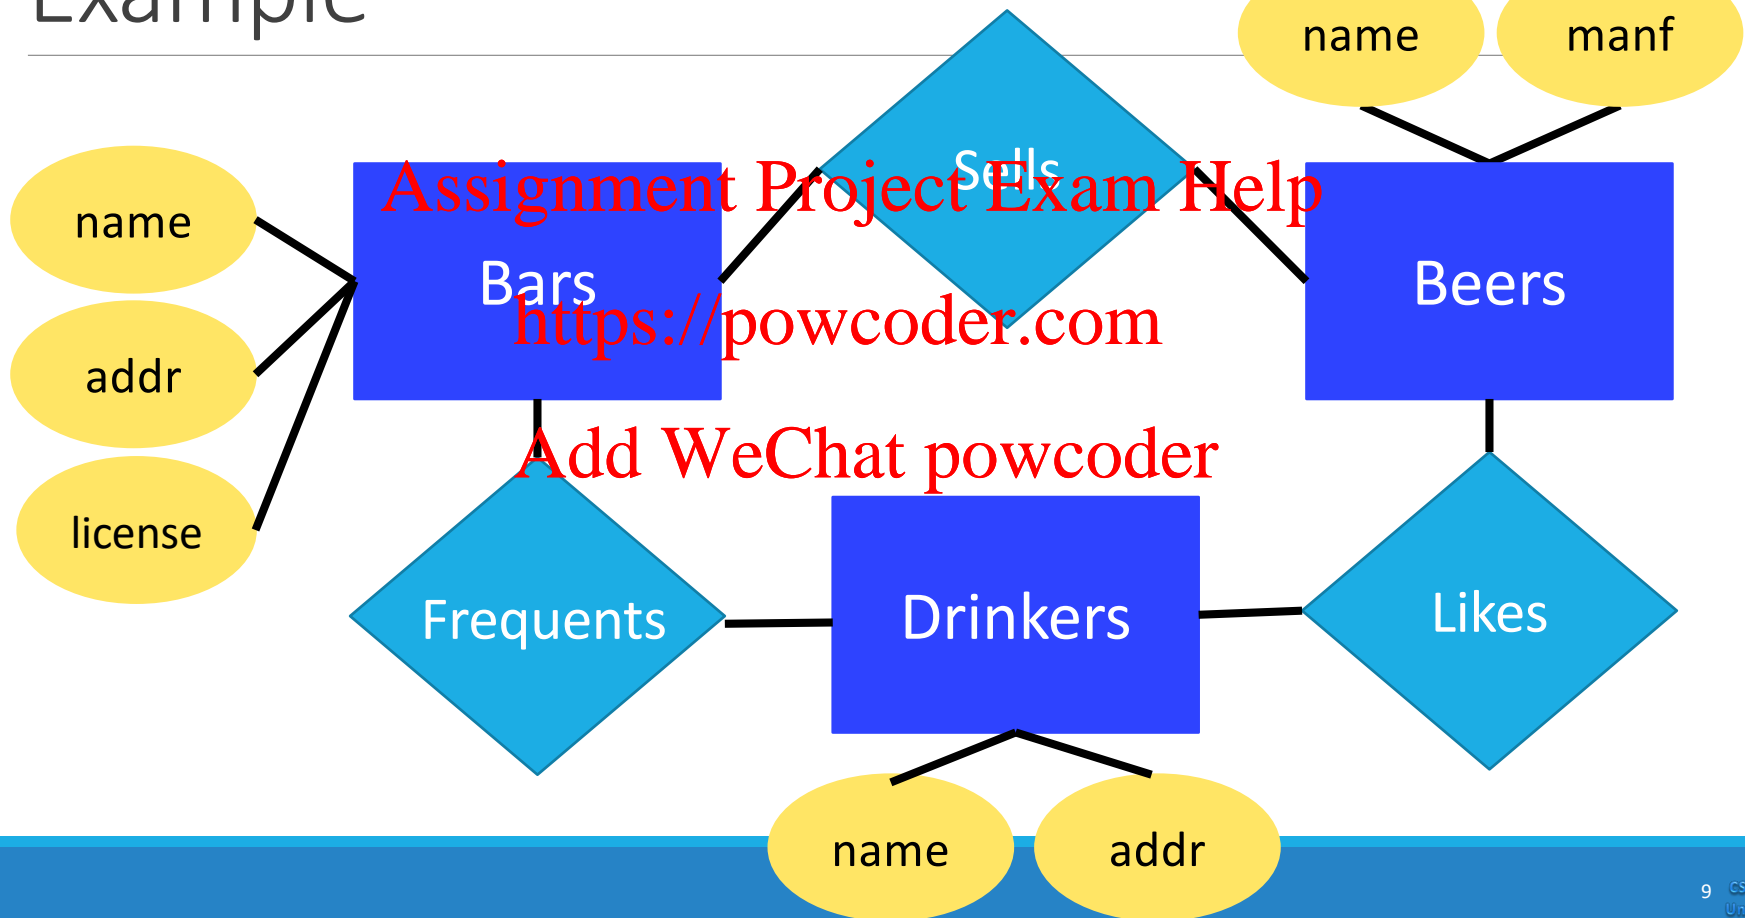



Relationship Set

The current “value” of an entity set is the set of entities that belong to it.
e.g. the set of all bars in our database.

The “value” of a relationship is a **relationship set**, a set of tuples with one component for each related entity set.

<https://powcoder.com>
Add WeChat powcoder

Formally:

An n -ary relationship set R relates n entity sets E_1, \dots, E_n ; where each relationship in R involves E_1, \dots, E_n .

- Same entity set could participate in different relationship sets, or different “roles” in same set.



Example

For the relationship *Sells*, we might have a relationship set like:

Bar	Beer
Joe's Bar	Canadian
Joe's Bar	Stella
Joe's Bar	Miller
Tammy's Bar	Canadian
Tammy's Bar	Corona



Multi-way Relationships

Sometimes, we need a relationship that connects more than two entity sets.

Assignment Project Exam Help

<https://powcoder.com>


Suppose that **Drinkers** will only drink certain **Beers** at certain **Bars**.

Add WeChat powcoder

- Our three binary relationships **Likes**, **Sells**, and **Frequents** do not allow us to make this distinction.
- But a 3-way relationship would.



Example

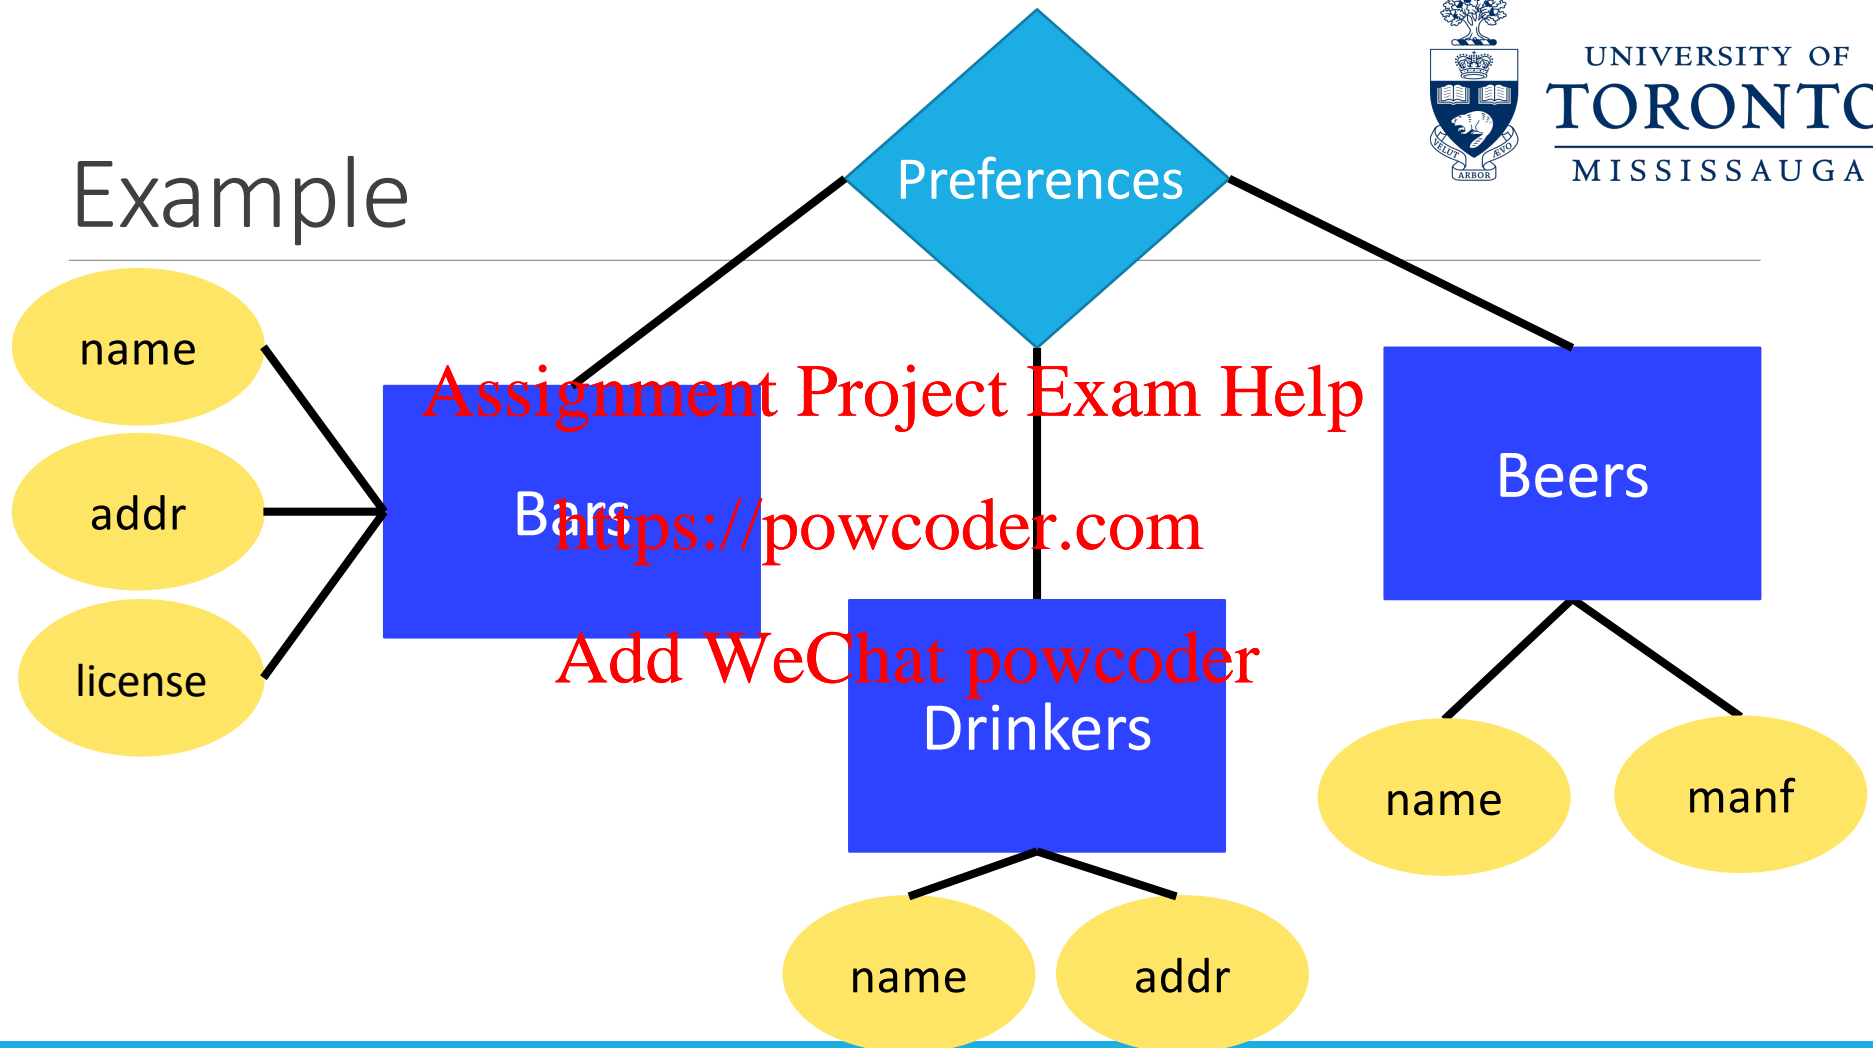



A Typical Relationship Set

Bar	Drinker	Beer
Joe's Bar	Jenna	Canadian
Joe's Bar	Abdi	Stella
Joe's Bar	James	Miller
Tammy's Bar	Jenna	Canadian
Tammy's Bar	Abdi	Corona
Joe's Bar	Abdi	Bud
Tammy's Bar	James	Bud
Tammy's Bar	James	Sleemans



Many-Many Relationship

Focus: binary relationships

Assignment Project Exam Help
e.g. **Sells** between **Bars** and **Beers**


<https://powcoder.com>

Add WeChat powcoder
In a many-many relationship, an entity of either set can be connected to many entities of the other set.

e.g. a bar sells many beers; a beer is sold by many bars.



Many-Many Illustrated

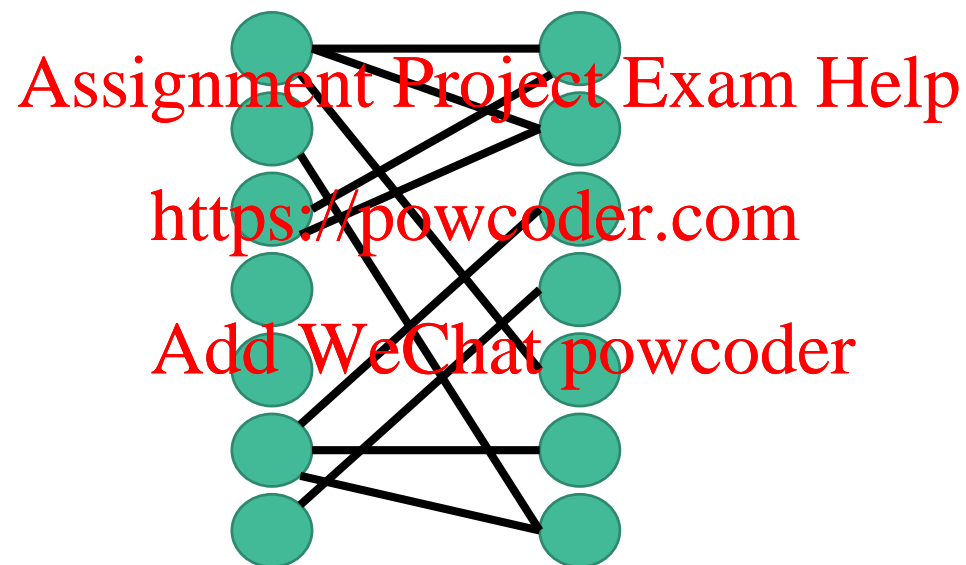

Note: each line is an instance of the binary relationship!



Many-One Relationships

Some binary relationships are many-one from one entity set to another.

Assignment Project Exam Help

Each entity of the first set is connected to at most one entity of the second set.


<https://powcoder.com>

Add WeChat powcoder

But an entity of the second set can be connected to zero, one, or many entities of the first set.



Many-One Illustrated

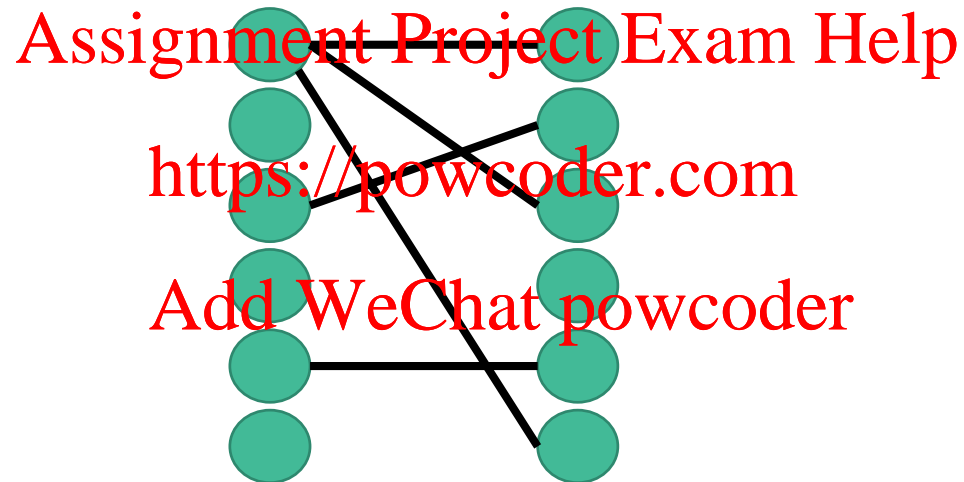

(Partial) Function on entity set.

Bars

Beers

Drinkers




Example

Favourite, from **Drinkers** to **Beers** is many-to-one

A drinker has at most one favourite beer.

A beer can be the favourite of any number of drinkers (0 included).

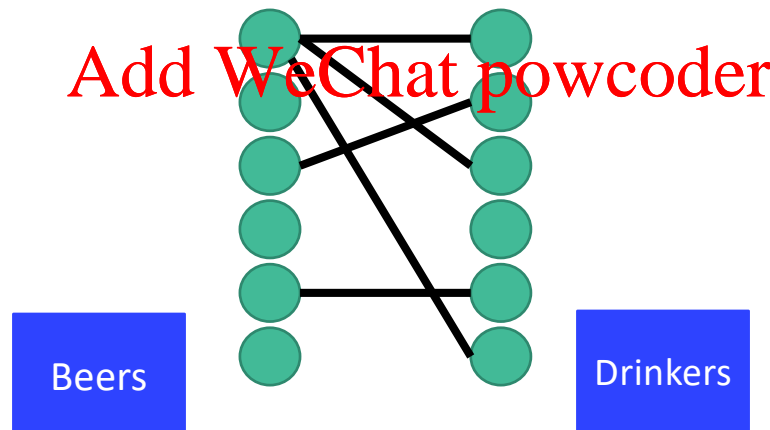



One-One Relationship

Each entity of either entity set is related to (at most) one entity of the other set.


Assignment Project Exam Help

e.g. Relationship **Best-Seller** between entity-sets **Manufacturers** and **Beers**.

<https://powcoder.com>

- A beer is the best seller for $\{0|1\}$ manufacturers, and no manufacturer can have more than one best-seller (assume no ties).

Add WeChat powcoder

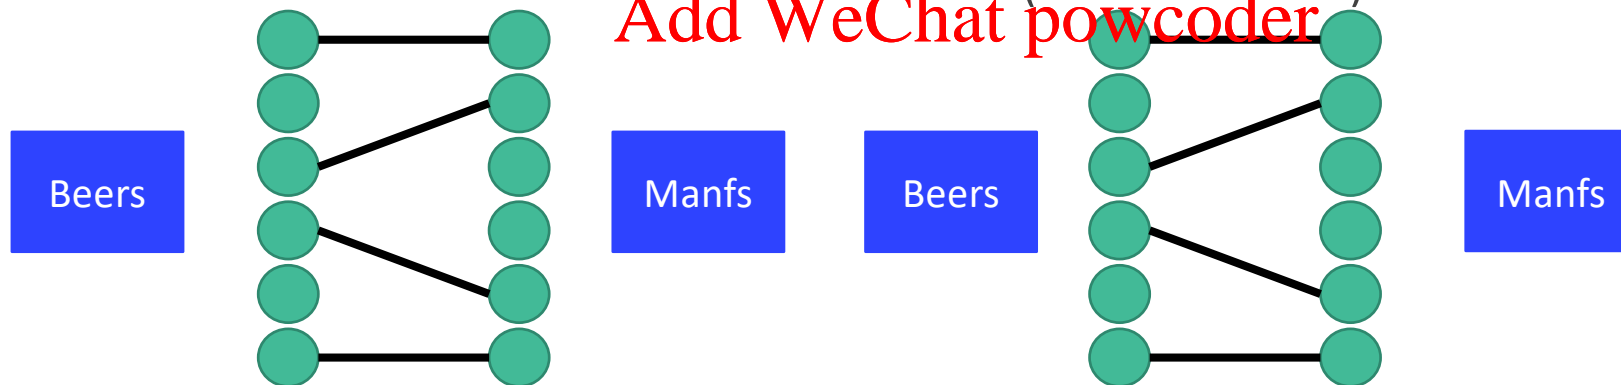



Multiplicity


Multiplicity is the *cardinality* (maximum number of relationships that occur) and the *participation* (in a relationship).

<https://powcoder.com>

E.g., a many-one relationship has one entity set which is entering (at most) one, while a one-one relationship has both entity sets entering (at most) one.




Example: Many-One Relationship

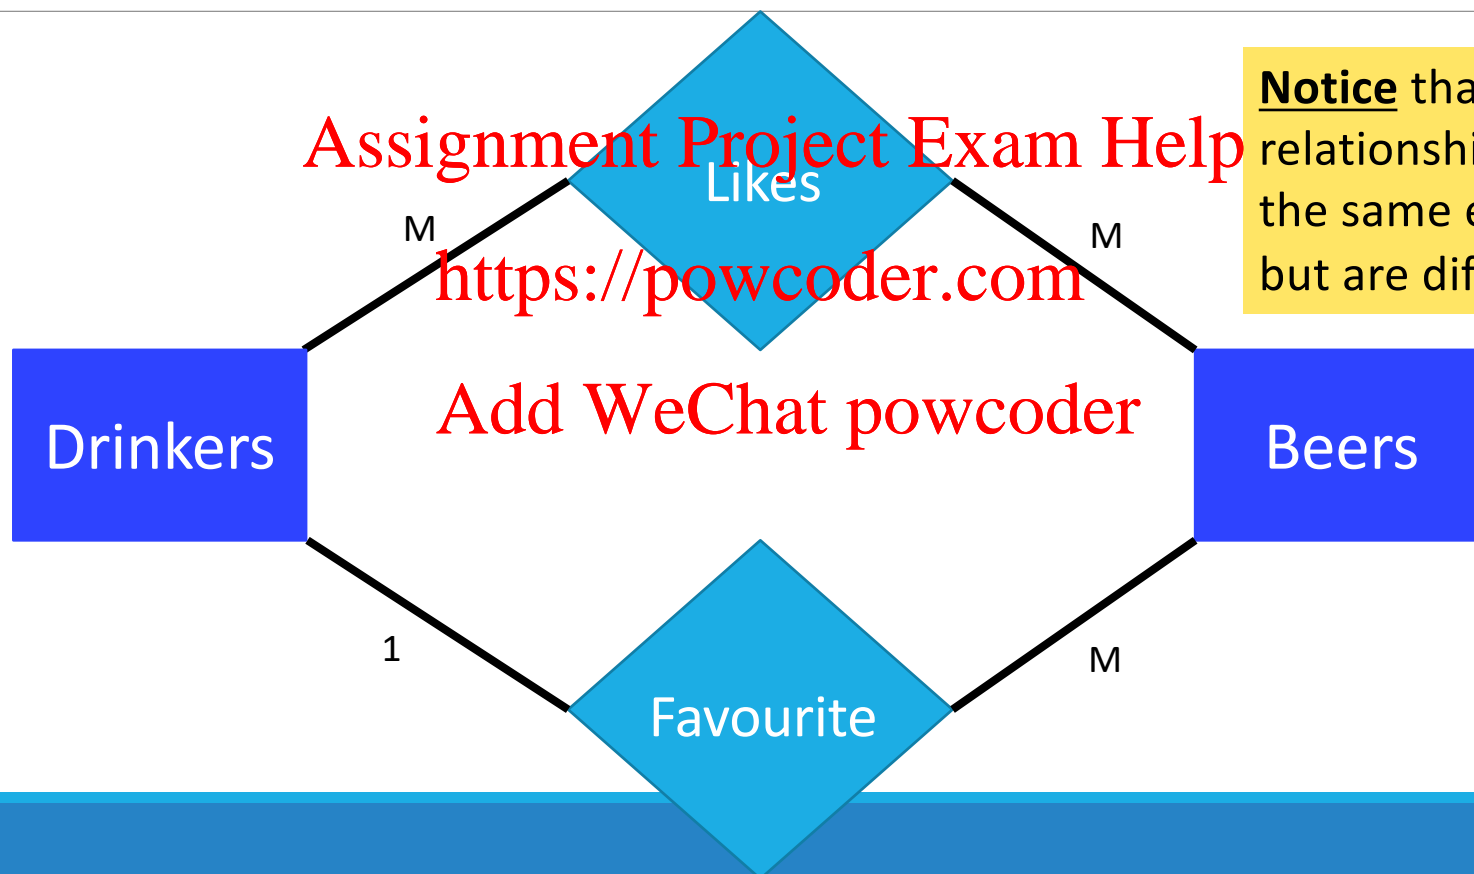

Notice that two relationships connect the same entity-sets but are different!



Example: Many-One Relationship

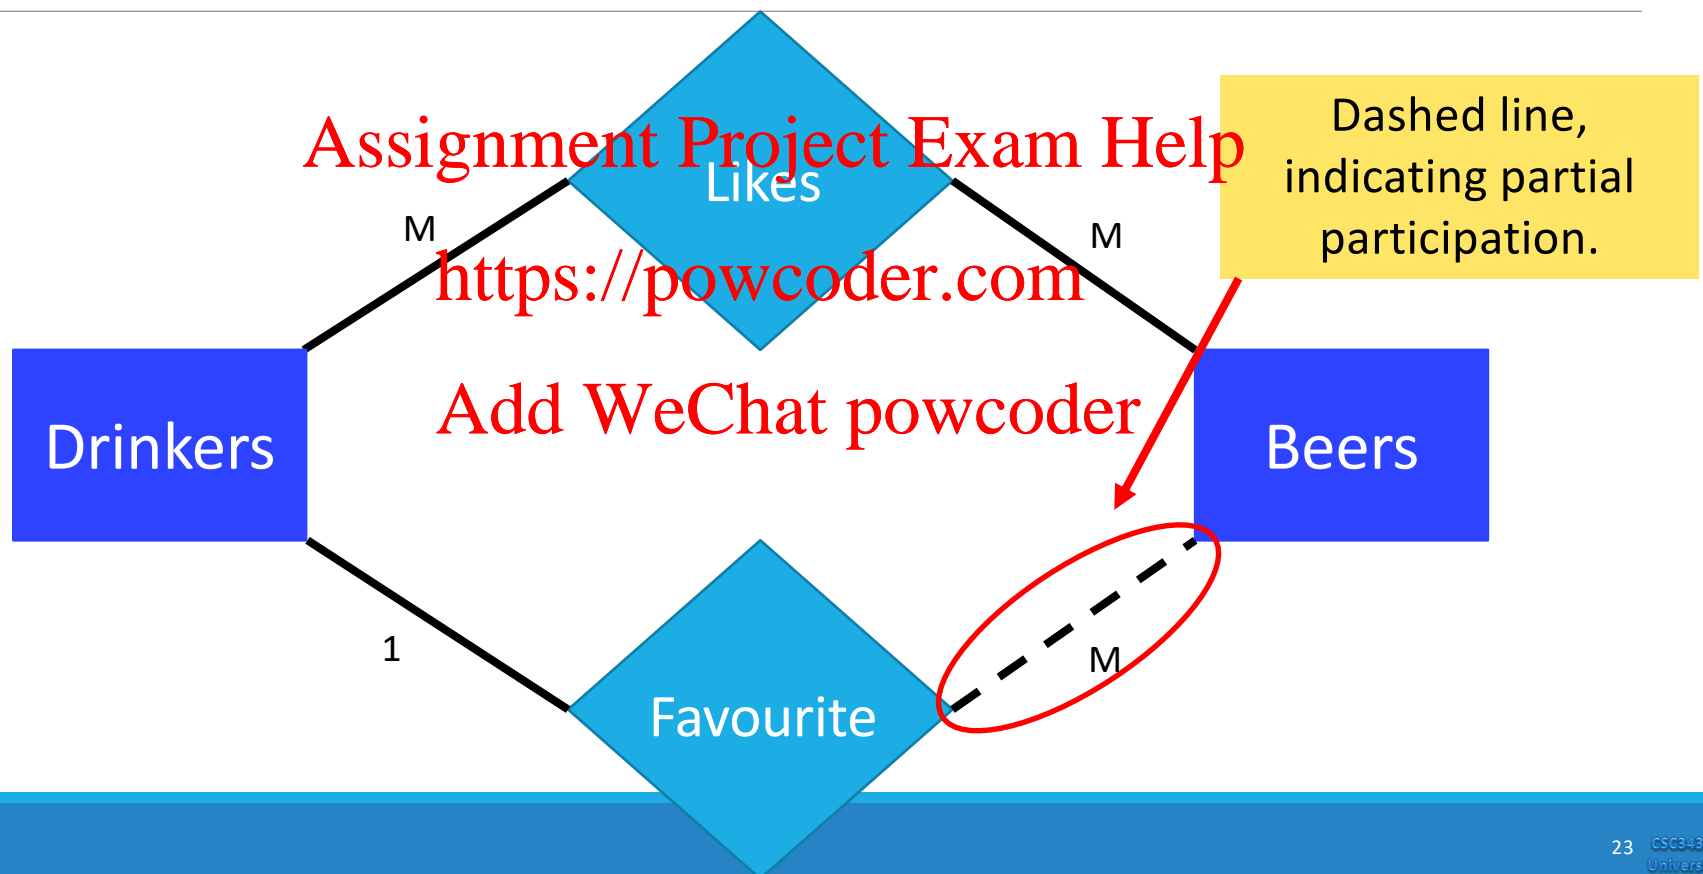



Example: One-One Relationship

Consider **Best-Seller** between **Manfs** and **Beers**.


- Some Beers are not the best-seller of any manufacturer.
- But a Beer manufacturer must have a best-seller.





In the E-R Diagram

Assignment Project Exam Help

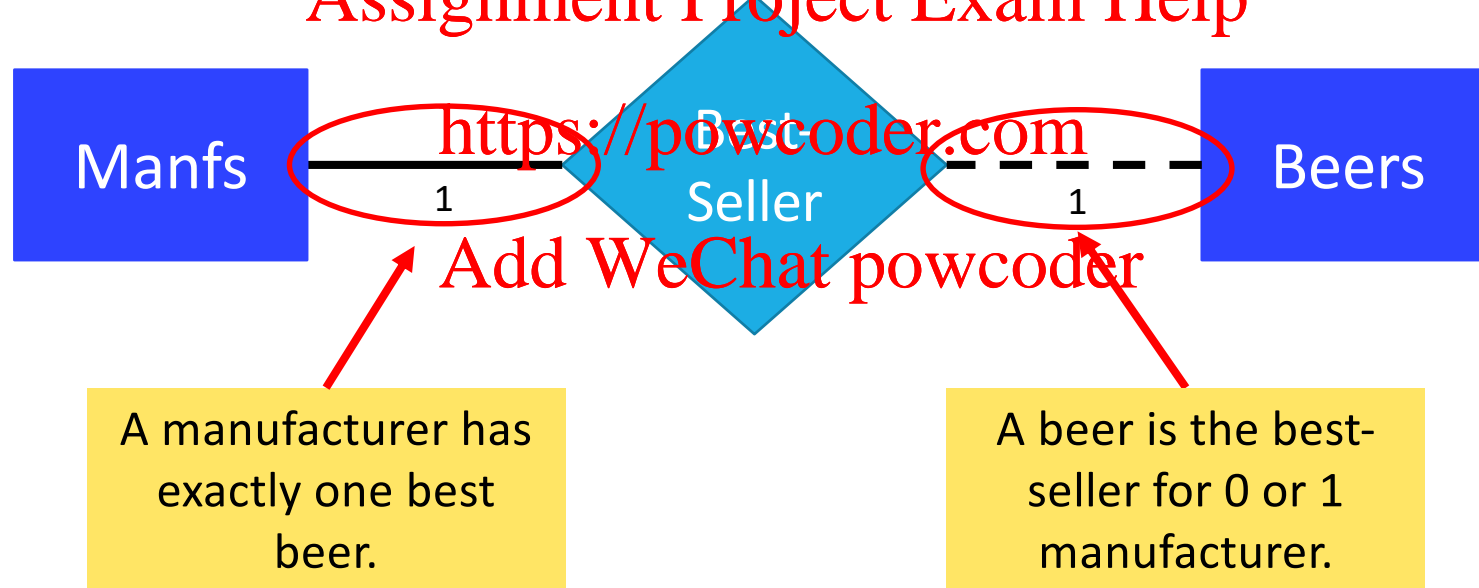



Participation Constraint

Does every student have to take a course?

Assignment Project Exam Help


- If so, this is a *participation constraint*: the participation of **Students** in **Enrolled** is said to be *total* (vs *partial*)
- Every **SID** value in **Students** table must appear in a row of the **Enrolled** table (with a non-null **SID** value!)

<https://powcoder.com>

Add WeChat powcoder





Example: Many-One Relationship

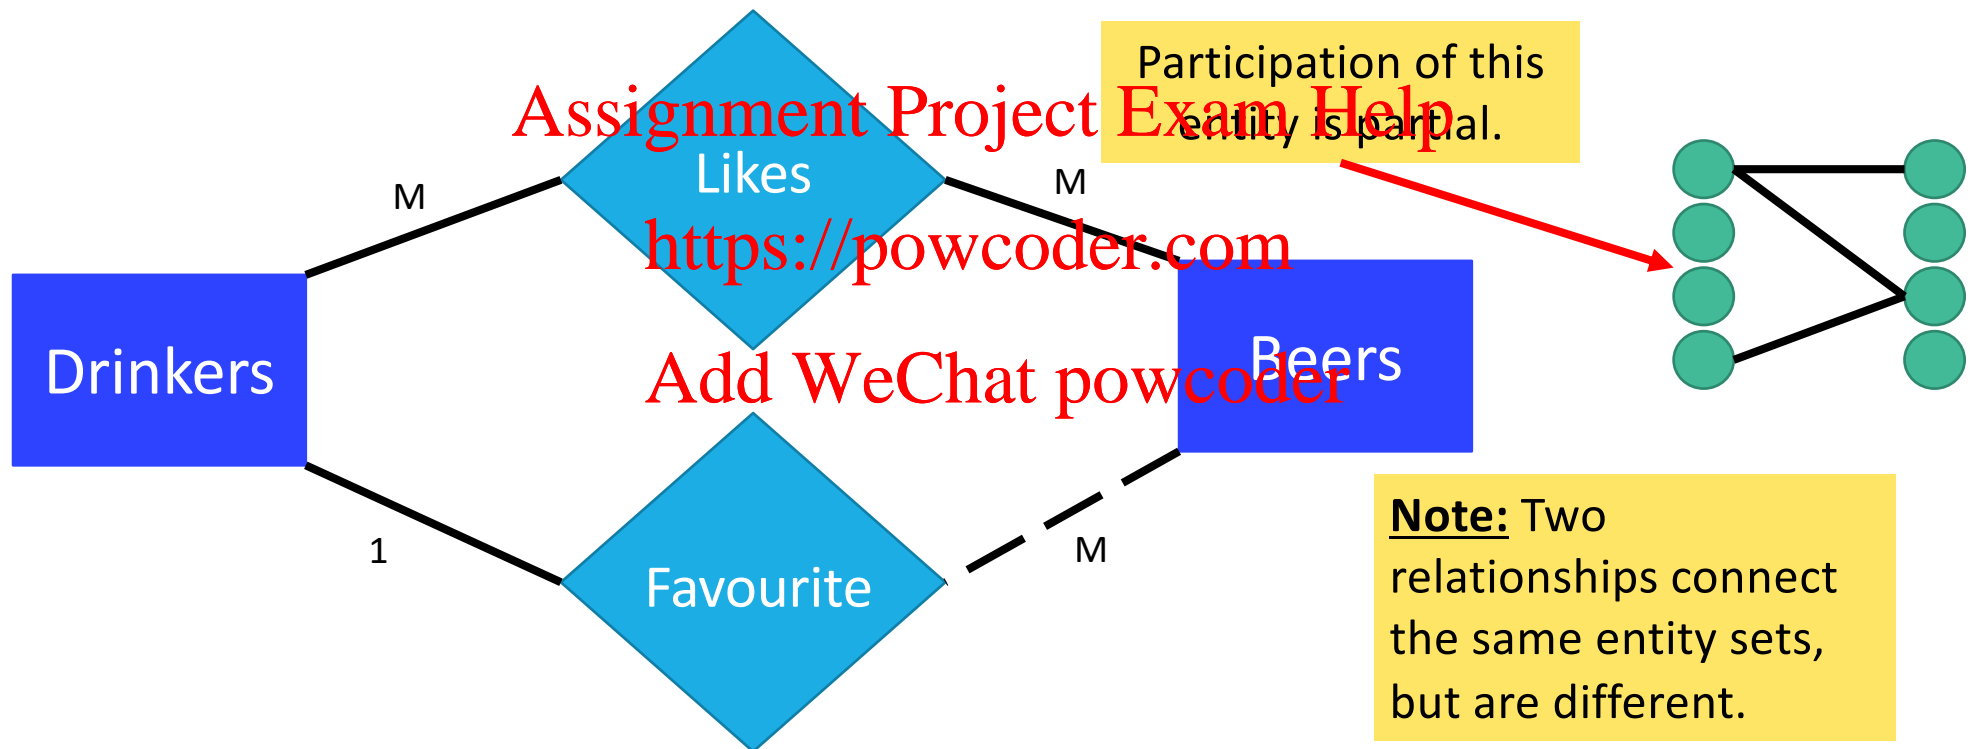



Example: Many-One Relationship

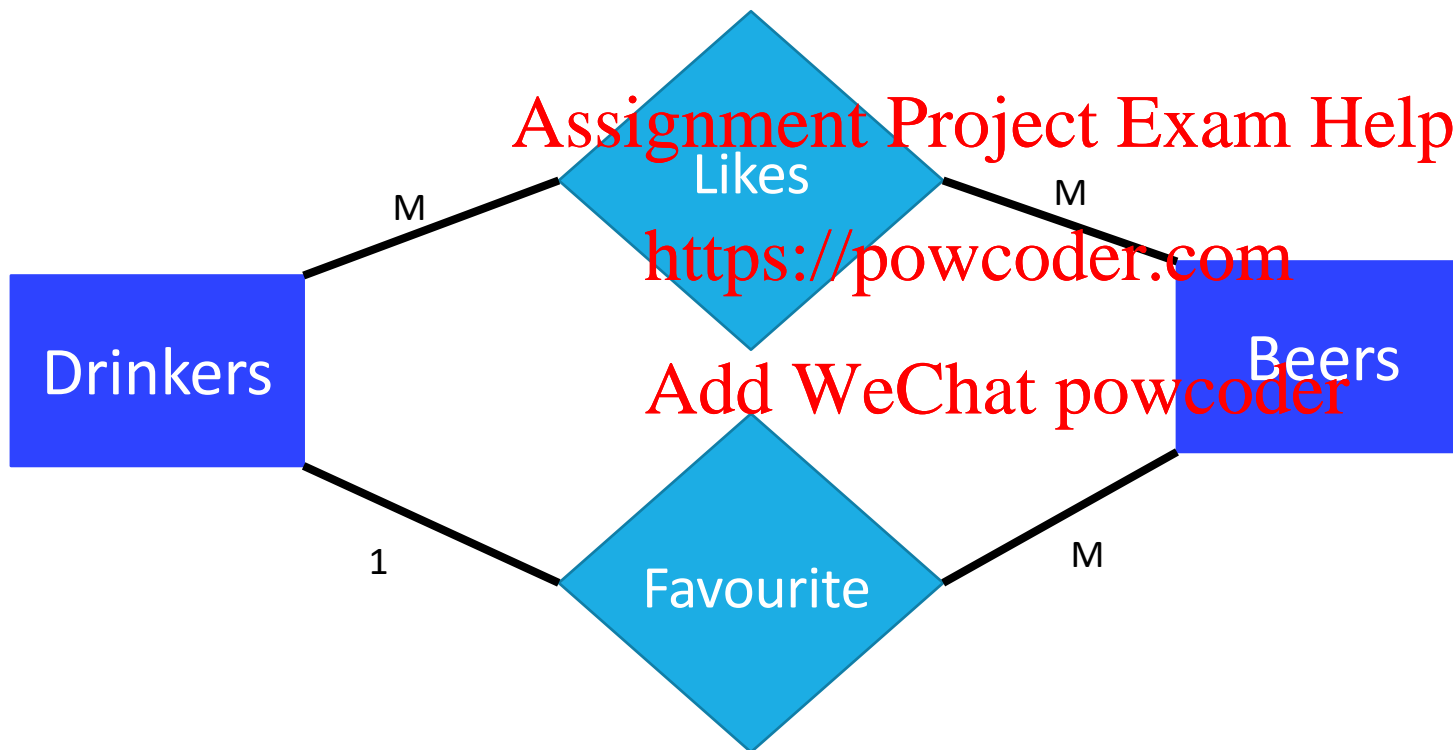

Participation of this entity is total.



Chen's Notation

- This is what we will be using in this course!

<https://powcoder.com>

- Take a look at the handout for reference.


Add WeChat powcoder



Key Constraints

Many-Many: “An employee can work in many departments, and a department can have many employees”

One-Many: “A department has at most one manager, and employees can manage many departments.”

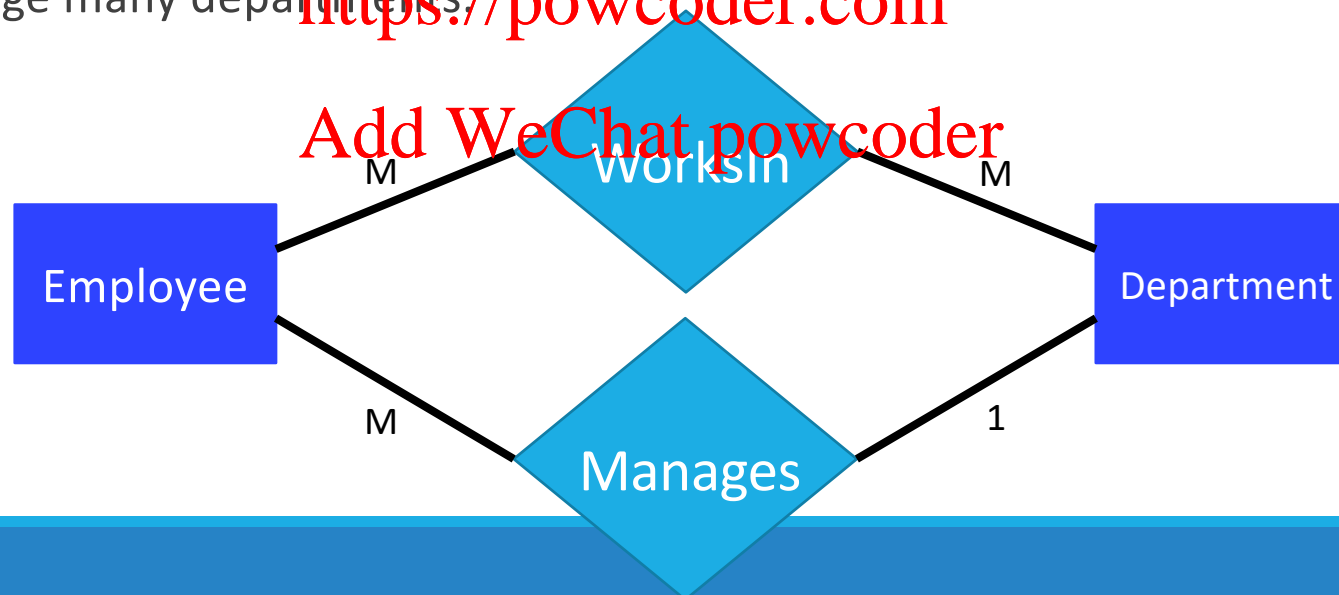




Participation Constraints

Does every department have a manager?

- If yes, then every department must appear in the manages relation:
partial participation vs. total participation.

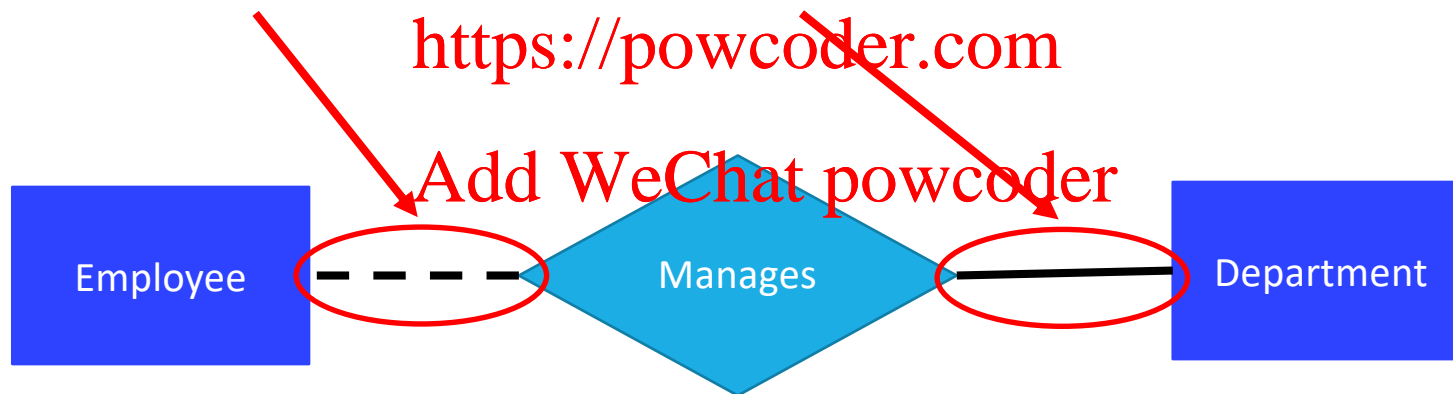



Attributes on Relationships

In certain instances, it is useful to attach an attribute to a relationship.

Assignment Project Exam Help

Think of this attribute as a property of tuples in the relationship set.

<https://powcoder.com>

- i.e., a type of connector/bridge between entity sets to satisfy an entity.

Add WeChat powcoder

Let's see an example!




Example

Bars **sell** Beers: Beers have a **price**; Bars have a **price**

Assignment Project Exam Help


<https://powcoder.com>

Add WeChat powcoder

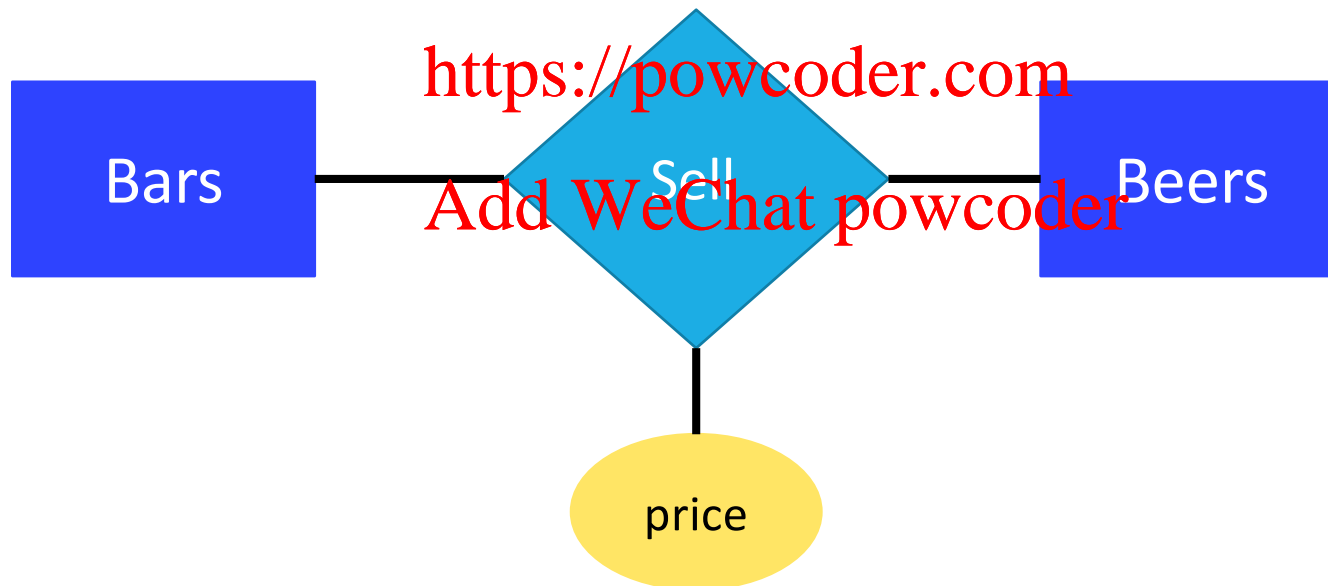



Example

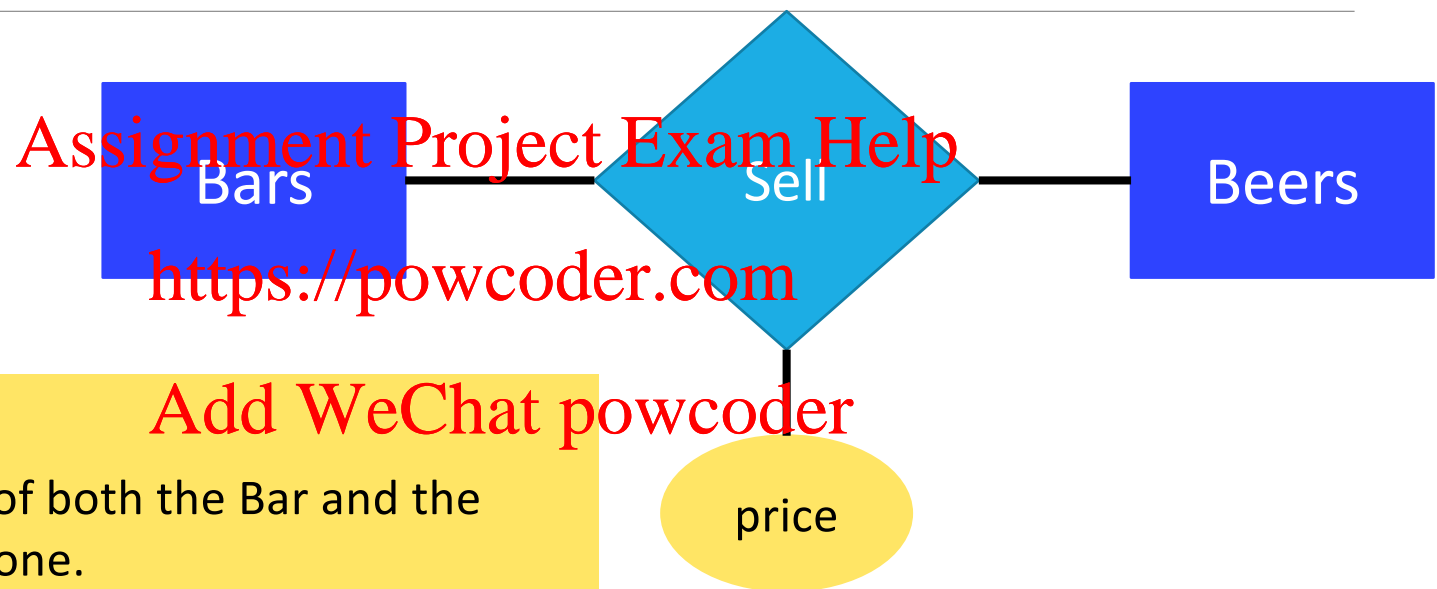

Explanation:

Price is a function of both the Bar and the Beer, not of one alone.
e.g., “The price of Miller beer at Joe’s bar.”



Equivalent Diagrams

i.e., without attributes on relationships

Assignment Project Exam Help


Create an **entity set** representing values of the **attribute** (**entity**).
<https://powcoder.com>

Add WeChat powcoder

Make that **entity set** participate in the **relationship**.

Let's see an example!

Example

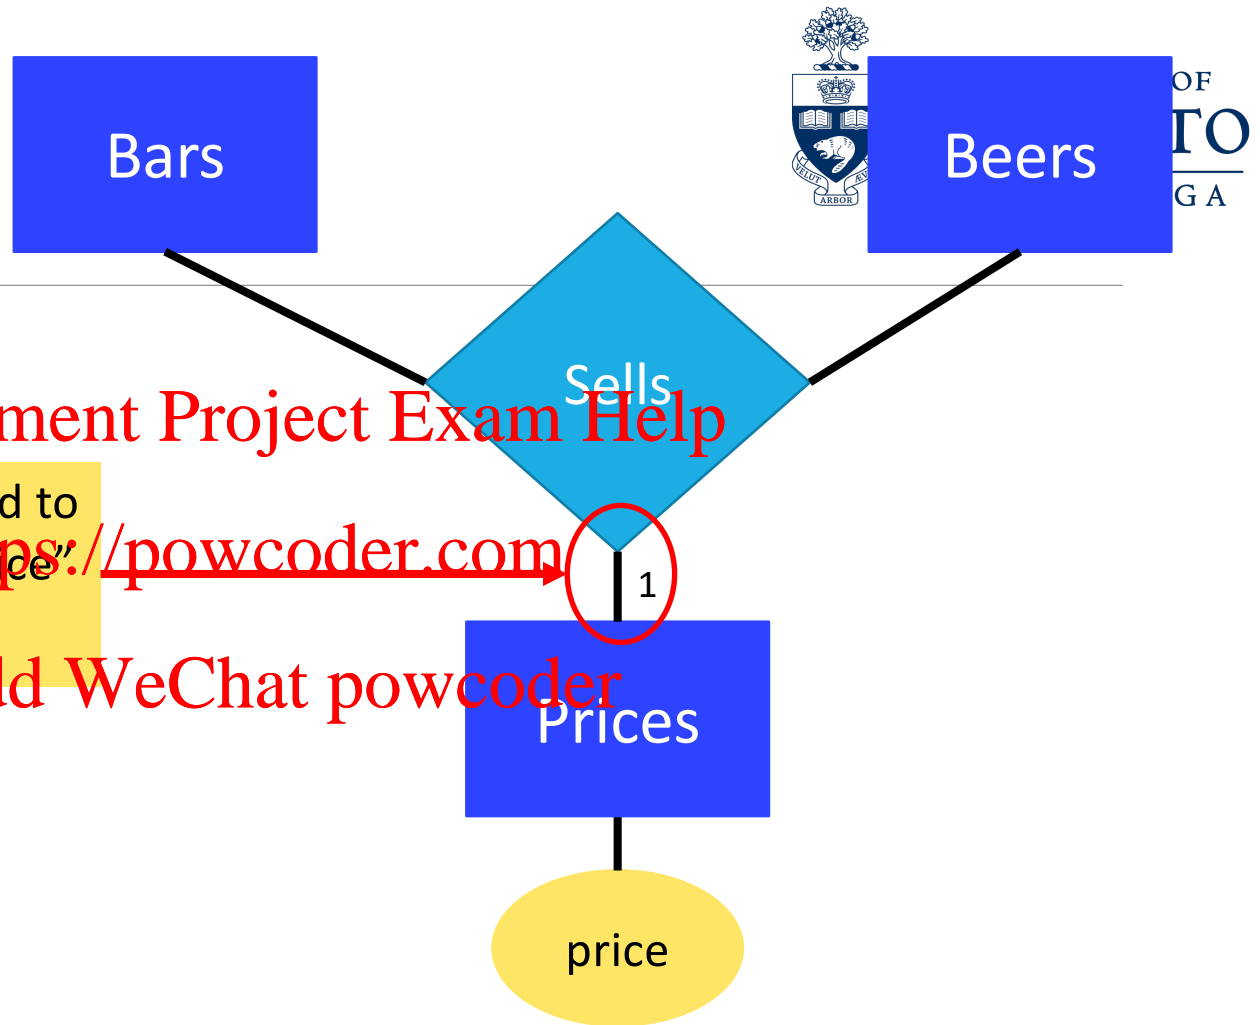

Assignment Project Exam Help

Bars and Beers are required to form Prices and thus a "price" attribute/entity.

<https://powcoder.com>

Add WeChat powcoder



Roles

Sometimes an entity set appears more than once in a relationship.

Assignment Project Exam Help

Label the edges between the relationship and entity set with names called **roles**.

<https://powcoder.com>


Add WeChat powcoder



EXAMPLE

Relationship Set

Husband	Wife
John	Elizabeth
Warren	Alice
...	...

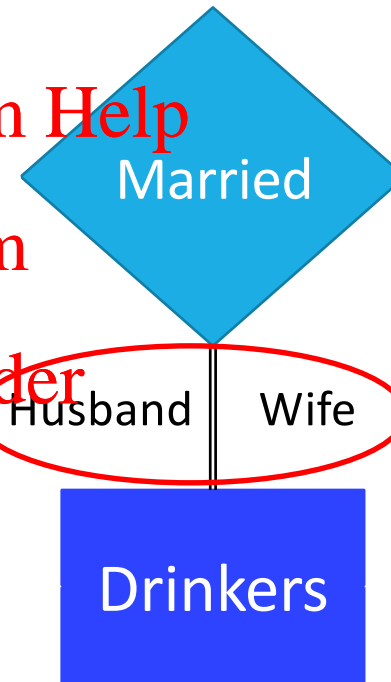

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Notationally you denote the cardinality,
not the name of the attribute



EXAMPLE


Relationship Set

Assignment Project Exam Help

Husband	Wife
John	Elizabeth
Warren	Alice
...	...

<https://powcoder.com>

Add WeChat powcoder

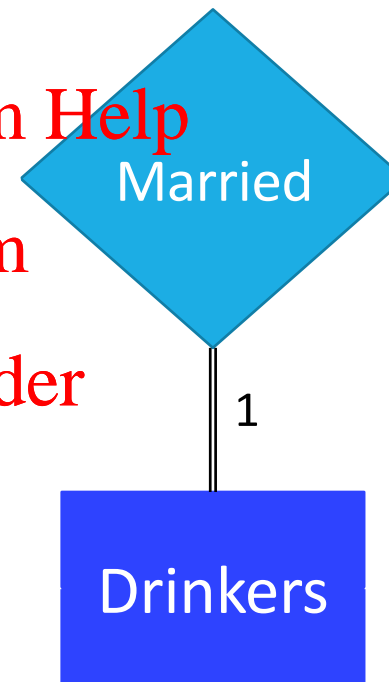



EXAMPLE


Relationship Set

Assignment Project Exam Help

Buddy1	Buddy2
Mike	Joe
Liz	Lisa
Jenny	Peter
Courtney	Moe
...	...

<https://powcoder.com>

Add WeChat powcoder

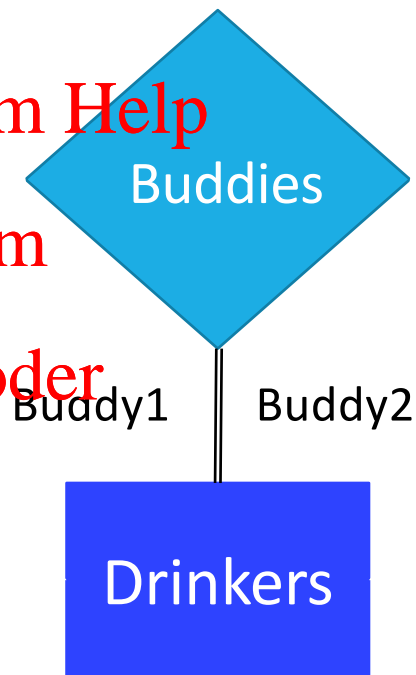




EXAMPLE 2

Relationship Set

Buddy1	Buddy2
Mike	Ilir
Mike	Lisa
Ilir	Lisa
Andrew	Dan
...	...

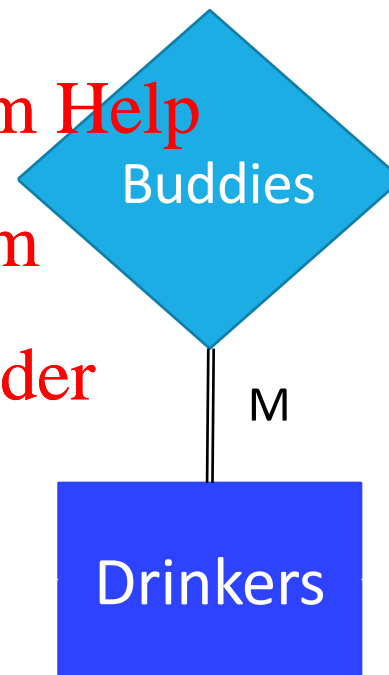

<https://powcoder.com>

Add WeChat powcoder



Subclasses

Subclass (hierarchical) = special case = more properties

Assignment Project Exam Help

e.g., Ales are a kind of beer.

<https://powcoder.com>

- Not every beer is an ale, but some are.
- Let us suppose that in addition to all the *properties* (attributes and relationships) of beers also have the attribute **colour**.

Add WeChat powcoder



Subclasses in ER Diagrams

ISA triangles indicate the subclass relationship

- Point to the superclass.

<https://powcoder.com>

Reasons for using **ISA**:

- To add descriptive attributes specific to a subclass
- To identify entities that participate in a relationship.



Example



Note:

Assume subclasses form a tree.




ISA (“is a”) Hierarchies

As in C++, or other PLs, attributes are inherited.

If we declare A **ISA** B, every A entity is also considered to be a B entity.

- **Overlap constraints:** Can two sub-classes contain the same entity?
e.g. Can Mike be an Hourly_Emps as well as a Contract_Emps entity?
- **Covering constraints:** Does every Employees entity have to be an Hourly_Emps or a Contract_Emps entity?

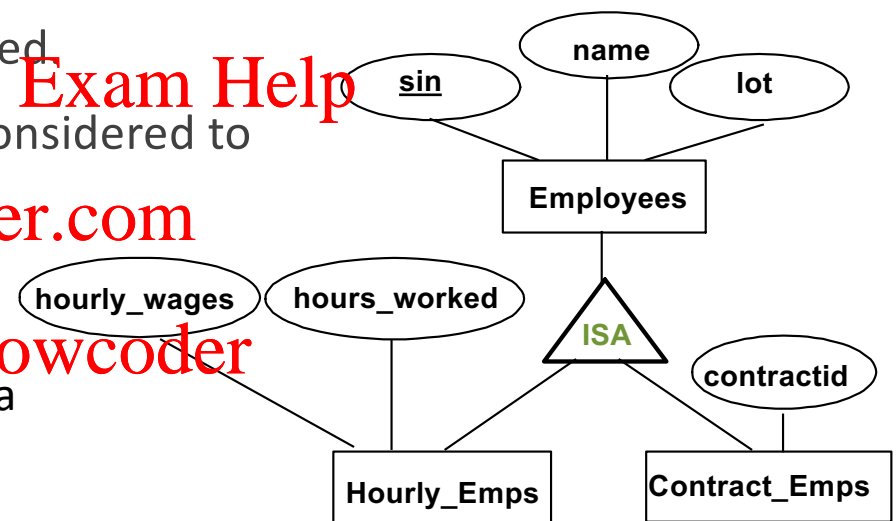



ISA (“is a”) Hierarchies


Assignment Project Exam Help

Reasons for using **ISA**:

- To add descriptive attributes specific to a subclass
- To identify entities that participate in a relationship.

<https://powcoder.com>

Add WeChat powcoder

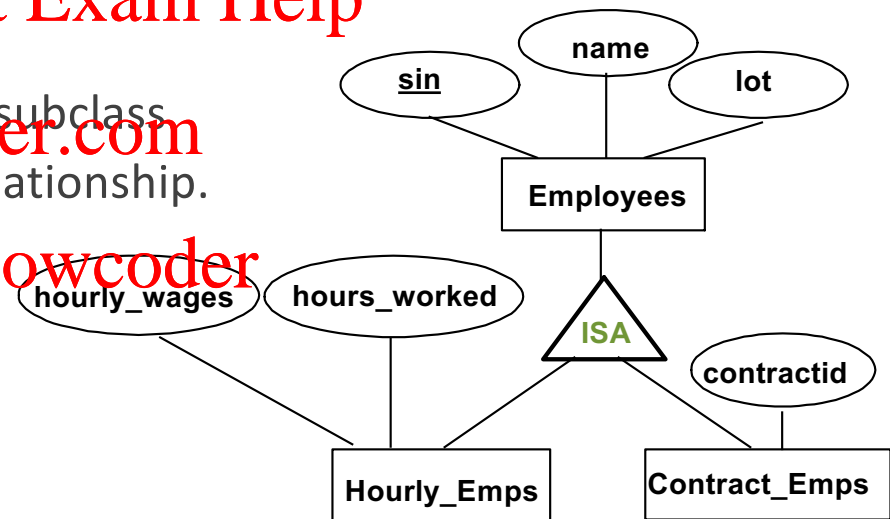



Aggregation


Used when we have to model a relationship involving (entity sets and) a relationship set.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Aggregation allows us to treat a relationship set as an entity set for the purposes of participation in (other) relationships.

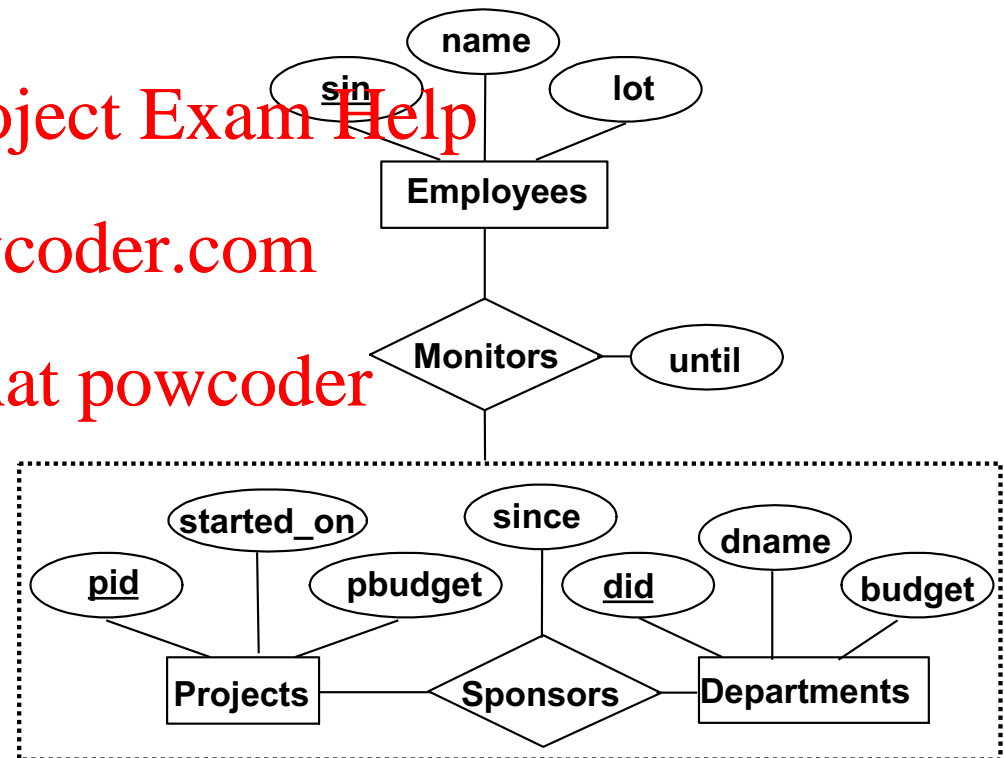



Keys

A **key** is a set of attributes for one entity set such that no two entities in this set agree on all the attributes of the key.

- It is allowed for two entities to agree on some, but not all, of the key attributes.

<https://powcoder.com>


We **must** designate a key for every entity set.

- This is identified by underlining the key attribute(s).

Add WeChat powcoder



Example: Multi-Attribute Key

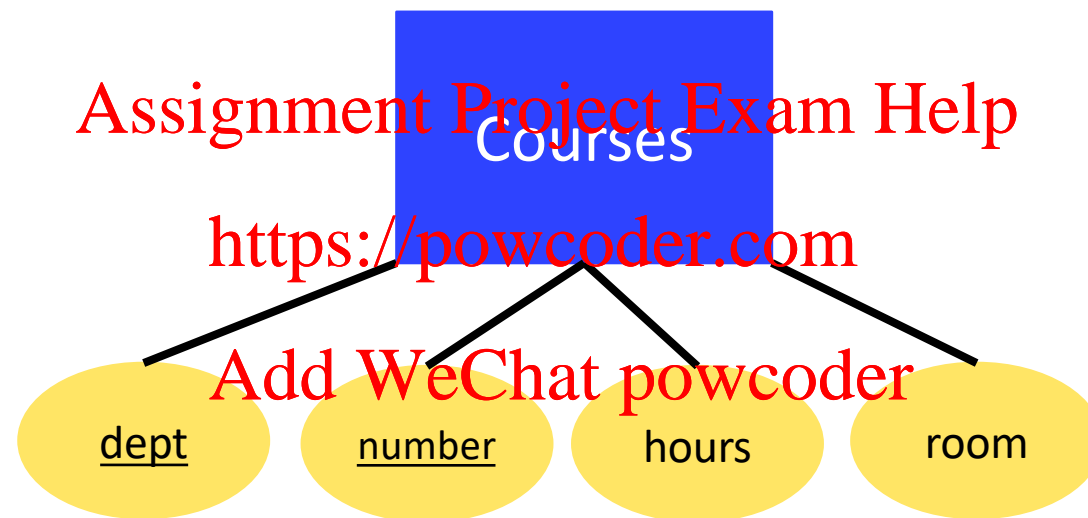

Note:

hours and **room** could also serve as a key, but we must select only one primary key (compound in this case).




Keys

In an **ISA** hierarchy, only the root entity set has a key, and it must serve as the key for all entities in the hierarchy.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

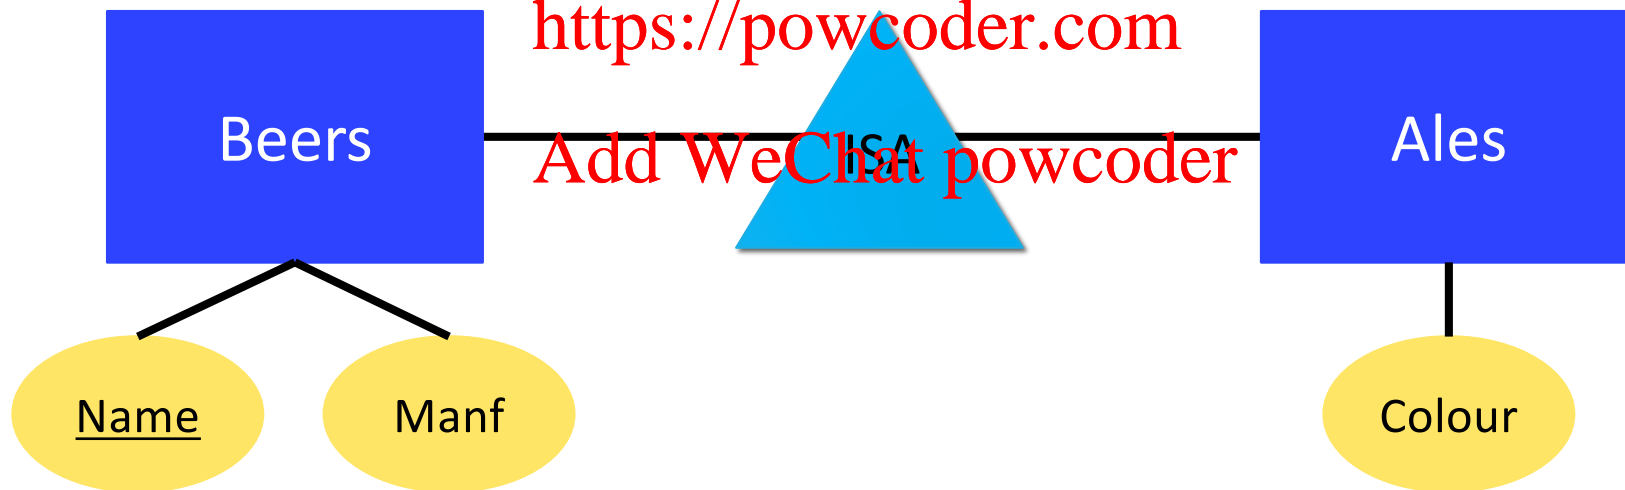



Weak Entity Sets

Occasionally, entities of an entity set need “help” to identify them uniquely.
Let E represent an entity set; E is said to be **weak** if:

<https://powcoder.com>

- E is uniquely identifiable by more than one many-one relationships from E
and
- E includes the key of the related entities from the connected entity sets



Example: Weak Entity Set

name is almost a key for football players, but there could potentially be two players with the same name.

Assignment Project Exam Help

number is certainly not a key, since players on two teams could have the same number.

<https://powcoder.com>

Add WeChat powcoder

But **Teams name** and **number** (i.e. {name, number}) with relation to the player by **Plays-on** is unique.



Example: Weak Entity Set



Double diamond for identifying the many-one relationship.

Double rectangle for the weak entity-set.



Weak Entity-Set Rules

A weak entity set has one or more many-one relationships to other (supporting) entity sets.

Assignment Project Exam Help

<https://powcoder.com>

- Not every many-one relationship from a weak entity set need be supporting.

Add WeChat powcoder

- Supporting relationships must have a double-diamond.



Weak Entity-Set Rules

The key for a weak entity set is its own underlined attributes and the keys from supporting entity sets.

Assignment Project Exam Help


<https://powcoder.com>

e.g., number (Players) and name (Teams) is a key for Players.

Add WeChat powcoder



Example

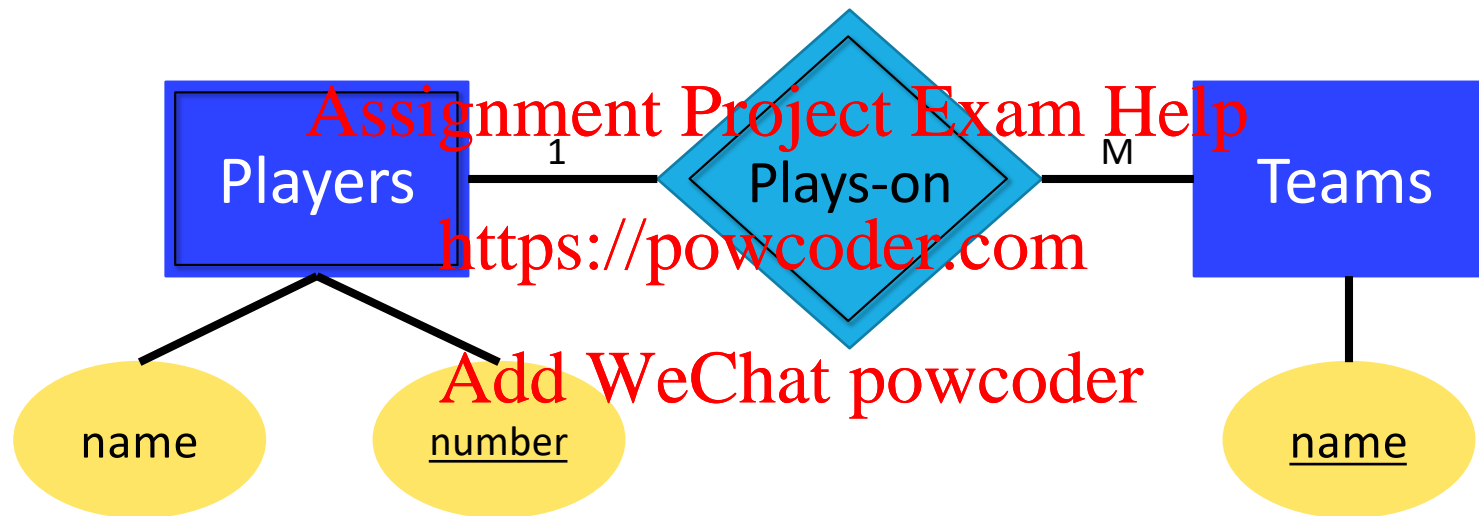

e.g., **number** (**Players**) and **name** (**Teams**) is the key for **Players**.



Design Techniques

1. Avoid Redundancy
2. Limit the use of weak entity sets
3. Don't use an entity set when an attribute will do

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



1. Avoiding Redundancy

Redundancy is saying the same thing in two (or more) different ways.

- “the inclusion of extra components that are not strictly necessary to functioning; repetition or superfluity of information.”


<https://powcoder.com>

Redundancy wastes space and (more importantly) encourages inconsistency.

- Multiple representations of the same fact become inconsistent if we modify one and forget/do not modify its counterpart.



Example: Bad

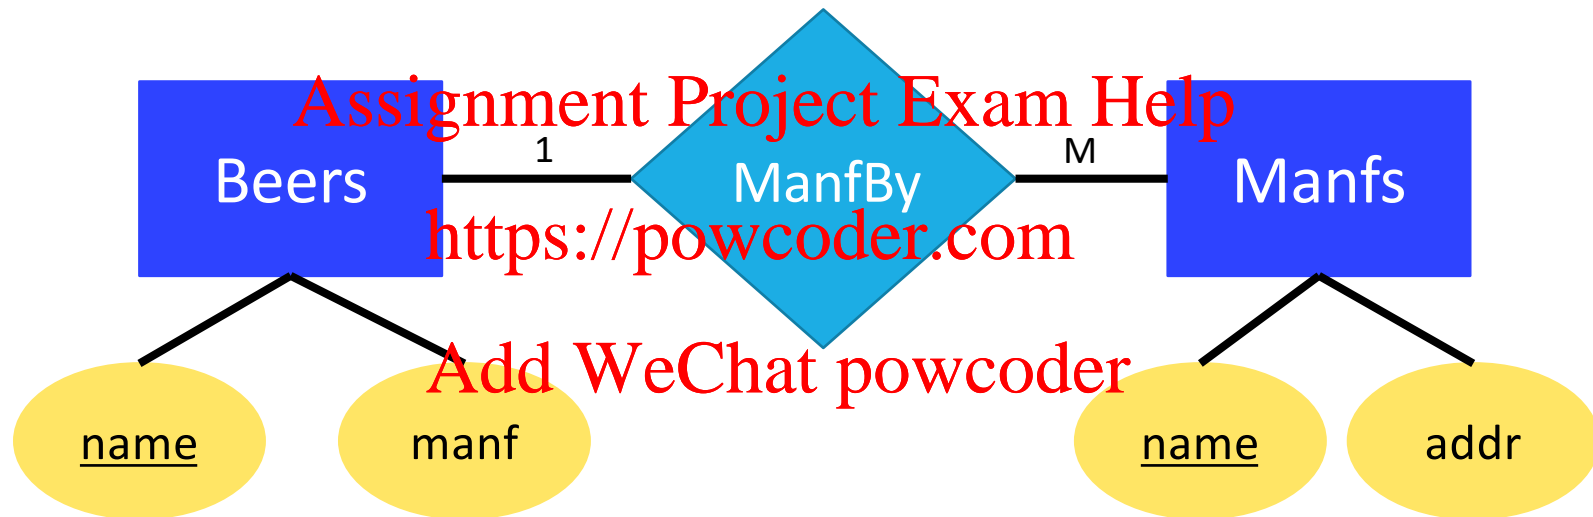


Note:

This design states the manufacturer of a beer twice: as an attribute and as a related entity set.



Example: Good

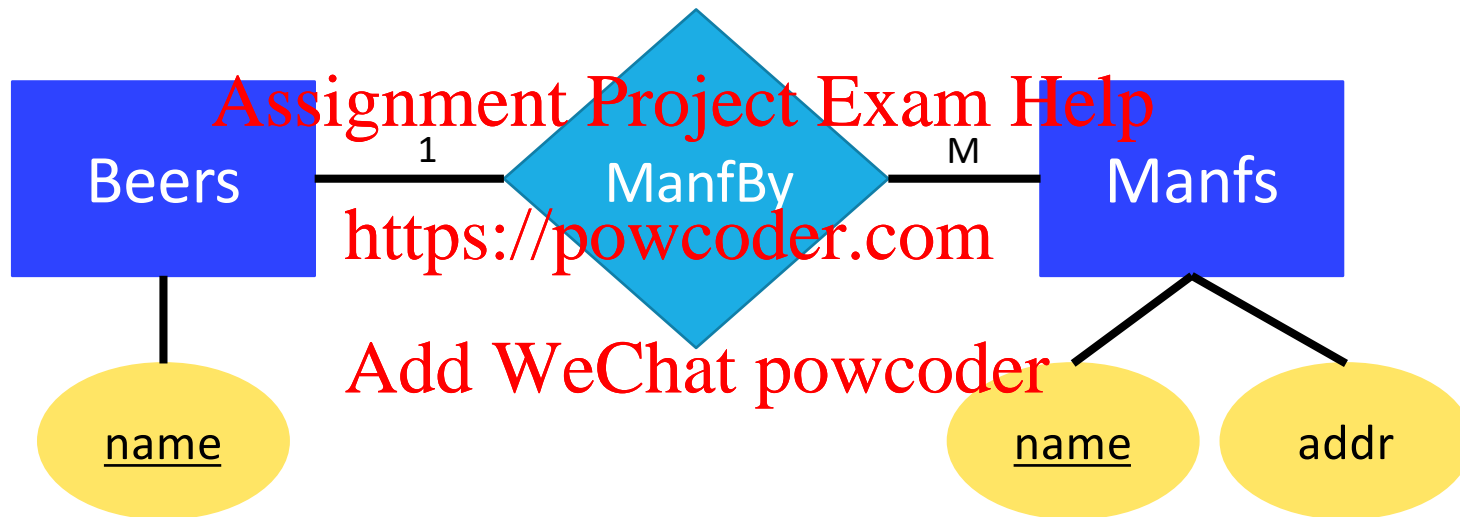

Note:

This design gives the address of each manufacturer exactly one.




Example: Bad

Pause. Think why?

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

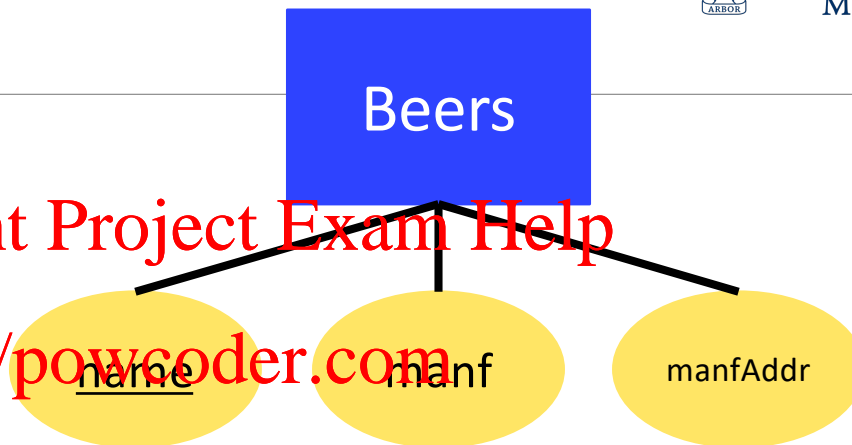

Note:

This design is repetitive! The manufacturer's address will be repeated for each beer. Also, in the event there are temporarily no beers for a manufacturer the value is lost.



Entity Sets vs. Attributes

An entity set should satisfy (at least) one of the following:

- It is more than the name of something (i.e., *it has at least one non-key attribute*).

OR


- It is the “many” in a many-one or many-many relationship.

Depends on the application requirements:

- If we have several addresses per employee, *address* must be an entity (since attributes cannot be set-valued).
- If the structure (city, street, etc...) is important, e.g., we want to retrieve employees in a given city, *address* must be modeled as an entity (since attribute values are atomic).



Example: Good

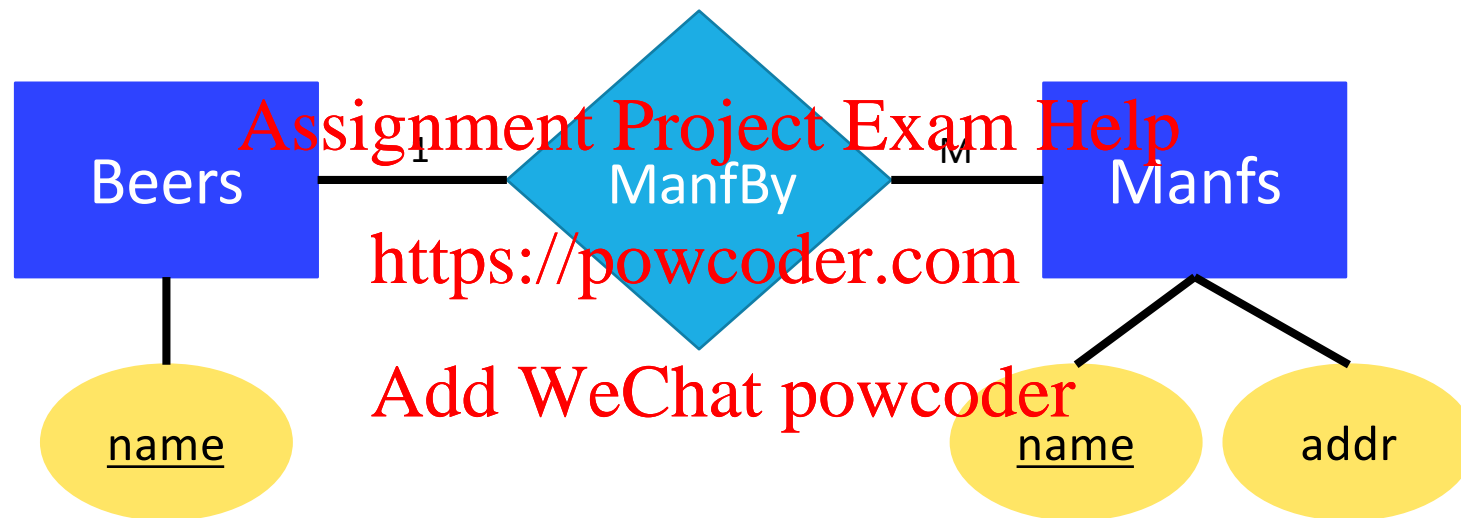


Manfs deserves to be an entity set because of the non-key attribute **addr**.

Beers deserves to be an entity set because of the duplication issue with Manfs' addr seen earlier.



Example: Bad

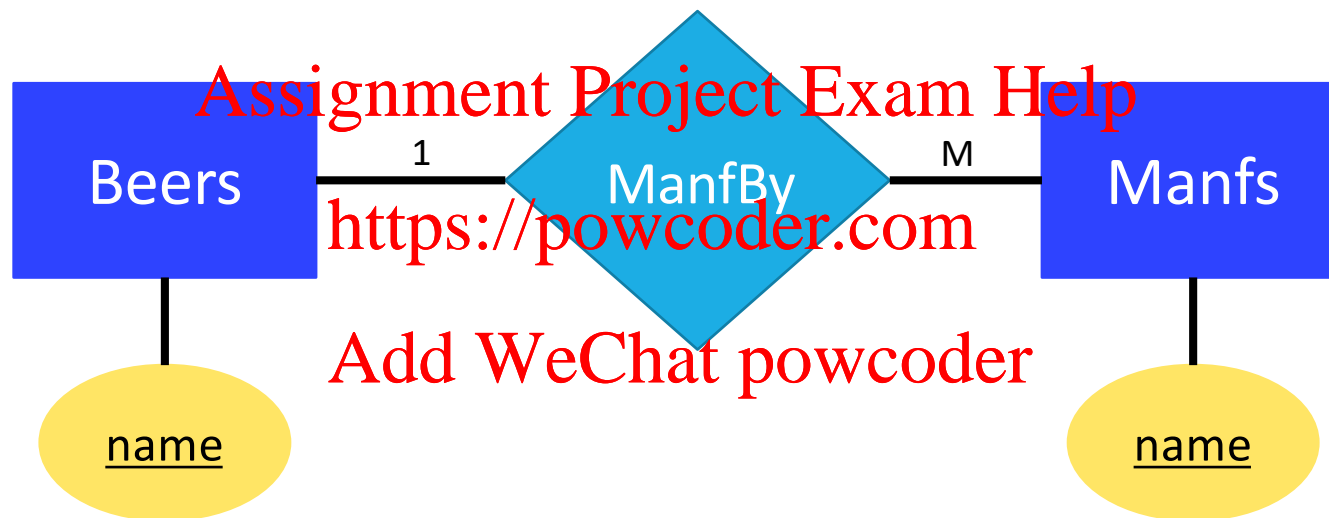

Since the manufacturer is nothing but a name, and neither does beers, it can be one unified entity set.




Example: Good

Assignment Project Exam Help

<https://powcoder.com>

There is no need to make the manufacturer an entity set, because we record nothing about manufacturers beside their name.

Add WeChat powcoder

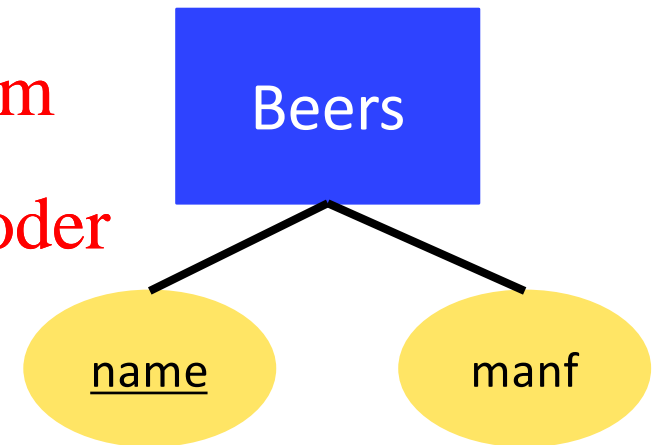



2. Limit the use of Weak Entity Sets

Novice database designers often doubt that anything could be a key by itself.

- They make all entity sets weak, supported by all other entity sets to which they are linked.

In reality, we usually create unique ID's for entity sets.

- Examples include: Social Insurance Numbers, automobile's VINs, etc...



When do we need Weak Entity Sets?

The usual reason is that there is no global authority capable of creating unique IDs.

<https://powcoder.com>

e.g., it is unlikely that there could be an agreement to assign an unique player number across all football teams in the world.

Add WeChat powcoder



From E/R Diagrams to Relations

Entity Set → relation

- Attributes → attributes

Assignment Project Exam Help

<https://powcoder.com>

Relationships → relations whose attributes are only:

- The keys of the connected entity sets.
- Attributes of the relationship itself.

Add WeChat powcoder




Entity-Set \rightarrow Relation

Assignment Project Exam Help

Relation: Beers(name, manf)


<https://powcoder.com>

Add WeChat powcoder

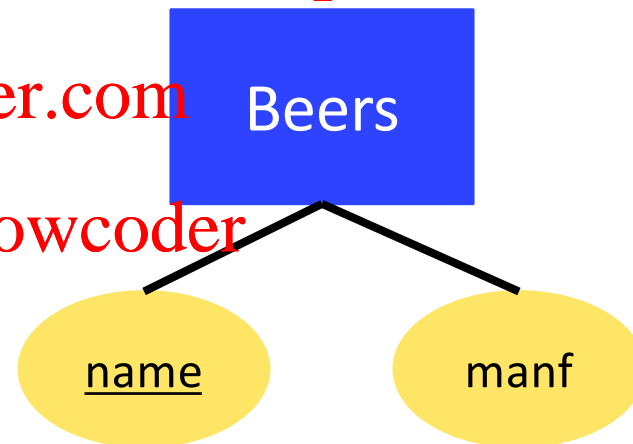



Relationship \rightarrow Relation

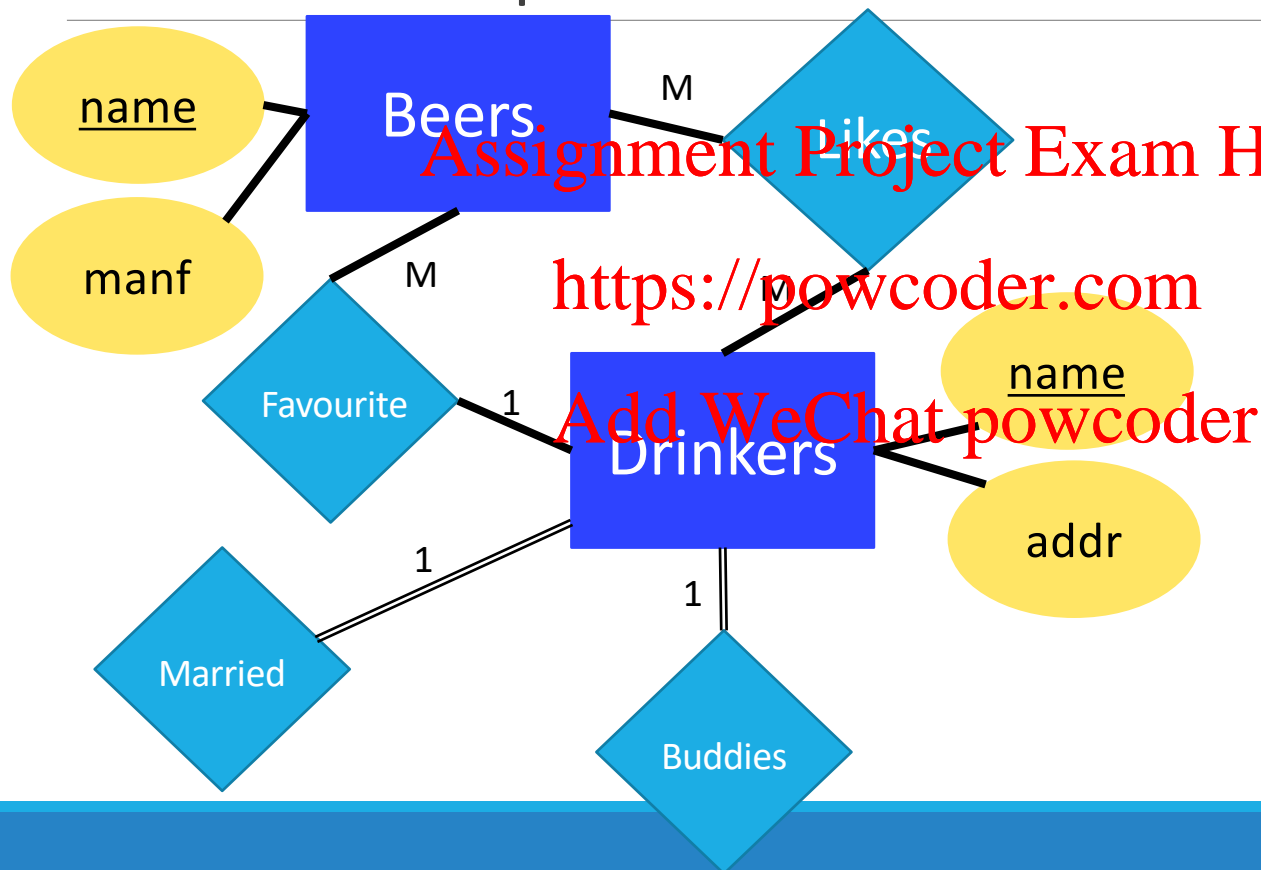

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Likes(drinker, beer)

Favourite(drinker, beer)

Buddies(buddy1, buddy2)

Married(husband, wife)



Handling Weak Entity Sets


Relation for a weak entity set must include attributes for its complete key (including those belonging to other entity sets), as well as its own, non-key attributes.

<https://powcoder.com>

A supporting relation is redundant and yields no relation (unless it has attributes).



Example: Weak Entity Set → Relation

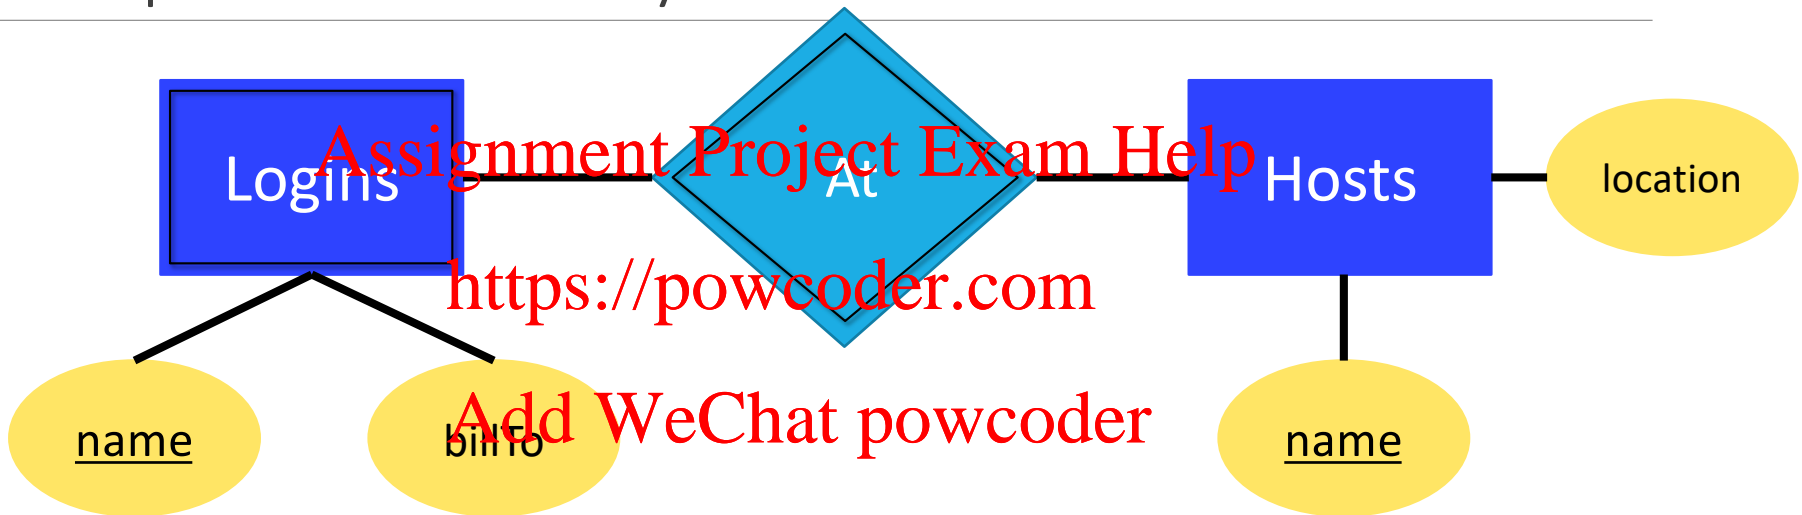


Hosts(hostName, location)

Logins(loginName, hostName, billTo)

At(loginName, hostName)



Example: Weak Entity Set \rightarrow Relation

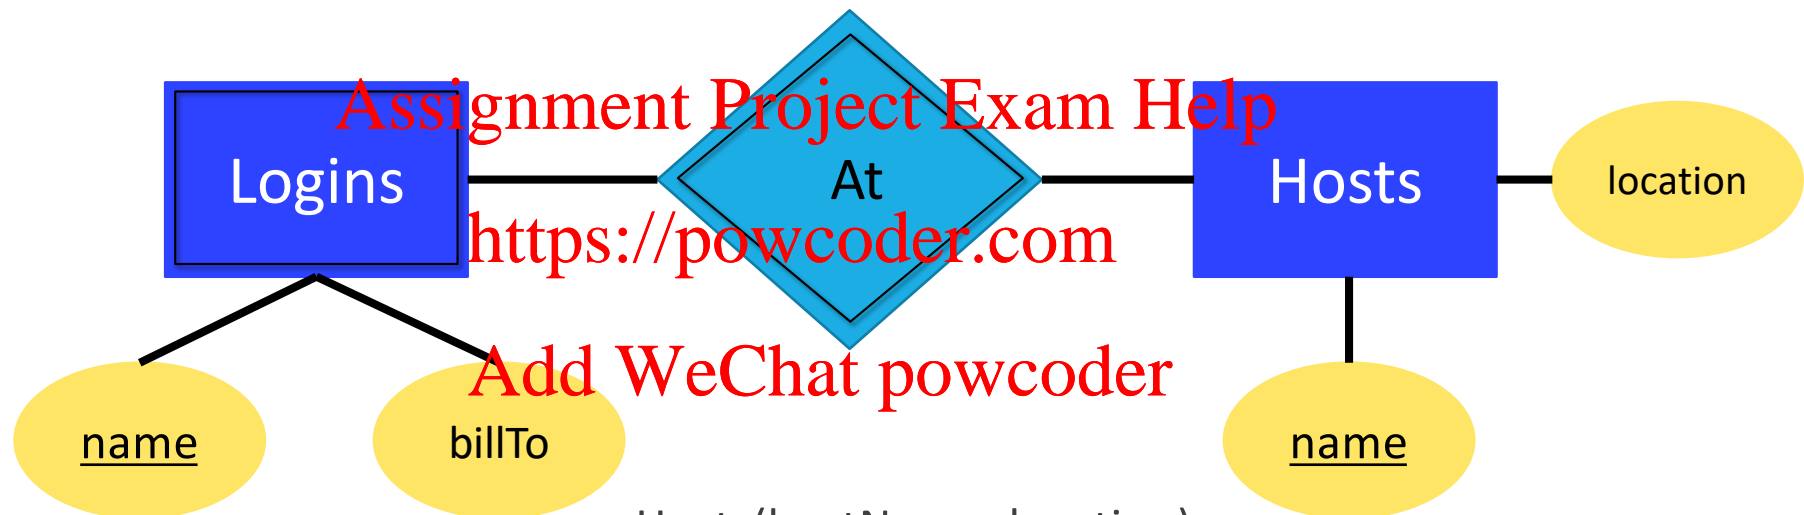

Hosts(hostName, location)

Logins(loginName, hostName, billTo)

At(loginName, hostName)


Note:

At becomes part of Logins.



Entity vs. Relationship

ER diagram is OK if a manager gets a separate discretionary budget for each Department:

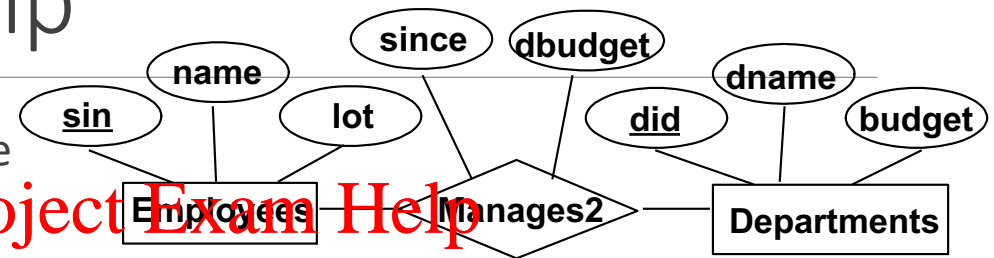


What if a manager gets a discretionary budget that covers all managed Departments?

Redundancy

- ❖ **dbudget** stored for each dept managed by manager.

Misleading

- ❖ Suggest **dbudget** associated with department manager combination.

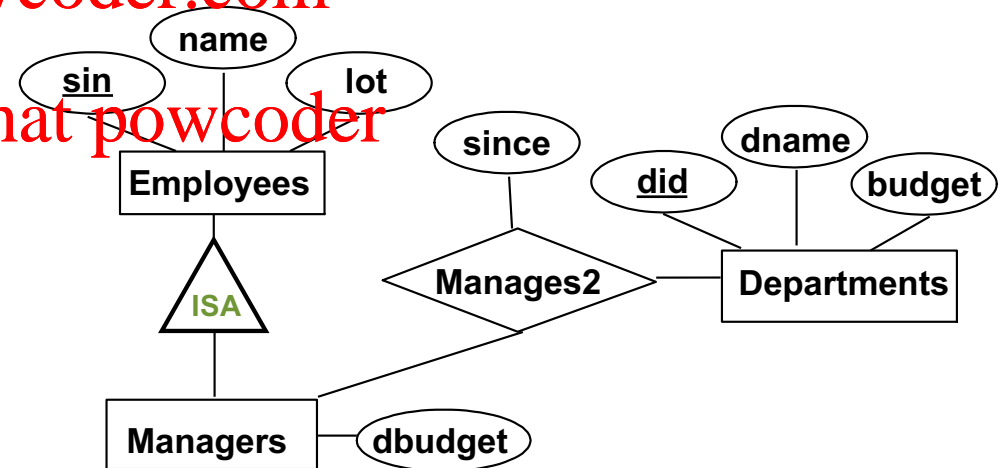



Summary

Conceptual design follows requirements analysis,

- Yields a high-level description of data to be stored

ER model popular for conceptual design

- Constructs are expressive, close to the way people think about their applications.

Basic constructs: *entities*, *relationships*, and *attributes* (of entities and relationships).

Some additional constructs: *weak entities*, *ISA hierarchies*.



Summary

Several kinds of integrity constraints can be expressed in the ER model: *key constraints*, *participation constraints*, and *overlap/covering constraints* for ISA hierarchies. Some *foreign key constraints* are also implicit in the definition of a relationship set.

- Some constraints cannot be expressed in the ER model.
 - Notably, *functional dependencies* (FDs). We will talk about these later in the course.
- Constraints play an important role in determining the best database design for an enterprise.



Summary

ER design is *subjective*. There are often many ways to model a given scenario!

Assignment Project Exam Help

Analyzing alternatives can be tricky, especially for a large enterprise.
Common choices include

<https://powcoder.com>

- Entity vs. attribute, entity vs. relationship, binary or n-ary relationship, whether or not to use ISA hierarchies
- Ensuring good database design: resulting relational schema should be analyzed and refined further.

Add WeChat powcoder



Flowchart Building

Online Tools:

- <https://www.draw.io> → we will be using this in this course

Assignment Project Exam Help

<https://powcoder.com>

Applications:

- OmniGraffle Pro **Add WeChat powcoder**
 - <https://www.omnigroup.com/omnigraffle>
- Microsoft PowerPoint or Word
- There are many more...

Questions?



UNIVERSITY OF
TORONTO
MISSISSAUGA

Assignment Project Exam Help

Q & A
<https://powcoder.com>

Add WeChat powcoder

THANKS FOR LISTENING
I'LL BE ANSWERING QUESTIONS NOW



UNIVERSITY OF
TORONTO
MISSISSAUGA

Citations, Images and Resources

Database Management Systems (3rd Ed.), Ramakrishnan & Gehrke

Some content is based off the slides of Dr. Fei Chiang - <http://www.cas.mcmaster.ca/~fchiang/>

<https://en.oxforddictionaries.com/definition/redundancy>

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder