

Assignment Project Exam Help

Add WeChat powcoder

CSC373

Week 5:

Assignment Project Exam Help
Network Flow (contd)

<https://powcoder.com>

Add WeChat powcoder

Nisarg Shah

Recap

Add WeChat powcoder

- Some more DP

- Traveling salesman problem (TSP)

- Start of network flow

<https://powcoder.com>

- Problem statement
- Ford-Fulkerson algorithm
- Running time
- Correctness using max-flow, min-cut

This Lecture

Add WeChat powcoder

- Network flow in polynomial time
 - Edmonds-Karp algorithm (shortest augmenting path)

Assignment Project Exam Help

- Applications of network flow
 - Bipartite matching & Hall's theorem
 - Edge-disjoint paths & Menger's theorem
 - Multiple sources/sinks
 - Circulation networks
 - Lower bounds on flows
 - Survey design
 - Image segmentation

<https://powcoder.com>

Add WeChat powcoder

Assignment Project Exam Help

Ford-Fulkerson Recap

Add WeChat powcoder

- Define the residual graph G_f of flow f

- G_f has the same vertices as G

- For each edge $e = (u, v)$ in G , G_f has at most two edges

- Forward edge $e = (u, v)$ with capacity $c(e) - f(e)$

- We can send this much additional flow on e

- Reverse edge $e^{rev} = (v, u)$ with capacity $f(e)$

- The maximum “reverse” flow we can send is the maximum amount by which we can reduce flow on e , which is $f(e)$


- We only add each edge if its capacity > 0

Assignment Project Exam Help

Ford-Fulkerson Recap

Add WeChat powcoder

- Example!

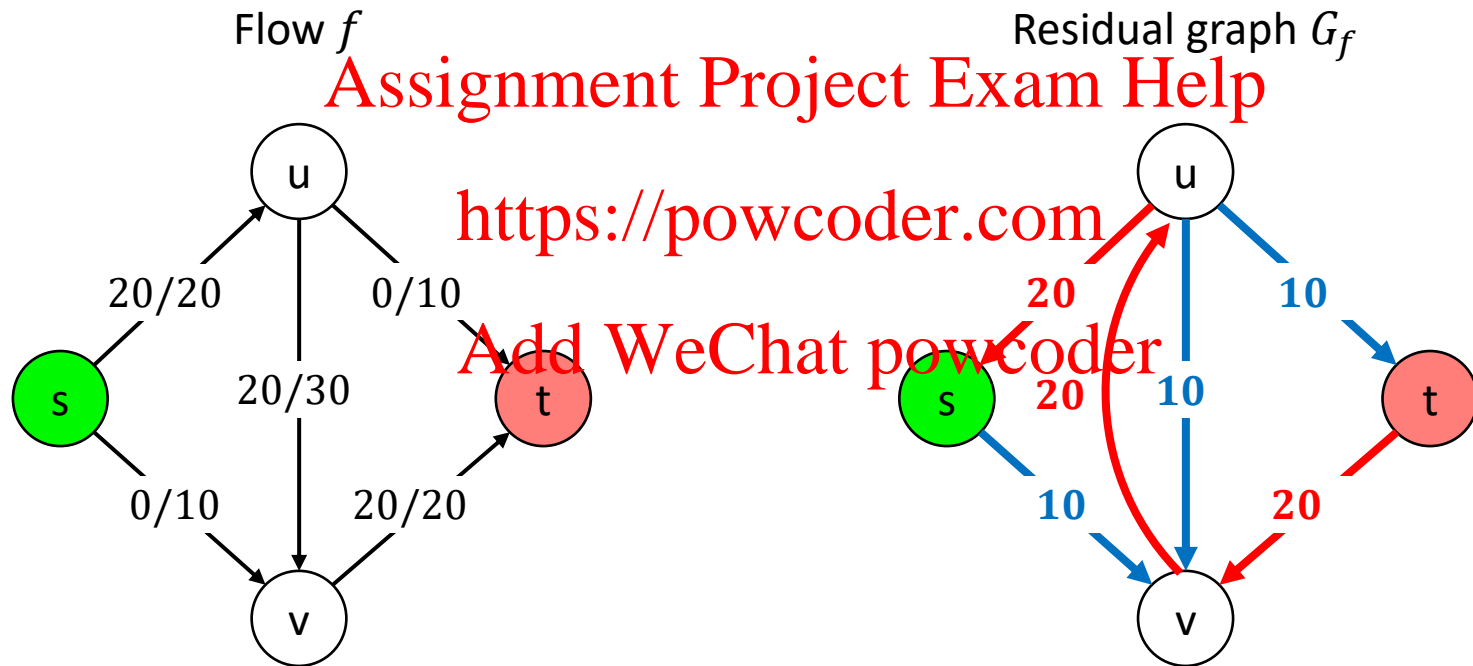

Ford-Fulkerson Recap

Add WeChat powcoder

MaxFlow(G):

// initialize:

Set $f(e) = 0$ for all e in G

Assignment Project Exam Help

// while there is s - t path in G_f :

<https://powcoder.com>

While $P = \text{FindPath}(s, t, \text{Residual}(G, f)) \neq \text{None}$:

$f = \text{Augment}(f, P)$

Add WeChat powcoder

UpdateResidual(G, f)

EndWhile

Return f

Assignment Project Exam Help

Ford-Fulkerson Recap

Add WeChat powcoder

- Running time:

- #Augmentations:

- At every step, flow and capacities remain integers
 - For path P in G_f , $\text{bottleneck}(P, f) > 0$ implies $\text{bottleneck}(P, f) \geq 1$
 - Each augmentation increases flow by at least 1
 - At most $C = \sum_{e \text{ leaving } s} c(e)$ augmentations

- Time for an augmentation:

- G_f has n vertices and at most $2m$ edges
 - Finding an s - t path in G_f takes $O(m + n)$ time

- Total time: $O((m + n) \cdot C)$

Assignment Project Exam Help

Edmonds-Karp Algorithm

Add WeChat powcoder

- At every step, find the shortest path from s to t in G_f , and augment.

MaxFlow(G):

// initialize:

Set $f(e) = 0$ for all e in G

// Find shortest s - t path in G_f & augment:

While $P = \text{BFS}(s, t, \text{Residual}(G, f)) \neq \text{None}$:

$f = \text{Augment}(f, P)$

 UpdateResidual(G, f)

EndWhile

Return f

Minimum number of edges

<https://powcoder.com>

Add WeChat powcoder

Proof Overview

Add WeChat powcoder

- Overview

- **Lemma 1:** The length of the shortest $s \rightarrow t$ path in G_f never decreases.

- (Proof ahead)

- **Lemma 2:** After at most m augmentations, the length of the shortest $s \rightarrow t$ path in G_f must strictly increase.

- (Proof ahead)

- **Theorem:** The algorithm takes $O(m^2n)$ time.

- **Proof:**


- Length of shortest $s \rightarrow t$ path in G_f can go from 0 to $n - 1$
 - Using Lemma 2, there can be at most $m \cdot n$ augmentations
 - Each takes $O(m)$ time using BFS. ■

Assignment Project Exam Help

Level Graph

Add WeChat powcoder

- **Level graph** L_G of a directed graph $G = (V, E)$:
 - Level: $\ell(v)$ = length of shortest $s \rightarrow v$ path
 - Level graph $L_G = (V, E_L)$ is a subgraph of G where we only retain edges $(u, v) \in E$ where $\ell(v) = \ell(u) + 1$
 - Intuition: Keep only the edges useful for shortest paths

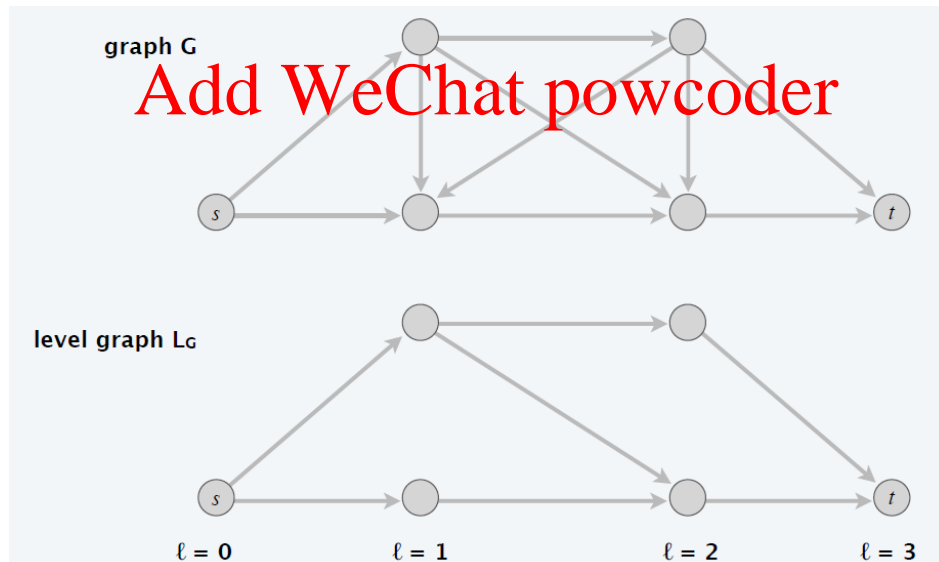

Assignment Project Exam Help

Level Graph

Add WeChat powcoder

- **Level graph** L_G of a directed graph $G = (V, E)$:
 - Level: $\ell(v)$ = length of shortest $s \rightarrow v$ path
 - Level graph $L_G = (V, E')$ is a subgraph of G where we only retain edges $(u, v) \in E$ where $\ell(v) = \ell(u) + 1$
 - Intuition: Keep only the edges useful for shortest paths
 - **Property:** P is a shortest $s \rightarrow v$ path in G if and only if P is an $s \rightarrow v$ path in L_G .
- <https://powcoder.com>
- Add WeChat powcoder

Assignment Project Exam Help

Edmonds-Karp Proof


Add WeChat powcoder

- **Lemma 1:**

- Length of the shortest $s \rightarrow t$ path in G_f never decreases.

- **Proof:** Assignment Project Exam Help

- Let f and f' be flows before and after an augmentation step, and G_f and $G_{f'}$ be their residual graphs.

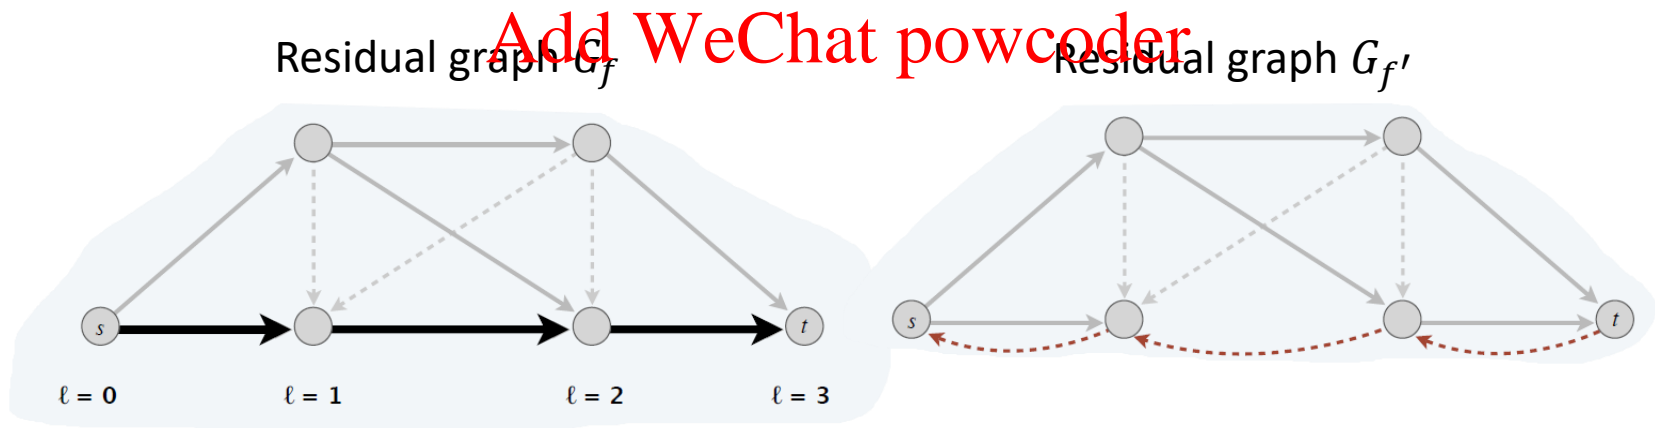

Assignment Project Exam Help

Edmonds-Karp Proof

Add WeChat powcoder

NOT IN SYLLABUS

- Lemma 1:

- Length of the shortest $s \rightarrow t$ path in G_f never decreases.

- Proof: Assignment Project Exam Help

- Let f and f' be flows before and after an augmentation step, and G_f and $G_{f'}$ be their residual graphs.
- Augmentation happens along a path in L_{G_f}
- For each edge on the path, we either remove it, add an opposite direction edge, or both.
- Opposite direction edges can't help reduce the length of the shortest $s \rightarrow t$ path (exercise!).
- QED!

Assignment Project Exam Help

Edmonds-Karp Proof

Add WeChat powcoder

NOT IN SYLLABUS

- Lemma 2:

- After at most m augmentations, the length of the shortest $s \rightarrow t$ path in G_f must strictly increase.

- Proof:

- In each augmentation step, we remove at least one edge from L_{G_f}
 - Because we make the flow on at least one edge on the shortest path equal to its capacity
- No new edges are added in L_{G_f} unless the length of the shortest $s \rightarrow t$ path strictly increases
- This cannot happen more than m times! ■

Assignment Project Exam Help

Edmonds-Karp Proof Overview

Add WeChat powcoder

- Overview

- **Lemma 1:** The length of the shortest $s \rightarrow t$ path in G_f never decreases.

- **Lemma 2:** After at most m augmentations, the length of the shortest $s \rightarrow t$ path in G_f must strictly increase.

- **Theorem:** The algorithm takes $O(m^2n)$ time.

Assignment Project Exam Help

Edmonds-Karp Proof Overview

Add WeChat powcoder

- **Note:**
 - Some graphs require $\Omega(mn)$ augmentation steps
 - But we may be able to reduce the time to run each augmentation step
- <https://powcoder.com>
- Two algorithms use this idea to reduce run time
 - Dinitz's algorithm [1970] $\Rightarrow O(mn^2)$
 - Sleator–Tarjan algorithm [1983] $\Rightarrow O(mn \log n)$
 - Using the dynamic trees data structure

Assignment Project Exam Help

Add WeChat powcoder


Assignment Project Exam Help
Network Flow Applications
<https://powcoder.com>

Add WeChat powcoder

Rail network connecting Soviet Union with Eastern European countries

(Tolstoï 1930s)

Add WeChat powcoder

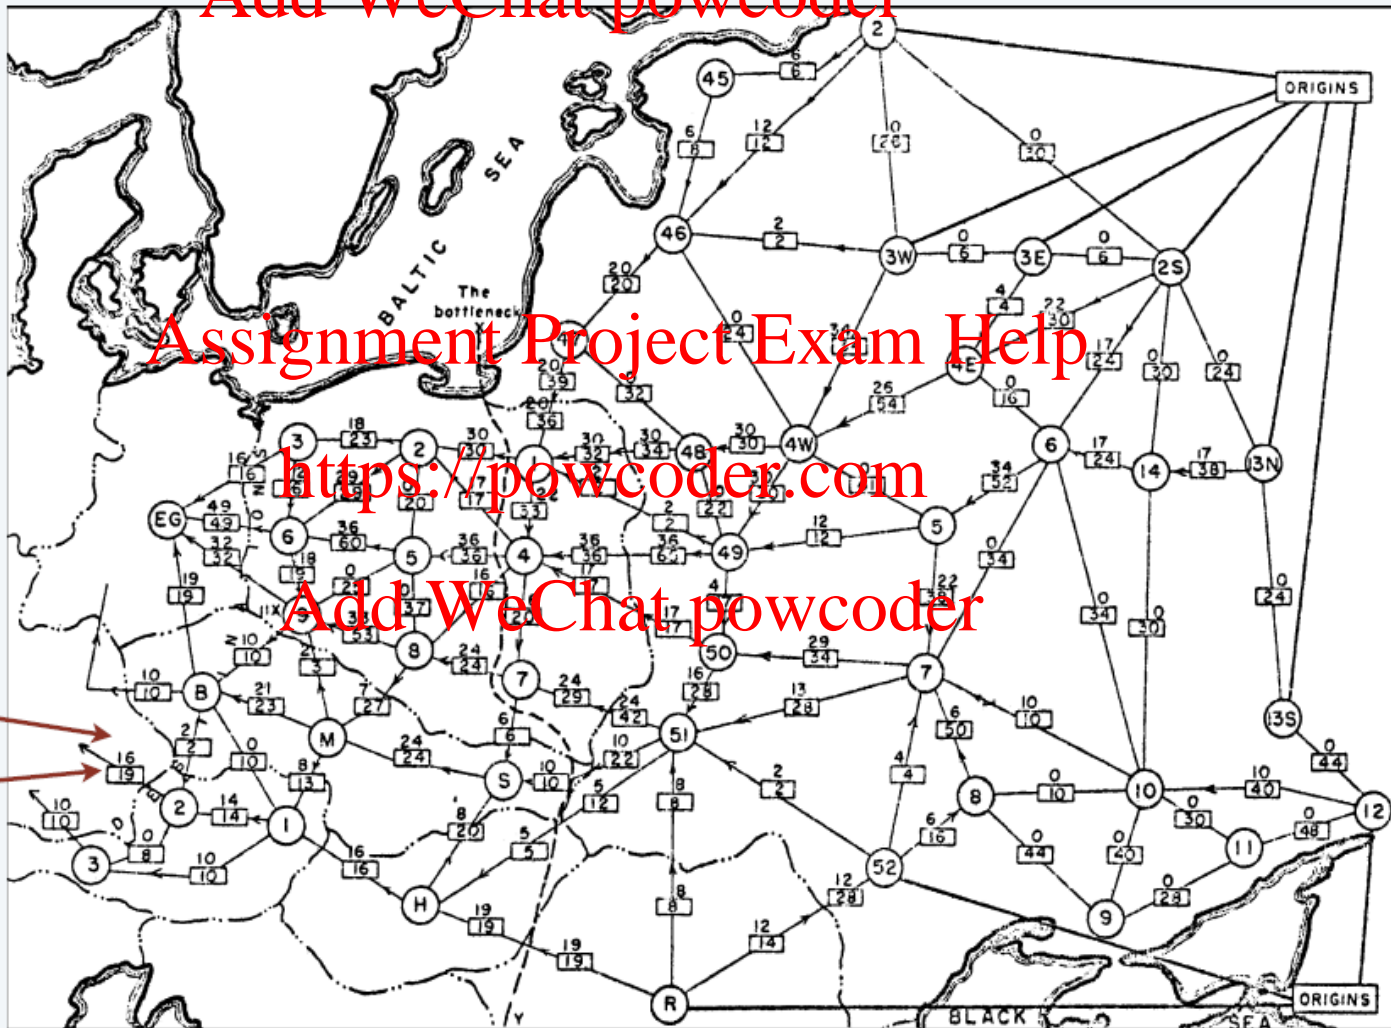

Rail network connecting Soviet Union with Eastern European countries (Tolstoï 1930s)

Add WeChat powcoder


Min-cut

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

flow
capacity

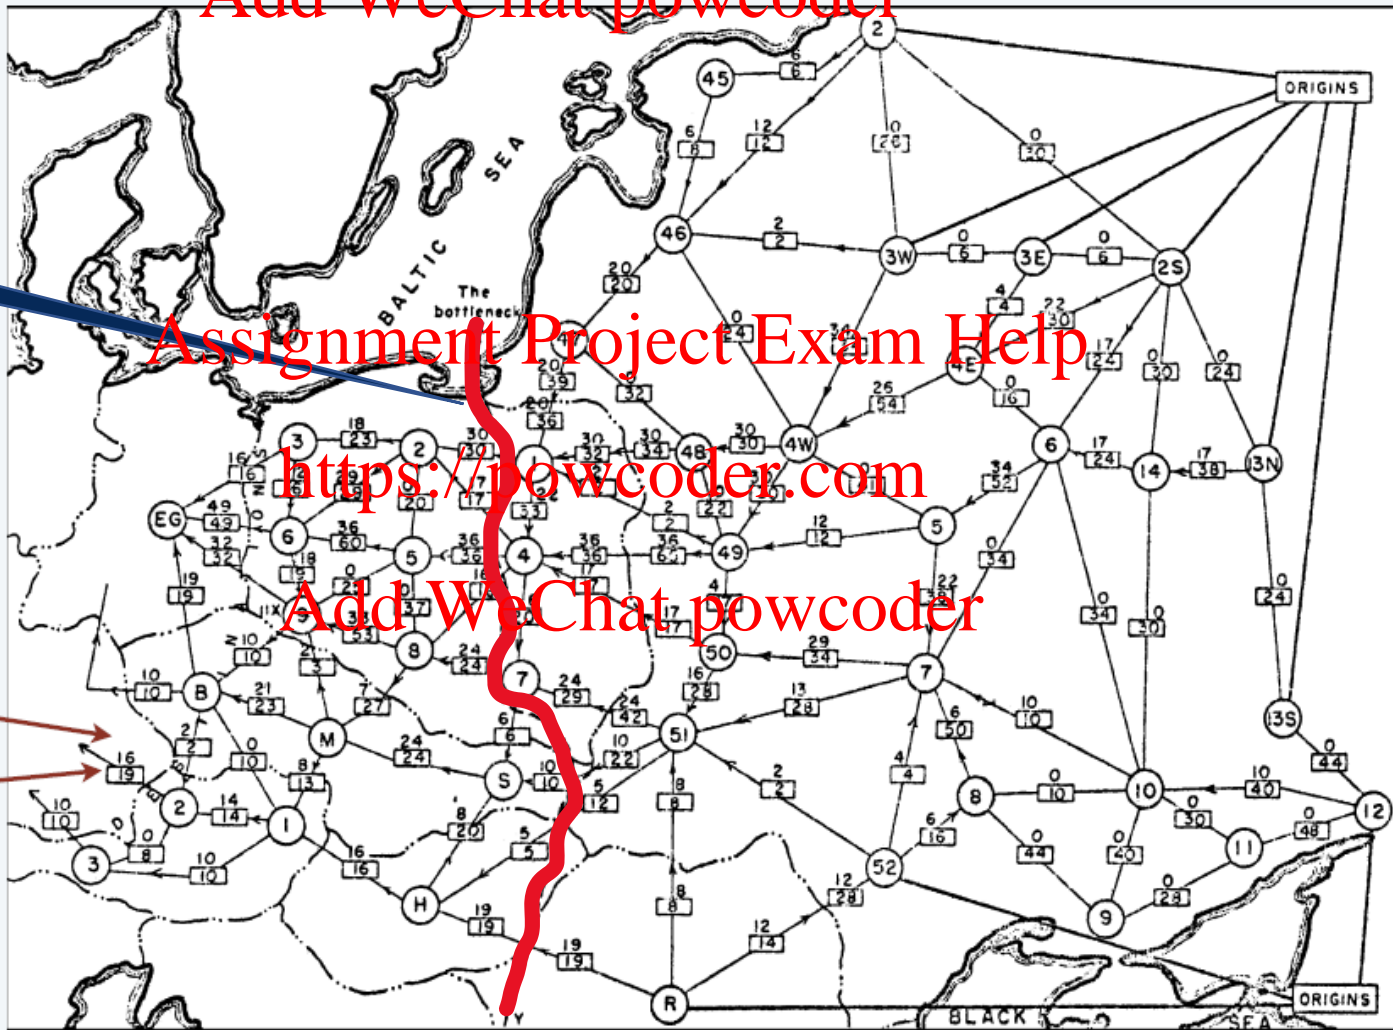

Integrality Theorem

Add WeChat powcoder

- Before we look at applications, we need the following special property of the max-flow computed by Ford-Fulkerson and its variants

Assignment Project Exam Help

- **Observation:** <https://powcoder.com>
 - If edge capacities are integers, then the max-flow computed by Ford-Fulkerson and its variants are also integral (i.e. the flow on each edge is an integer).
 - Easy to check that each augmentation step preserves integral flow

Add WeChat powcoder

Bipartite Matching

Add WeChat powcoder

- Problem

- Given a bipartite graph $G = (U \cup V, E)$, find a maximum cardinality matching


Assignment Project Exam Help

<https://powcoder.com>

- We do not know any efficient greedy or dynamic programming algorithm for this problem.
- But it can be reduced to max-flow.

Add WeChat powcoder

Bipartite Matching

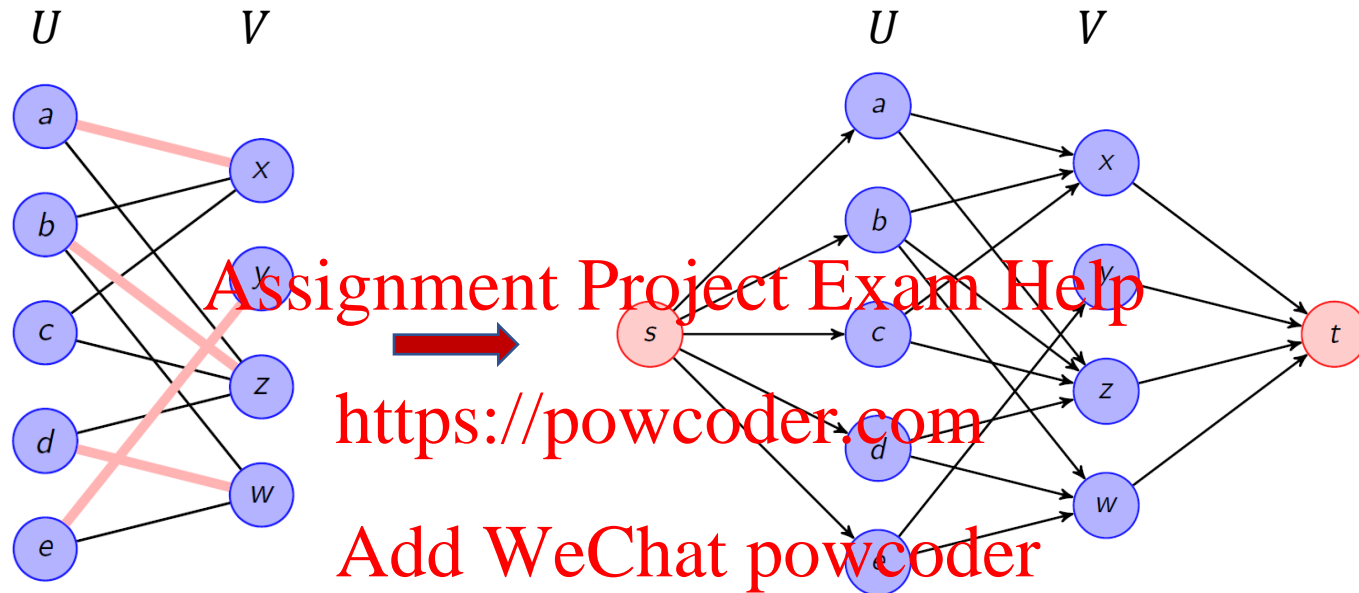

- Create a directed flow graph where we...
 - Add a source node s and target node t
 - Add edges, all of capacity 1:
 - $s \rightarrow u$ for each $u \in U$, $v \rightarrow t$ for each $v \in V$
 - $u \rightarrow v$ for each $(u, v) \in E$

Bipartite Matching

Add WeChat powcoder

- Observation

- There is a 1-1 correspondence between matchings of size k in the original graph and flows with value k in the corresponding flow network.

Assignment Project Exam Help

- Proof: (matching \Rightarrow integral flow)

<https://powcoder.com>

- Take a matching $M = \{(u_1, v_1), \dots, (u_k, v_k)\}$ of size k
- Construct the corresponding unique flow f_M where...
 - Edges $s \rightarrow u_i$, $u_i \rightarrow v_i$, and $v_i \rightarrow t$ have flow 1, for all $i = 1, \dots, k$
 - The rest of the edges have flow 0
- This flow has value k

Add WeChat powcoder

Bipartite Matching

Add WeChat powcoder

- Observation

- There is a 1-1 correspondence between matchings of size k in the original graph and flows with value k in the corresponding flow network.

Assignment Project Exam Help

- Proof: (integral flow \Rightarrow matching)

<https://powcoder.com>

- Take any flow f with value k
- The corresponding unique matching M_f = set of edges from U to V with a flow of 1
 - Since flow of k comes out of s , unit flow must go to k distinct vertices in U
 - From each such vertex in U , unit flow goes to a distinct vertex in V
 - Uses integrality theorem

Add WeChat powcoder

Bipartite Matching

Add WeChat powcoder

- Perfect matching = flow with value n
 - where $n = |U| = |V|$
- Recall naive Ford-Fulkerson running time:
 - $O((m + n) \cdot C)$ where C = sum of capacities of edges leaving s
 - Q: What's the additive WeChat powcoder used for bipartite matching?
- Some variants are faster...
 - Dinitz's algorithm runs in time $O(m\sqrt{n})$ when all edge capacities are 1

Assignment Project Exam Help

Hall's Marriage Theorem

Add WeChat powcoder


- When does a bipartite graph have a perfect matching?
 - Well, when the corresponding flow network has value n
 - But can we interpret this condition in terms of edges of the original bipartite graph?
 - For $S \subseteq U$, let $N(S) \subseteq V$ be the set of all nodes in V adjacent to some node in S
- Observation:
 - If G has a perfect matching, $|N(S)| \geq |S|$ for each $S \subseteq U$
 - Because each node in S must be matched to a distinct node in $N(S)$

Assignment Project Exam Help

Hall's Marriage Theorem

Add WeChat powcoder

- We'll consider a slightly different flow network, which is still equivalent to bipartite matching
 - All $U \rightarrow V$ edges now have ∞ capacity
 - $s \rightarrow U$ and $V \rightarrow t$ edges are still unit capacity

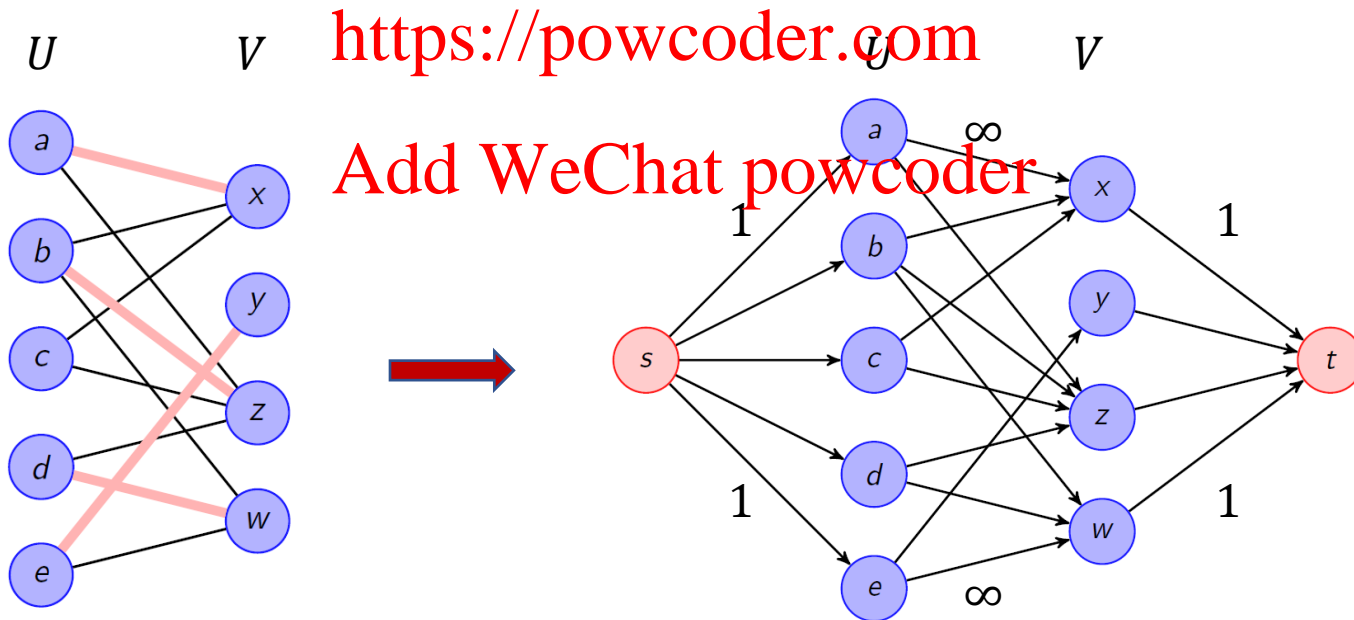

Hall's Marriage Theorem

Assignment Project Exam Help

Add WeChat powcoder

- Hall's Theorem:

- G has a perfect matching iff $|N(S)| \geq |S|$ for each $S \subseteq V$

Assignment Project Exam Help

- Proof (reverse direction, via network flow):

<https://powcoder.com>

- Suppose G doesn't have a perfect matching

Add WeChat powcoder

- Hence, max-flow = min-cut $< n$

- Let (A, B) be the min-cut

- Can't have any $U \rightarrow V$ (∞ capacity edges)
- Has unit capacity edges $s \rightarrow U \cap B$ and $V \cap A \rightarrow t$

Hall's Marriage Theorem

Assignment Project Exam Help
Add WeChat powcoder

- Hall's Theorem:

- G has a perfect matching iff $|N(S)| \geq |S|$ for each $S \subseteq V$

Assignment Project Exam Help

- Proof (reverse direction, via network flow):

- $cap(A, B) = |U \cap B| + |V \cap A| < n = |U|$

- So $|V \cap A| < |U \cap A|$

- But $N(U \cap A) \subseteq V \cap A$ because the cut doesn't include any ∞ edges

- So $|N(U \cap A)| \leq |V \cap A| < |U \cap A|$. ■

Some Notes

Add WeChat powcoder

- Runtime for bipartite perfect matching

- 1955: $O(mn)$ → Ford-Fulkerson
- 1973: $O(m\sqrt{n})$ → blocking flow (Hopcroft-Karp, Karzanov)
- 2004: $O(n^{2.378})$ → fast matrix multiplication (Mucha-Sankowski) <https://powcoder.com>
- 2013: $\tilde{O}(m^{10/7})$ → electrical flow (Madry)
- Best running time is still an open question

Add WeChat powcoder

- Nonbipartite graphs

- Hall's theorem → Tutte's theorem
- 1965: $O(n^4)$ → Blossom algorithm (Edmonds)
- 1980/1994: $O(m\sqrt{n})$ → Micali-Vazirani

Assignment Project Exam Help


Edge-Disjoint Paths

Add WeChat powcoder

- Problem

- Given a directed graph $G = (V, E)$, two nodes s and t , find the maximum number of edge-disjoint $s \rightarrow t$ paths

- Two $s \rightarrow t$ paths P and P' are edge-disjoint if they don't share an edge

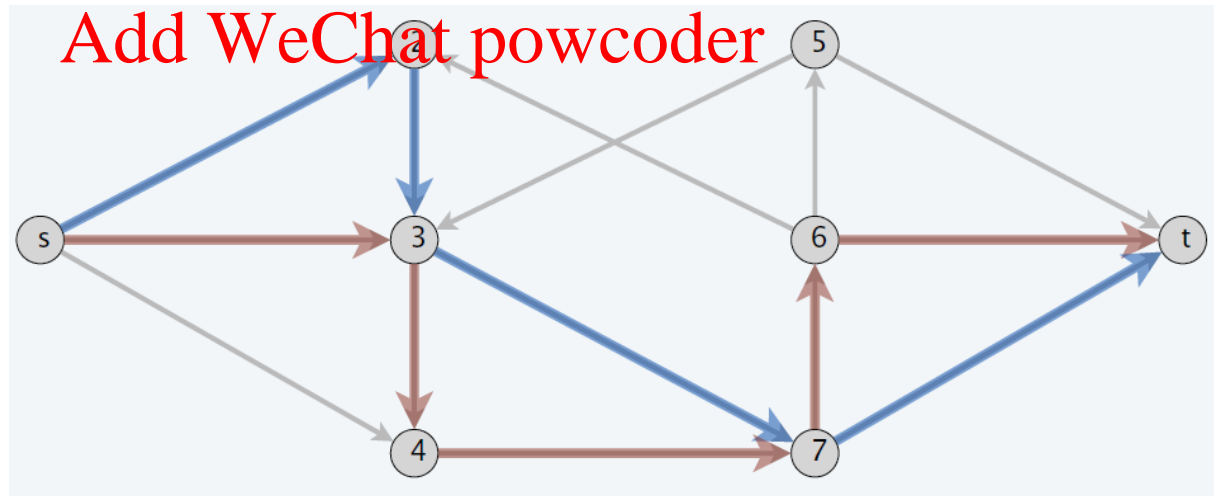


Assignment Project Exam Help

Edge-Disjoint Paths

Add WeChat powcoder

- Application:
 - Communication networks
 - Max-flow formulation
 - Assign unit capacity on all edges
- <https://powcoder.com>

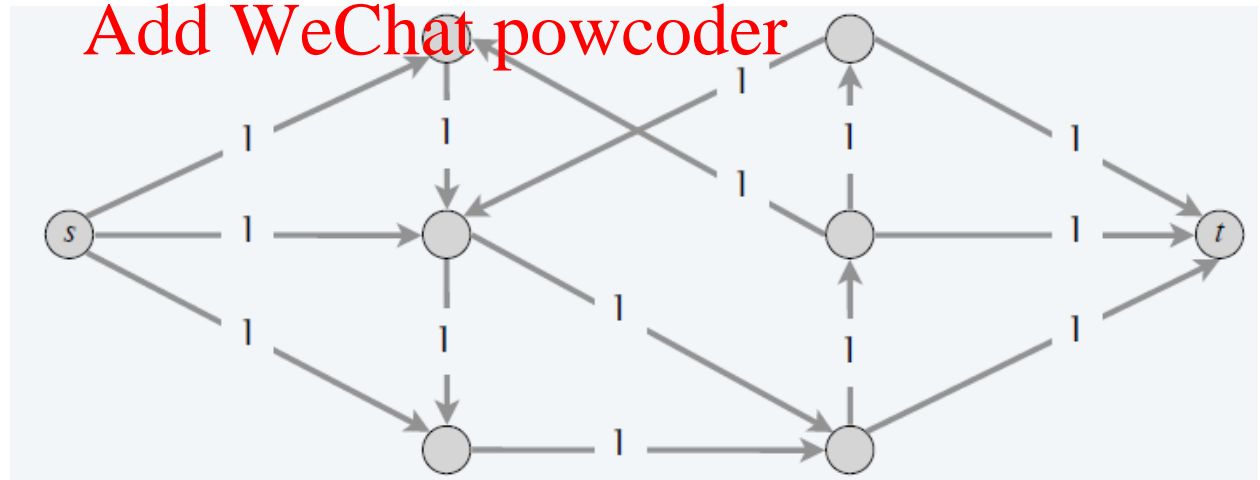

Edge-Disjoint Paths

Add WeChat powcoder

- Theorem:

- There is 1-1 correspondence between sets of k edge-disjoint $s \rightarrow t$ paths and integral flows of value k

Assignment Project Exam Help

- Proof (paths \rightarrow flow)

- Let $\{P_1, \dots, P_k\}$ be a set of k edge-disjoint $s \rightarrow t$ paths
- Define flow f where $f(e) = 1$ whenever $e \in P_i$ for some i , and 0 otherwise
- Since paths are edge-disjoint, flow conservation and capacity constraints are satisfied
- Unique integral flow of value k

<https://powcoder.com>

Add WeChat powcoder

Edge-Disjoint Paths

Add WeChat powcoder

- Theorem:

- There is 1-1 correspondence between k edge-disjoint $s \rightarrow t$ paths and integral flows of value k

Assignment Project Exam Help

- Proof (flow \rightarrow paths)

<https://powcoder.com>

- Let f be an integral flow of value k
- k outgoing edges from s have unit flow
- Pick one such edge (s, u_1)
 - By flow conservation, u_1 must have unit outgoing flow (which we haven't used up yet).
 - Pick such an edge and continue building a path until you hit t
- Repeat this for the other $k - 1$ edges coming out of s with unit flow. ■


Add WeChat powcoder

Assignment Project Exam Help

Edge-Disjoint Paths

Add WeChat powcoder

- Maximum number of edge-disjoint $s \rightarrow t$ paths
 - Equals max flow in this network
 - By max-flow min-cut theorem, also equals minimum cut
 - **Exercise:** minimum cut = minimum number of edges we need to delete to disconnect s from t
 - Hint: Show each direction separately (\leq and \geq)

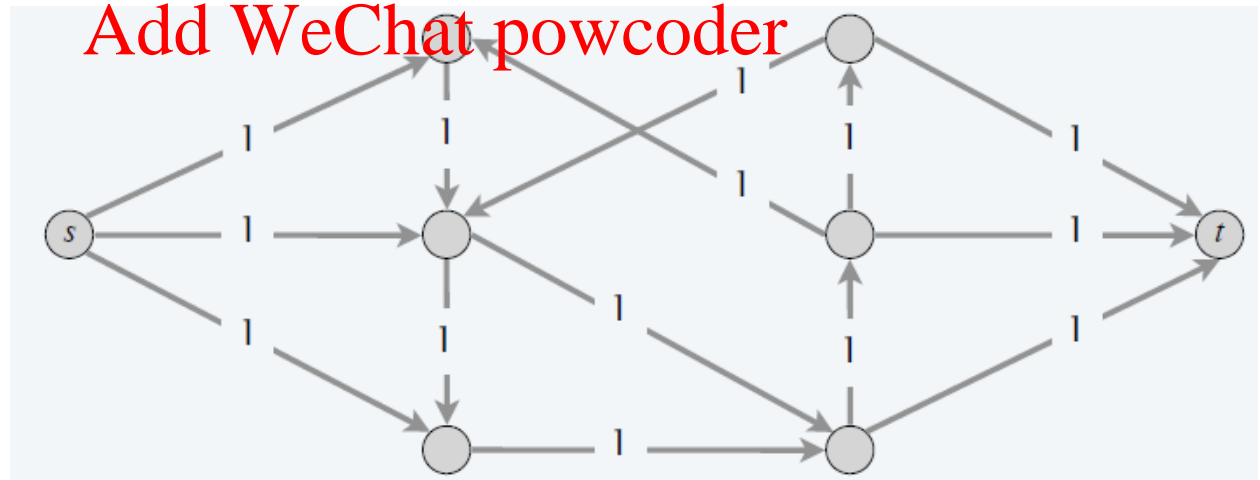

Edge-Disjoint Paths

Add WeChat powcoder

- Exercise!

- Show that to compute the maximum number of edge-disjoint s - t paths in an undirected graph, you can create a directed flow network by adding each undirected edge in both directions and setting all capacities to 1

<https://powcoder.com>

- Menger's Theorem

Add WeChat powcoder

- In any directed/undirected graph, the maximum number of edge-disjoint (resp. vertex-disjoint) $s \rightarrow t$ paths equals the minimum number of edges (resp. vertices) whose removal disconnects s and t

Assignment Project Exam Help

Multiple Sources/Sinks


Add WeChat powcoder

- Problem

- Given a directed graph $G = (V, E)$ with edge capacities $c: E \rightarrow \mathbb{N}$, sources s_1, \dots, s_k and sinks t_1, \dots, t_ℓ , find the maximum total flow from sources to sinks.

Assignment Project Exam Help

<https://powcoder.com>

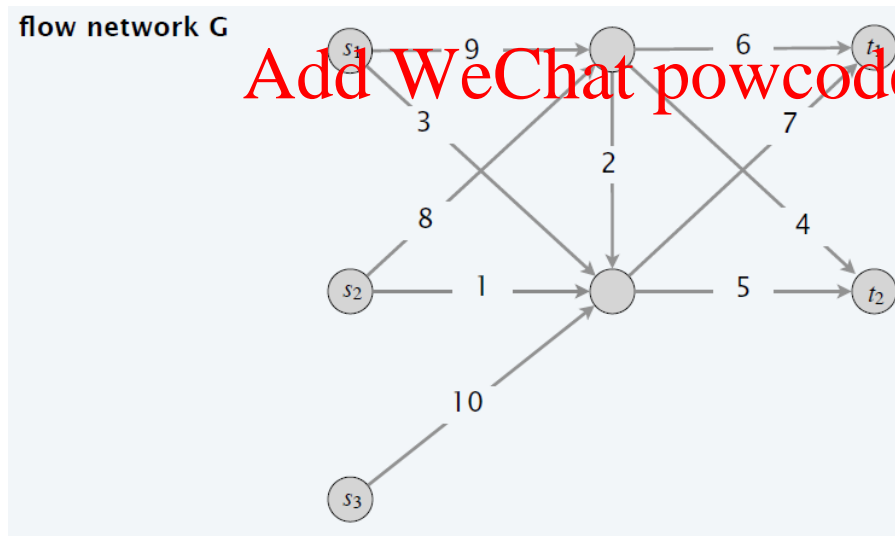

Add WeChat powcoder

Assignment Project Exam Help


Multiple Sources/Sinks

Add WeChat powcoder

- Network flow formulation

- Add a new source s , edges from s to each s_i with ∞ capacity
- Add a new sink t , edges from each t_i to t with ∞ capacity
- Find max-flow from s to t

- **Claim:** 1 – 1 correspondence between flows in two networks

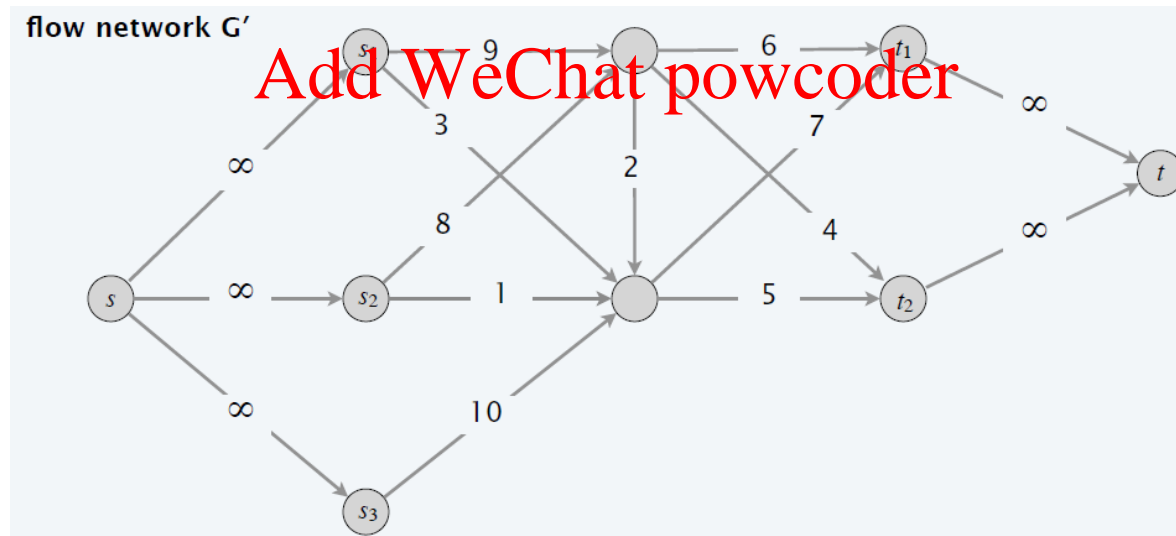

Circulation

- Input

- Directed graph $G = (V, E)$
- Edge capacities $c : E \rightarrow \mathbb{N}$
- Node demands $d : V \rightarrow \mathbb{Z}$

- Output

- Some circulation $f : E \rightarrow \mathbb{N}$ satisfying
 - For each $e \in E : 0 \leq f(e) \leq c(e)$
 - For each $v \in V : \sum_{e \text{ entering } v} f(e) - \sum_{e \text{ leaving } v} f(e) = d(v)$

- Note that you need $\sum_{v:d(v)>0} d(v) = \sum_{v:d(v)<0} -d(v)$
- What are demands?

Circulation

Add WeChat powcoder

- Demand at v = amount of flow you need to take out at node v
 - $d(v) > 0$: You need to take some flow out at v
 - So there should be $d(v)$ more incoming flow than outgoing flow
 - “Demand node”
 - $d(v) < 0$: You need to put some flow in at v
 - So there should be $|d(v)|$ more outgoing flow than incoming flow
 - “Supply node”
 - $d(v) = 0$: Node has flow conservation
 - Equal incoming and outgoing flows
 - “Transshipment node”

Assignment Project Exam Help


<https://powcoder.com>

Add WeChat powcoder

Circulation

Assignment Project Exam Help
Add WeChat powcoder

- Example

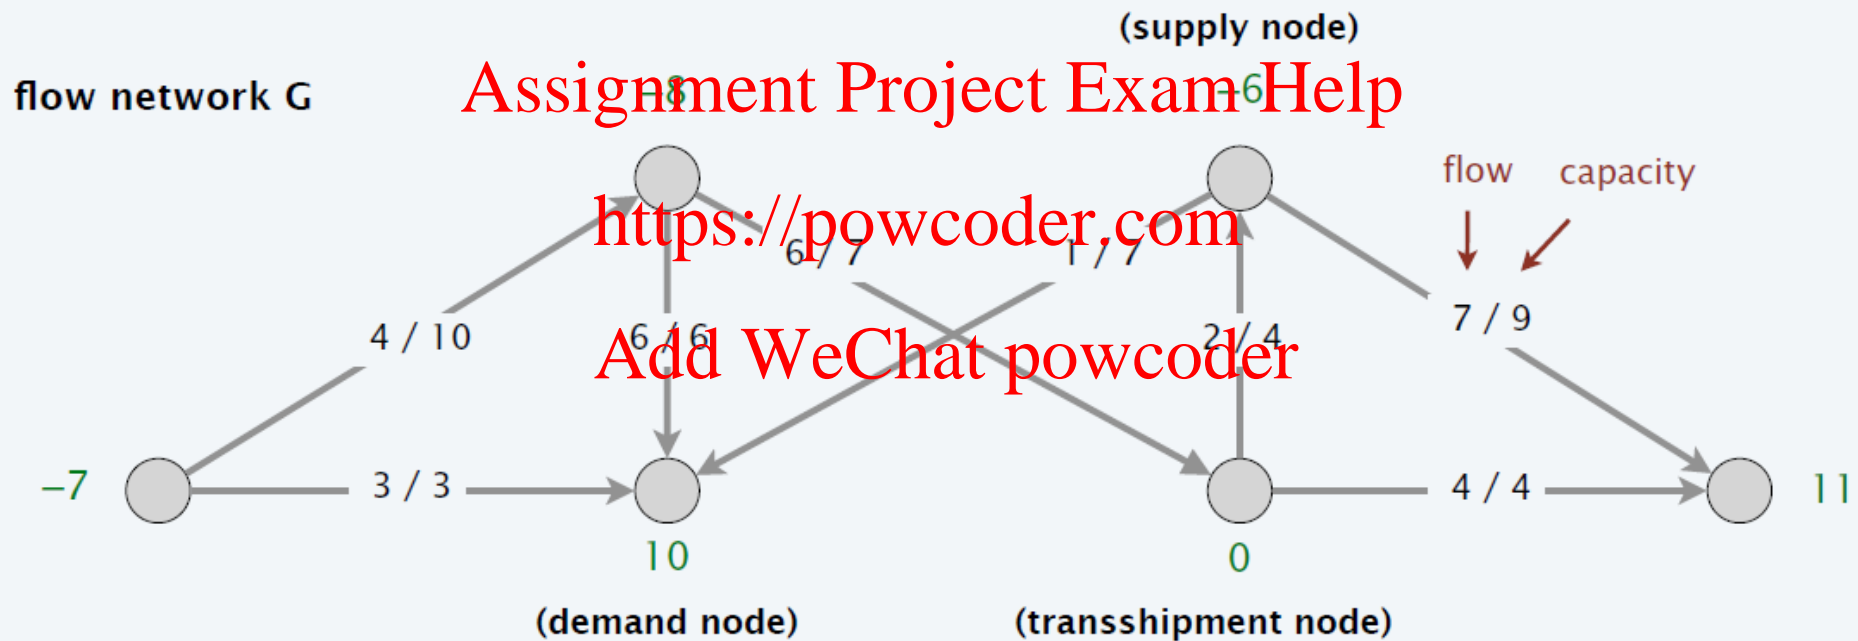

Circulation

Add WeChat powcoder

- Network-flow formulation G'

- Add a new source s and a new sink t
- For each “supply” node v with $d(v) < 0$, add edge (s, v) with capacity $-d(v)$
- For each “demand” node v with $d(v) > 0$, add edge (v, t) with capacity $d(v)$


Add WeChat powcoder

- **Claim:** G has a circulation iff G' has max flow of value $\sum_{v:d(v)>0} d(v) = \sum_{v:d(v)<0} -d(v)$

Circulation

Assignment Project Exam Help
Add WeChat powcoder


- Example

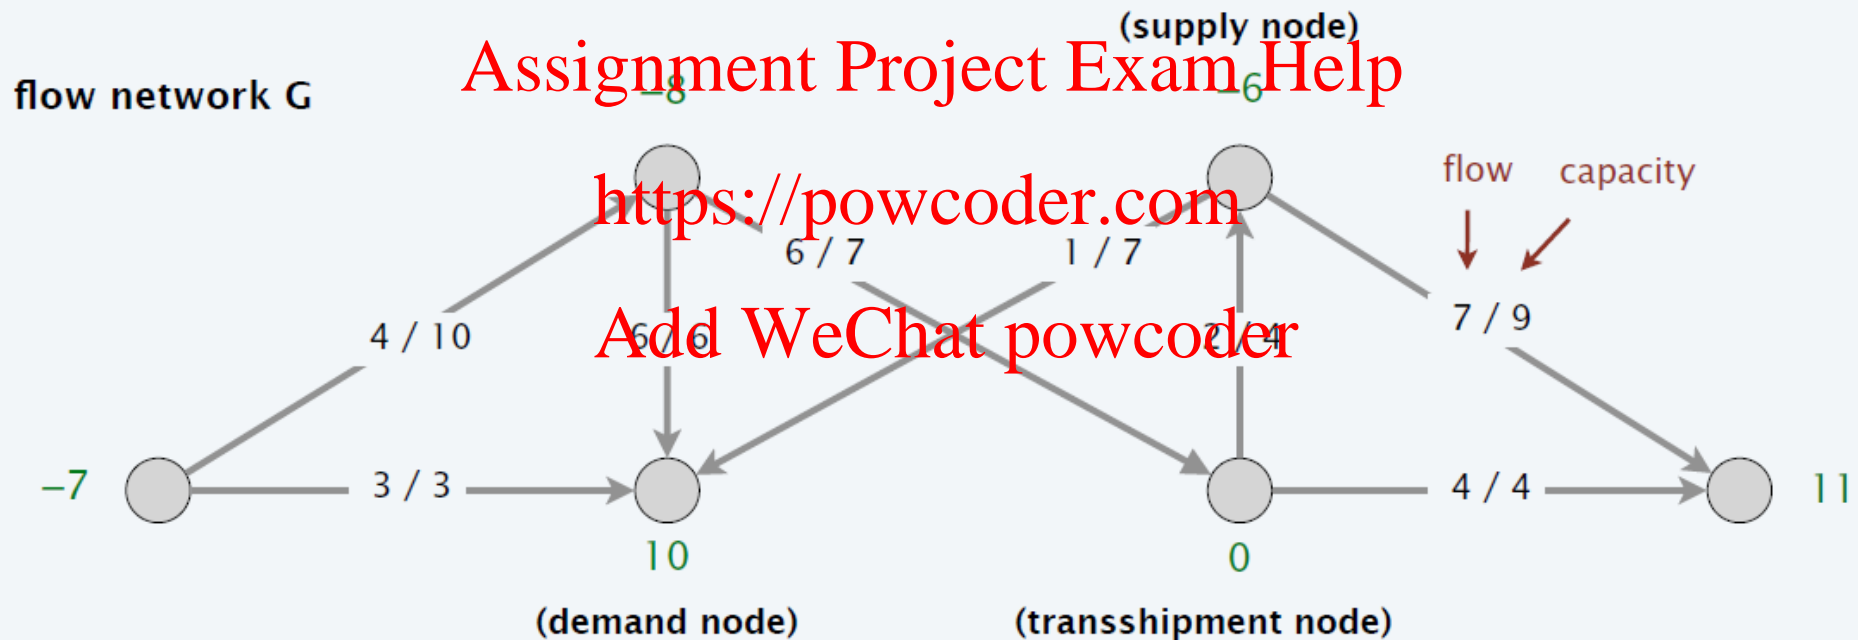

Circulation

Assignment Project Exam Help
Add WeChat powcoder

- Example

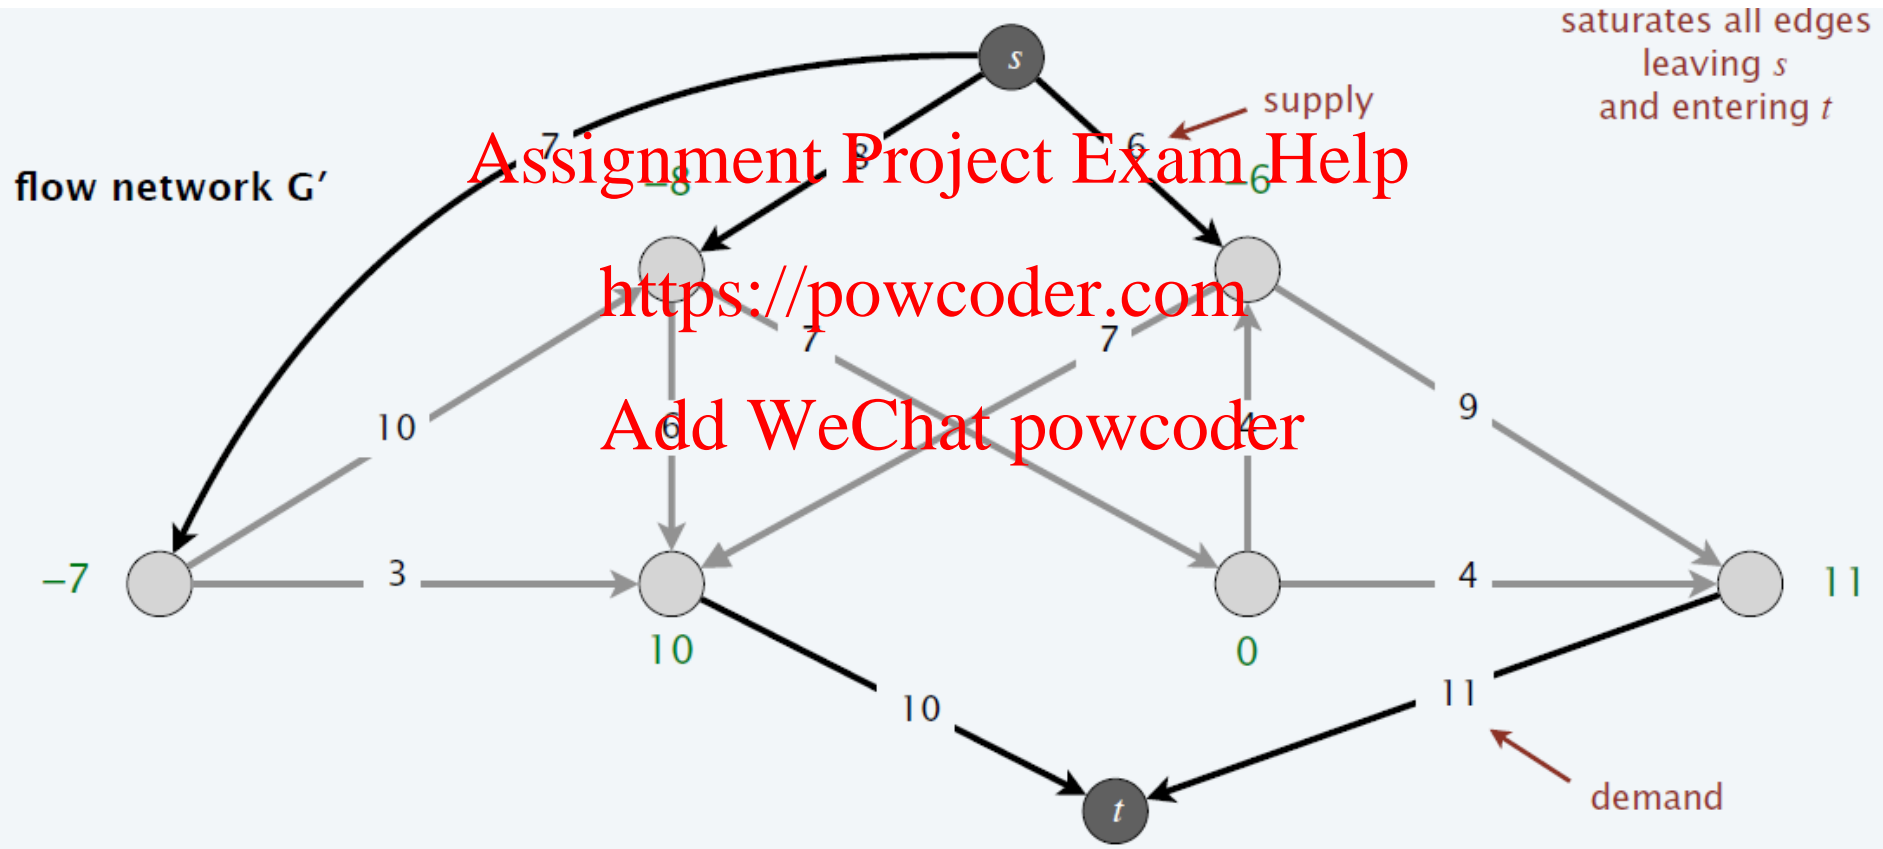

Circulation with Lower Bounds

• Input

- Directed graph $G = (V, E)$
- Edge capacities $c : E \rightarrow \mathbb{N}$ and lower bounds $\ell : E \rightarrow \mathbb{N}$
- Node demands $d : V \rightarrow \mathbb{Z}$

• Output


- Some circulation $f : E \rightarrow \mathbb{N}$ satisfying
 - For each $e \in E : \ell(e) \leq f(e) \leq c(e)$
 - For each $v \in V : \sum_{e \text{ entering } v} f(e) - \sum_{e \text{ leaving } v} f(e) = d(v)$

- Note that you still need $\sum_{v:d(v)>0} d(v) = \sum_{v:d(v)<0} -d(v)$

Circulation with Lower Bounds

Add WeChat powcoder

- Transform to circulation without lower bounds
 - Do the following operation to each edge

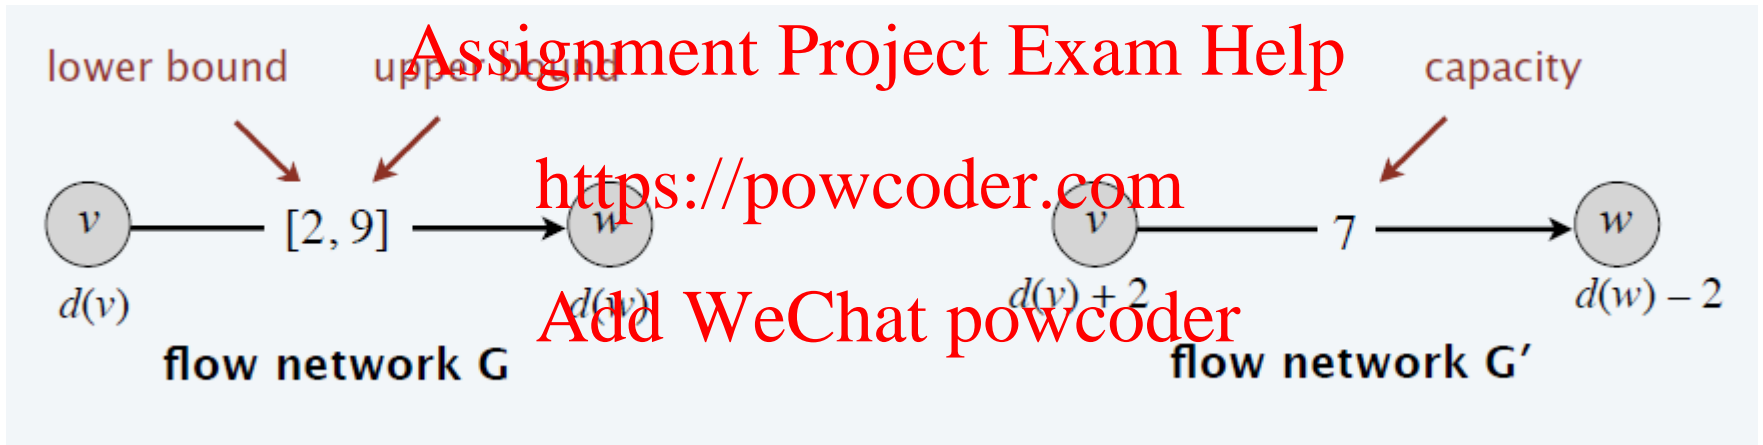

- **Claim:** Circulation in G iff circulation in G'
 - Proof sketch: $f(e)$ gives a valid circulation in G iff $f(e) - \ell(e)$ gives a valid circulation in G'

Assignment Project Exam Help

Survey Design

Add WeChat powcoder

- Problem

- We want to design a survey about m products
 - We have one question in mind for each product
 - Need to ask product j 's question to between p_j and p_j' consumers
- There are a total of n consumers
 - Consumer i owns a subset of products O_i
 - We can ask consumer i questions about only these products
 - We want to ask consumer i between c_i and c_i' questions
- Is there a survey meeting all these requirements?

Assignment Project Exam Help

Survey Design

Add WeChat powcoder

- Bipartite matching is a special case

➤ $c_i = c'_i = p_j = p'_j = 1$ for all i and j

Assignment Project Exam Help

- Formulate as circulation with lower bounds

<https://powcoder.com>

➤ Create a network with special nodes s and t

➤ Edge from s to each consumer i with flow $\in [c_i, c'_i]$

Add WeChat powcoder

➤ Edge from each consumer i to each product $j \in O_i$ with flow $\in [0, 1]$

➤ Edge from each product j to t with flow $\in [p_j, p'_j]$

➤ Edge from t to s with flow in $[0, \infty]$


➤ All demands and supplies are 0

Assignment Project Exam Help

Survey Design

Add WeChat powcoder

- Max-flow formulation:
 - Feasible survey iff feasible circulation in this network

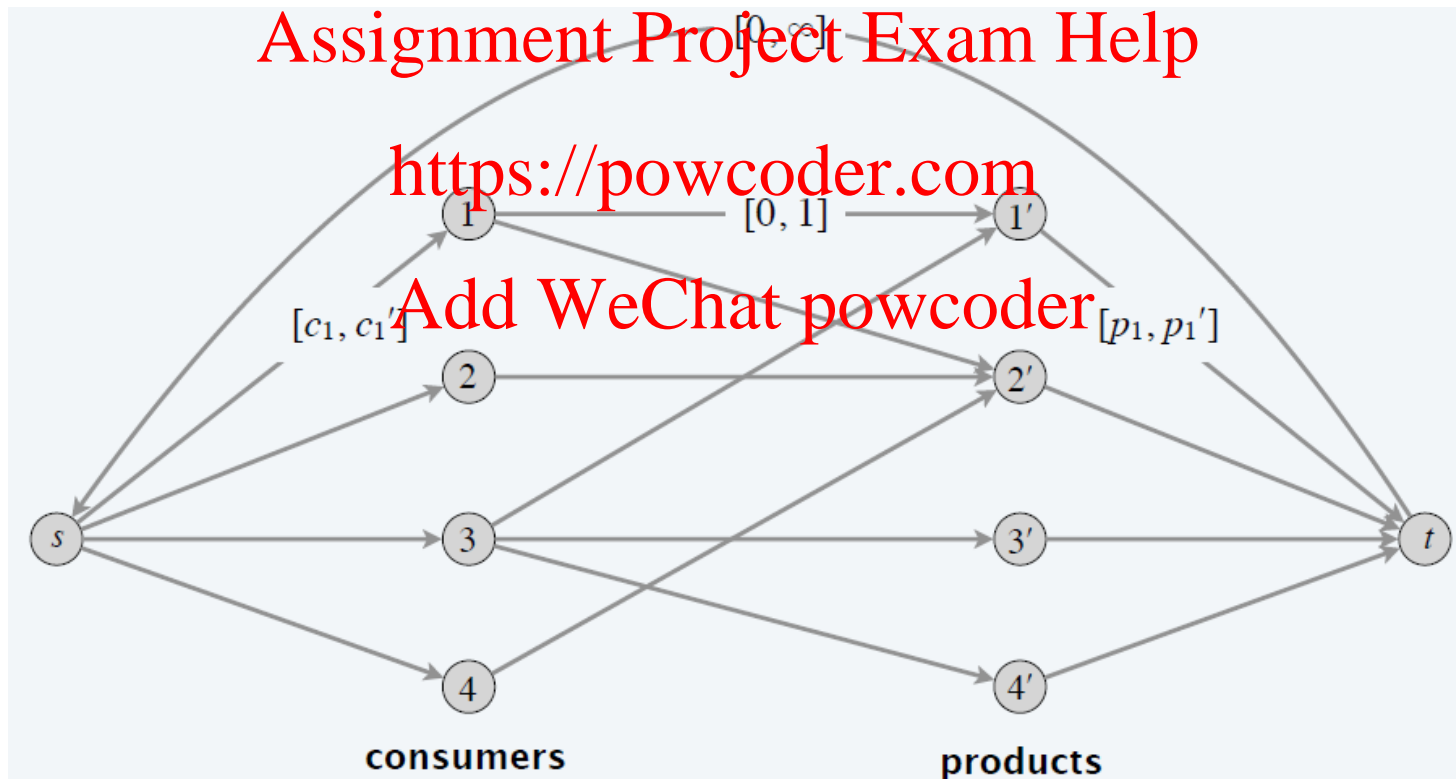

Assignment Project Exam Help

Image Segmentation

Add WeChat powcoder



- Foreground/background segmentation
 - Given an image, separate “foreground” from “background”
- Here's the power of PowerPoint (or the lack thereof)

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Remove
background

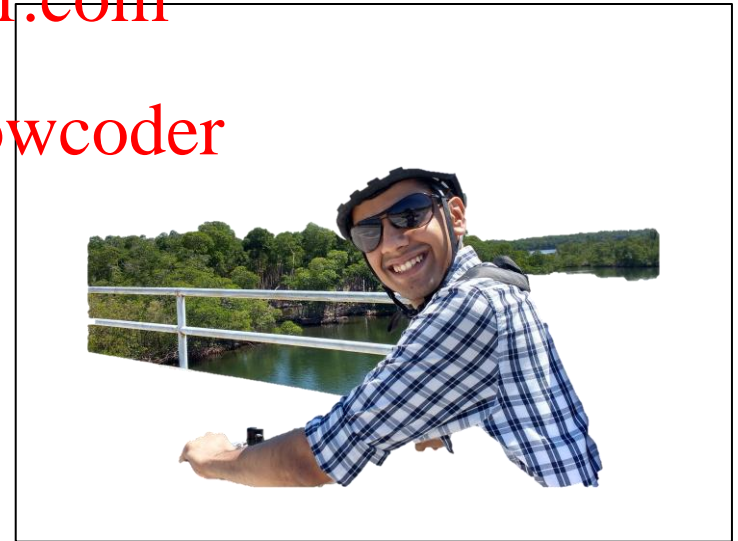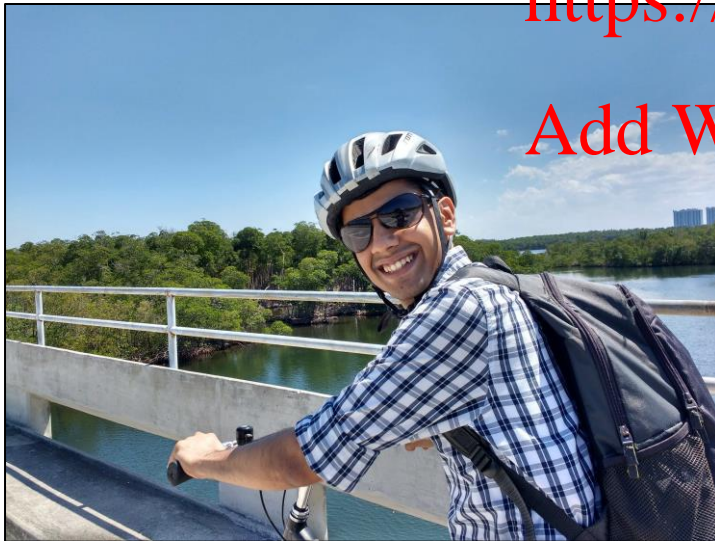

Assignment Project Exam Help

Image Segmentation

Add WeChat powcoder


- Foreground/background segmentation
 - Given an image, separate “foreground” from “background”
- Here's what remove.bg gets using AI

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Remove
background

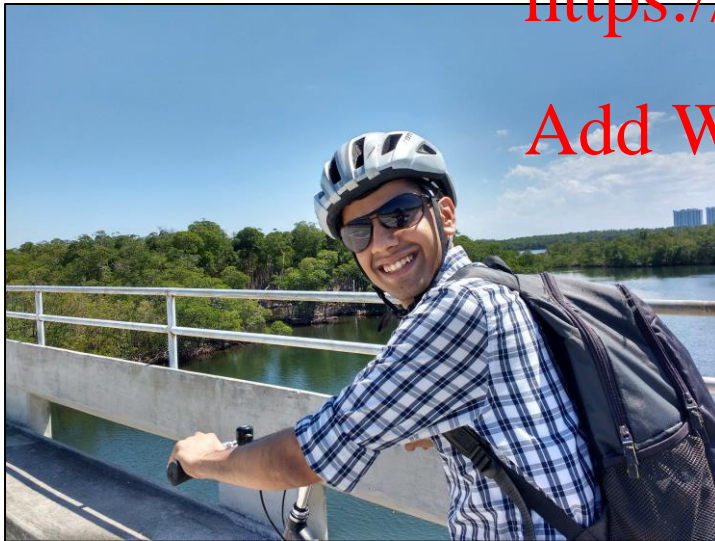

Assignment Project Exam Help


Image Segmentation

Add WeChat powcoder

- Informal problem

- Given an image (2D array of pixels), and likelihood estimates of different pixels being foreground/background, label each pixel as foreground or background

- Want to prevent having too many neighboring pixels where one is labeled foreground but the other is labeled background

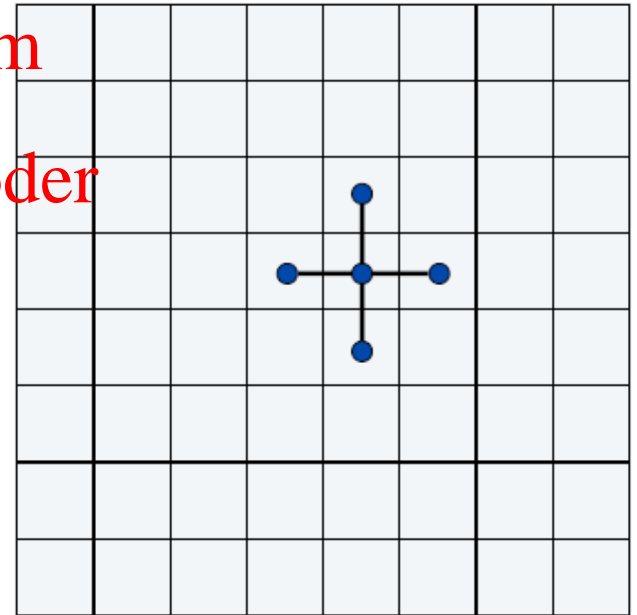

Assignment Project Exam Help

Image Segmentation

Add WeChat powcoder

- Input

- An image (2D array of pixels)
- a_i = likelihood of pixel i being in foreground
- b_i = likelihood of pixel i being in background
- $p_{i,j}$ = penalty for “separating” pixels i and j (i.e. labeling one of them as foreground and the other as background)

- Output

- Label each pixel as “foreground” or “background”
- Minimize “total penalty”
 - Want it to be high if a_i is high but i is labeled background, b_i is high but i is labeled foreground, or $p_{i,j}$ is high but i and j are separated

Assignment Project Exam Help

Image Segmentation

Add WeChat powcoder

- Recall

- a_i = likelihood of pixels i being in foreground
- b_i = likelihood of pixels i being in background
- $p_{i,j}$ = penalty for separating pixels i and j
- Let E = pairs of neighboring pixels

- Output

- Minimize total penalty

- A = set of pixels labeled foreground
- B = set of pixels labeled background
- Penalty =

$$\sum_{i \in A} b_i + \sum_{j \in B} a_j + \sum_{\substack{(i,j) \in E \\ |A \cap \{i,j\}| = 1}} p_{i,j}$$

Assignment Project Exam Help

Image Segmentation

Add WeChat powcoder

- Formulate as a min-cut problem

- Want to divide the set of pixels V into (A, B) to minimize

$$\sum_{i \in A} b_i + \sum_{j \in B} a_j + \sum_{(i,j) \in E} p_{i,j}$$

Assignment Project Exam Help

<https://powcoder.com>

- Nodes:

- source s , target t , and v_i for each pixel i

- Edges:

- (s, v_i) with capacity a_i for all i
- (v_i, t) with capacity b_i for all i
- (v_i, v_j) and (v_j, v_i) with capacity $p_{i,j}$ each for all neighboring (i, j)


Assignment Project Exam Help

Image Segmentation

Add WeChat powcoder

- Formulate as min-cut problem
 - Here's what the network looks like

Assignment Project Exam Help

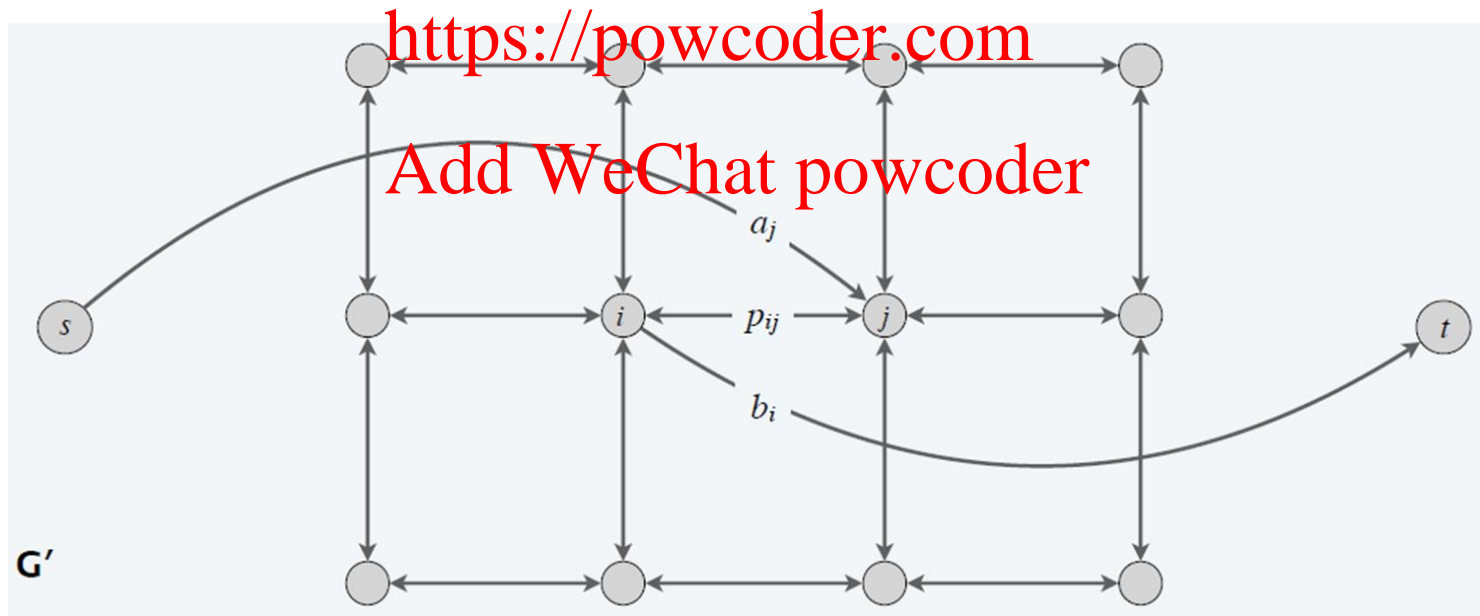

Assignment Project Exam Help

Image Segmentation

Add WeChat powcoder

If i and j are labeled differently, it will add $p_{i,j}$ exactly once

- Consider the min-cut (A, B)


$$cap(A, B) = \sum_{i \in A} b_i + \sum_{j \in B} a_j + \sum_{\substack{(i,j) \in E \\ i \in A, j \in B}} p_{i,j}$$

- Exactly what we want to minimize!

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

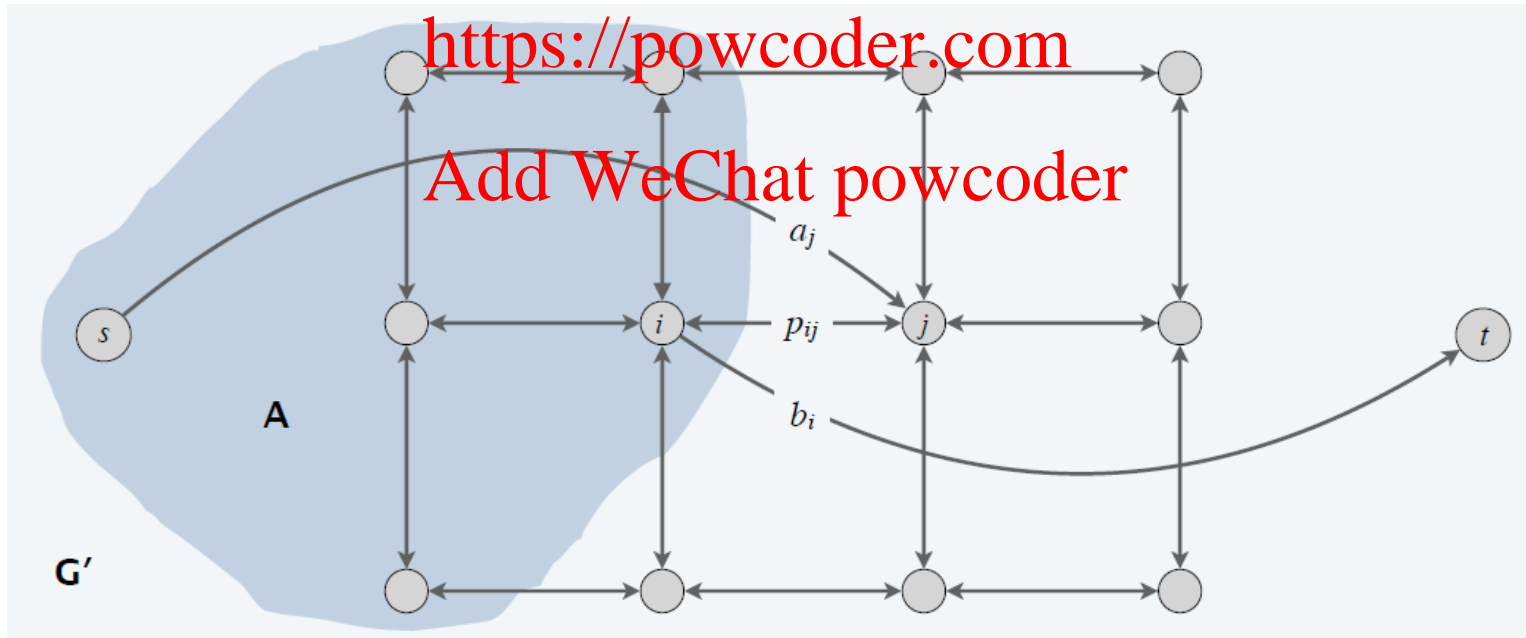

Assignment Project Exam Help

Image Segmentation

Add WeChat powcoder

- GrabCut [Rother-Kolmogorov-Blake 2004]

“GrabCut” — Interactive Foreground Extraction using Iterated Graph Cuts

Carsten Rother*

Vladimir Kolmogorov[†]

Andrew Blake[‡]

<https://powcoder.com>



Figure 1: Three examples of GrabCut . The user drags a rectangle loosely around an object. The object is then extracted automatically.

Assignment Project Exam Help Profit Maximization (Yea...!)

Add WeChat powcoder

- Problem

- There are n tasks
- Performing task i generates a profit of p_i
 - We allow $p_i < 0$ (i.e. performing task i may be costly)
- There is a set E of precedence relations
 - $(i, j) \in E$ indicates that if we perform i , we must also perform j

- Goal


- Find a subset of tasks S which, subject to the precedence constraints, maximizes $profit(S) = \sum_{i \in S} p_i$

Assignment Project Exam Help

Profit Maximization

Add WeChat powcoder

- We can represent the input as a graph
 - Nodes = tasks, node weights = profits,
 - Edges = precedence constraints
 - **Goal:** find a subset of nodes S with highest total weight s.t. if $i \in S$ and $(i, j) \in E$, then $j \in S$ as well

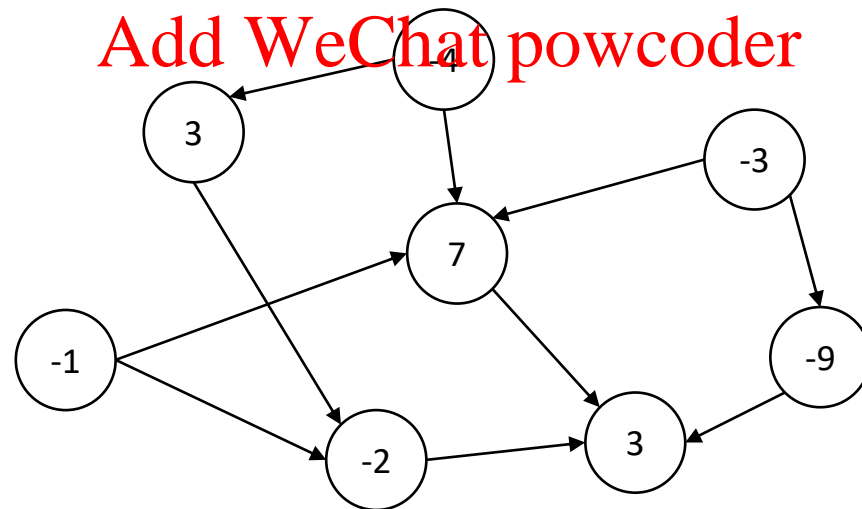

Assignment Project Exam Help

Profit Maximization


Add WeChat powcoder

- Want to formulate as a min-cut
 - Add source s and target t
 - min-cut $(A, B) \Rightarrow$ want desired solution to be $S = A \setminus \{s\}$
 - Goals:
 - $cap(A, B)$ should nicely relate to $profit(S)$
 - Precedence constraints must be respected
 - “Hard” constraints are usually enforced using infinite capacity edges
- Construction:
 - Add each $(i, j) \in E$ with *infinite* capacity
 - For each i :
 - If $p_i > 0$, add (s, i) with capacity p_i
 - If $p_i < 0$, add (i, t) with capacity $-p_i$

Assignment Project Exam Help

Profit Maximization


Add WeChat powcoder

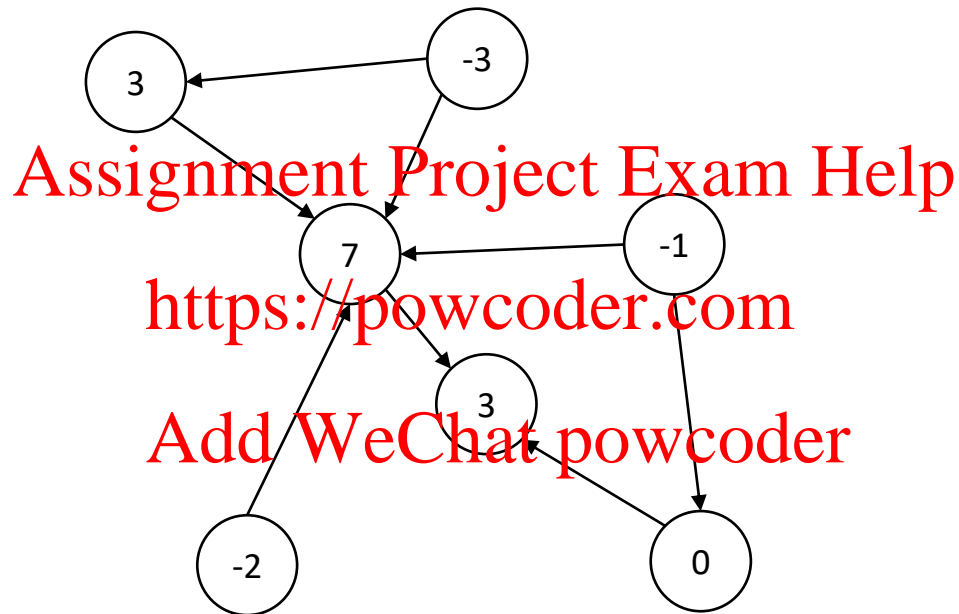

Assignment Project Exam Help

Profit Maximization


Add WeChat powcoder

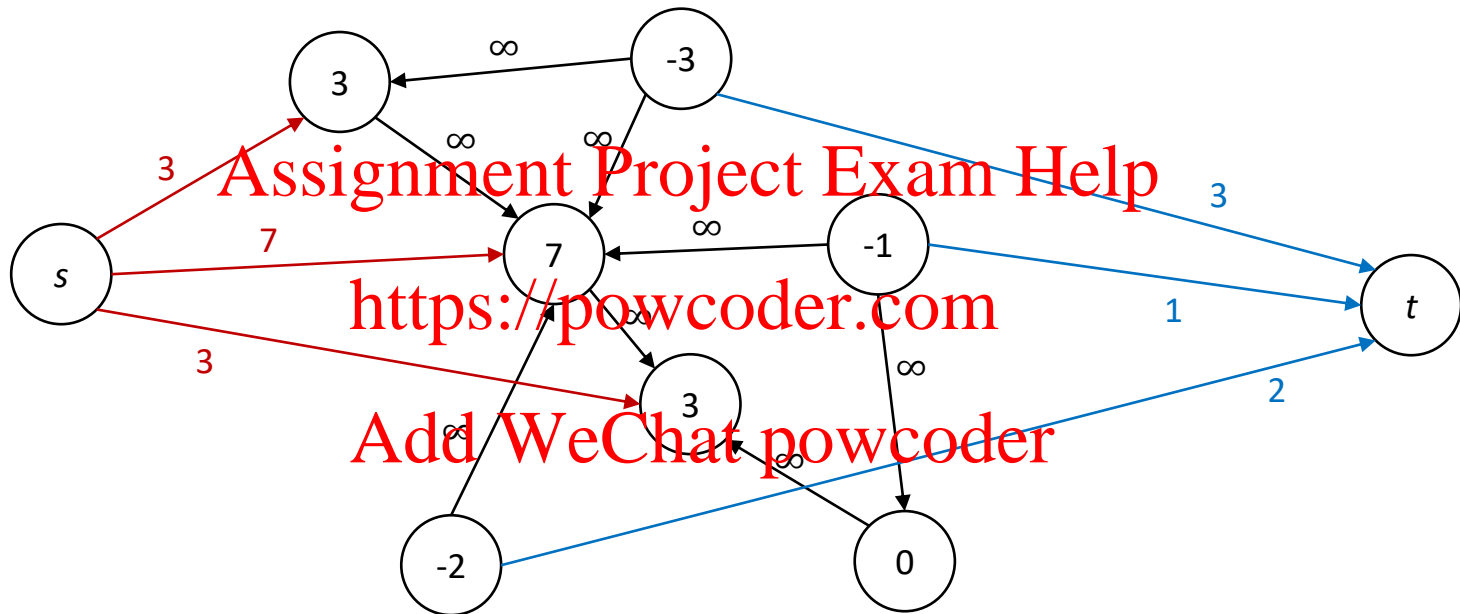

Assignment Project Exam Help

Profit Maximization

Add WeChat powcoder

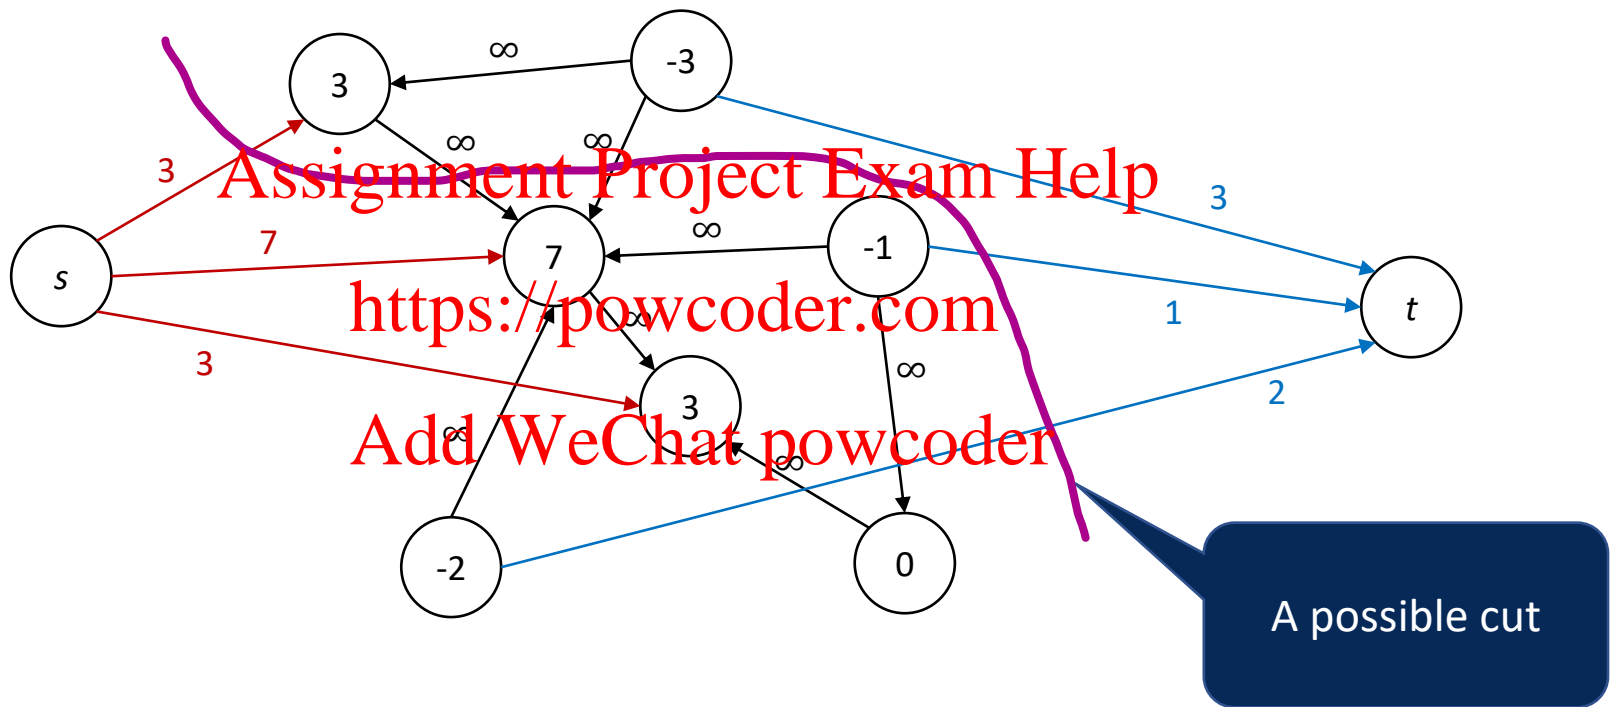

QUESTION: What is the capacity of this cut?

Assignment Project Exam Help

Profit Maximization

Add WeChat powcoder

Exercise: Show that...

1. A finite capacity cut exists.
2. If $cap(A, B)$ is finite, then $A \setminus \{s\}$ is a valid solution;
3. Minimizing $cap(A, B)$ maximizes $profit(A \setminus \{s\})$
 - Show that $cap(A, B) = \text{constant} - profit(A \setminus \{s\})$, where the constant is independent of the choice of (A, B)