

Semantic Analysis

Assignment Project Exam Help

CSE 307 – <https://powcoder.com> Principles of Programming Languages

Stony Brook University
Add WeChat powcoder

<http://www.cs.stonybrook.edu/~cse307>

Role of Semantic Analysis

- Syntax vs. Semantics:
 - syntax concerns the form of a valid program (described conveniently by a context-free grammar CFG)
 - semantics concerns its meaning: rules that go beyond mere form
- the number of arguments contained in a call to a subroutine matches the number of formal parameters in the subroutine definition – cannot be counted using CFG
- type consistency
- All branches of a subroutine end with a valid return

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Role of Semantic Analysis

- Defines what the program means
- Detects if the program is correct
<https://powcoder.com>
- Helps to translate it into another representation

Role of Semantic Analysis

- Following parsing, the next two phases of the "typical" compiler are:
 - semantic analysis
 - (intermediate) code generation
- Semantic rules are divided into:
 - *static* semantics enforced at compile time
 - *dynamic* semantics: the compiler generates code to enforce dynamic semantic rules at run time (or calls libraries to do it) (for errors like division by zero, out-of-bounds index in array)
- The principal job of the *semantic analyzer* is to enforce static semantic rules, plus:
 - constructs a syntax tree
 - gathers information needed by the code generator

Role of Semantic Analysis

- Parsing, semantic analysis, and intermediate code generation can be interleaved:
 - a common approach interleaves construction of a syntax tree during parsing with phases for semantic analysis and code generation
 - The semantic analysis and intermediate code generation annotate the parse tree with *attributes*
 - *Attribute grammars* provide a formal framework for the decoration of a syntax tree
 - The *attribute flow* constrains the order(s) in which nodes of a tree can be decorated.
 - Can replace the parse tree with a syntax tree that reflects the input program in a more straightforward way

Role of Semantic Analysis

- Dynamic checks: semantic rules enforced at run time
 - C requires no dynamic checks at all (it relies on the hardware to find division by zero, or attempted access to memory outside the bounds of the program).
 - Java checks as many rules as possible, so that an untrusted program cannot do anything to damage the memory or files of the machine on which it runs.
- Many compilers that generate code for dynamic checks provide the option of disabling them (enabled during program development and testing, but disabled for production use, to increase execution speed)
 - Hoare: “*like wearing a life jacket on land, and taking it off at sea*”

Role of Semantic Analysis

- **Assertions**: logical formulas written by the programmers regarding the values of program data used to reason about the correctness of their algorithms (the assertion is expected to be **true** when execution reaches a certain point in the code):
 - Java: `assert denominator != 0;`
 - An **AssertionError** exception will be thrown if the semantic check fails at run time.
 - C: `assert (denominator != 0);`
 - If the assertion fails, the program will terminate abruptly with a message: `a.c:10: failed assertion 'denominator != 0'`
 - Some languages also provide explicit support for *invariants*, *preconditions*, and *post-conditions*.
 - Like Dafny from Microsoft <https://github.com/Microsoft/dafny>

Automated Verification

- Languages for formally specifying an algorithm:
 - Dafny, ProVerif, TLA+
- Model Checking - systematic exploration of all the program states reachable by the specified algorithm. Each state checked for violations of claims in specification.
- Automated verification uses interactive theorem provers (Coq, Isabelle, etc.) or SMT solvers to verify that all claims made about the program state in the specification are true.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Java Assertions

- Java example:
 - An assertion in Java is a statement that enables us to assert an assumption about our program.
 - An assertion contains a Boolean expression that should be true during program execution.
 - Assertions can be used to assure program correctness and avoid logical errors.
 - An assertion is declared using the Java keyword **assert** in JDK 1.5 as follows:

assert assertion; //OR

assert assertion : detailMessage;

where **assertion** is a Boolean expression and **detailMessage** is a primitive-type or an **Object** value.

Java Assertion Example

```
public class AssertionDemo {  
    public static void main(String[] args) {  
        int i;  
        int sum = 0;  
        for (i = 0; i < 10; i++) {  
            sum += i;  
        }  
        assert i==10;  
        assert sum>10 && sum<5*10 : "sum is " + sum;  
    }  
}
```

- When an assertion statement is executed, Java evaluates the assertion
 - If it is false, an **AssertionError** will be thrown

Java Assertion Example

- The **AssertionError** class has a no-arg constructor and seven overloaded single-argument constructors of type **int**, **long**, **float**, **double**, **boolean**, **char**, and **Object**
- For the first assert statement in the example (with no detail message), the no-arg constructor of **AssertionError** is used.
- For the second assert statement with a detail message, an appropriate **AssertionError** constructor is used to match the data type of the message.
- Since **AssertionError** is a subclass of **Error**, when an assertion becomes false, the program displays a message on the console and exits

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Running Programs with Assertions

- By default, the assertions are disabled at runtime
 - To enable it, use the switch **-enableassertions**, or **-ea** for short, as follows:

```
java -ea AssertionDemo
public class AssertionDemo {
    public static void main(String[] args) {
        int i; int sum = 0;
        for (i = 0; i < 10; i++) {
            sum += i;
        }
        assert i!=10;
    }
}
```

Exception in thread "main" java.lang.AssertionError
at AssertionDemo.main([AssertionDemo.java:7](#))

Running Programs with Assertions

- Assertions can be selectively enabled or disabled at class level or package level
- The disable switch is **-disableassertions** or **-da** for short.
- For example, the following command enables assertions in package **package1** and disables assertions in class **Class1**:

```
java -ea:package1 -da:Class1 AssertionDemo
```

Using Exception Handling or Assertions?

- Assertion should not be used to replace exception handling.
- Exception handling deals with unusual circumstances during program execution.
- Assertions are to assure the correctness of the program
- Exception handling addresses *robustness* and assertion addresses *correctness*
- Assertions are used for internal consistency and validity checks
- Assertions are checked at runtime and can be turned on or off at startup time

Using Exception Handling or Assertions?

- Do not use assertions for argument checking in public methods:
 - Valid arguments that may be passed to a public method are considered to be part of the method's contract
 - The contract must always be obeyed whether assertions are enabled or disabled
 - For example, the following code in the **Circle** class should be rewritten using exception handling:

```
public void setRadius(double newRadius) {  
    assert newRadius >= 0;  
    radius = newRadius;  
}
```

Using Exception Handling or Assertions?

- Use assertions to reaffirm assumptions.
 - This gives you more confidence to assure correctness of the program.
- A common use of assertions is to replace assumptions with assertions in the code.
- A good use of assertions is place assertions in a switch statement without a default case. For example:

```
switch (month) {  
    case 1: ... ; break;  
    case 2: ... ; break;  
    ...  
    case 12: ... ; break;  
    default: assert false : "Invalid month: " + month;  
}
```


Correctness of Algorithms

- **Loop Invariants:** used to prove correctness of a loop with respect to pre- and post-conditions

[Pre-condition for the loop]

while (G)

[Statements in the body of the loop]

end while

[Post-condition for the loop]

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

A loop is correct with respect to its pre- and post-conditions if, and only if, whenever the algorithm variables satisfy the pre-condition for the loop and the loop terminates after a finite number of steps, the algorithm variables satisfy the post-condition for the loop

Loop Invariant

- A **loop invariant** $I(n)$ is a predicate whose domain is the set of integers, such that for each iteration of the loop (mathematical induction), if the predicate is true before the iteration, then it is true after the iteration

If the loop invariant $I(0)$ is true before the first iteration of the loop AND <https://powcoder.com>

After a finite number of iterations of the loop, the guard G becomes false AND [Add WeChat powcoder](#)

The truth of the loop invariant ensures the truth of the post-condition of the loop

then the loop will be correct with respect to it pre- and post-conditions

Loop Invariant

- **Correctness of a Loop to Compute a Product:**

A loop to compute the product mx for a nonnegative integer m and a real number x , without using multiplication

Loop invariant $I(n)$: $i = n$ and $\text{product} = n * x$

Guard G : $i \neq m$

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Multiplication Loop

[Pre-condition: m is a nonnegative integer,
 x is a real number,
 $i = 0$, and
 $\text{product} = 0$]

while ($i \neq m$)
 $\text{product} := \text{product} + x$
 $i := i + 1$
end while

[Post-condition: $\text{product} = mx$]

Loop invariant $I(n)$: $i = n$ and $\text{product} = n \cdot x$

Guard G : $i \neq m$

Base Property: $I(0)$ is " $i = 0$ and $\text{product} = 0 \cdot x = 0$ "

Inductive Property:

[If $G \wedge I(k)$ is true before a loop iteration
(where $k \geq 0$), then $I(k+1)$ is true after the loop
iteration.]

Let k be a nonnegative integer such that $G \wedge I(k)$ is true

Assignment Project Exam Help

Since $i \neq m$, the guard is passed

<https://powcoder.com>

$\text{product} = \text{product} + x = kx + x = (k + 1)x$

$i = i + 1 = k + 1$

Add WeChat powcoder

$I(k + 1)$: ($i = k + 1$ and $\text{product} = (k + 1)x$) is true

Eventual Falsity of Guard: [After a finite number of iterations of
the loop, G becomes false]

After m iterations of the loop: $i = m$ and G becomes false

Correctness of the Post-Condition:

[If N is the least number of iterations after which G is false and $I(N)$ is true, then the value of the algorithm variables will be as specified in the post-condition of the loop.]

$I(N)$ is true at the end of the loop. $i = N$ and $\text{product} = Nx$

G becomes false after N iterations, $i = m$, so $m = i = N$

The post-condition: the value of product after execution of the loop should be $m * x$ is true.

Static analysis

- Static analysis: compile-time algorithms that predict run-time behavior
- **Type checking**, for example, is static and precise in ML: the compiler ensures that no variable will ever be used at run time in a way that is inappropriate for its type
- By contrast, languages like Lisp and Smalltalk accept the run-time overhead of dynamic type checks
- In Java, type checking is mostly static, but dynamically loaded classes and type casts require run-time checks

Static analysis

- Examples of static analysis:
 - *Alias analysis* determines when values can be safely cached in registers, computed “out of order,” or accessed by concurrent threads.
 - *Escape analysis* determines when all references to a value will be confined to a given context, allowing it to be allocated on the stack instead of the heap, or to be accessed without locks.
 - *Subtype analysis* determines when a variable in an object-oriented language is guaranteed to have a certain subtype, so that its methods can be called without dynamic dispatch.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Other static analysis

- Static analysis is usually done for Optimizations:
 - optimizations can be *unsafe* if they may lead to incorrect code
 - *speculative* if they usually improve performance, but may degrade it in certain cases
 - *Non-binding prefetches* bring data into the cache before they are needed,
 - *Trace scheduling* rearranges code in hopes of improving the performance of the processor pipeline and the instruction cache.
- A compiler is *conservative* if it applies optimizations only when it can guarantee that they will be both safe and effective
- A compiler is *optimistic* if it uses speculative optimizations
 - it may also use unsafe optimizations by generating two versions of the code, with a dynamic check that chooses between them based on information not available at compile time
- Optimizations can lead to security risks if implemented incorrectly (see 2018 Spectre hardware vulnerability: microarchitecture-level optimizations to code execution [can] leak information)

Attribute Grammars

- Both semantic analysis and (intermediate) code generation can be described in terms of *annotation*, or "*decoration*" of a parse or syntax tree
 - attributes are properties/actions attached to the production rules of a grammar
 - ATTRIBUTE GRAMMARS provide a formal framework for decorating a parse tree
- The attributes are divided into two groups: *synthesized* attributes and *inherited* attributes
 - ***Synthesized***: the value is computed from the values of attributes of the children
 - *S-attributed grammar* = synthesized attributes only

Attribute Grammars

- LR (bottom-up) grammar for arithmetic expressions made of constants, with precedence and associativity

$$E \longrightarrow E + T$$

$$E \longrightarrow E - T$$

$$E \longrightarrow T$$

$$T \longrightarrow T * F$$

$$T \longrightarrow T / F$$

$$T \longrightarrow F$$

$$F \longrightarrow - F$$

$$F \longrightarrow (E)$$

$$F \longrightarrow \text{const}$$

- detects if a string follows the grammar
- but says nothing about what the program MEANS

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Attribute Grammars *semantic function*

- Attributed grammar:

- defines the semantics of the input program

- Associates expressions to mathematical concepts!!!

- Attribute rules are definitions, not assignments: they are not necessarily meant to be evaluated at any particular time, or in any particular order

$E_1 \longrightarrow E_2 + T$ (sum, etc.)
 $\triangleright E_1.val := \text{sum}(E_2.val, T.val)$

$E_1 \longrightarrow E_2 - T$
 $\triangleright E_1.val := \text{difference}(E_2.val, T.val)$

$E \longrightarrow T$
 $\triangleright E.val := T.val$ *copy rule*

$T_1 \longrightarrow T_2 * F$
 $\triangleright T_1.val := \text{product}(T_2.val, F.val)$

$T_1 \longrightarrow T_2 / F$
 $\triangleright T_1.val := \text{quotient}(T_2.val, F.val)$

$T \longrightarrow F$
 $\triangleright T.val := F.val$

$F_1 \longrightarrow - F_2$
 $\triangleright F_1.val := \text{additive_inverse}(F_2.val)$

$F \longrightarrow (E)$
 $\triangleright F.val := E.val$

$F \longrightarrow \text{const}$
 $\triangleright F.val := \text{const.val}$

Attribute Grammars

- Attributed grammar to count the elements of a list:

$L \longrightarrow \text{id}$

$L_1 \longrightarrow L_2, \text{id}$

▷ $L_1.c := 1$

▷ $L_1.c := L_2.c + 1$

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Attribute Grammars Example with variables

Tokens: `int (attr val), var (attr name)`

`S -> var = E`

▷ `assign(var.name, E.val)`

`E1 -> E2 + T`

▷ `E1.val = add(E2.val, T.val)`

`E1 -> E2 - T`

▷ `E1.val = sub(E2.val, T.val)`

`E -> T`

▷ `E.val = T.val`

`T -> var`

▷ `T.val = lookup(var.name)`

`T -> int`

▷ `T.val = int.val`

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Input:

“bar = 50

foo = 100 + 200 – bar”

Evaluating Attributes

- The process of evaluating attributes is called *annotation*, or *DECORATION*, of the parse tree
 - When the parse tree under the previous example grammar is fully decorated, the value of the expression will be in the **val** attribute of the root
- The code fragments for the rules are called *SEMANTIC FUNCTIONS*
 - For example:
E1.val = sum(E2.val, T.val)
 - Semantic functions are not allowed to refer to any variables or attributes outside the current production
 - Action routines may do that (see later)

Assignment Project Exam Help

<https://powcoder.com>


Add WeChat powcoder

Evaluating Attributes

Decoration of a parse tree for $(1 + 3) * 2$

needs to detect the order of attribute evaluation:

- Curving arrows show the *attribute flow*
 - Each box holds the output of a single semantic rule
 - The arrow is the input to the rule
- *synthesized attributes*: their values are calculated (synthesized) only in productions in which their symbol appears on the left-hand side.
- A *S-attributed grammar* is a grammar where all attributes are synthesized.

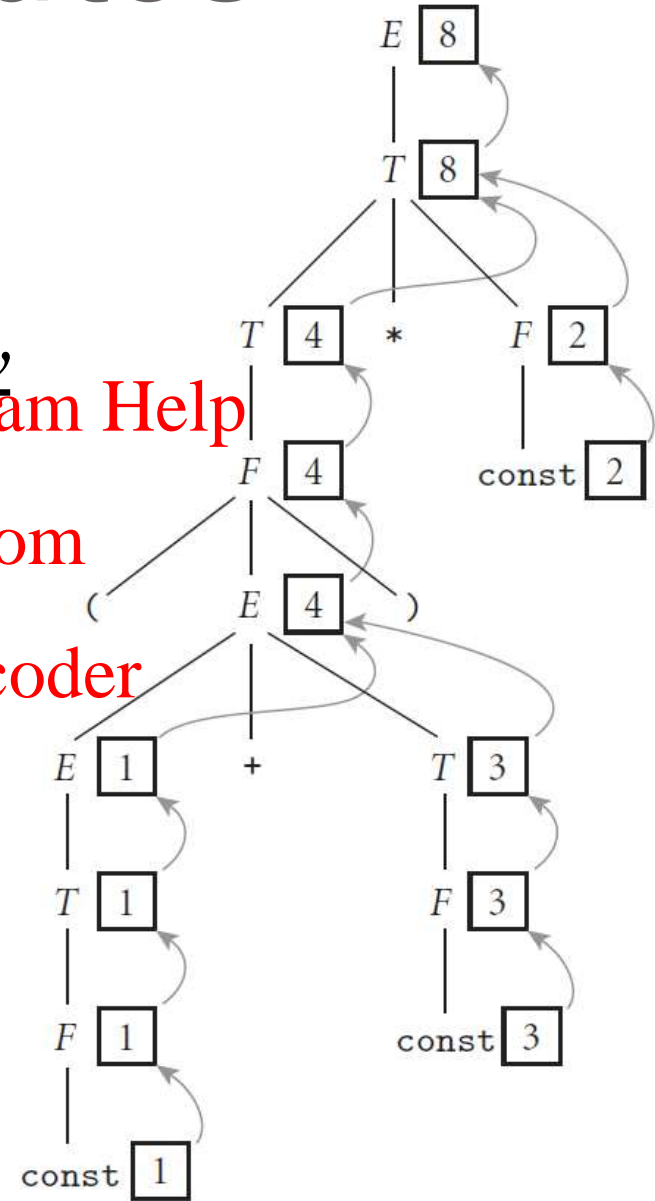


Evaluating Attributes

- Tokens have only synthesized attributes, initialized by the scanner (name of an identifier, value of a constant, etc.).
- **INHERITED attributes** may depend on things above or to the side of them in the parse tree, e.g., LL(1) grammar:

$expr \rightarrow const\ expr_tail$
 $expr_tail \rightarrow -\ const\ expr_tail \mid \epsilon$


we cannot summarize the right subtree of the root with a single numeric value

subtraction is left associative:
requires us to embed the entire tree into the attributes of a single node

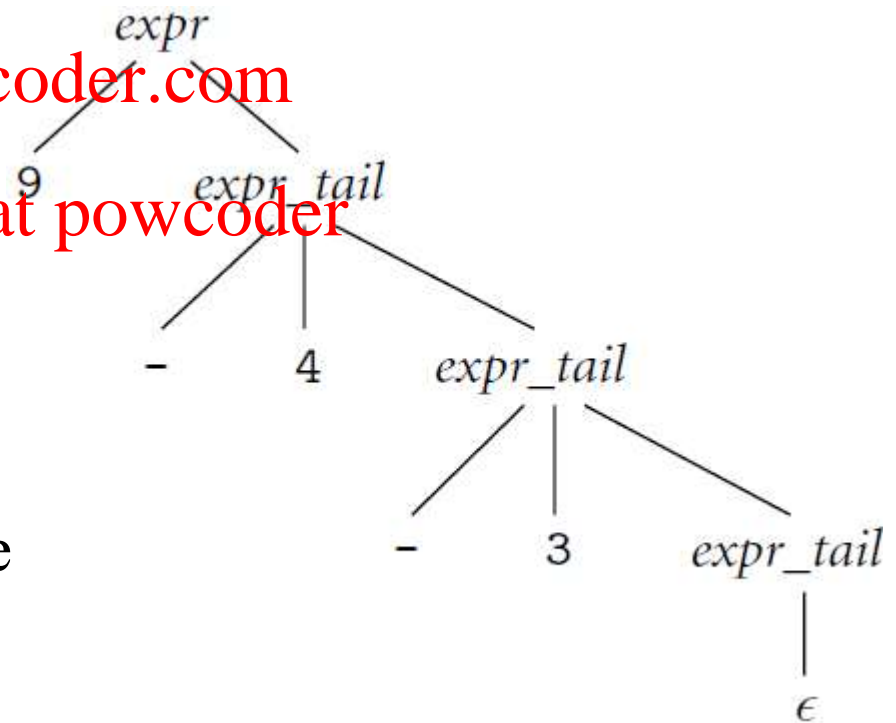

Evaluating Attributes

- Decoration with *left-to-right attribute flow*: pass attribute values not only **bottom-up** but **also left-to-right** in the tree
- 9 can be combined in left-associative fashion with the 4 and
- 5 can then be passed into the middle *expr_tail* node, combined with the 3 to make 2, and then passed upward to the root

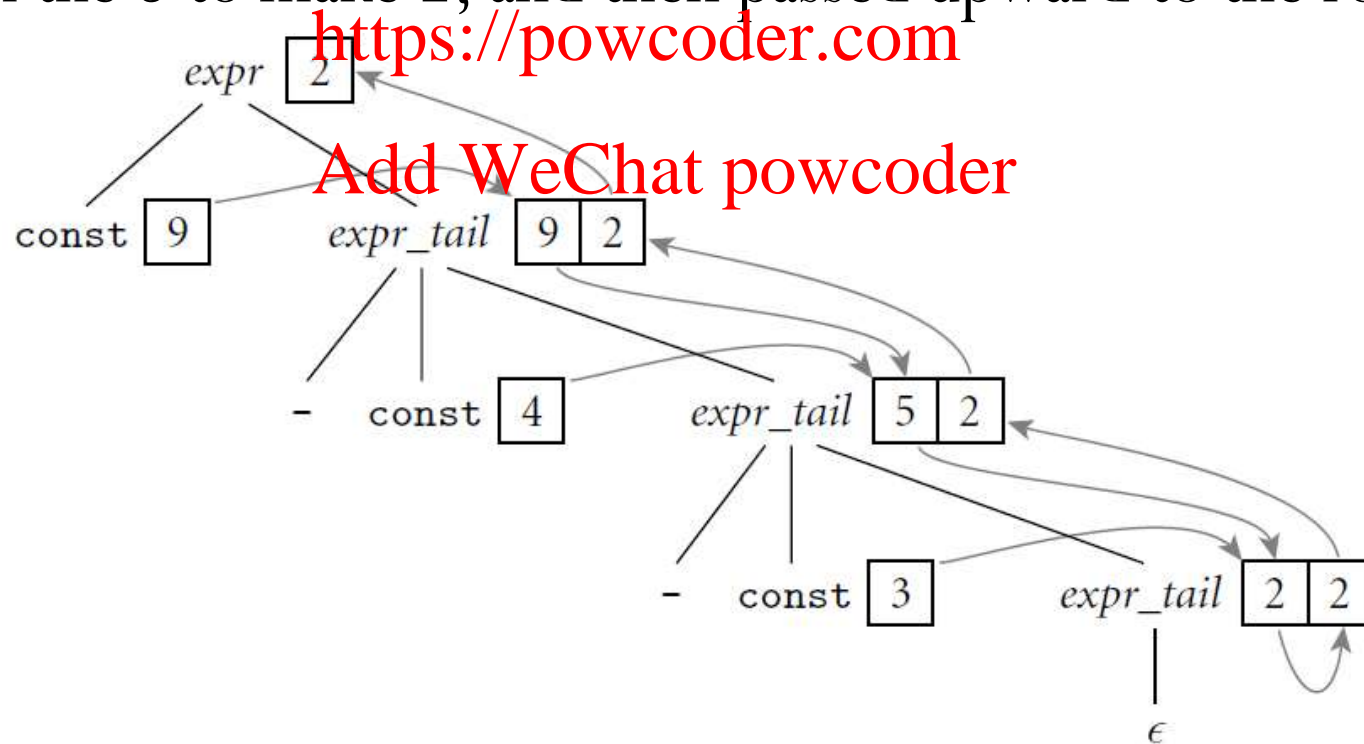

Evaluating Attributes

$expr \longrightarrow \text{const } expr_tail$

▷ $expr_tail.st := \text{const.val}$ (1)

▷ $expr.val := expr_tail.val$ (2)

$expr_tail_1 \longrightarrow - \text{const } expr_tail_2$

▷ $expr_tail_2.st := expr_tail_1.st - \text{const.val}$

▷ $expr_tail_1.val := expr_tail_2.val$

$expr_tail \longrightarrow \epsilon$

▷ $expr_tail.val := expr_tail.st$

(1) serves to copy the left context (value of the expression so far) into a “Subtotal” (st)

<https://powcoder.com> attribute.

Add WeChat powcoder

Root rule (2) copies the final value from the right-most leaf back up to the root.

Evaluating Attributes


An attribute grammar for constant expressions based on an LL(1) CFG

- An attribute grammar is **well defined** if its rules determine a unique set of values for the attributes of every possible parse tree.
- An attribute grammar is **noncircular** if it never leads to a parse tree in which there are cycles in the attribute flow graph.

1. $E \rightarrow T TT$
 $\triangleright TT.st := T.val$
 $\triangleright E.val := TT.val$
2. $TT_1 \rightarrow + T TT_2$
 $\triangleright TT_2.st := TT_1.st + T.val$
 $\triangleright TT_1.val := TT_2.val$
3. $TT_1 \rightarrow - T TT_2$
 $\triangleright TT_2.st := TT_1.st - T.val$
 $\triangleright TT_1.val := TT_2.val$
4. $TT \rightarrow \epsilon$
 $\triangleright TT.val := TT.st$
5. $T \rightarrow F FT$
 $\triangleright FT.st := F.val$
 $\triangleright T.val := FT.val$
6. $FT_1 \rightarrow * F FT_2$
 $\triangleright FT_2.st := FT_1.st \times F.val$
 $\triangleright FT_1.val := FT_2.val$
7. $FT_1 \rightarrow / F FT_2$
 $\triangleright FT_2.st := FT_1.st \div F.val$
 $\triangleright FT_1.val := FT_2.val$
8. $FT \rightarrow \epsilon$
 $\triangleright FT.val := FT.st$
9. $F_1 \rightarrow - F_2$
 $\triangleright F_1.val := - F_2.val$
10. $F \rightarrow (E)$
 $\triangleright F.val := E.val$
11. $F \rightarrow \text{const}$
 $\triangleright F.val := \text{const.val}$

Evaluating Attributes

Top-down parse tree for $(1 + 3) * 2$ with *left-to-right attribute flow*

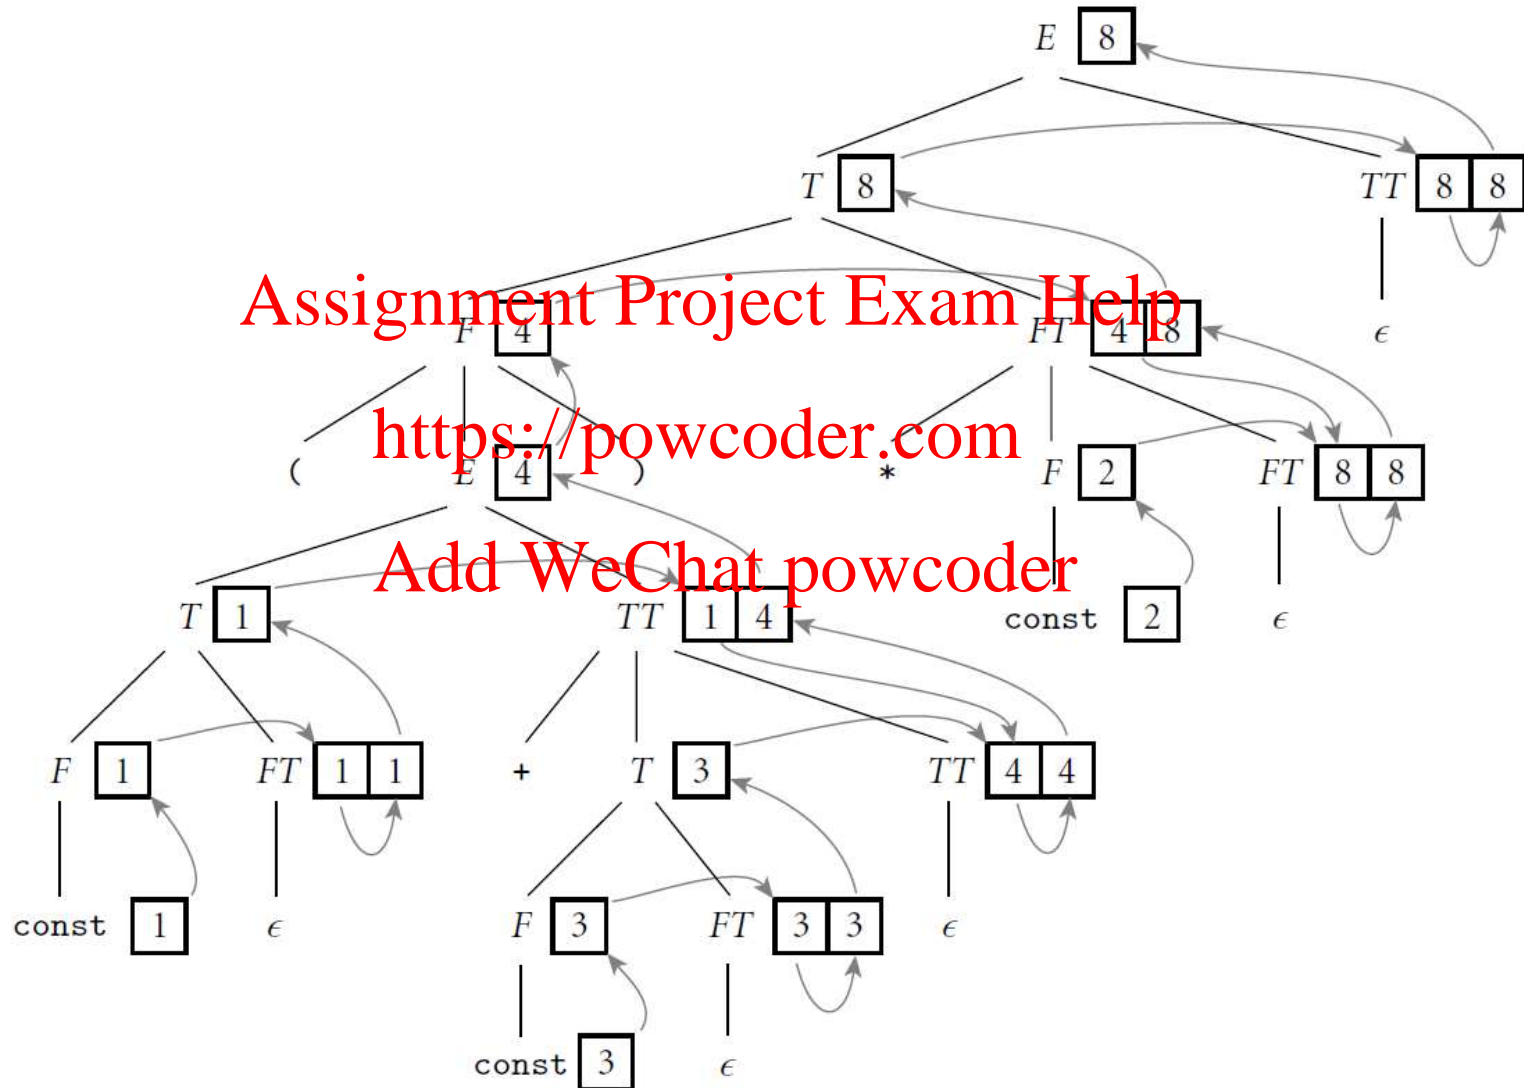

Evaluating Attributes

- *Synthesized Attributes (S-attributed grammars):*
 - Data flows bottom-up
 - Can be parsed by LR grammars
- *Inherited Attributes:*
 - Data flows top-down and bottom-up
 - Can be parsed with LL grammars

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Evaluating Attributes


- A *translation scheme* is an algorithm that decorates parse trees by invoking the rules of an attribute grammar in an order consistent with the tree's attribute flow
 - An *oblivious* scheme makes repeated passes over a tree, invoking any semantic function whose arguments have all been defined, and stopping when it completes a pass in which no values change.
 - A *dynamic* scheme tailors the evaluation order to the structure of the given parse tree, e.g., by constructing a topological sort of the attribute flow graph and then invoking rules in an order consistent with the sort.
- An attribute grammar is *L-attributed* if its attributes can be evaluated by visiting the nodes of the parse tree in a single left-to-right, depth-first traversal (same order with a top-down parse)

Syntax trees

- A *one-pass compiler* is a compiler that interleaves semantic analysis and code generation with parsing
- *Syntax trees*: if the parsing and code generation are **not** interleaved, then attribute rules must be added to create the syntax tree:
 - The attributes in these grammars point to nodes of the syntax tree (containing unary or binary operators, pointers to the supplied operand(s), etc.)
 - The attributes hold neither numeric values nor target code fragments

Syntax trees

- Bottom-up (S-attributed) attribute grammar to construct a syntax tree

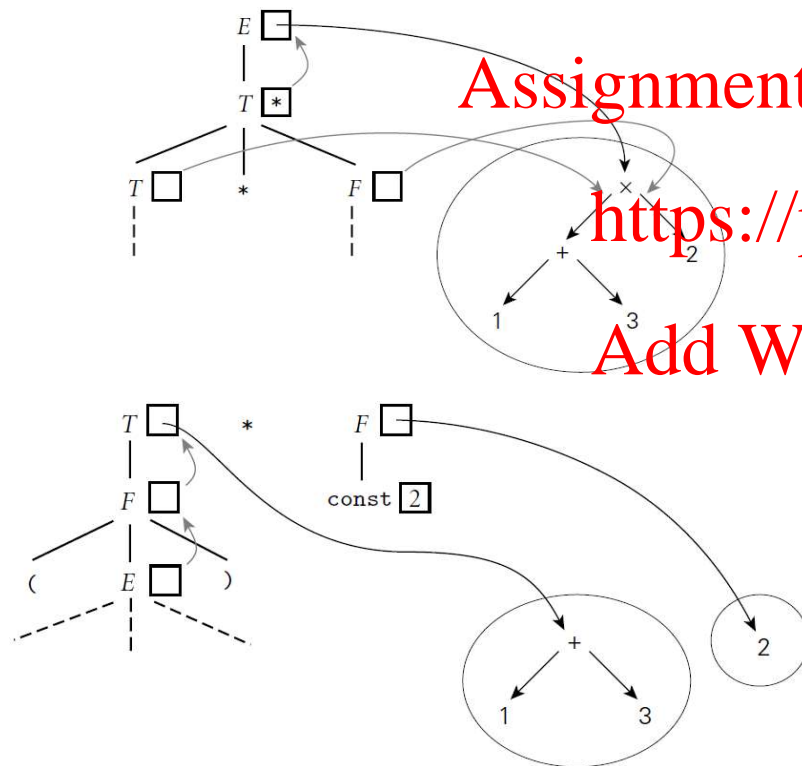

$$E_1 \longrightarrow E_2 + T$$

▷ $E_1.ptr := \text{make_bin_op}("+", E_2.ptr, T.ptr)$

$$E_1 \longrightarrow E_2 - T$$

▷ $E_1.ptr := \text{make_bin_op}("-", E_2.ptr, T.ptr)$

$$E \longrightarrow T$$

▷ $E.ptr := T.ptr$

$$T_1 \longrightarrow T_2 * F$$

▷ $T_1.ptr := \text{make_bin_op}("x", T_2.ptr, F.ptr)$

$$T_1 \longrightarrow T_2 / F$$

▷ $T_1.ptr := \text{make_bin_op}("/", T_2.ptr, F.ptr)$

$$T \longrightarrow F$$

▷ $T.ptr := F.ptr$

$$F_1 \longrightarrow - F_2$$

▷ $F_1.ptr := \text{make_un_op}("+/-", F_2.ptr)$

$$F \longrightarrow (E)$$

▷ $F.ptr := E.ptr$

$$F \longrightarrow \text{const}$$

▷ $F.ptr := \text{make_leaf}(\text{const.val})$


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Syntax trees

- Top-down (L-attributed) attribute grammar to construct a syntax tree:

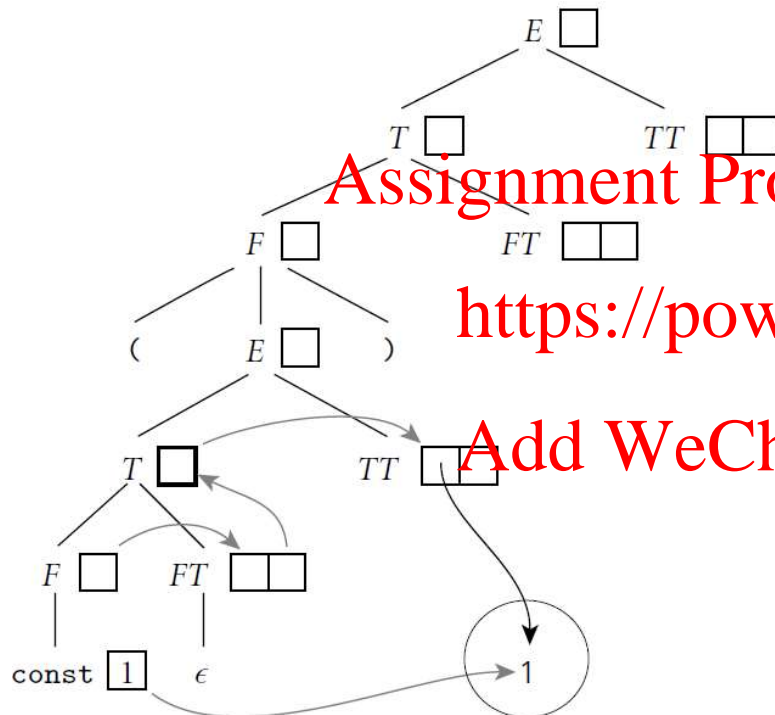

$E \rightarrow T TT$

- $\triangleright TT.st := T.ptr$
- $\triangleright E.ptr := TT.ptr$

$TT_1 \rightarrow + T TT_2$

- $\triangleright TT_2.st := \text{make_bin_op}("+", TT_1.st, T.ptr)$
- $\triangleright TT_1.ptr := TT_2.ptr$

$TT_1 \rightarrow - T TT_2$

- $\triangleright TT_2.st := \text{make_bin_op}("-", TT_1.st, T.ptr)$
- $\triangleright TT_1.ptr := TT_2.ptr$

$TT \rightarrow \epsilon$

- $\triangleright TT.ptr := TT.st$

$FT_1 \rightarrow F FT_2$

- $\triangleright FT.st := F.ptr$
- $\triangleright T.ptr := FT.ptr$

$FT_1 \rightarrow * F FT_2$

- $\triangleright FT_2.st := \text{make_bin_op}("x", FT_1.st, F.ptr)$
- $\triangleright FT_1.ptr := FT_2.ptr$

$FT_1 \rightarrow / F FT_2$

- $\triangleright FT_2.st := \text{make_bin_op}("/\div", FT_1.st, F.ptr)$
- $\triangleright FT_1.ptr := FT_2.ptr$

$FT \rightarrow \epsilon$

- $\triangleright FT.ptr := FT.st$

$F_1 \rightarrow - F_2$

- $\triangleright F_1.ptr := \text{make_un_op}("+/-", F_2.ptr)$

$F \rightarrow (E)$

- $\triangleright F.ptr := E.ptr$

$F \rightarrow \text{const}$

- $\triangleright F.ptr := \text{make_leaf}(\text{const.val})$

Action Routines

- While it is possible to construct automatic tools to analyze attribute flow and decorate parse trees, most compilers rely on *action routines*, which the compiler writer embeds in the right-hand sides of productions to evaluate attribute rules at specific points in a parse
- An *action routine* is like a "semantic function" that we tell the compiler to execute at a particular point in the parse
- In an LL-family parser, action routines can be embedded at arbitrary points in a production's right-hand side
 - They will be executed left to right during parsing

Action Routines

- If semantic analysis and code generation are interleaved with parsing, then action routines can be used to perform semantic checks and generate code

Assignment Project Exam Help

- Later compilation phases can then consist of ad-hoc tree traversal. <https://powcoder.com>
Add WeChat powcoder
Or can use an automatic tool to generate a translation scheme
- If semantic analysis and code generation are broken out as separate phases, then action routines can be used to build a syntax tree

Action Routines

- Entries in the attributes stack are pushed and popped automatically
- The *syntax tree* is produced

$program \rightarrow item$

$int_decl : item \rightarrow id\ item$

$read : item \rightarrow id\ item$

$real_decl : item \rightarrow id\ item$

$write : item \rightarrow expr\ item$

$null : item \rightarrow \epsilon$

$\div : expr \rightarrow expr\ expr$

$+: expr \rightarrow expr\ expr$

$float : expr \rightarrow expr$

$id : expr \rightarrow \epsilon$

$real_const : expr \rightarrow \epsilon$

program

int_decl

read

real_decl

read

write

null

int a

read a

real b

read b

write (float (a) + b) / 2.0

float

b

a

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Decorating a Syntax Tree

- Sample of complete tree grammar representing structure of the syntax tree

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

```
id : expr → ε
  ▷ if (id.name, A) ∈ expr.symtab          -- for some type A
    expr.errors := null
    expr.type := A
  else
    expr.errors := [id.name "undefined at" id.location]
    expr.type := error

int_const : expr → ε
  ▷ expr.type := int

real_const : expr → ε
  ▷ expr.type := real

'+' : expr1 → expr2 expr3
  ▷ expr2.symtab := expr1.symtab
  ▷ expr3.symtab := expr1.symtab
  ▷ check_types(expr1, expr2, expr3)

'-' : expr1 → expr2 expr3
  ▷ expr2.symtab := expr1.symtab
  ▷ expr3.symtab := expr1.symtab
  ▷ check_types(expr1, expr2, expr3)

'×' : expr1 → expr2 expr3
  ▷ expr2.symtab := expr1.symtab
  ▷ expr3.symtab := expr1.symtab
  ▷ check_types(expr1, expr2, expr3)

'÷' : expr1 → expr2 expr3
  ▷ expr2.symtab := expr1.symtab
  ▷ expr3.symtab := expr1.symtab
  ▷ check_types(expr1, expr2, expr3)

float : expr1 → expr2
  ▷ expr2.symtab := expr1.symtab
  ▷ convert_type(expr2, expr1, int, real, "float of non-int")

trunc : expr1 → expr2
  ▷ expr2.symtab := expr1.symtab
  ▷ convert_type(expr2, expr1, real, int, "trunc of non-real")
```