

<https://powcoder.com>

Assignment Project Exam Help

Add WeChat powcoder

For a short humorous talk on  
languages without strong typing:

Assignment Project Exam Help

<https://powcoder.com>

<https://www.destroyallsoftware.com/talks/wat>

Add WeChat powcoder

[Broader point: No one (few people) knows what  
their programs do in untyped languages.]

<https://powcoder.com>

Assignment Project Exam Help

Add WeChat powcoder

Assignment Project Exam Help  
Type Checking Basics

<https://powcoder.com>

Add WeChat powcoder

CSI 3120

Amy Felty

University of Ottawa

slides copyright 2017, 2018, 2019, 2020

Author David Walker, updated by Amy Felty

permission granted to reuse these slides for non-commercial educational purposes

<https://powcoder.com> Last Time

## Functional programming history

- Church & the lambda calculus
- Scheme
- ML (OCaml)
- Modern times: F#, Clojure, Scala, Map Reduce, ...

<https://powcoder.com>

## OCaml

- Functional language, gets most work done by analyzing old data and producing *new, immutable* data
- Simple, typed programming language based on the lambda calculus
- Immutable data is the default; mutable data is possible (imperative, object-oriented)

## <https://powcoder.com> Type Checking

- Every value has a type and so does every expression
- This is a concept that is familiar from Java but it becomes more important when programming in a functional language
- The type of an expression is determined by the type of its subexpressions
- We write  $(e : t)$  to say that expression  $e$  has type  $t$ . eg:

$2 : \text{int}$

$\text{"hello"} : \text{string}$

$2 + 2 : \text{int}$

$\text{"I say " ^ "hello"} : \text{string}$

# <https://powcoder.com> Type Checking Rules

- There are a set of simple rules that govern type checking
  - programs that do not follow the rules will not type check and OCaml will refuse to compile them for you (the nerve!)
  - at first you may find this to be a pain ...

## Assignment Project Exam Help

- But types are a great thing:
  - they *help us think* about how to construct our programs
  - they help us *find stupid programming errors*
  - they help us track down compatibility errors quickly when we edit and *maintain our code*
  - they allow us to *enforce powerful invariants* about our data structures

# <https://powcoder.com> Type Checking Rules

- Example rules:
  - (1) `0 : int` (and similarly for any other integer constant `n`)
  - (2) `"abc" : string` (and similarly for any other string constant `"..."`)

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

- Example rules: Assignment Project Exam Help

(1)  $0 : \text{int}$  Add WeChat powcoder (and similarly for any other integer constant  $n$ )

(2)  $"abc" : \text{string}$  (and similarly for any other string constant "...")

Assignment Project Exam Help

(3) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 + e2 : \text{int}$  (4) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 * e2 : \text{int}$   
<https://powcoder.com>

Add WeChat powcoder

# <https://powcoder.com> Type Checking Rules

- Example rules: [Assignment Project Exam Help](https://powcoder.com)

(1)  $0 : \text{int}$  [Add WeChat powcoder](https://powcoder.com) (and similarly for any other integer constant  $n$ )

(2)  $"abc" : \text{string}$  (and similarly for any other string constant "...")

## Assignment Project Exam Help

(3) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 + e2 : \text{int}$  <https://powcoder.com> (4) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 * e2 : \text{int}$

(5) if  $e1 : \text{string}$  and  $e2 : \text{string}$  then  $e1 \wedge e2 : \text{string}$  [Add WeChat powcoder](https://powcoder.com) (6) if  $e : \text{int}$  then  $\text{string\_of\_int } e : \text{string}$



# https://powcoder.com Type Checking Rules

- Example rules: Assignment Project Exam Help

(1)  $0 : \text{int}$  (and similarly for any other integer constant  $n$ ) Add WeChat powcoder

(2)  $"abc" : \text{string}$  (and similarly for any other string constant "...")

## Assignment Project Exam Help

(3) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 + e2 : \text{int}$  (4) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 * e2 : \text{int}$  https://powcoder.com

(5) if  $e1 : \text{string}$  and  $e2 : \text{int}$  then  $e1 \wedge e2 : \text{string}$  Add WeChat powcoder (6) if  $e : \text{int}$  then  $\text{string\_of\_int } e : \text{string}$

- Using the rules:

$2 : \text{int}$  and  $3 : \text{int}$ . (By rule 1)

# <https://powcoder.com> Type Checking Rules

- Example rules:

(1)  $0 : \text{int}$  (and similarly for any other integer constant  $n$ )

(2)  $"abc" : \text{string}$  (and similarly for any other string constant "...")

(3) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 + e2 : \text{int}$

(4) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 * e2 : \text{int}$

(5) if  $e1 : \text{string}$  and  $e2 : \text{int}$  then  $e1 \wedge e2 : \text{string}$

(6) if  $e : \text{int}$  then  $\text{string\_of\_int } e : \text{string}$

- Using the rules:

$2 : \text{int}$  and  $3 : \text{int}$ . (By rule 1)

Therefore,  $(2 + 3) : \text{int}$  (By rule 3)

# https://powcoder.com Type Checking Rules

- Example rules:

(1)  $0 : \text{int}$  (and similarly for any other integer constant  $n$ )

(2)  $"abc" : \text{string}$  (and similarly for any other string constant "...")

(3) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 + e2 : \text{int}$

(4) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 * e2 : \text{int}$

(5) if  $e1 : \text{string}$  and  $e2 : \text{int}$  then  $e1 ^ e2 : \text{string}$

(6) if  $e : \text{int}$  then  $\text{string\_of\_int } e : \text{string}$

- Using the rules:

$2 : \text{int}$  and  $3 : \text{int}$ . (By rule 1)

Therefore,  $(2 + 3) : \text{int}$  (By rule 3)

$5 : \text{int}$  (By rule 1)

# <https://powcoder.com> Type Checking Rules

- Example rules:

(1)  $0 : \text{int}$  (and similarly for any other integer constant  $n$ )

(2)  $"abc" : \text{string}$  (and similarly for any other string constant)

(3) if  $e1 : \text{int}$  and  $e2 : \text{int}$   
then  $e1 + e2 : \text{int}$

(5) if  $e1 : \text{string}$  and  $e2 : \text{string}$   
then  $e1 \wedge e2 : \text{string}$

- Using the rules:

$2 : \text{int}$  and  $3 : \text{int}$ . (By rule 1)

Therefore,  $(2 + 3) : \text{int}$  (By rule 3)

$5 : \text{int}$  (By rule 1)

Therefore,  $(2 + 3) * 5 : \text{int}$  (By rule 4 and our previous work)

FYI: This is a **formal proof**  
that the expression is well-  
typed!

# https://powcoder.com Type Checking Rules

- Example rules:

(1)  $0 : \text{int}$  (and similarly for any other integer constant  $n$ )

(2)  $"abc" : \text{string}$  (and similarly for any other string constant "...")

(3) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 + e2 : \text{int}$

(4) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 * e2 : \text{int}$


(5) if  $e1 : \text{string}$  and  $e2 : \text{int}$  then  $e1 \wedge e2 : \text{string}$

(6) if  $e : \text{int}$  then  $\text{string\_of\_int } e : \text{string}$

- Another perspective:

rule (4) for typing expressions  
says I can put any expression  
with type  $\text{int}$  in place of the  $????$

$???? * ???? : \text{int}$

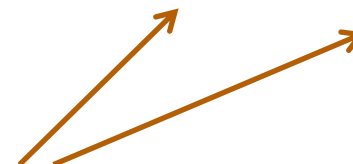

# https://powcoder.com Type Checking Rules

- Example rules:

(1)  $0 : \text{int}$  (and similarly for any other integer constant  $n$ )

(2)  $"abc" : \text{string}$  (and similarly for any other string constant "...")

(3) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 + e2 : \text{int}$

(4) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 * e2 : \text{int}$

(5) if  $e1 : \text{string}$  and  $e2 : \text{string}$  then  $e1 \wedge e2 : \text{string}$

(6) if  $e : \text{int}$  then  $\text{string\_of\_int } e : \text{string}$

- Another perspective:

rule (4) for typing expressions  
says I can put any expression  
with type  $\text{int}$  in place of the  $???$

$7 * ??? : \text{int}$



# https://powcoder.com Type Checking Rules

- Example rules: Assignment Project Exam Help

(1)  $0 : \text{int}$  (and similarly for any other integer constant  $n$ ) Add WeChat powcoder

(2)  $"abc" : \text{string}$  (and similarly for any other string constant "...")

## Assignment Project Exam Help


(3) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 + e2 : \text{int}$  (4) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 * e2 : \text{int}$  https://powcoder.com

(5) if  $e1 : \text{string}$  and  $e2 : \text{string}$  then  $e1 \wedge e2 : \text{string}$  Add WeChat powcoder (6) if  $e : \text{int}$  then  $\text{string\_of\_int } e : \text{string}$

- Another perspective:

rule (4) for typing expressions  
says I can put any expression  
with type int in place of the ????

7 \* (add\_one 17) : int

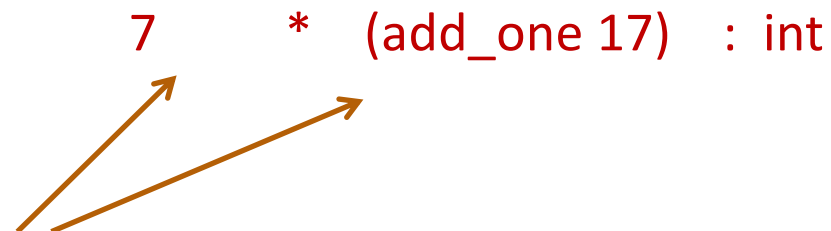

## <https://powcoder.com> Type Checking Rules

- You can always start up the OCaml interpreter to find out a type of a simple expression:

```
$ ocaml
OCaml Version 4.07.0
#
```

<https://powcoder.com>

Add WeChat powcoder



## <https://powcoder.com> Type Checking Rules

- You can always start up the OCaml interpreter to find out a type of a simple expression:

```
$ ocaml
OCaml Version 4.07.0
# 3 + 1;
```

<https://powcoder.com>

Add WeChat powcoder

# Type Checking Rules

- You can always start up the OCaml interpreter to find out a type of a simple expression:

```
$ ocaml
OCaml Version 4.07.0
# 3 + 1;
- : int = 4
#
```

press  
return  
and you  
find out  
the type  
and the  
value

# Type Checking Rules

- You can always start up the OCaml interpreter to find out a type of a simple expression:

```
$ ocaml
OCaml Version 4.07.0
# 3 + 1;
- : int = 4
# "hello " ^ "world";;
- : string = "hello world"
#
```

press  
return  
and you  
find out  
the type  
and the  
value

## <https://powcoder.com> Type Checking Rules

- You can always start up the OCaml interpreter to find out a type of a simple expression:

```
$ ocaml
OCaml Version 4.07.0
# 3 + 1;
- : int = 4
# "hello " ^ "world";;
- : string = "hello world"
# #quit;;
$
```

# https://powcoder.com Type Checking Rules

- Example rules: Assignment Project Exam Help

(1)  $0 : \text{int}$  (and similarly for any other integer constant  $n$ ) Add WeChat powcoder

(2)  $"abc" : \text{string}$  (and similarly for any other string constant "...")

## Assignment Project Exam Help

(3) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 + e2 : \text{int}$  (4) if  $e1 : \text{int}$  and  $e2 : \text{int}$  then  $e1 * e2 : \text{int}$  https://powcoder.com

(5) if  $e1 : \text{string}$  and  $e2 : \text{string}$  then  $e1 \wedge e2 : \text{string}$  Add WeChat powcoder (6) if  $e : \text{int}$  then  $\text{string\_of\_int } e : \text{string}$

- Violating the rules:

$"hello" : \text{string}$

(By rule 2)

$1 : \text{int}$

(By rule 1)

$1 + "hello" : ??$

(NO TYPE! Rule 3 does not apply!)

# <https://powcoder.com> Type Checking Rules

- Violating the rules.

Add WeChat powcoder

```
# "hello" + 1;;
Error: This expression has type string but an
expression was expected of type int
```

<https://powcoder.com>

- The type error message tells you the type that was **expected** and the type that it **inferred** for your subexpression
- By the way, this was one of the nonsensical expressions that did not evaluate to a value
- It is a **good thing** that this expression does not type check!

*“Well typed programs do not go wrong”*

*Robin Milner, 1978*

# <https://powcoder.com> Type Checking Rules

- Violating the rules.

Add WeChat powcoder

```
# "hello" + 1;;
Error: This expression has type string but an
expression was expected of type int
```

<https://powcoder.com>

- A possible fix:

Add WeChat powcoder

```
# "hello" ^ (string_of_int 1);;
- : string = "hello1"
```

- One of the keys to becoming a good ML programmer is to understand type error messages.*

# Example Type-checking Rules

Assignment Project Exam Help

Add WeChat powcoder

Assignment Project Exam Help

if  $e1 : \text{bool}$   
 and  $e2 : t$  and  $e3 : t$  (the same type  $t$ , for some type  $t$ )  
 then if  $e1$  then  $e2$  else  $e3 : t$  (that same type  $t$ )

Add WeChat powcoder



# <https://powcoder.com> Type Checking Rules

- Type errors for if statements can be confusing sometimes.  
Example: We create a string from  $s$ , concatenating it  $n$  times:

```
let rec concatn s n =
  if n <= 0 then
```

```
    s
  else
```

```
    s ^ (concatn s (n-1))
```

Add WeChat powcoder

# https://powcoder.com Type Checking Rules

- Type errors for if statements can be confusing sometimes.  
Example. We create a string from `s`, concatenating it `n` times:

```
let rec concatn s n =  
  if n <= 0 then
```

```
  else
```

```
    s ^ (concatn s (n-1))
```

OCaml says:

**Error: This expression has type int but an  
expression was expected of type string**

# https://powcoder.com Type Checking Rules

- Type errors for if statements can be confusing sometimes.  
Example. We create a string from s, concatenating it n times:

```
let rec concatn s n =  
  if n <= 0 then
```

```
  else
```

```
    s ^ (concatn s (n-1))
```

???

OCaml says:

**Error: This expression has type int but an  
expression was expected of type string**

# https://powcoder.com Type Checking Rules

- Type errors for if statements can be confusing sometimes.  
Example. We create a string from  $s$ , concatenating it  $n$  times:

```
let rec concatn s n =  
  if n <= 0 then
```

```
  else
```

```
    s ^ (concatn s (n-1))
```

they don't  
agree!

???

OCaml says:

**Error: This expression has type int but an  
expression was expected of type string**

# https://powcoder.com Type Checking Rules

- Type errors for if statements can be confusing sometimes.  
Example. We create a string from s, concatenating it n times:

Add WeChat powcoder

```
let rec concatn s n =  
  if n <= 0 then
```

they don't  
agree!



```
else
```

```
  s ^ (concatn s (n-1))
```

???

Add WeChat powcoder

The type checker points to the correct branch as the cause of an error because it does not AGREE with the type of an earlier branch.  
Really, the error is in the earlier branch.

Moral: *Sometimes you need to look in an earlier branch for the error*  
even though the type checker points to a later branch.  
The type checker doesn't know what the user wants.

# A Tactic: Add Typing Annotations

Assignment Project Exam Help

Add WeChat powcoder

```
let rec concatn (s:string) (n:int) : string =  
  if n <= 0 then  
    0  
  else  
    s ^ (concatn s (n-1))
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Error: This expression has type int but an  
expression was expected of type string

<https://powcoder.com>

Assignment Project Exam Help

Add WeChat powcoder

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

**EXCEPTIONS:**

**DO THEY CAUSE PROGRAMS TO**

**"GO WRONG"?**

# Type Checking Rules

- What about this expression:

```
# 3 / 0 ;;  
Exception: Division_by_zero.
```

- Why doesn't the ML type checker do us the favor of telling us the expression will raise an exception?

<https://powcoder.com>

Add WeChat powcoder



# <https://powcoder.com> Type Checking Rules

- What about this expression:

Add WeChat powcoder

```
# 3 / 0 ;;
Exception: Division_by_zero.
```

- Why doesn't the ML type checker do us the favor of telling us the expression will raise an exception?
  - In general, detecting a divide-by-zero error requires we know that the divisor evaluates to 0.
  - In general, deciding whether the divisor evaluates to 0 requires solving the halting problem:

```
# 3 / (if turing_machine_halts m then 0 else 1) ;;
```

- There are type systems that will rule out divide-by-zero errors, but they require programmers to supply proofs to the type checker

<https://powcoder.com>  
Isn't that cheating?

Assignment Project Exam Help  
“Well typed programs do not go wrong”

Robin Milner, 1978  
Add WeChat powcoder

(3 / 0) is well typed. Does it “go wrong?” Answer: No.

Assignment Project Exam Help

“Go wrong” is a technical term meaning “have no defined semantics.” Raising an exception is perfectly well defined semantics, which we can reason about, which we can handle in ML with an exception handler.

So, it's not cheating.

<https://powcoder.com>  
Type Soundness

Assignment Project Exam Help  
“Well typed programs do not go wrong”

Add WeChat powcoder

Programming languages with this property have  
*sound* type systems. They are called *safe* languages.

Assignment Project Exam Help

Safe languages are generally immune to buffer overrun  
vulnerabilities, uninitialized pointer vulnerabilities, etc.  
(but not immune to all bugs!)

Safe languages: ML, Java, Python, ...

Unsafe languages: C, C++, Pascal

# Well typed programs do not go wrong

## Assignment Project Exam Help

Turing Award, 1991



Robin Milner

## Add WeChat powcoder

For three distinct and complete achievements:

1. **LCF**, the mechanization of Scott's Logic of Computable Functions, probably the first theoretically based yet practical tool for machine assisted proof construction;

2. **ML**, the first language to include polymorphic type inference together with a type-safe exception-handling mechanism;

3. **CCS**, a general theory of concurrency

In addition, he formulated and strongly advanced full abstraction, the study of the relationship between operational and denotational semantics."

*"Well typed programs do not go wrong"*

*Robin Milner, 1978*

<https://powcoder.com>

Assignment Project Exam Help

Add WeChat powcoder

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

**SUMMARY**

<https://powcoder.com>

OCaml

OCaml is a *functional* programming language

- Java gets most work done by *modifying* data
- OCaml gets most work done by producing *new, immutable* data

OCaml is a *typed* programming language

- the *type* of an expression *correctly predicts* the kind of *value* the expression will generate when it is executed
- there are systematic rules defining when any expression (or program) type checks
  - these rules actually form a formal logic ... it is not a coincidence that languages like ML are used inside theorem provers
- the type system is *sound*; the language is *safe*