

<https://powcoder.com>

Assignment Project Exam Help

Add WeChat powcoder

Assignment Project Exam Help

# Modules and Abstract Data Types

Add WeChat powcoder  
CSI 3120

Amy Felty

University of Ottawa

## Assignment Project Exam Help The Reality of Development

We rarely know the *right* algorithms or the *right* data structures when we start a design project.

- When implementing a search engine, what data structures and algorithms should you use to build the index? To build the query evaluator?

Assignment Project Exam Help

Reality is that *we often have to change our code*, once we've built a prototype.

Add WeChat powcoder

- Often, we don't even know what the *user wants* (requirements) until they see a prototype.
- Often, we don't know where the *performance problems* are until we can run the software on realistic test cases.
- Sometimes we just want to change the design -- come up with *simpler* algorithms, architecture later in the design process

## Assignment Project Exam Help Engineering for Change

Given that we know the software will change, how can we write the code so that doing the changes will be easier?

The primary trick: use *data and algorithm abstraction*.

- *Don't* code in terms of ~~Assignment Project Exam Help~~ that the language provides.
- *Do* code with *high-level abstractions* in mind that fit the problem domain.
- Implement the abstractions using a *well-defined interface*.
- Swap in *different implementations* for the abstractions.
- *Parallelize* the development process.

# Assignment Project Exam Help Abstract Data Types

Add WeChat powcoder



Barbara Liskov  
Assistant Professor, MIT  
1973

Invented CLU language  
that enforced data abstraction



Barbara Liskov  
Professor, MIT  
Turing Award 2008

“For contributions to practical and theoretical foundations of programming language and system design, especially related to data abstraction, fault tolerance, and distributed computing.”

## Assignment Project Exam Help Language-enforced Abstraction

**Rule of thumb:** Use the language to enforce an abstraction.

- Murphy's law for unenforced data abstraction:
  - What is not enforced, will be broken at some point, by a client
- This is what module systems are for!
  - reveal little information about *how* something is implemented
  - provide maximum flexibility for change moving forward.
  - pays off down the line
- Like all design rules, break it when necessary
  - recognize when a barrier is causing more trouble than it's worth
- ML has a particularly great module system

# Assignment Project Exam Help in OCaml

Use OCaml modules to build new abstract data types!

- ***signature***: an interface.
  - specifies the abstract type(s) without specifying their implementation
  - specifies the set of operations on the abstract types
- ***structure***: an implementation.
  - a collection of type and value definitions
  - notion of an implementation matching or satisfying an interface
    - gives rise to a notion of sub-typing
- ***functor***: a parameterized module
  - really, a function from modules to modules
  - allows us to factor out and re-use modules

## Assignment Project Exam Help Simple Modules

OCaml Convention:

- file Name.ml is a *structure* implementing a module named **Name**
- file Name.mli is a *signature* for the module named **Name**
  - if there is no file Name.mli, OCaml infers the default signature
- Other modules, like ClientA pr ClientB can:
  - use *dot notation* to refer to contents of Name. eg: Name.val
  - **open Set**: get access to all elements of Name
    - opening a module puts lots of names in your namespace

Signature



Name.mli

Structure



Name.ml

...

Name.x

...

ClientA.ml

...

open Name

... X ...

ClientB.ml

## At first glance: OCaml modules = C modules?

**C has:** Add WeChat powcoder

- .h files (signatures) similar to .mli files?
- .c files (structures) similar to .ml files?

**But ML also has:**

- tighter control over type abstraction
  - define abstract, transparent or translucent types in signatures
    - *i.e.*, give none, all or some of the type information to clients
- more structure
  - modules can be defined within modules
  - *i.e.*, signatures and structures can be defined inside files
- more reuse
  - multiple modules can satisfy the same interface
  - the same module can satisfy multiple interfaces
  - modules take other modules as arguments (functors)
- fancy features: dynamic, first class modules!

# At first glance: OCaml modules = C modules?

C has:

Add WeChat powcoder

- .h files (signatures) similar to .mli files?
- .c files (structures) similar to .ml files?

But ML also has:

- tighter coupling over type system
  - define abstract types
  - i.e., give them signatures
- more reuse
  - modules
  - i.e., signatures
- more reuse
  - multiple modules can share the same signature
  - the same module can satisfy multiple signatures
  - modules take other modules as arguments (functors)
- fancy features: dynamic, first class modules!

Add WeChat powcoder  
**ML = Winning!**

## Assignment Project Exam Help Example Signature

```
Add WeChat powcoder
module type INT_STACK =
  sig
    type t
    val empty : unit -> t
    val push   : int -> t -> t
    val is_empty : t -> bool
    val pop    : t -> t
    val top    : t -> int option
  end
```

## Assignment Project Exam Help Example Signature

```
Add WeChat powcoder
module type INT_STACK =
  sig
    type t
    val empty : unit -> t
    val push   : int -> t -> t
    val is_empty : t -> bool
    val pop    : t -> t
    val top   : t -> int option
  end
```

*convention:* when the module is about 1 data type, use **t** as the name of the type.

clients refer to Stack.t

## Assignment Project Exam Help Example Signature

```
Add WeChat powcoder
module type INT_STACK =
  sig
    type t
    val empty : unit -> t
    val push   : int -> t -> t
    val is_empty : t -> bool
    val pop    : t -> t
    val top   : t -> int option
  end
```

empty and push  
are abstract  
**constructors**:  
functions that build  
our abstract type.

## Assignment Project Exam Help Example Signature

```
Add WeChat powcoder
module type INT_STACK =
  sig
    type t
    val empty : unit -> t
    val push : int -> t -> t
    val is_empty : t -> bool
    val pop : t -> int
    val top : t -> int
  end
```

is\_empty is an  
*observer* – useful  
for determining  
properties of the  
ADT.


## Assignment Project Exam Help Example Signature

```
Add WeChat powcoder
module type INT_STACK =
  sig
    type t
    val empty : unit -> t
    val push : int -> t -> t
    val is_empty : t -> bool
    val pop : t -> t
    val top : t -> int option
  end
```

pop is sometimes called a *mutator* (though it doesn't really change the input)

## Assignment Project Exam Help Example Signature

```
Add WeChat powcoder
module type INT_STACK =
  sig
    type t
    val empty : unit -> t
    val push   : int -> t -> t
    val is_empty : t -> bool
    val pop    : t -> t
    val top    : t -> int option
  end
```

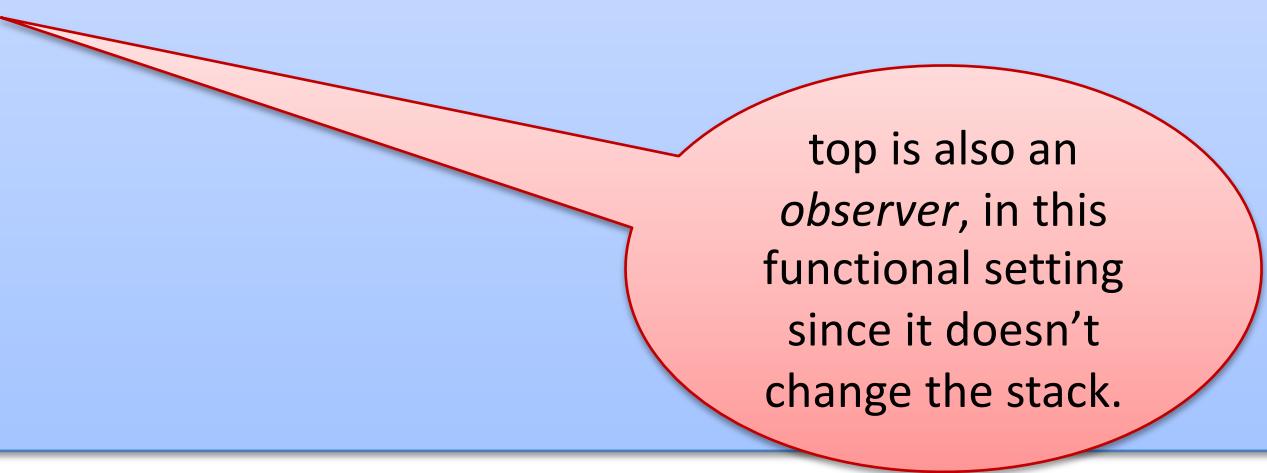

top is also an *observer*, in this functional setting since it doesn't change the stack.

# Assignment Project Exam Help signature!

```
module type INT_STACK = Add WeChat powcoder
sig
  type t
  (* create an empty stack *)
  val empty : unit -> t

  (* push an element on the top of the stack *)
  val push : int t -> t Assignment Project Exam Help

  (* returns true if the stack is empty *)
  val is_empty : t -> bool

  (* pops top element off the stack;
     returns empty stack if the stack is empty *)
  val pop : t -> t Add WeChat powcoder

  (* returns the top element of the stack; returns
     None if the stack is empty *)
  val top : t -> int option

end
```

## Assignment Project Exam Help Signature Comments

- Signature comments are for clients of the module
  - explain what each function should do
    - how it manipulates abstract values (stacks)
  - **not** how it manipulates concrete values
  - don't reveal implementation details that should be hidden behind the abstraction

<https://powcoder.com>

- Don't copy signature comments into your structures
  - your comments will get out of date in one place or the other
  - an extension of the general rule: don't copy code
- Place implementation comments inside your structure
  - comments about implementation invariants hidden from client
  - comments about helper functions

# Assignment Project Exam Help Example Structure

## Add WeChat powcoder

```
module ListIntStack : INT_STACK =
  struct
    type t = int list
    let empty () : t = []
    let push (i:int) (s:t) : t = i::s
    let is_empty (s:t) =
      match s with
        | [] -> true
        | _ :: _ -> false
    let pop (s:t) : t =
      match s with
        | [] -> []
        | _ :: tl -> tl
    let top (s:t) : int option =
      match s with
        | [] -> None
        | h :: _ -> Some h
  end
```

# Assignment Project Exam Help Example Structure

```
module ListIntStack : INT_STACK =
  struct
    type t = int list
    let empty () : t = []
    let push (i:int) (s:t) : t = i :: s
    let is_empty (s:t) =
      match s with
      | [] -> true
      | _ :: _ -> false
    let pop (s:t) : t =
      match s with
      | [] -> []
      | _ :: tl -> tl
    let top (s:t) : int option =
      match s with
      | [] -> None
      | h :: _ -> Some h
  end
```

Inside the module,  
we know the  
**concrete type** used  
to implement the  
abstract type.

# Assignment Project Exam Help Example Structure

```
module ListIntStack : INT_STACK =  
  struct  
    type t = int list  
    let empty () : t = []  
    let push (i:int) (s:t) : t =  
    let is_empty (s:t) =  
      match s with  
        | [] -> true  
        | _ :: _ -> false  
    let pop (s:t) : t =  
      match s with  
        | [] -> []  
        | _ :: tl -> tl  
    let top (s:t) : int option =  
      match s with  
        | [] -> None  
        | h :: _ -> Some h  
  end
```

But by giving the module the INT\_STACK interface, which does not reveal how stacks are being represented, we prevent code outside the module from knowing stacks are lists.

## Assignment Project Exam Help An Example Client

Add WeChat powcoder

```
module ListIntStack : INT_STACK =
  struct
    ...
  end
```

Assignment Project Exam Help

```
let s0 = ListIntStack.empty ()
let s1 = ListIntStack.push 3 s0
let s2 = ListIntStack.push 4 s1
let i = ListIntStack.top s2
```

## Assignment Project Exam Help An Example Client


Add WeChat powcoder

```
module ListIntStack : INT_STACK =
  struct
    ...
  end
```

Assignment Project Exam Help

```
let s0 = ListIntStack.empty ()
let s1 = ListIntStack.push 3 s0
let s2 = ListIntStack.push 4 s1
let i = ListIntStack.top s2
```

Add WeChat powcoder

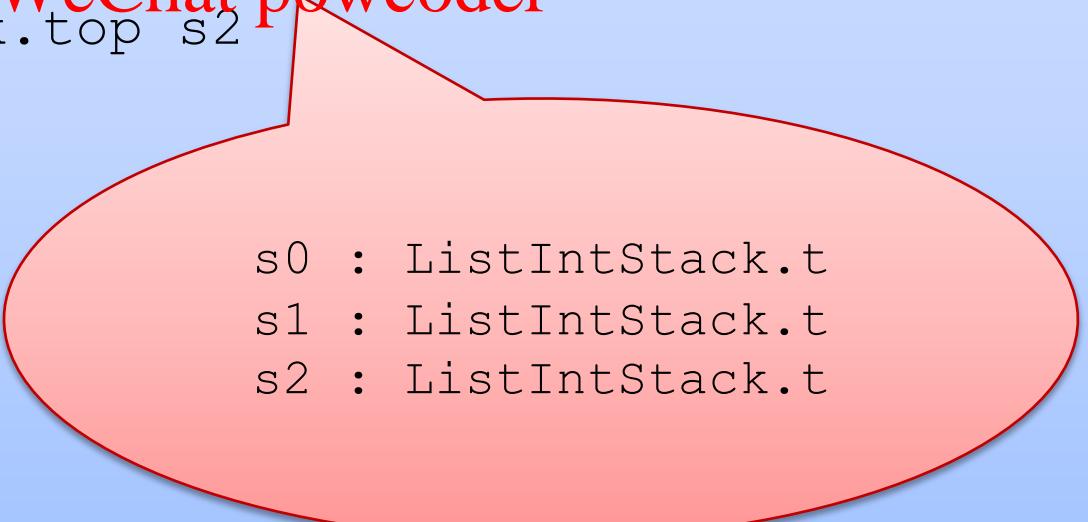

```
s0 : ListIntStack.t
s1 : ListIntStack.t
s2 : ListIntStack.t
```

## Assignment Project Exam Help An Example Client

Add WeChat powcoder

```
module ListIntStack : INT_STACK =
  struct
    ...
  end
```

Assignment Project Exam Help

```
let s0 = ListIntStack.empty ()
let s1 = ListIntStack.push 3 s0
let s2 = ListIntStack.push 4 s1
let i = ListIntStack.top s2
(* i : int option = Some 4 *)
```

Add WeChat powcoder

## Assignment Project Exam Help An Example Client

Add WeChat powcoder

```
module ListIntStack : INT_STACK =
  struct
    ...
  end
```

Assignment Project Exam Help

```
let s0 = ListIntStack.empty ()
let s1 = ListIntStack.push 3 s0
let s2 = ListIntStack.push 4 s1
let i = ListIntStack.top s2
          (* i : int option = Some 4 *)
let j = ListIntStack.top (ListIntStack.pop s2)
          (* j : int option = Some 3 *)
```

## Assignment Project Exam Help An Example Client

Add WeChat powcoder

```
module ListIntStack : INT_STACK =
  struct
    ...
  end
```

Assignment Project Exam Help

```
let s0 = ListIntStack.empty ()
let s1 = ListIntStack.push 3 s0
let s2 = ListIntStack.push 4 s1
let i = ListIntStack.top s2
          (* i : int option = Some 4 *)
let j = ListIntStack.top (ListIntStack.pop s2)
          (* j : int option = Some 3 *)
open ListIntStack
```

## Assignment Project Exam Help An Example Client

### Add WeChat powcoder

```
module ListIntStack : INT_STACK =
  struct
    ...
  end
```

### Assignment Project Exam Help

```
let s0 = ListIntStack.empty ()
let s1 = ListIntStack.push 3 s0
let s2 = ListIntStack.push 4 s1
let i = ListIntStack.top s2
          (* i : int option = Some 4 *)
let j = ListIntStack.top (ListIntStack.pop s2)
          (* j : int option = Some 3 *)
open ListIntStack
let k = top (pop (pop s2))
          (* k : int option = None *)
```

## Assignment Project Exam Help An Example Client

```
Add WeChat powcoder
module type INT_STACK =
sig
  type t
  val push : int -> t -> t
  ...

```

Assignment Project Exam Help

```
module ListIntStack : INT_STACK
```

```
let s2 = ListIntStack.push 4 s1
```

...

```
let l = List.rev s2
```

Error: This expression has type ListIntStack.t but  
an expression was expected of type 'a list.

Notice that the  
client is not  
allowed to know  
that the stack is a  
list.

# Assignment Project Exam Help Example Structure

```
module ListIntStack = struct
  type t = int list
  let empty () : t = []
  let push (i:int) (s:t) = i::s
  let is_empty (s:t) =
    match s with
    | [] -> true
    | _ :: _ -> false
exception EmptyStack
let pop (s:t) =
  match s with
  | [] -> []
  | _ :: tl -> tl
let top (s:t) =
  match s with
  | [] -> None
  | h :: _ -> Some h
end
```

Note that when you are debugging, you may want to comment out the signature ascription so that you can access the contents of the module.

## The Client without the Signature

```
module ListIntStack : sig
  type t
  val empty : t
  val push : int * t → t
  val pop : t * int
  val top : t → int
  val is_empty : t → bool
end
```

```
let s = ListIntStack.empty()
let s1 = ListIntStack.push 3 s
let s2 = ListIntStack.push 4 s1
...
let l = List.rev s2
      (* l : int list = [3; 4] *)
```

If we don't seal the module with a signature, the client can know that stacks are lists.

# Assignment Project Exam Help Example Structure

```
module ListIntStack = struct
  type t = int list
  let empty () : t = []
  let push (i:int) (s:t) = i::s
  let is_empty (s:t) =
    match s with
    | [] -> true
    | _ :: _ -> false
exception EmptyStack
let pop (s:t) =
  match s with
  | [] -> []
  | _ :: tl -> tl
let top (s:t) =
  match s with
  | [] -> None
  | h :: _ -> Some h
end
```

When you put the signature on here, you are restricting client access to the information in the signature (which does *not* reveal that stack = int list.) So clients can *only* use the stack operations on a stack value (not list operations.)

## Assignment Project Exam Help Example Structure

```
module type INT_STACK =  
  sig  
    type stack  
    ...  
  
    val inspect : stack -> int list  
    val run_unit_tests : unit -> unit  
  end
```

```
module ListIntStack : INT_STACK =  
  struct  
    type stack = int list  
    ...  
  
    let inspect (s:stack) : int list = s  
    let run_unit_tests () : unit = ...  
  end
```

Another technique:

Add testing components to your signature.

Another option: we have 2 signatures, one for testing and one for the rest of the code)

## Assignment Project Exam Help Recall the Integer Stack Signature

Add WeChat powcoder

```
module type INT_STACK =
  sig
    type t
    val empty : unit -> t
    val push : int -> t
    val is_empty : t -> bool
    val pop : t -> int
    val top : t -> int option
  end
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# A Signature for Polymorphic Stacks

Add WeChat powcoder

```
module type INT_STACK =
  sig
    type t
    val empty : unit -> t
    val push : int -> t -> t
    val is_empty : t -> bool
    val pop : t -> t
    val top : t -> int
  end
```

```
module type STACK =
  sig
    type 'a stack
    val empty : unit -> 'a stack
    val push : 'a -> 'a stack -> 'a stack
    val is_empty : 'a stack -> bool
    val pop : 'a stack -> 'a stack
    val top : 'a stack -> 'a option
  end
```

# Assignment Project Exam Help

```
module ListStack : STACK =  
  struct  
    type 'a stack = 'a list  
    let empty () : 'a stack = []  
    let push (x:'a) (s:'a stack) : 'a stack = x::s  
    let is_empty (s:'a stack) =  
      match s with  
        | [] -> true  
        | _ :: _ -> false  
    let pop (s:'a stack) : 'a stack =  
      match s with  
        | [] -> []  
        | _ :: tl -> tl  
    let top (s:'a stack) : 'a option =  
      match s with  
        | [] -> None  
        | h :: _ -> Some h  
  end
```

## Assignment Project Exam Help Wrap up and Summary

- It is often tempting to break the abstraction barrier.
  - e.g., during development, you want to print out a set, so you just call a convenient function you have lying around for iterating over lists and printing them out.
- But the whole point of the barrier is to support future change in implementation.
  - e.g., moving from <https://powcoder.com> to sorted invariant.
  - or from lists to balanced trees.
- Many languages provide ways to leak information through the abstraction barrier.
  - “good” clients should not take advantage of this.
  - but they always end up doing it.
  - so you end up having to support these leaks when you upgrade, else you’ll break the clients.

## Assignment Project Exam Help Key Points

OCaml's linguistic mechanisms include:

- *signatures* (interfaces)
- *structures* (implementations)
- *functors* (functions from modules to modules)

We can use the module system

- provides support for *name-spaces*
- *hiding information* (types, local value definitions)
- *code reuse* (via functors, reusable interfaces, reusable modules)

### Add WeChat powcoder

Information hiding allows design in terms of *abstract* types and algorithms.

- think “sets” not “lists” or “arrays” or “trees”
- think “document” not “strings”
- the less you reveal, the easier it is to replace an implementation
- use linguistic mechanisms to implement information hiding
  - invariants written down as comments are easy to violate
  - use the type checker to guarantee you have strong protections in place