




Add WeChat powcoder

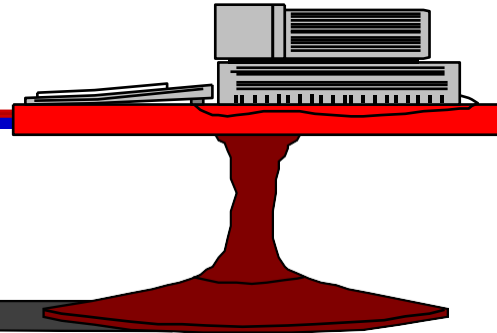

Assignment Project Exam Help

Overview of Network Programming: Sockets

<https://powcoder.com>


Add WeChat powcoder

EE450: Introduction to Computer Networks

Professor A. Zahid

Add WeChat powcoder Application Programming Interface

- The services provided by the operating system that provide the interface between application and the TCP/IP Protocol Suite.

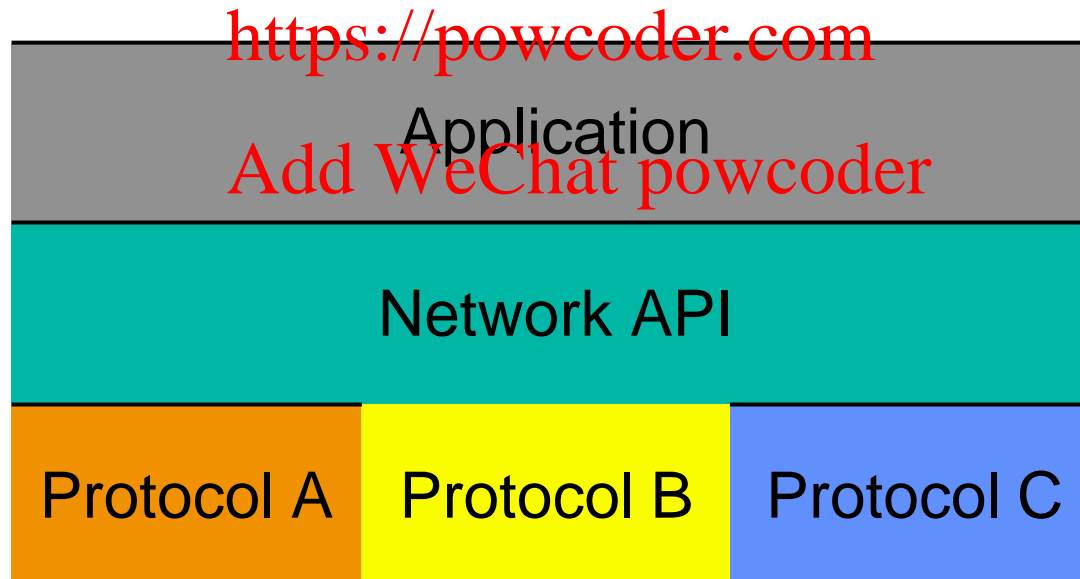


Add WeChat powcoder

API: Sockets

- TCP/IP does not include an API definition.
- There are a variety of APIs for use with TCP/IP:
 - UNIX Sockets
 - Winsock (Windows Sockets)
- A socket is an abstract representation of a communication endpoint.
- A socket allows the application to “plug in” to the network and communicate with other applications
- A socket is uniquely identified by the IP address, Port number and the underlying transport layer protocol


Add WeChat powcoder Socket Types

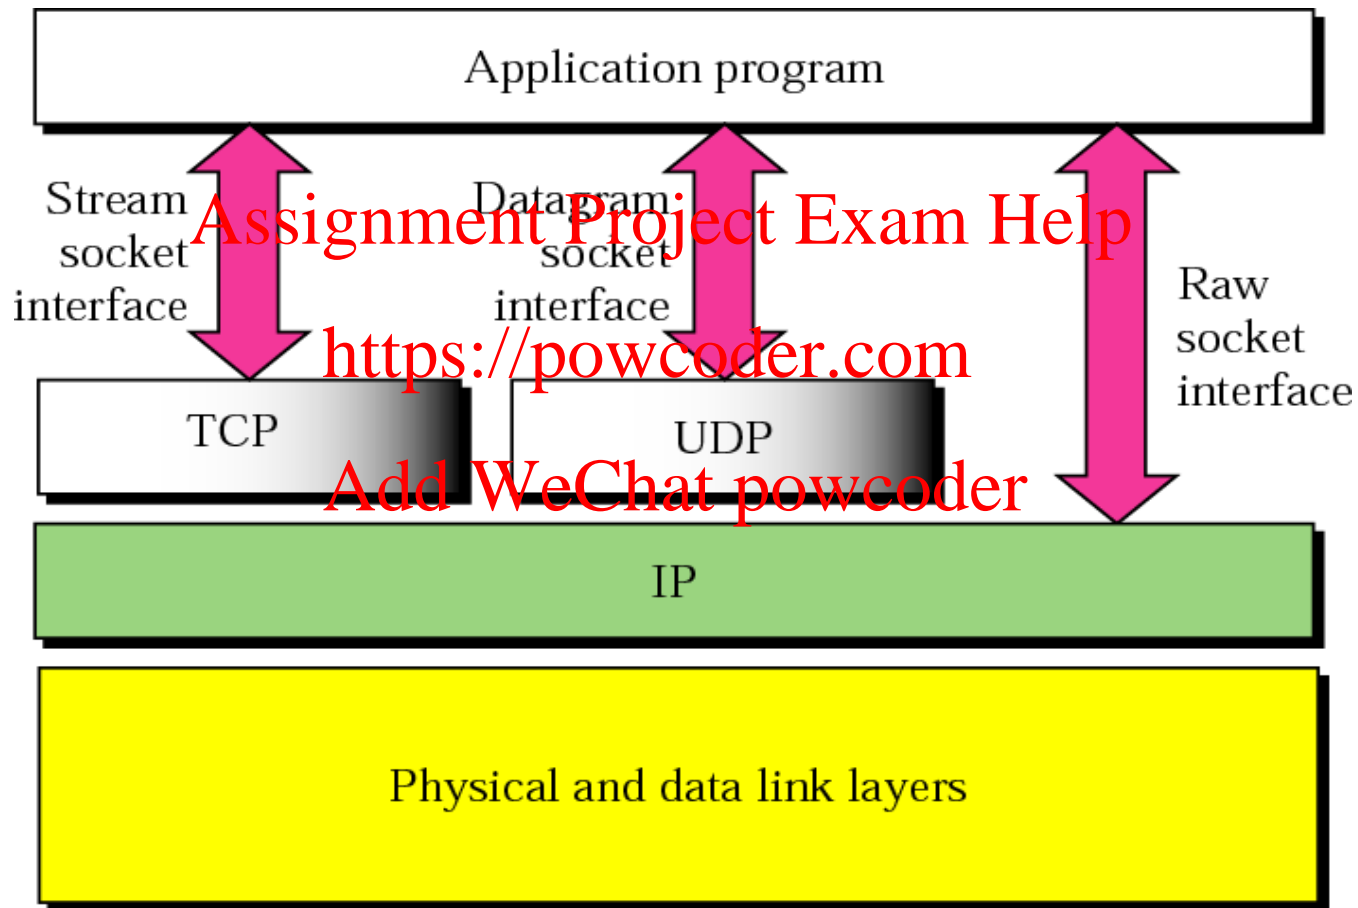


Add WeChat powcoder

Socket Structure

Socket

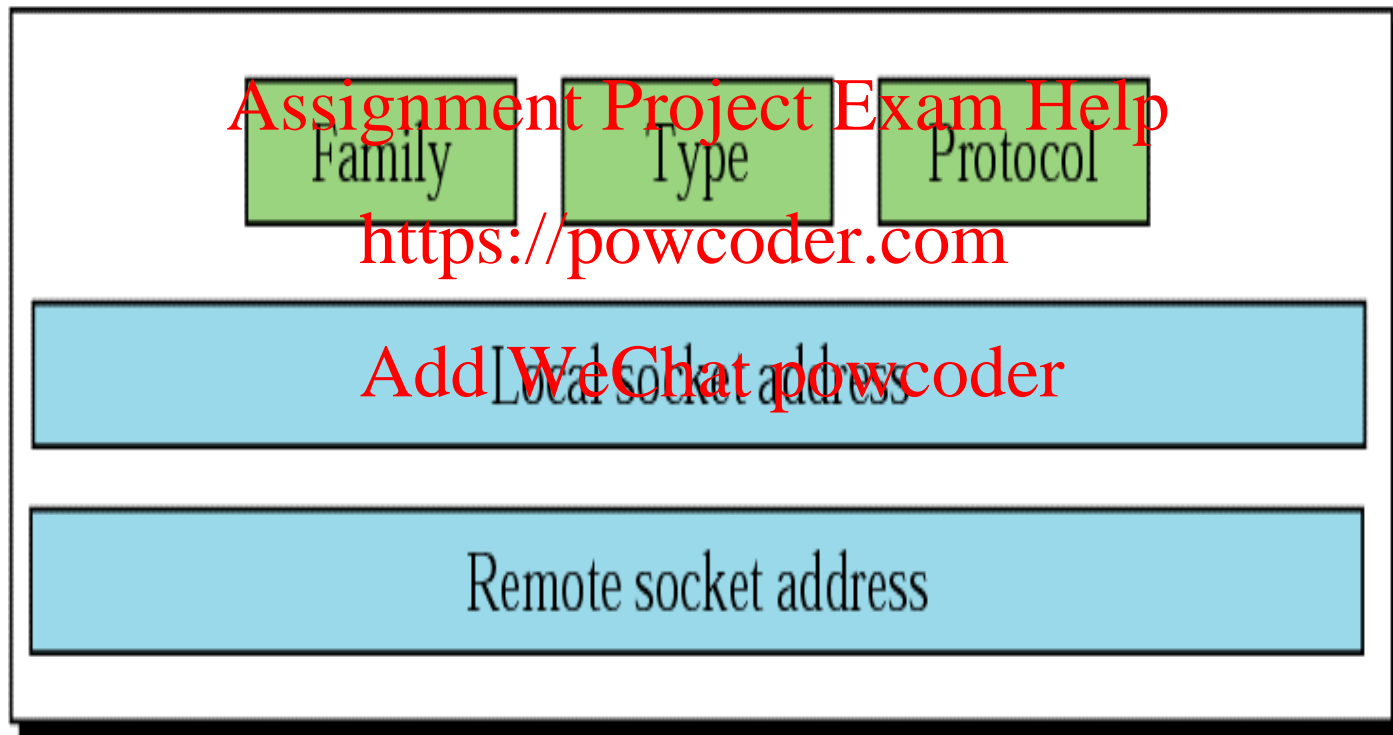

Add WeChat powcoder Socket Descriptor Data Structure

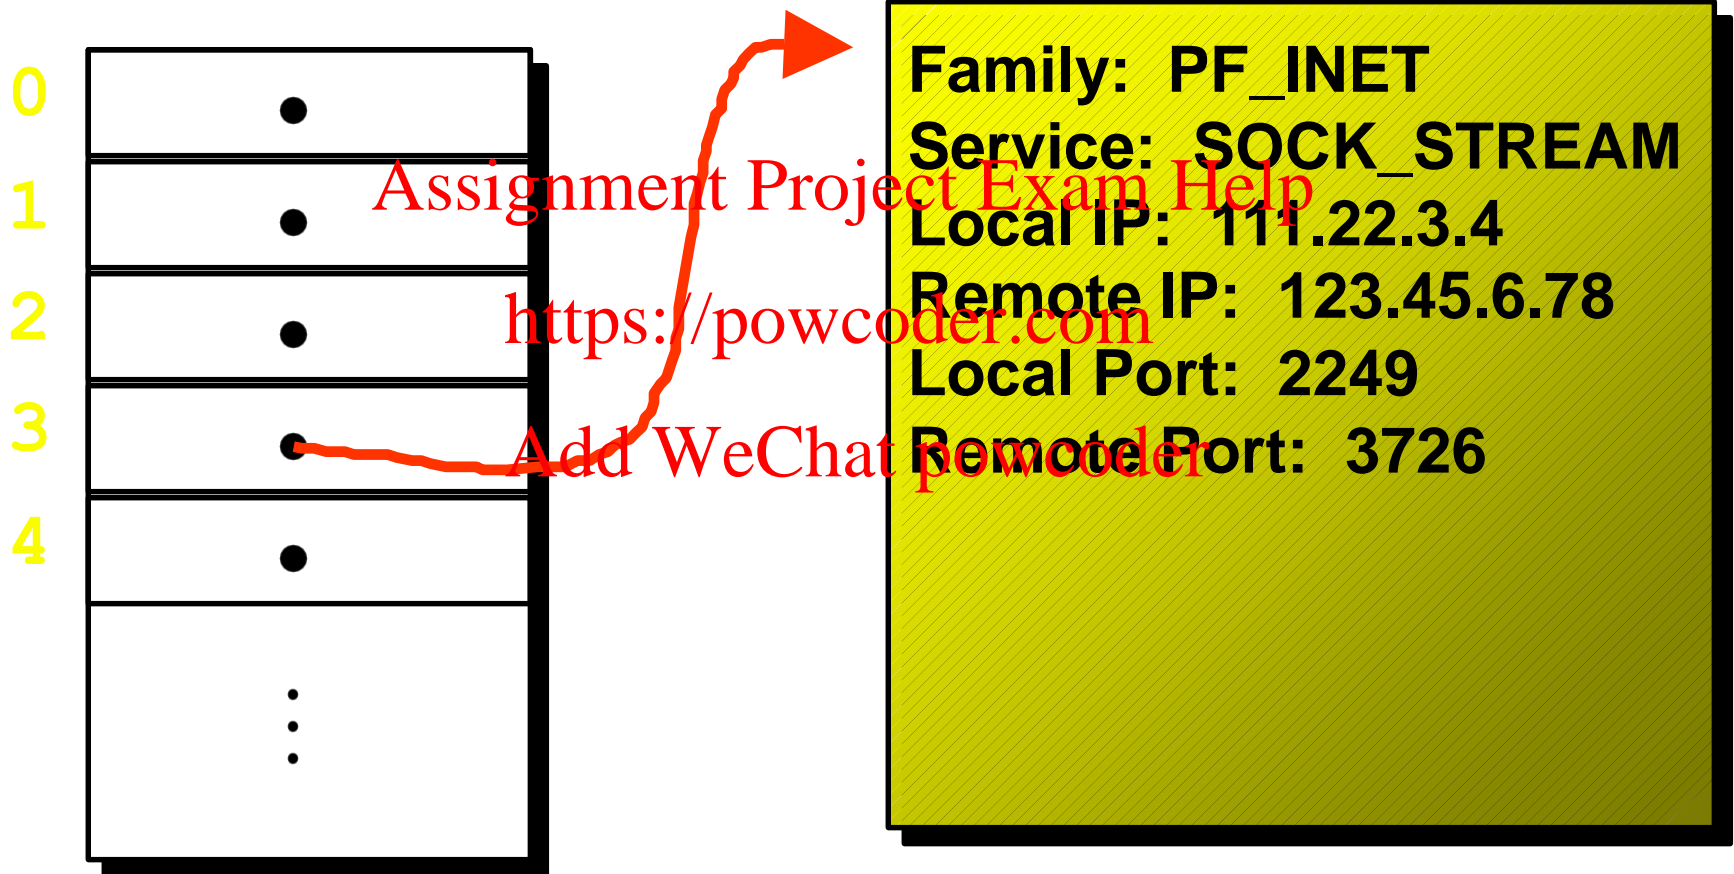

Add WeChat powcoder

Basic Sockets API

- Clients and Servers differ in some aspects of their use of API and they are the same in other aspects
- Both client and server programs begin by asking the NOS to "create" a socket. The function to accomplish that is `Socket ()`
 - `int socket (int protocol family, int type, int protocol)`
 - Protocol family: `PF_INET`
 - Type: `SOCK_STREAM`, `SOCK_DGRAM`
 - Protocol: `TCP`, `UDP`
- Return value of `Socket ()` is a non-negative integer called **Socket Descriptor** (or -1 if errors)

Add WeChat powcoder TCP Server

- Create a TCP socket using Socket ()
- Assign a port number to the socket using Bind ()
 - `int bind (int socket, local address, address length)`
 - Local address is the IP address and the port number of the server. It is this address that the client and the server need to agree on to communicate. Neither one need to know the client address.
 - Address length is length of address structure
 - If successful, Bind () returns 0, otherwise it returns -1
 - If successful, the socket at server side is "associated" to the local IP address and the local port number
- Listen to connections from clients using Listen ()
 - `int listen (int socket, int queue limit)`
 - Queue limit is an upper bound on # of clients that can be waiting
 - If successful, Listen () returns a 0, otherwise it returns -1

Add WeChat powcoder TCP Server (Continued)

- The socket that has been bounded to a port and marked for listening is never actually used for sending and receiving. The socket (known as the welcoming socket or the "parent" socket).
Assignment Project Exam Help
- "Child" sockets are created for each client. It is this socket that is actually used for sending and receiving.
<https://powcoder.com>
Add WeChat powcoder
- Server gets a socket for an incoming client connection by calling `Accept ()`
 - `int accept (int socket, client address, address length)`
 - If successful, `accept ()` returns a descriptor for the new socket, otherwise it returns -1


Add WeChat powcoder TCP Server (Continued)

- Once the child socket is created, communications (send and receive) can take place
 - `int send (int socket, message, message length)`
 - `int recv (int socket, recv buffer, buffer length)`
- When the application is done with the socket, it needs to close it (The child socket, not the parent socket which is passively open to welcome new clients). This is done by calling `Close ()`
 - `int close (int socket)`

Add WeChat powcoder TCP Client


- Create a TCP socket using `Socket ()`
- Establish a connection to the server using `Connect ()`
 - `int connect (int socket, foreign address, address length)`
 - Foreign address is the address of the server and the port number of the server (The well-known port number)
- Communications using `Send` and `Recv`
 - `int send (int socket, message, message length)`
 - `int recv (int socket, recv buffer, buffer length)`
- Close the socket using `Close ()`
 - `int close (int socket)`

Add WeChat powcoder Connection-less Iterative Server

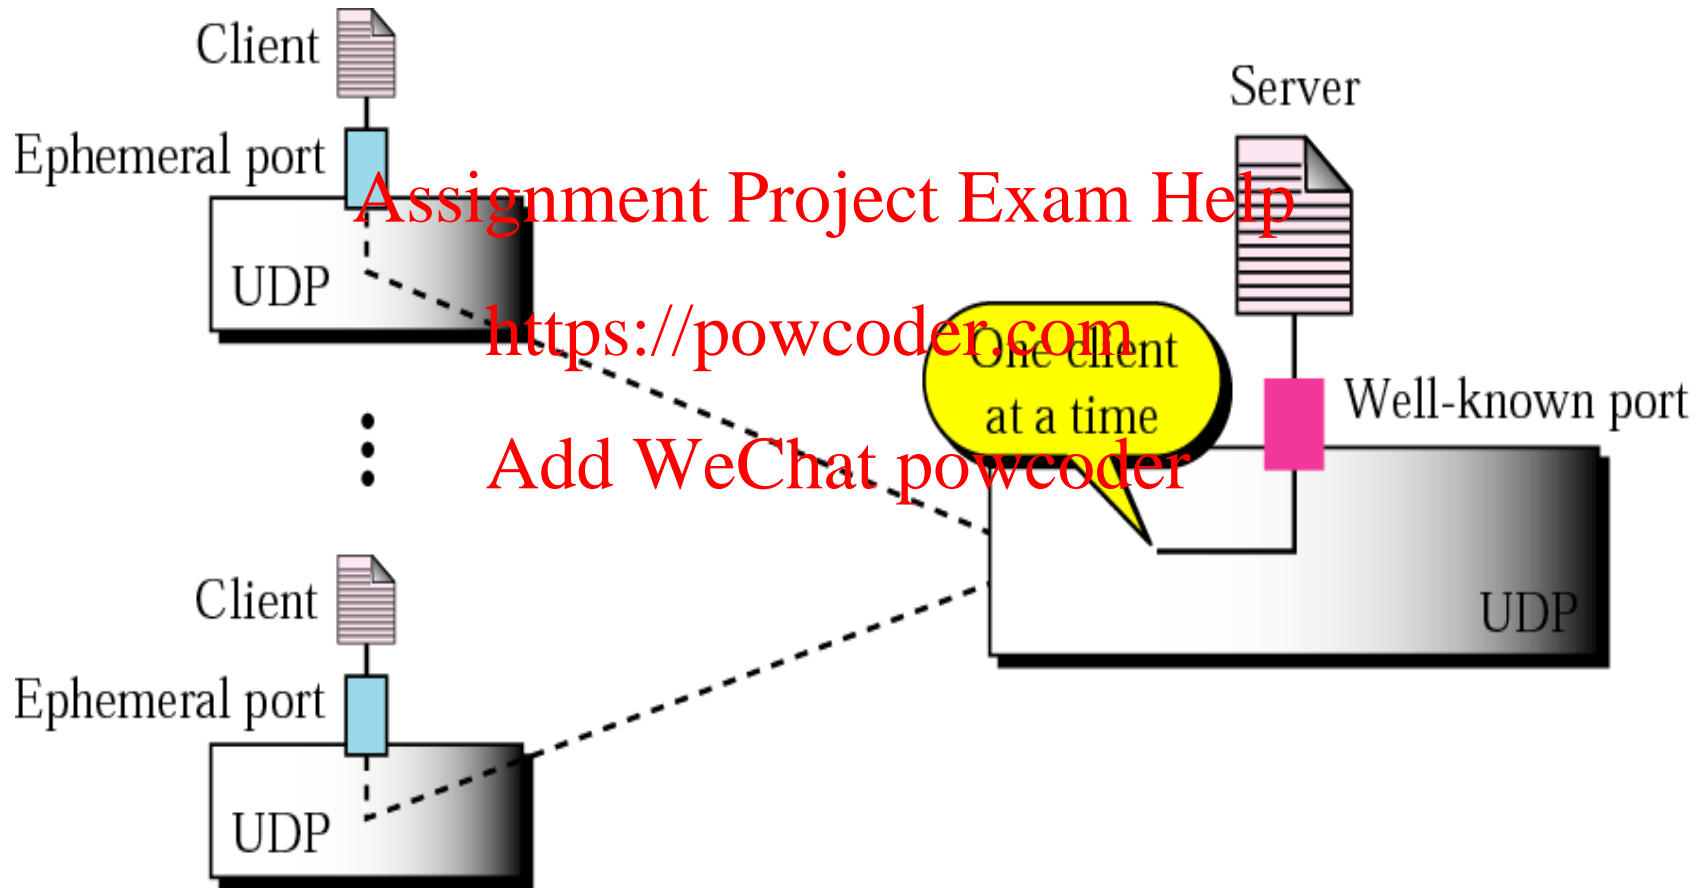


Flow Chart: Socket Interface for Connection-Less Iterative Server

Each server serves many clients but handles one request at a time.

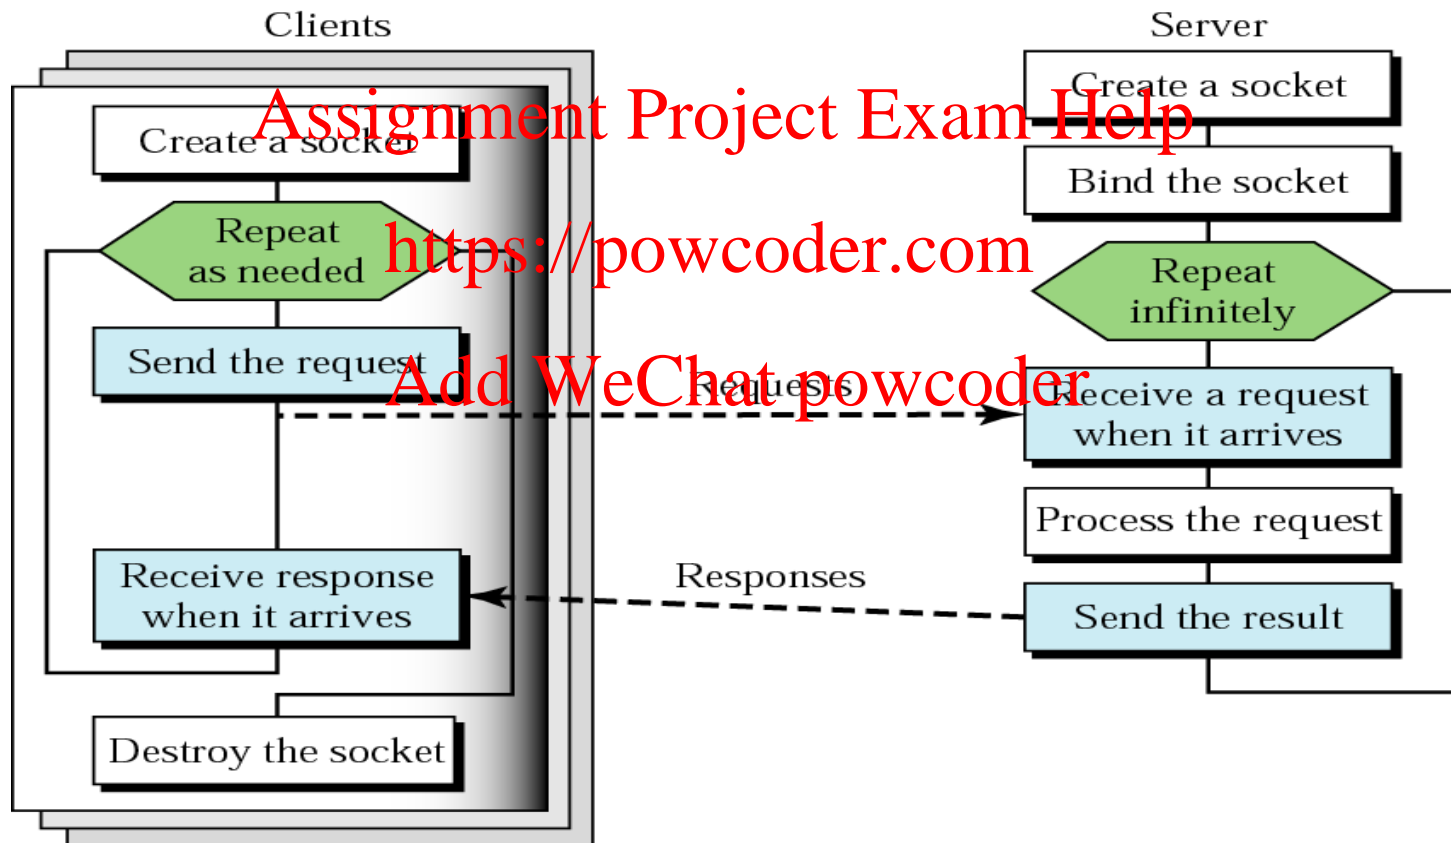

Add WeChat powcoder Connection-oriented Concurrent Server

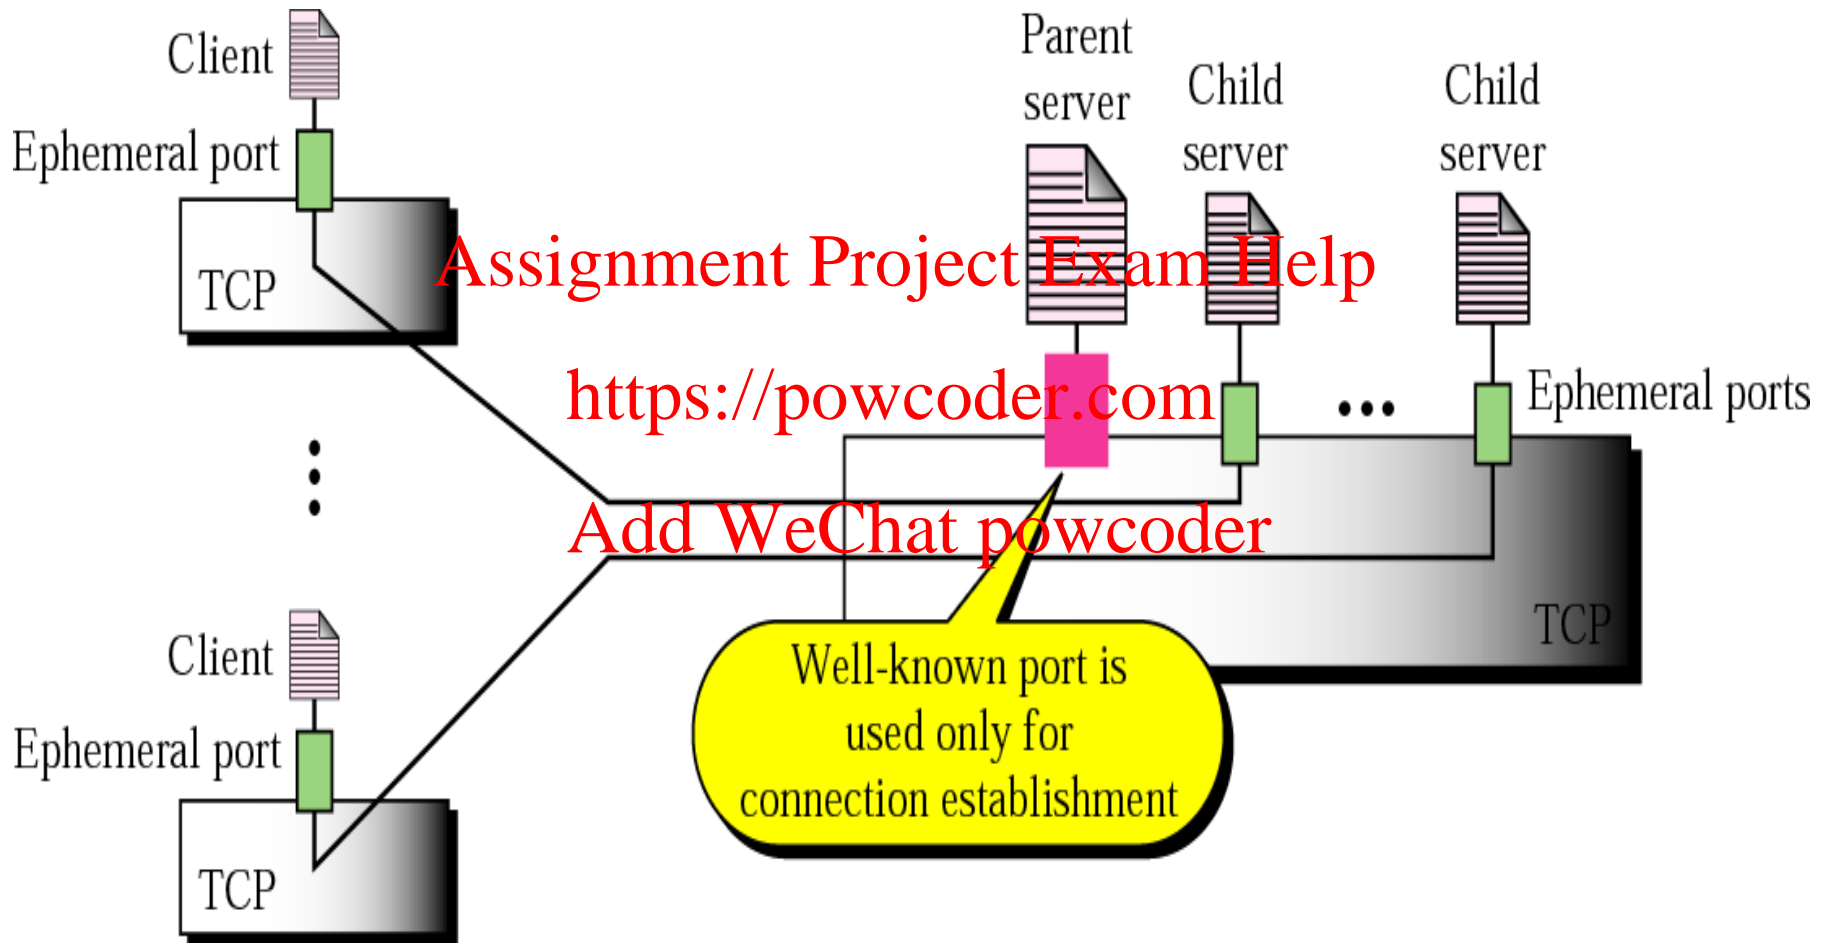

Flow Chart: Socket Interface for Connection-Oriented Concurrent Server

