

Chapter 2: Operating-System Structures

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

A View of Operating System Services

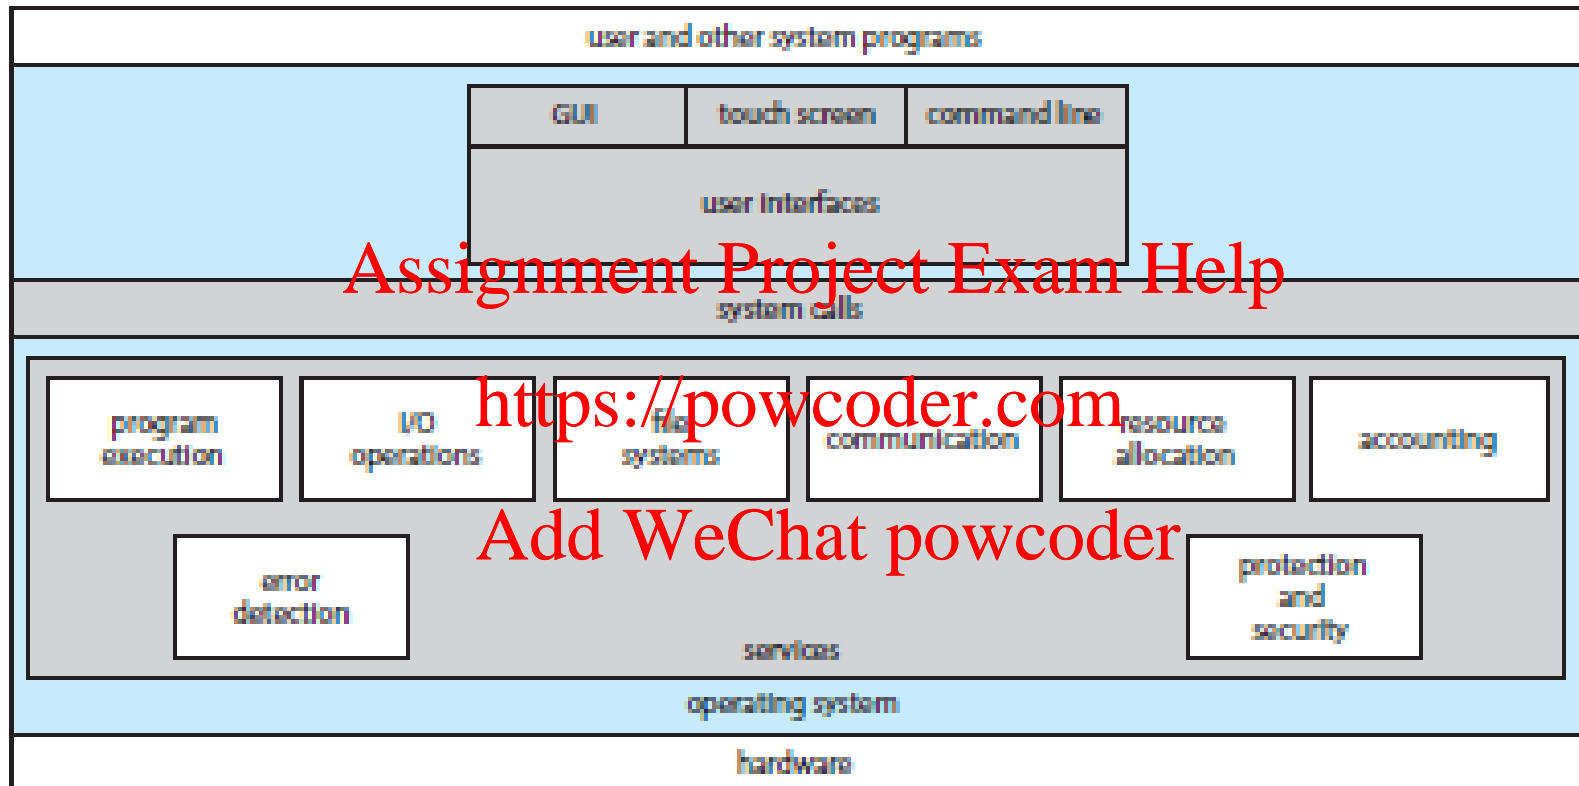



Figure 2.1 A view of operating system services.

System Calls

- Programming interface to the services provided by the OS
- Typically written in a high-level language (C or C++)
- Mostly accessed by programs via a high-level **Application Programming Interface (API)**
- Three most common APIs are Win32 API for Windows, POSIX API for POSIX-based systems (including virtually all versions of UNIX, Linux, and Mac OS X), and Java API for the Java virtual machine (JVM)

Example of System Calls

- System call sequence to copy the contents of one file to another file

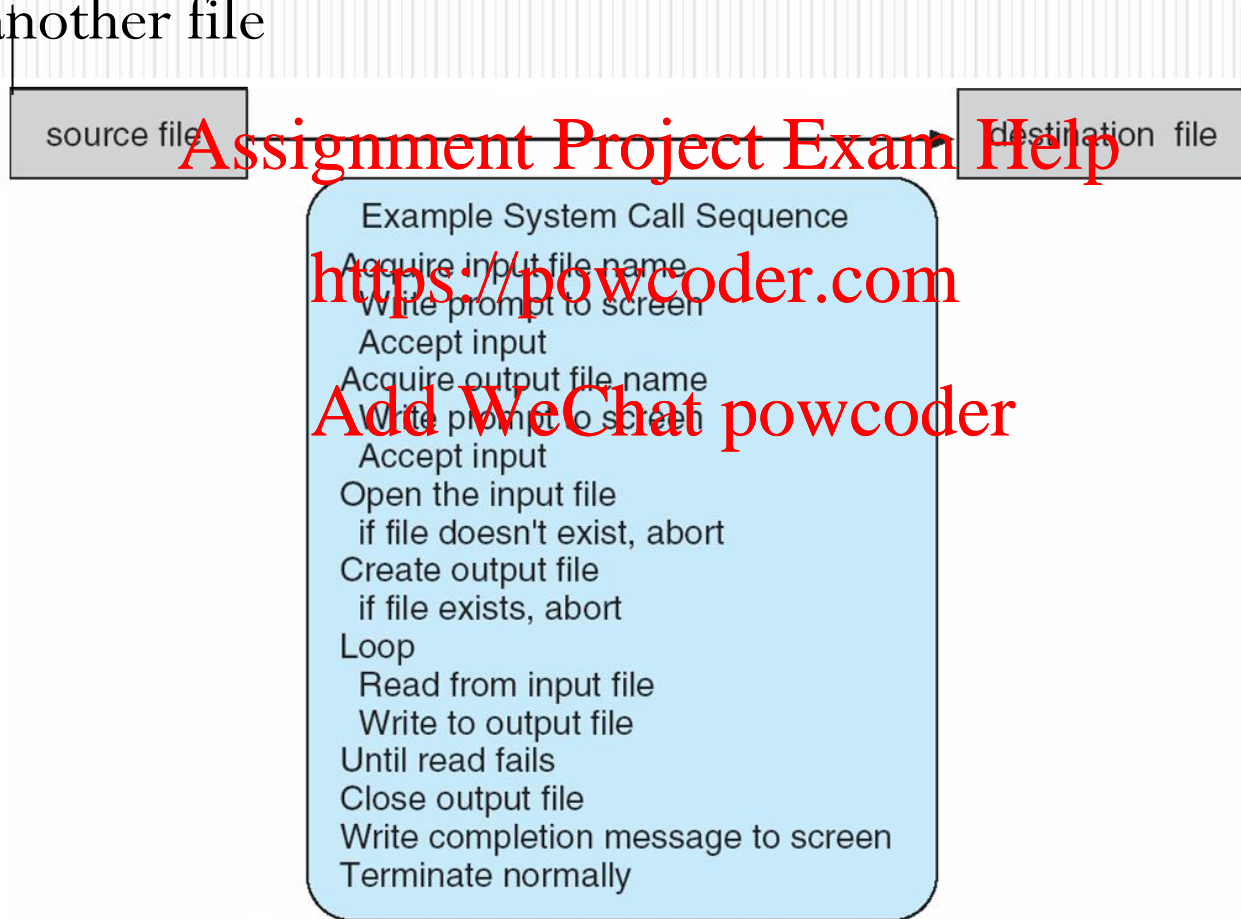

Example of Standard API

EXAMPLE OF STANDARD API

As an example of a standard API, consider the `read()` function that is available in UNIX and Linux systems. The API for this function is obtained from the `man` page by invoking the command

`man read`
on the command line. A description of this API appears below.

```
#include <unistd.h>
ssize_t read(int fd, void *buf, size_t count)
```

return value function name parameters

A program that uses the `read()` function must include the `unistd.h` header file, as this file defines the `ssize_t` and `size_t` data types (among other things). The parameters passed to `read()` are as follows:


- `int fd`—the file descriptor to be read
- `void *buf`—a buffer where the data will be read into
- `size_t count`—the maximum number of bytes to be read into the buffer

On a successful read, the number of bytes read is returned. A return value of 0 indicates end of file. If an error occurs, `read()` returns `-1`.

System Call Implementation

- Typically, a number associated with each system call
 - **System-call interface** maintains a table indexed according to these numbers
- The system call interface invokes intended system call in OS kernel and returns status of the system call and any return values <https://powcoder.com>
- The caller need not know anything about how the system call is implemented
 - Just needs to obey API and understand what OS will do as a result call
 - Most details of OS interface hidden from programmer by API
 - Managed by run-time support library (set of functions built into libraries included with compiler)


API – System Call – OS Relationship

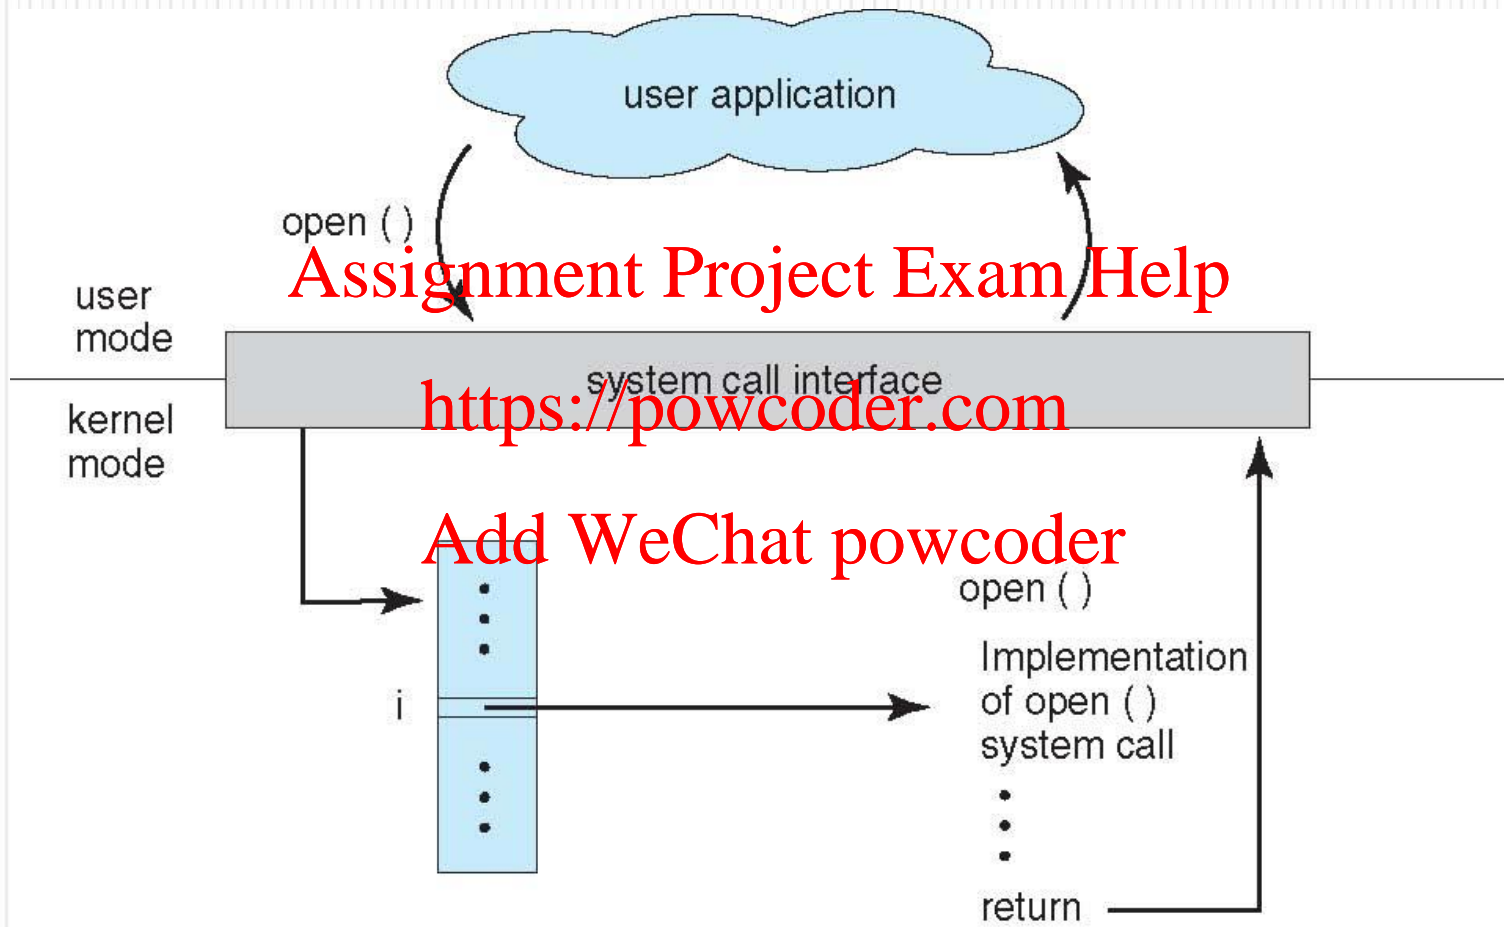

System Call Parameter Passing

- Often, more information is required than simply identity of desired system call
 - Exact type and amount of information vary according to OS and call
- Three general methods used to pass parameters to the OS
 - Simplest: pass the parameters in registers
 - In some cases, may be more parameters than registers
 - Parameters stored in a block, or table, in memory, and address of block passed as a parameter in a register
 - This approach taken by Linux and Solaris
 - Parameters placed, or **pushed**, onto the **stack** by the program and **popped** off the stack by the operating system
 - Block and stack methods do not limit the number or length of parameters being passed

Parameter Passing via Table

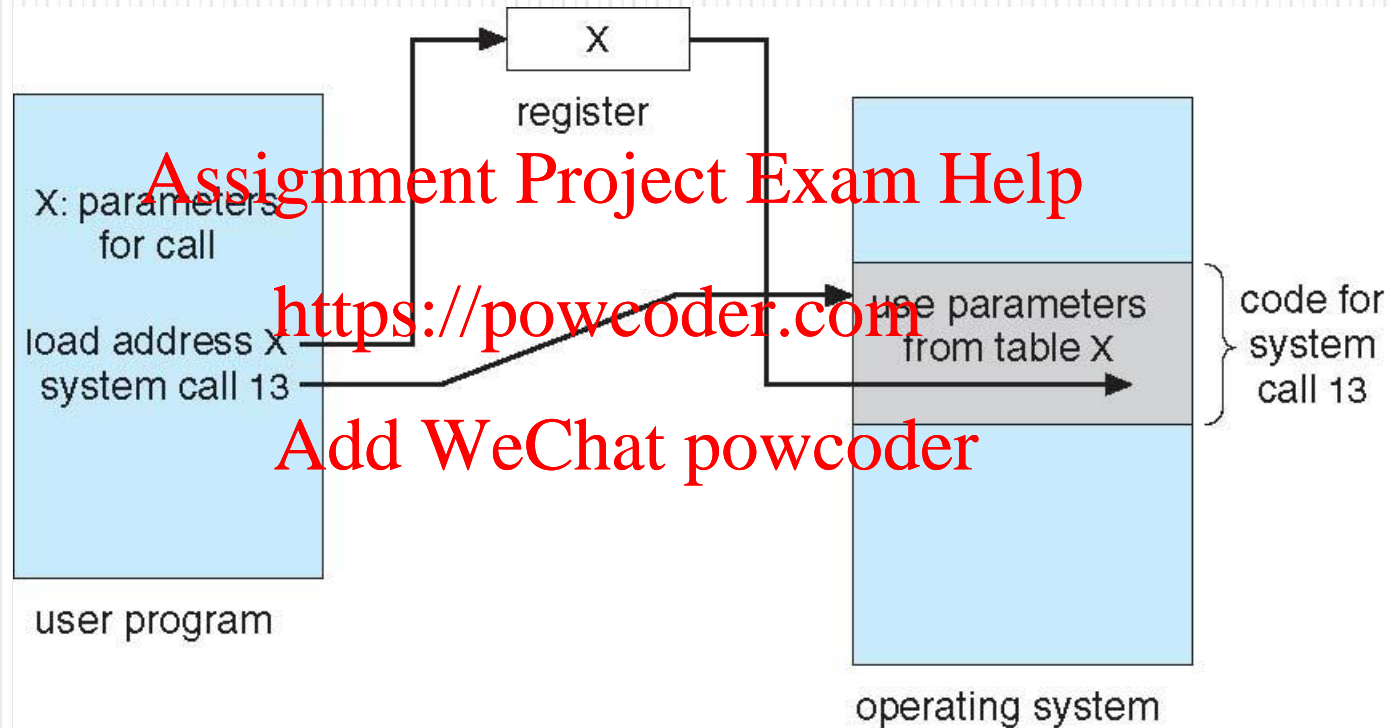


Examples of Windows and Unix System Calls

	Windows	Unix
Process Control	CreateProcess() ExitProcess() WaitForSingleObject()	fork() exit() wait()
File Manipulation	CreateFile() ReadFile() WriteFile() CloseHandle()	open() read() write() close()
Device Manipulation	SetConsoleMode() ReadConsole() WriteConsole()	ioctl() read() write()
Information Maintenance	GetCurrentProcessID() SetTimer() Sleep()	getpid() alarm() sleep()
Communication	CreatePipe() CreateFileMapping() MapViewOfFile()	pipe() shmget() mmap()
Protection	SetFileSecurity() InitializeSecurityDescriptor() SetSecurityDescriptorGroup()	chmod() umask() chown()

Standard C Library Example

- C program invoking printf() library call, which calls write() system call

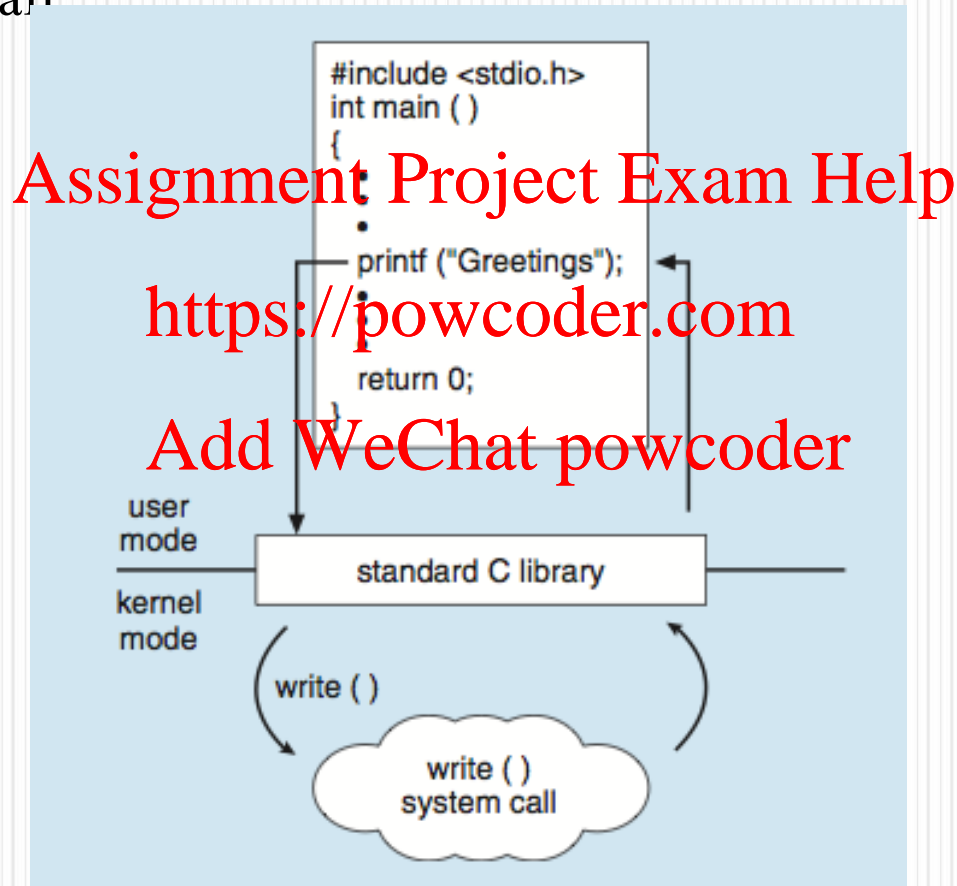

Operating System Design and Implementation

- Important principle to separate

Policy: *What* will be done?

Mechanism: *How* to do it?

Add WeChat powcoder

- Mechanisms determine how to do something, policies decide what will be done
 - The separation of policy from mechanism is a very important principle, it allows maximum flexibility if policy decisions are to be changed later

Operating System Structure

- General-purpose OS is very large program
- Various ways to structure one as follows

(1) **Monolithic Structure**: all the functionality of the kernel is placed in a single, static binary file that runs in a single address space.

- advantages: speed and efficiency due to less overhead in the system-call interface and fast communication within kernel

- disadvantages: difficult to implement and extend.

(2) **Layered Approach**

(3) **Microkernels**

(4) **Modules**

(5) **Hybrid Systems**

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

UNIX

- UNIX – limited by hardware functionality, the original UNIX operating system had limited structuring. The UNIX OS consists of two separable parts
 - Systems programs
 - The kernel
 - Consists of everything below the system-call interface and above the physical hardware
 - Provides the file system, CPU scheduling, memory management, and other operating-system functions; a large number of functions for one level


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Traditional UNIX System Structure

Beyond simple but not fully layered

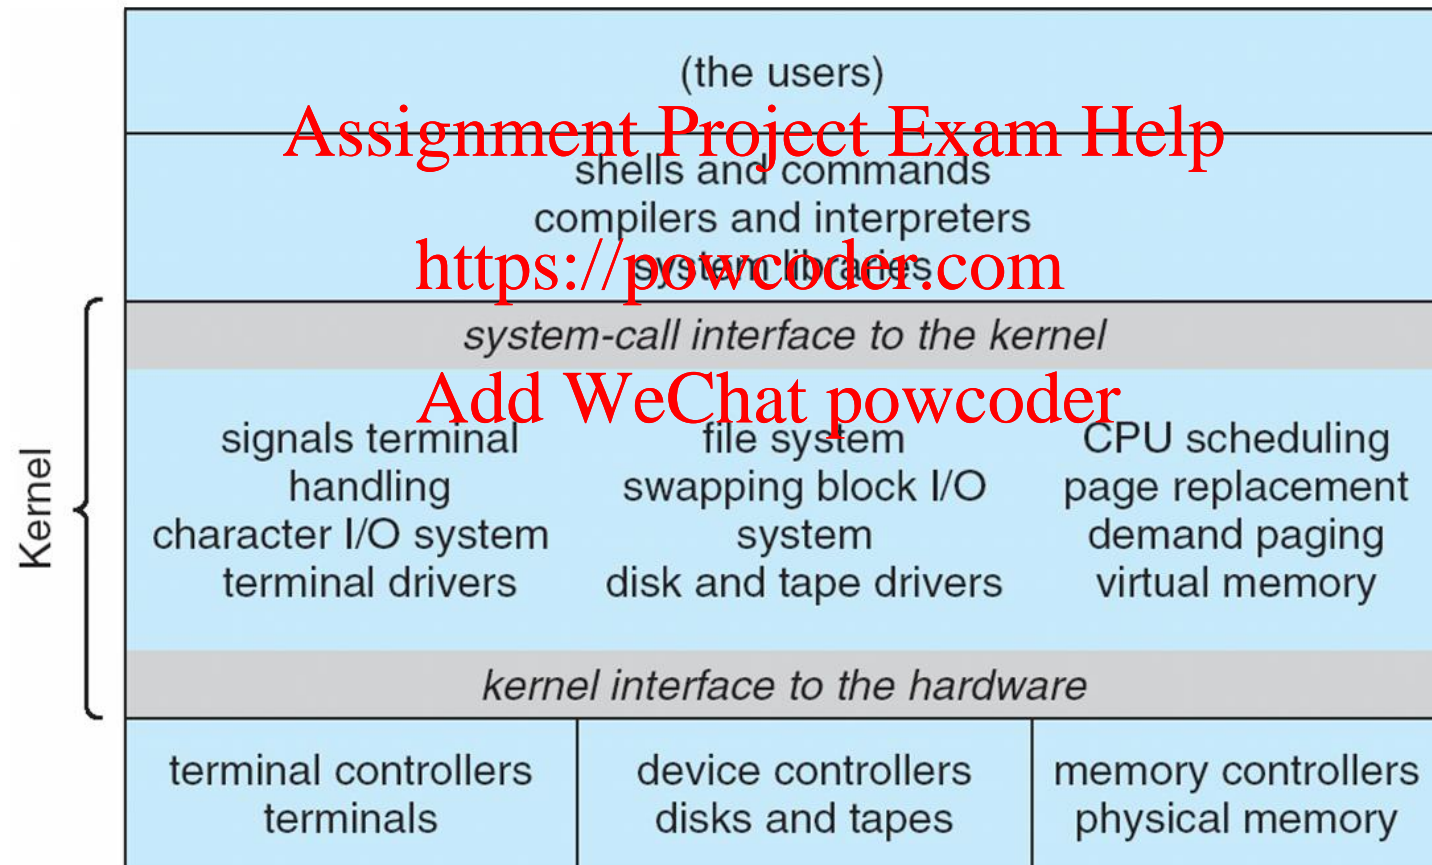

Linux System Structure

Similar to Unix, but has modular design that allows kernel to be modified during run-time


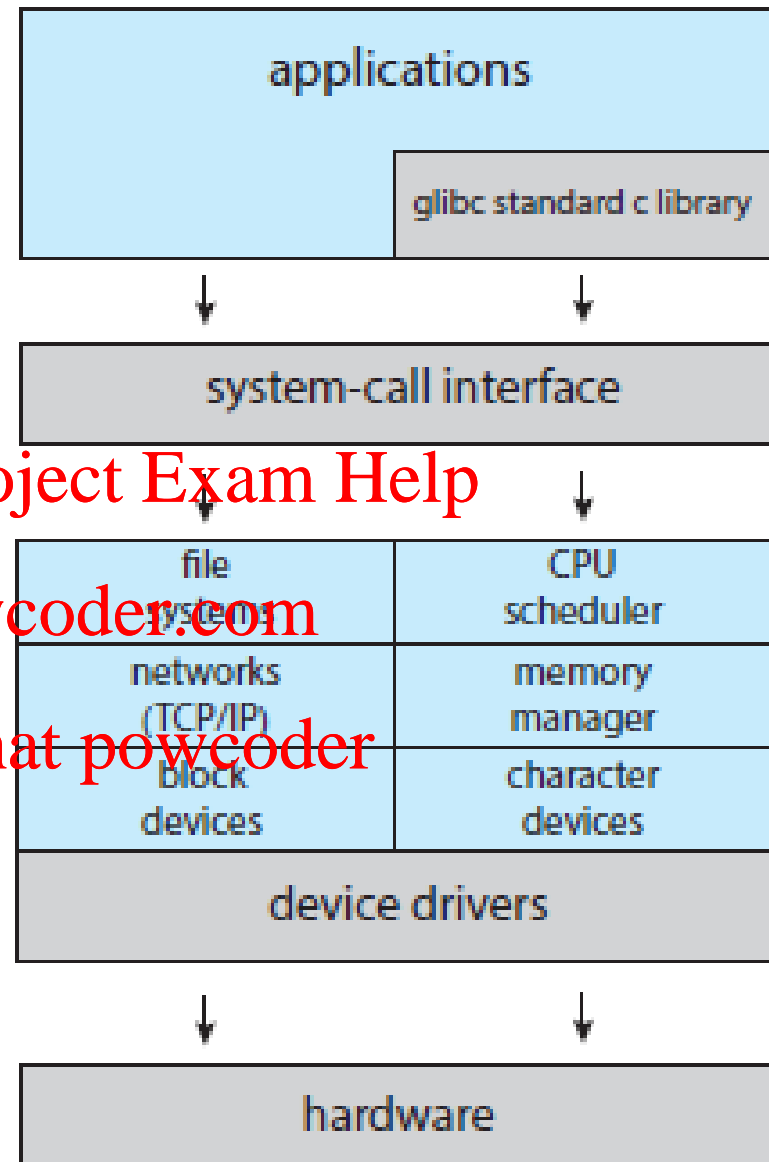


Figure 2.13 Linux system structure.

Layered Approach

- The operating system is divided into a number of layers (levels), each built on top of lower layers. The bottom layer (layer 0), is the hardware; the highest (layer N) is the user interface.
- With modularity, layers are selected such that each uses functions (operations) and services of only lower-level layers
- Advantages: - easy to design, implement, debug/verify
- Disadvantages: Each additional layer results in additional overhead

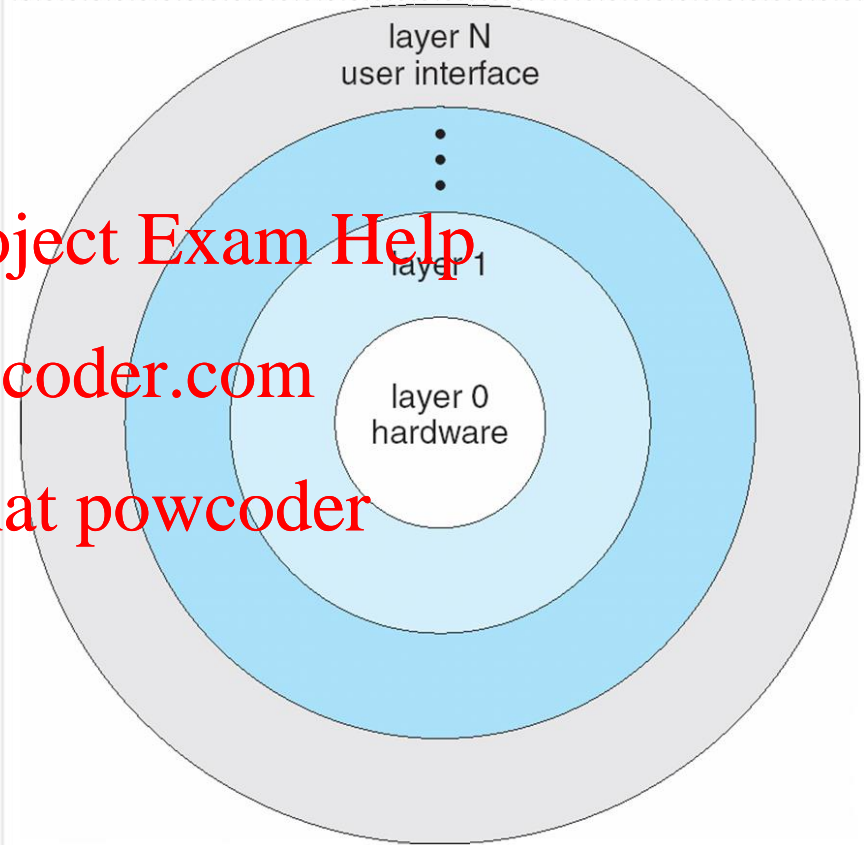

Microkernel System Structure


- Moves as much from the kernel into user space
- **Mach** example of **microkernel**
 - Mac OS X kernel (**Darwin**) partly based on Mach
- Communication takes place between user modules using **message passing**
- Benefits:
 - Easier to extend a microkernel
 - Easier to port the operating system to new architectures
 - More reliable (less code is running in kernel mode)
 - More secure
- Detriments:
 - Performance overhead of user space to kernel space communication

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Microkernel System Structure

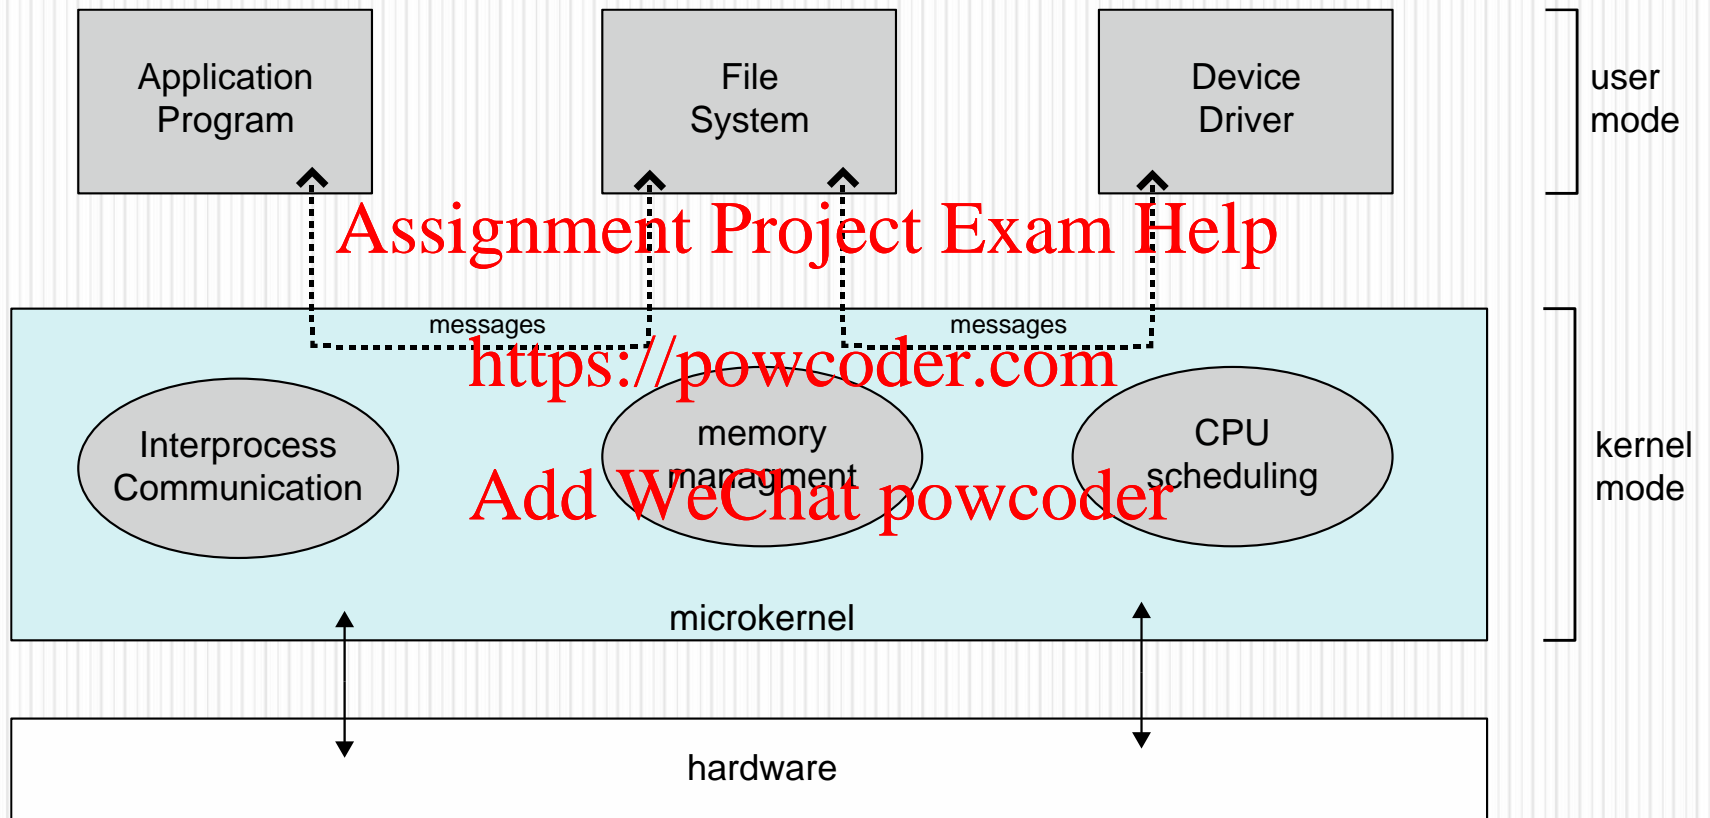

Modules

- Most modern operating systems implement **loadable kernel modules**
 - Uses object-oriented approach
 - Each core component is separate
 - Each talks to the others over known interfaces
 - Each is loadable as needed within the kernel
- Overall, similar to layers but with more flexible
 - Linux, Solaris, etc

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Hybrid Systems

- Most modern operating systems actually not one pure model
 - Hybrid combines multiple approaches to address performance, security, usability needs
 - Linux and Solaris kernels in kernel address space, so monolithic, plus modular for dynamic loading of functionality
 - Windows mostly monolithic, plus microkernel for different subsystem personalities
 - Apple Mac OS X hybrid kernel consisting of Mach microkernel and BSD Unix parts, plus I/O kit and dynamically loadable modules (called **kernel extensions**)

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

End of Chapter 2

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder