



MONASH
University

MONASH
INFORMATION
TECHNOLOGY

Week 5

Assignment Project Exam Help

Database Design In Logical Modelling
<https://powcoder.com>

Add WeChat powcoder

Workshop 2022 Semester 1



Reference

Several of the examples and diagrams used this week have been taken from:

Hoffer, J. A. , Prescott, M. B. & McFadden, F. R. “Modern Database Management”

<https://powcoder.com>
Add WeChat powcoder

Step 2 (and 3) of the Design Process

- Step 1 Conceptual Model (week 2)
 - Database Model independent
- Step 2 Logical Model (this week)
 - Select which type (model) of database you wish to implement your conceptual model in
 - Network, Relational, OO, XML, NoSQL, ...
 - Database model dependent
- Step 3 Physical Model
 - Select which specific vendor for your chosen model you will implement in
 - Oracle, MySQL, IBM DB2, SQL Server, ...
 - Database vendor dependent
 - Final output schema file to implement model (for relational model a set of tables)

Assignment Project Exam Help

<https://powcoder.com>


Add WeChat powcoder

Summary of Terminologies at Different Levels

Conceptual	Logical (Relational)	Physical (Relational)
Entity	Relation	Table
Attribute	Attribute	Column
Instance	Tuple	Row
Identifier (KEY)	Primary Key	Primary Key
Relationship	---	---
---	Foreign Key	Foreign Key

Music Model - Pre Class Activity

Conceptual

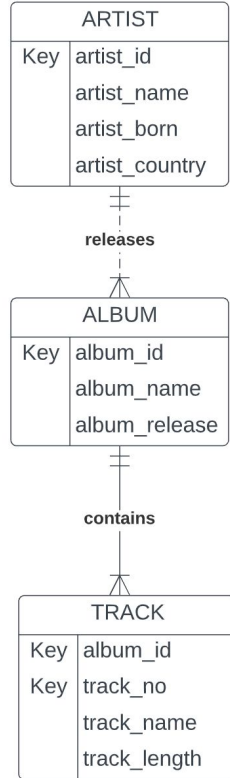

Relations

Assignment Project Exam Help

ARTIST (artist_id, artist_name, artist_born, artist_country)

ALBUM (album_id, album_name, album_release, artist_id)

<https://powcoder.com>

TRACK (album_id, track_no, track_name, track_length)

Add WeChat powcoder

Q1. Which of the following are invalid relations (note your reasons as you make your decisions):

- Assignment Project Exam Help**
<http://powcoder.com>
Add WeChat powcoder
- A. EMPLOYEE (empname, empdept, empno, empsalary)
 - B. CUSTOMER (custno, custname, custphone, custphone)
 - C. ORDER (orderid, orddate, custid)
 - D. PRODUCT (prodno, proddesc, produprice)
 - E. TRIP (trip_id, driver_id, driver_name, (stop_id, stop_time))
 - F. LICENCE_HELD (driver_id, licence_type)

Multiple answers possible

Week 3 Relational Model Characteristics


- Each relation must have a unique name
- Each attribute of a relation must have a distinct name within the relation
- An attribute cannot be multivalued (consist of repeating values)
- All values of an attribute need to be from the same domain
- The order of attributes and tuples in a relation is immaterial
- Each relation must have a primary key
- Logical (not physical) connections are made between relations by virtue of primary/foreign key pairing

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Recap Week 2 HiFlying Drone Conceptual Model

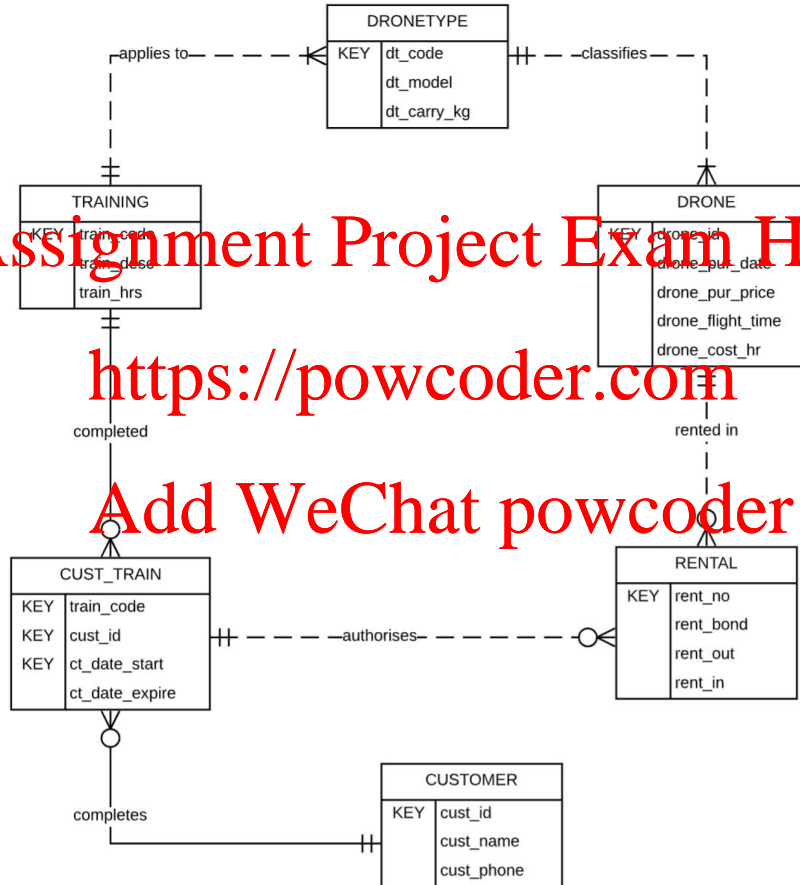

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Transforming ER diagrams into relations (mapping conceptual level to logical level)

- Essentially
 - KEY to PK
 - Represent relationships with PK/FK pairs
- The steps are:
 - Map strong (regular) entities
 - Map weak entities
 - Map binary relationships
 - Map associative entities
 - Map unary relationships
 - Map ternary relationships
 - *Map supertype/subtype relationships (is not part of this unit).*

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Map Regular Entities

- Composite Attributes


- When the regular entity type contains a composite attribute, only the simple component attributes of the composite attribute are included in the new relation.
- Compared to composite attributes, simple attributes not only improve data accessibility but also help in maintaining data quality
- Mapping a composite to its simple component attributes is the normal action *if no client specification, to the contrary, is available*
 - however, if in doubt ask eg phone numbers

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Mapping a Composite Attribute

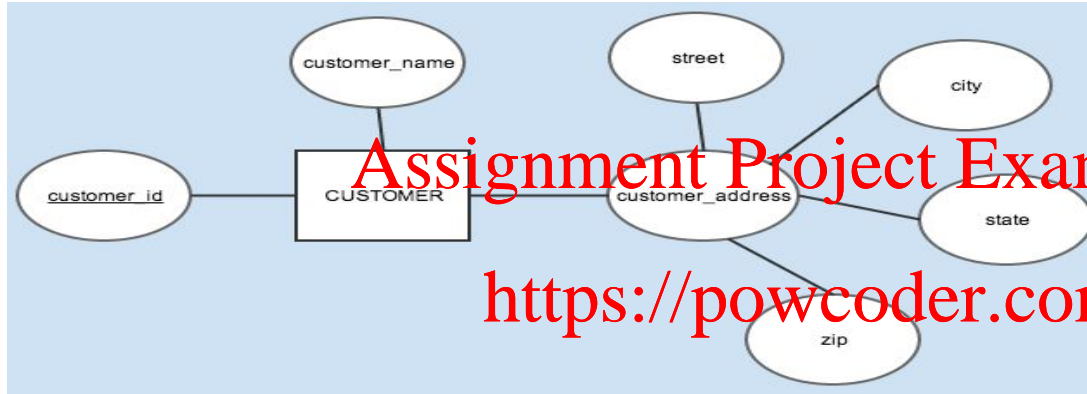

CUSTOMER	
Key	cust_id
	cust_name
	cust_street
	cust_city
	cust_state
	cust_zip

Add WeChat powcoder

CUSTOMER	
P	* cust_id
	* cust_name
	* cust_street
	* cust_city
	* cust_state
	* cust_zip

Map Regular Entities

- Multivalued Attribute


- When the regular entity type contains a multivalued attribute, two new relations are created.
- The first relation contains all the attributes of the entity type except the multivalued attribute itself.
- The second relation contains two attributes that form the PK. One of the attributes is the PK from the first relation, which becomes the FK in the second relation and the other is the multivalued attribute.
- There can also be non key attributes in the second relation depending upon the data requirements.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Mapping a Multi valued Attribute

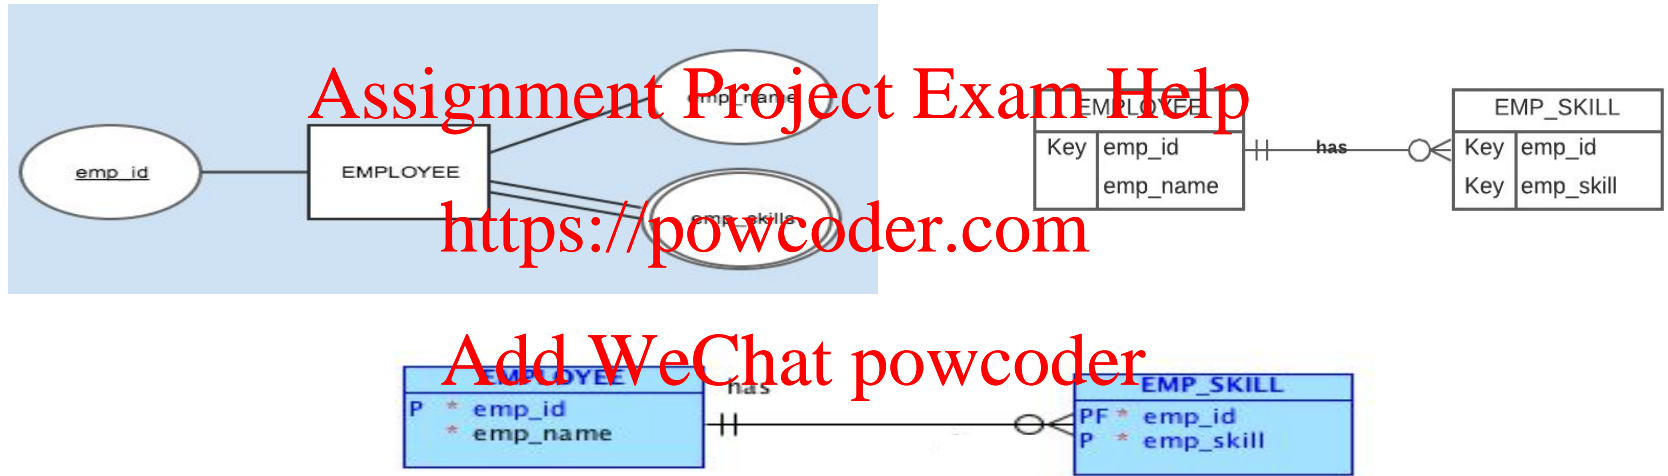

Is there a better solution than the one shown above?

What are the issues here - this was partially discussed in week 2




Mapping a Weak Entity

- For each weak entity type, create a new relation and include all of the simple attributes as attributes of this relation. The PK of the identifying relation is also included as the FK in this new relation.


Assignment Project Exam Help

<https://powcoder.com>





Add WeChat powcoder

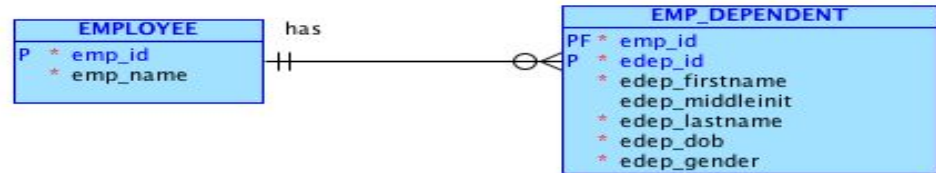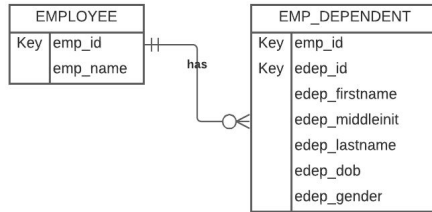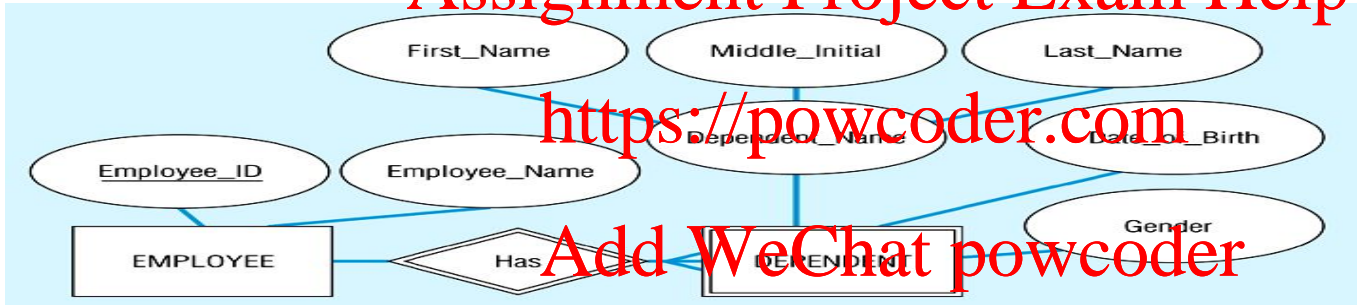

Conceptual

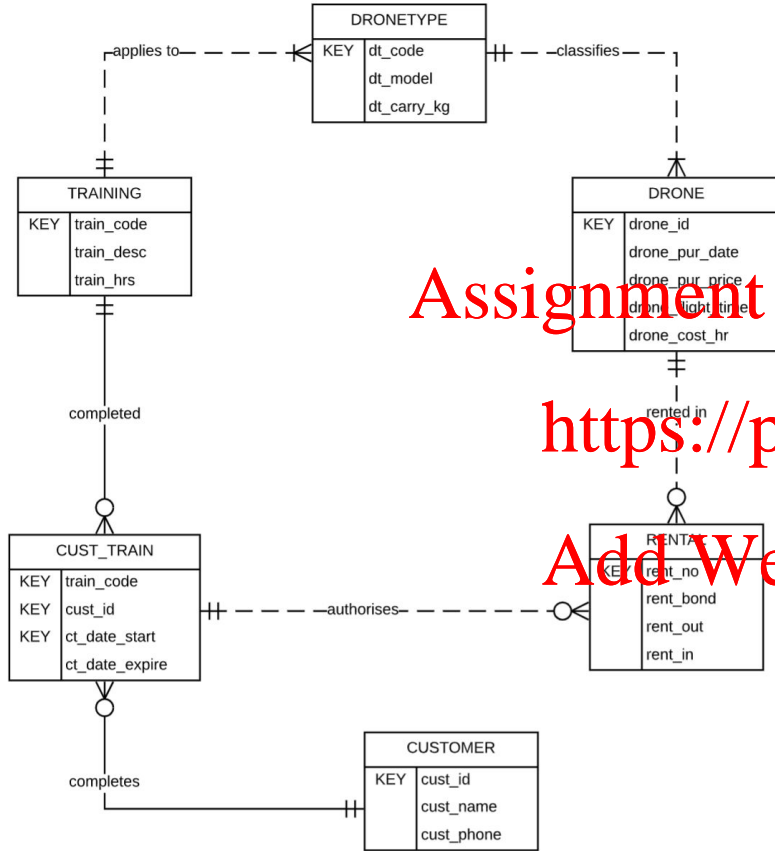

Logical



Assignment Project Exam Help



<https://powcoder.com>

Add WeChat powcoder

? rent_in

? phone

Mapping a 1:M Binary Relationship

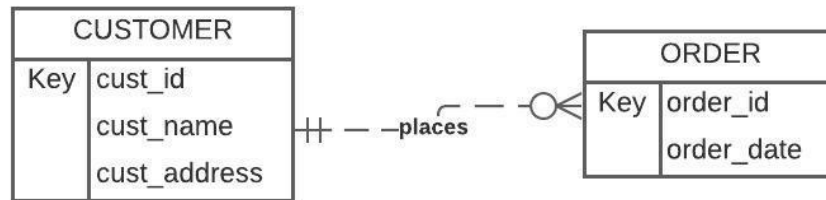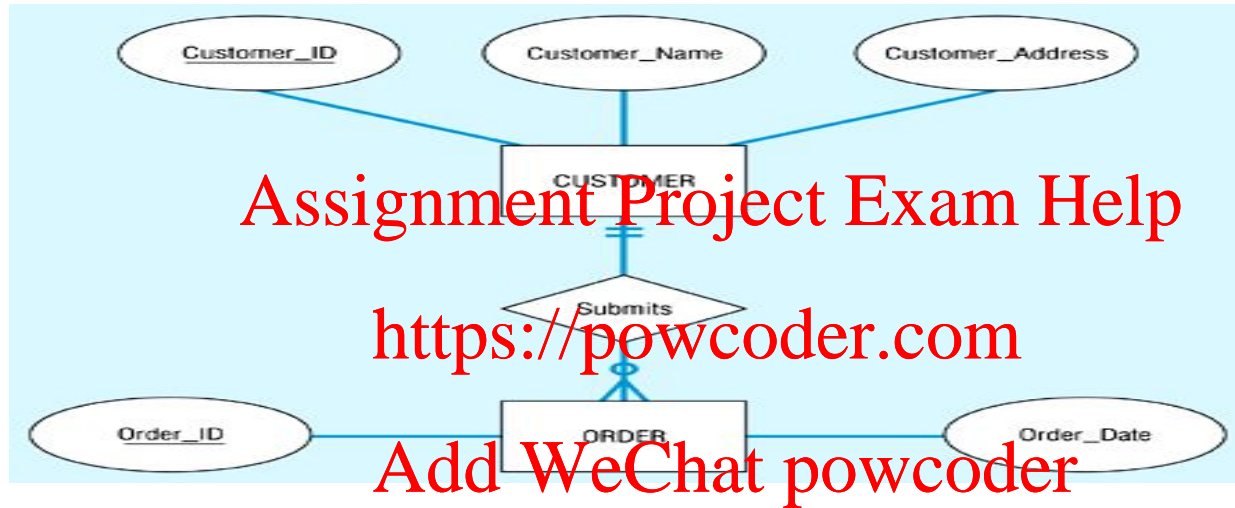

Map Binary Relationships (1:M)




<https://powcoder.com>

Add WeChat powcoder


For each 1:M binary relationship, first create a relation for each of the two entity types participating in the relationship. Then include the PK attribute (or attributes) of the entity on the one-side of the relationship as the FK on the many-side of the relationship.

Q2 The full set of attributes that are required in the RENTAL relation will be:

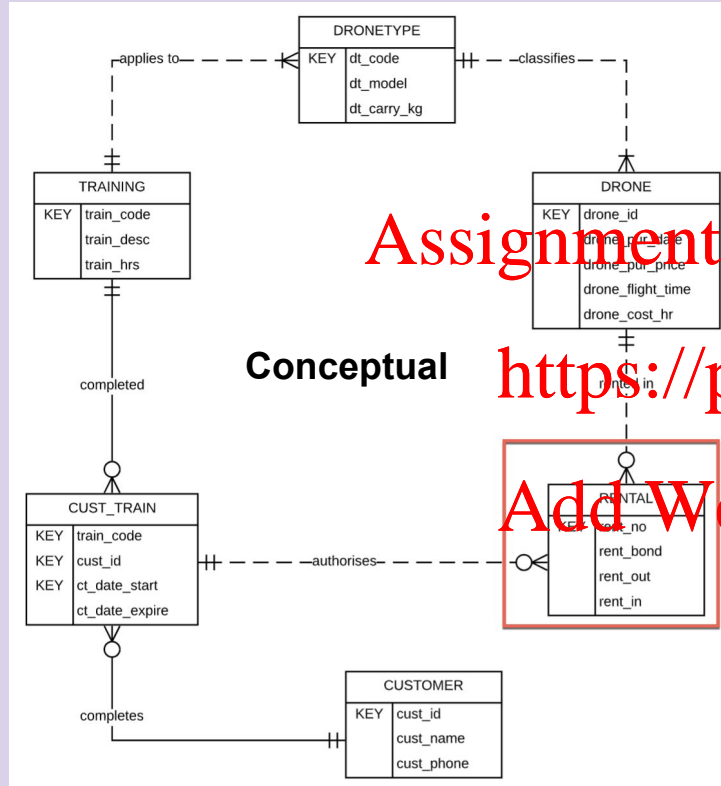


- rent_no, rent_bond, rent_out, rent_in
- rent_no, rent_bond, rent_out, rent_in, drone_id
- rent_no, rent_bond, rent_out, rent_in, train_code, cust_id, ct_date_start, drone_id
- rent_no, rent_bond, rent_out, rent_in, train_code, drone_id
- rent_no, rent_bond, rent_out, rent_in, train_code, cust_id, ct_date_start, drone_id, dt_code

Conceptual

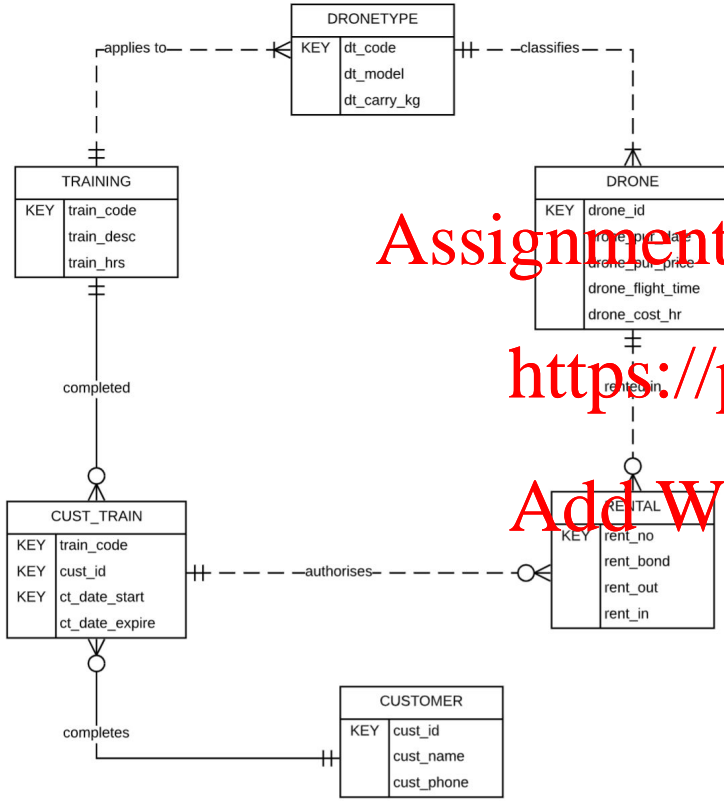

Logical

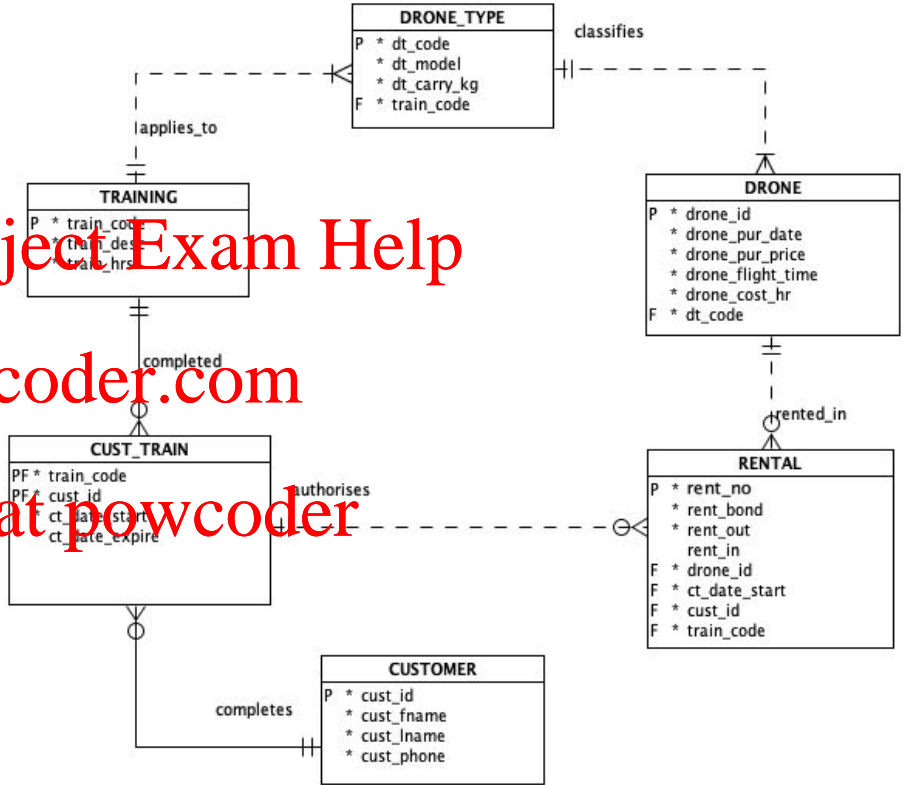


Assignment Project Exam Help


<https://powcoder.com>

Add WeChat powcoder

Mapping a M:N Binary Relationship

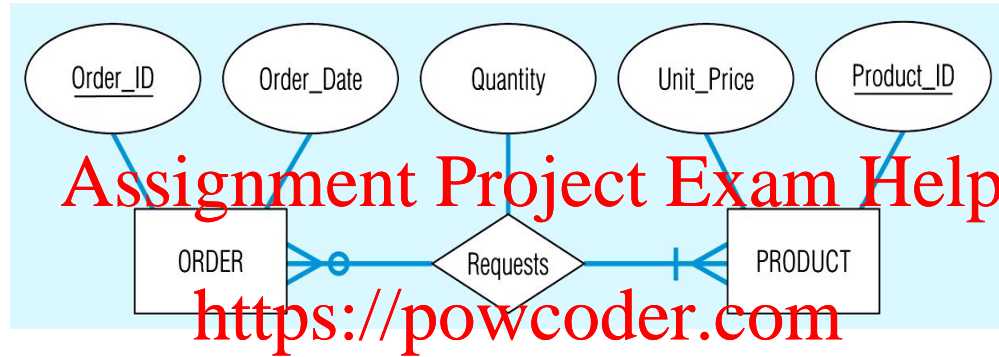

Assignment Project Exam Help
<https://powcoder.com>
Add WeChat powcoder

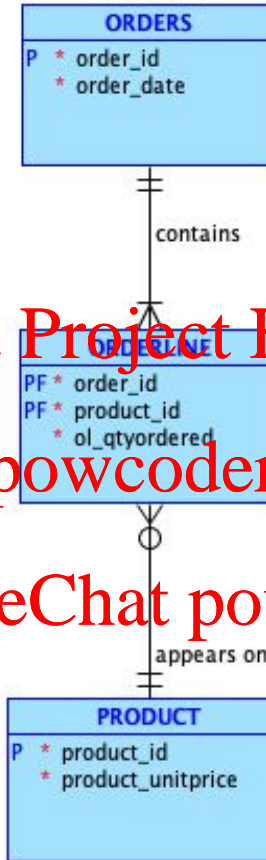

Map Binary Relationship (M:N)


- For a M:N binary relationship
 - First create a relation for each of the two entity types participating in the relationship.
 - Then create a new relation and include as foreign key attributes, the PK attribute (or attributes) for each of the two participating entity types. These attributes become the PK of the new relation.
 - If there are any nonkey attributes associated with the M:N relationship, they are also included in the new relation.

Assignment Project Exam Help


<https://powcoder.com>

Add WeChat powcoder


Mapping an associative entity with an Identifier

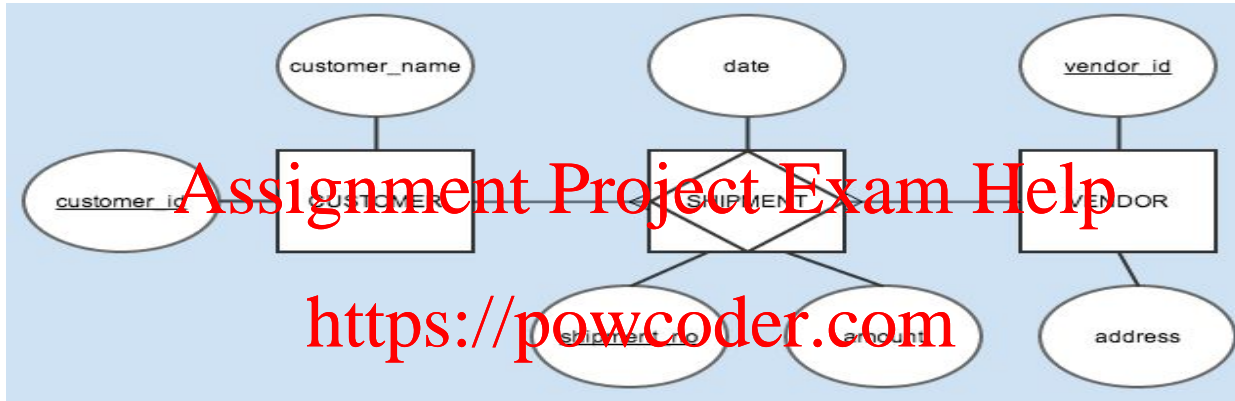

Add WeChat powcoder

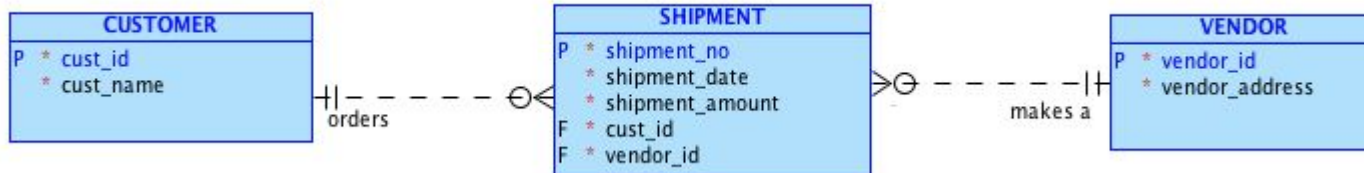

Mapping a 1:1 Binary Relationship

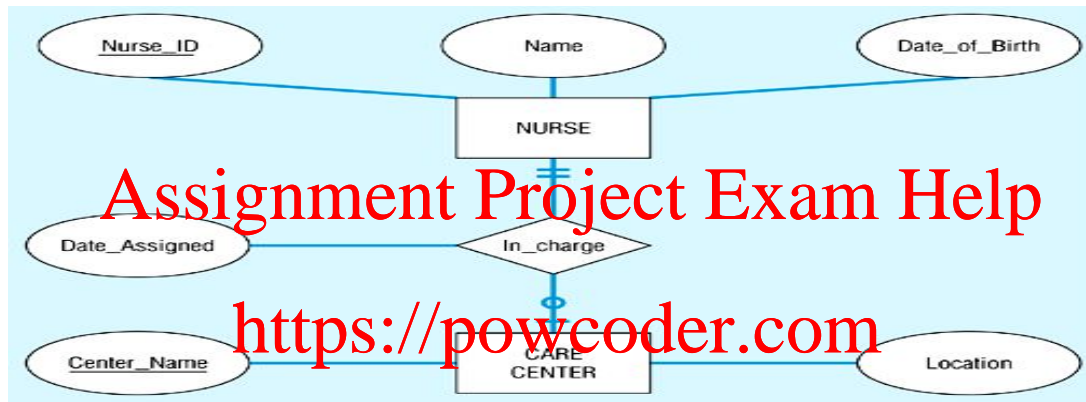

Q3. NURSE participation in this relationship is:



- A. Optional
- B. Mandatory
- C. It depends on the implementation
- D. 1:1
- E. 0

<https://powcoder.com>

Add WeChat powcoder

Map Binary Relationship (1:1)

- Create two relations, one for each of the participating entity types.
 - The primary key (PK) on the mandatory side of the relationship becomes the foreign key (FK) on the optional side of the relationship.
 - where both are optional place the FK on the side which causes the fewest nulls
 - Special case: 1:1 total relationship (mandatory participation from both sides)
 - Should consolidating the two entity types into one relation

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Map unary relationships


- Unary Relationship is a relationship between the instances of a single entity type.
- Unary 1:M Relationship – A relation is created for the entity type. Add a FK within the same relation that references the PK of the relation. A recursive foreign key is a FK in a relation that references the PK values of the same relation.
- Unary M:N Relationship – Two relations are created, one for the entity type in the relationship and the other as the associative relation to represent the M:N relationship itself. The PK of the associative relation consists of two attributes (with different names) taking their values from the PK of the other relation.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder


Mapping a 1:M Unary Relationship

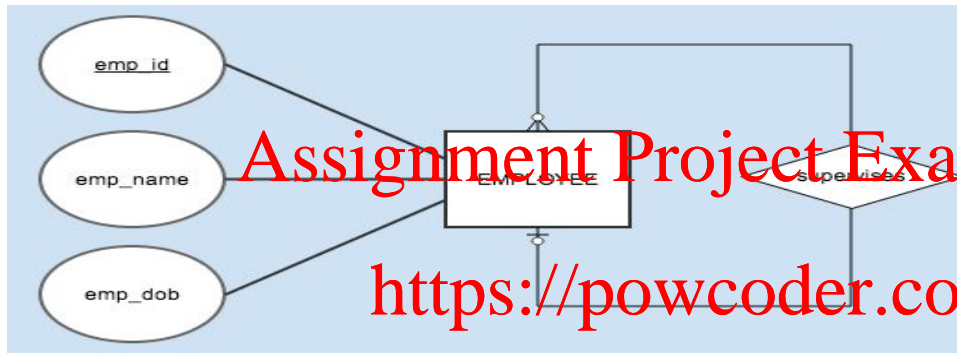


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

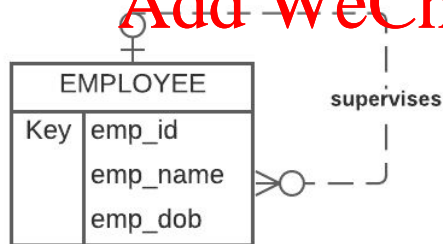




Mapping a M:N Unary Relationship

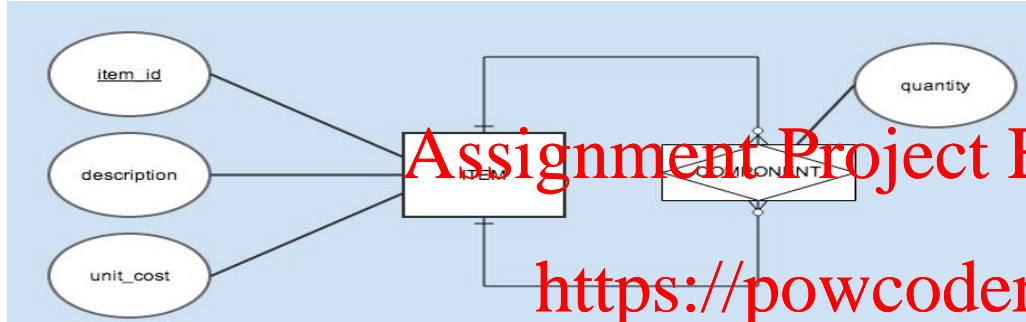

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

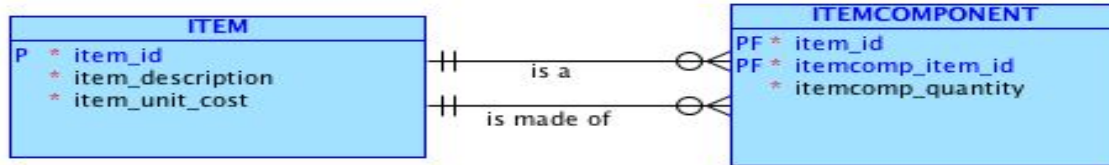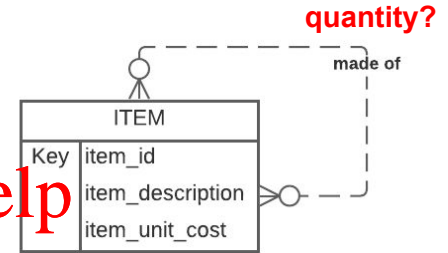

IMPORTANT NOTE

- Apply the principles we have discussed, think carefully about the consequences of relationship placement


Assignment Project Exam Help

– Recursive identifying relationships CANNOT exist


– 1:1 Total identifying relationships CANNOT exist

– Take care with relationship "loops"

- What happens here:

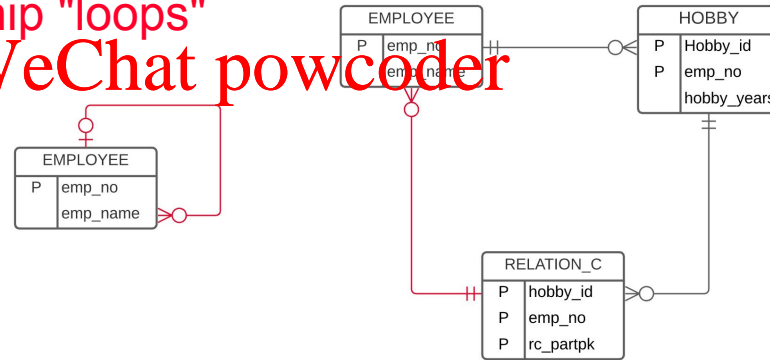

SQL Developer Data Modeler

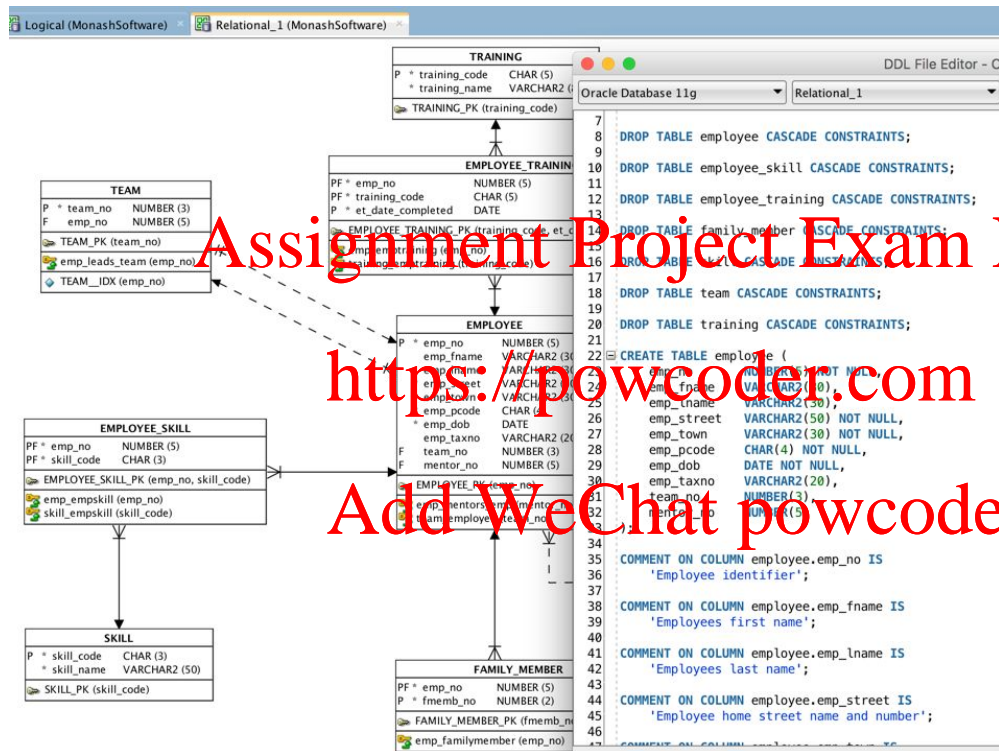


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Adding surrogate keys

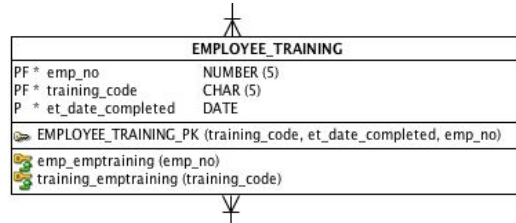

Surrogate PK's may be added **ONLY** on the logical model provided they are justified (include in documentation / assumptions).

Potential problem:

Need to ensure that the identified key from the conceptual model - the natural key:

(emp_no, training_code, et_date_completed) will still remain unique

Solution, where needed:

Define a unique index on the attributes of natural key

Assignment Project Exam Help



MANUALLY add new PK attribute (here et_no), **DO NOT USE** SQL Developers "Create Surrogate Key" option

<https://powcoder.com>


Add WeChat powcoder

et_no	emp_no	training_code	et_date_completed
1	101	ORA01	1-Oct-2016
2	101	ORA01	1-Oct-2016
3	101	ORA01	1-Oct-2016


- Unique Identifiers
- Relationships
- Subtypes
- Volume Properties
- Engineer To
- Comments
- Comments in RDBMS
- Overlapping Attributes
- Notes
- Impact Analysis
- Measurements
- Change Requests

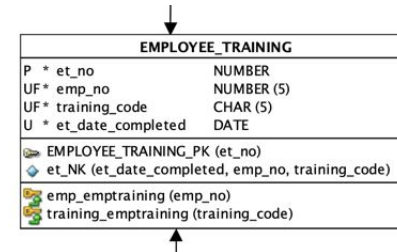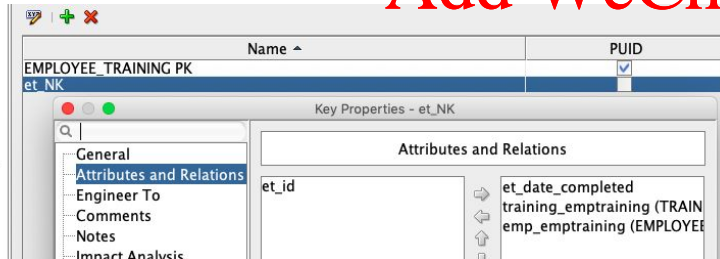

Logical

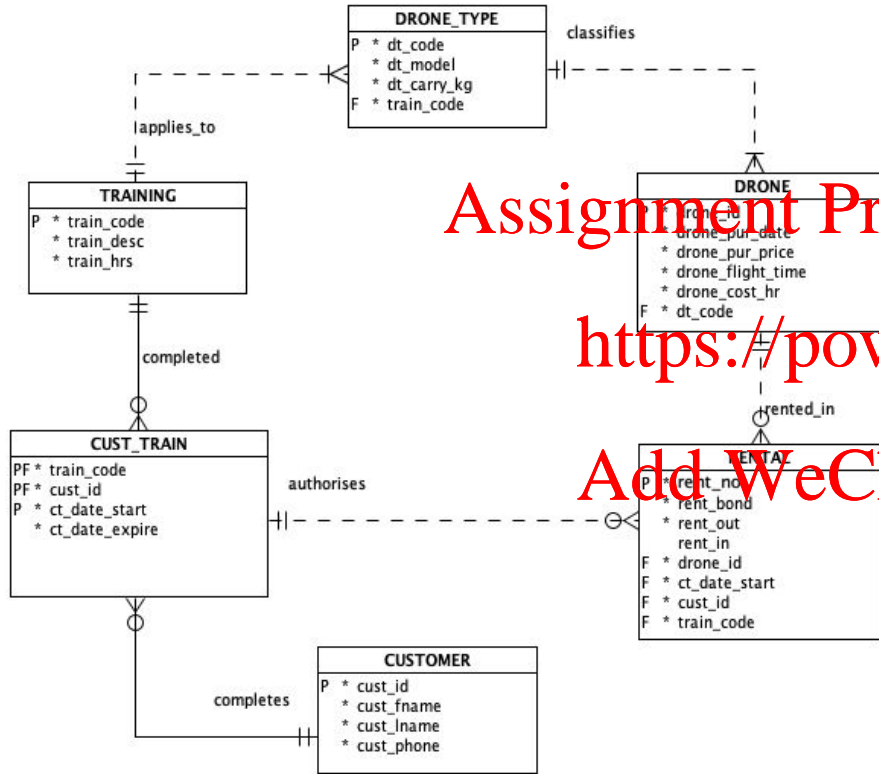

Logical - with Surrogate key

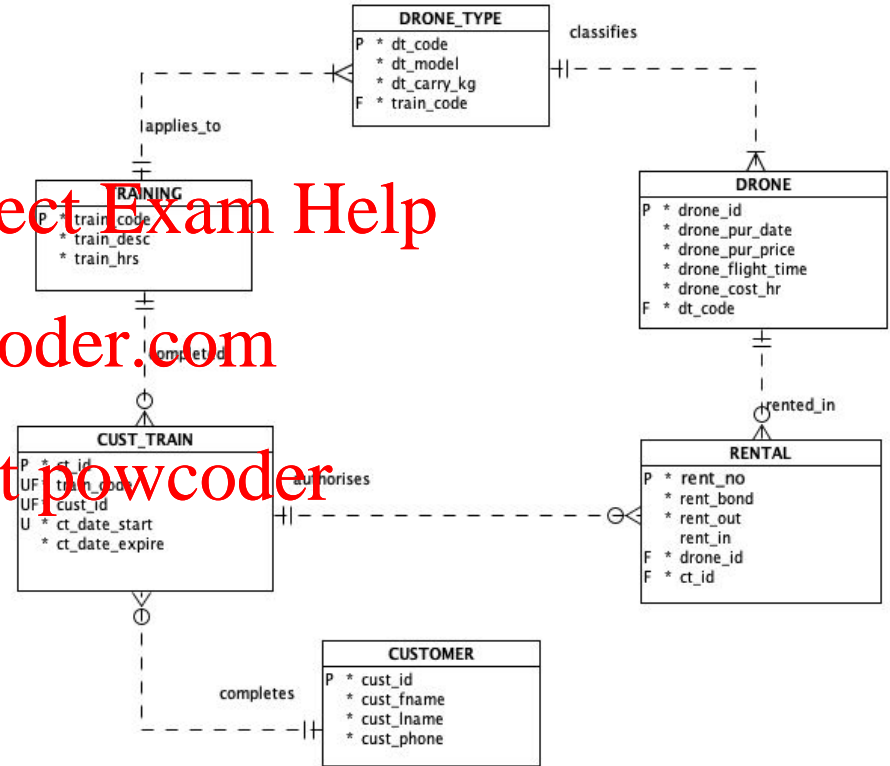

Assignment Project Exam Help


<https://powcoder.com>

Add WeChat powcoder

Ternary Relationships

Ternary


modelled as binary:

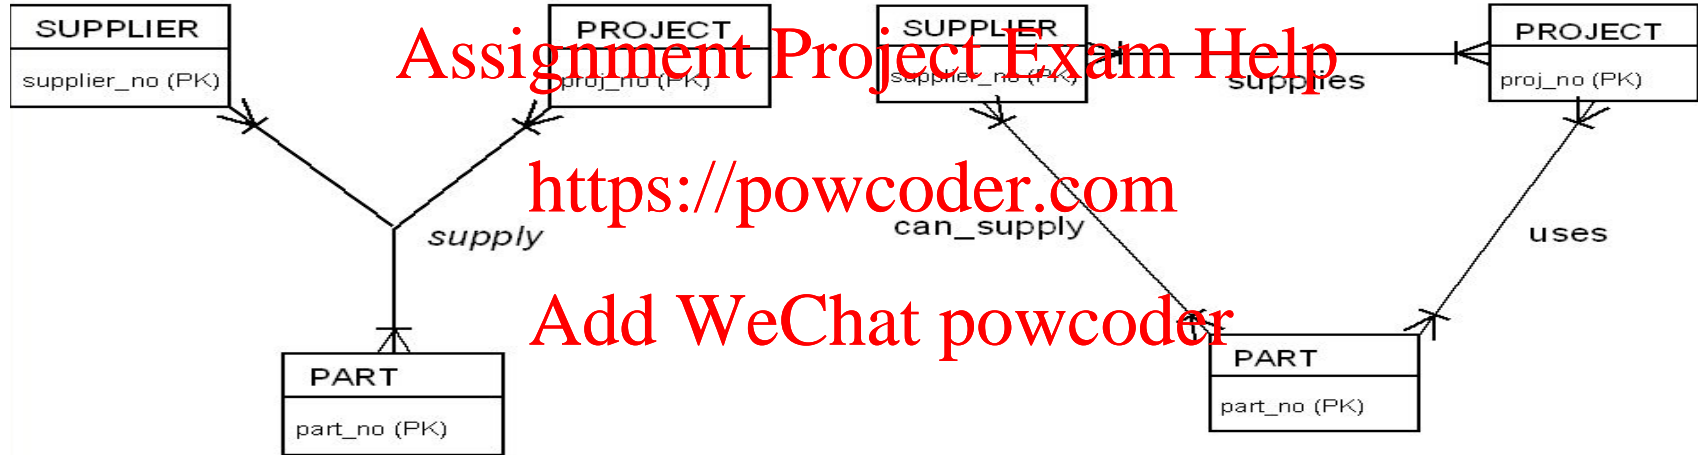

Ternary Relationships – model as binary relationships?

- Ternary represents more information than three binary relationships
- For example - Supplier 1 supplies Project 2 with Part 3 -
 - ternary **Assignment Project Exam Help**
 - instance (supplier 1, project 2, part 3) exists
 - binaries **<https://powcoder.com>**
 - instances
 - (supplier 1, project 2) (project 2, part 3) (supplier 1, part 3)
 - BUT does not imply (supplier 1, project 2, part 3)
- How then do we map such relationships?

Mapping a Ternary Relationship

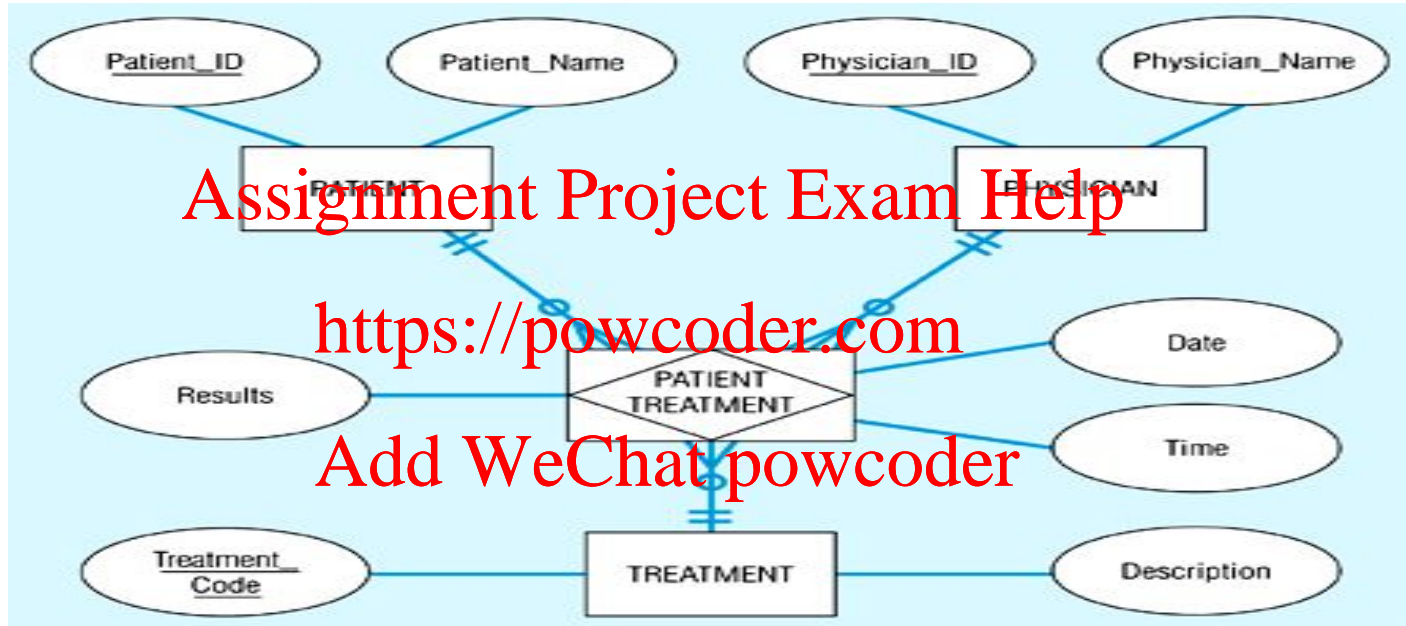

Map Ternary (and n-ary) Relationships


- Ternary relationship should be converted to an associative entity.
 - To map an associative entity type that links three regular entity types, an associative relation is created.
 - The default FK of this relation consists of the three PK attributes for the participating entity types.
 - Any attributes of the associative entity type become attributes of the new relation.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Mapping a Ternary Relationship

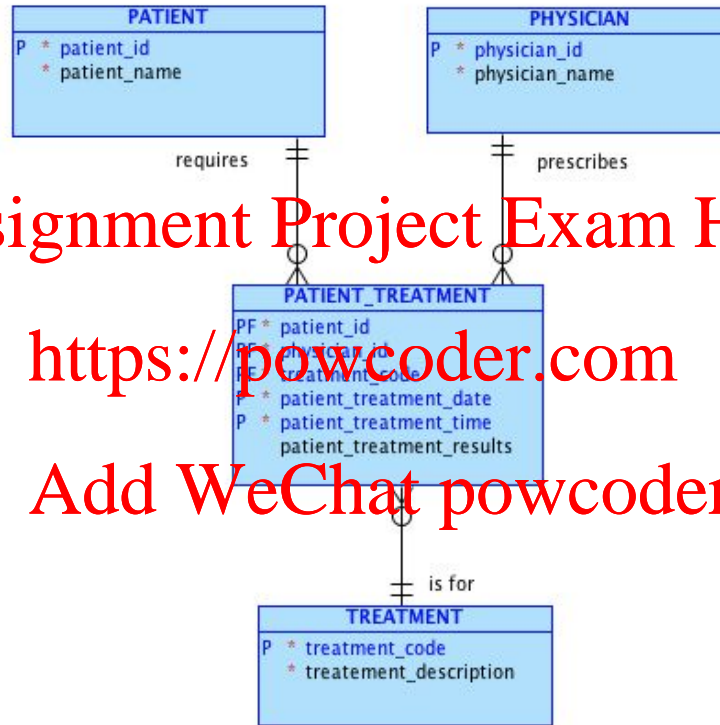

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Overall Design Process - checklist


1. Assignment 1A
 - a. complete conceptual model
2. Assignment 1B
 - free to modify submitted conceptual model in any manner - note will not be reassessed by marker (no requirement to submit again)
 - a. normalise supplied forms to 3NF, one form at a time UNF->1NF->2NF->3NF
 - b. carry out attribute synthesis on resultant set of 3NF relations to obtain one final set of 3NF relations
 - c. map your 1A conceptual model to relational logical model
 - d. integrate your final set of 3NF relations from 2b above, ensure attribute names in your normalisation are consistent with the names used in your logical model
 - e. check model for no insert/update/delete anomalies
 - f. check model for surrogate key requirement (if added ensure unique index on natural key created)
 - g. generate physical (relational) model and from this generate the schema file, add appropriate details to the schema file (see week 6 applied session)
 - h. run the schema file and ensure no error (if there are any go back and fix logical model and repeat step 2g until removed)

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Q4. What effect will the normalisation result have on the logical model?

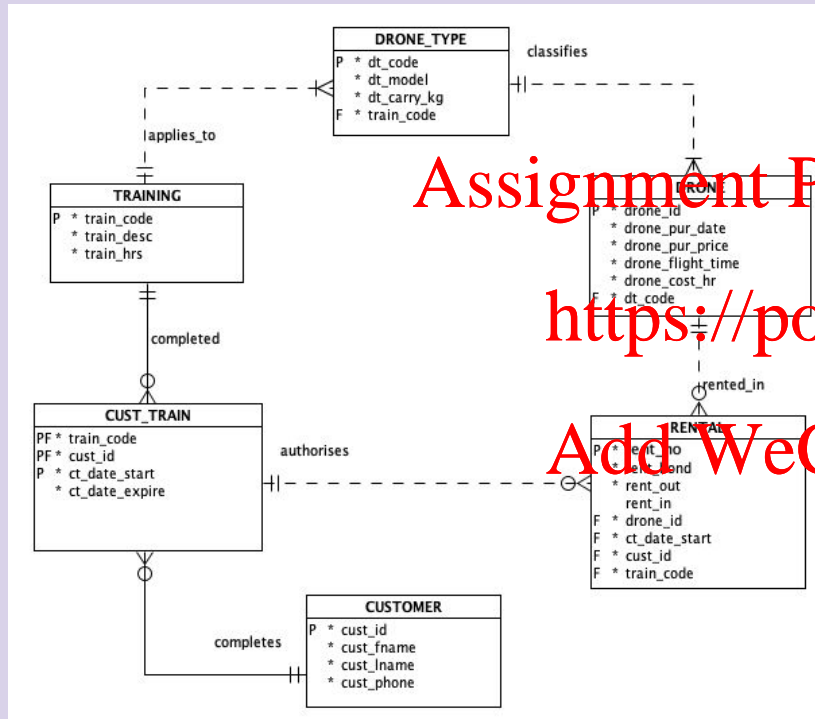

3NF:

TRAINING (train_code, train_desc, train_active_mnths)

DRONE_TYPE (dt_code, dt_model, dt_manuf, train_code)

TRAINER (trainer_id, trainer_rego, trainer_fname, trainer_lname, trainer_category)

TRAINING_COURSE (train_code, traincourse_date, trainer_id)


CUSTOMER (cust_id, cust_fname, cust_lname)

CUST_TRAINING (train_code, traincourse_date, cust_id, ct_exam_date, ct_date_expire)

- A. Change the attributes of TRAINING
- B. Change the attributes of CUSTOMER
- C. Change the PK in TRAINING
- D. Add a new relation TRAINER
- E. Add a new relation CUST_TRAINING

Multiple answers possible

ALSO in your group list the details of the changes which will need to be made to this model based on your answer/s

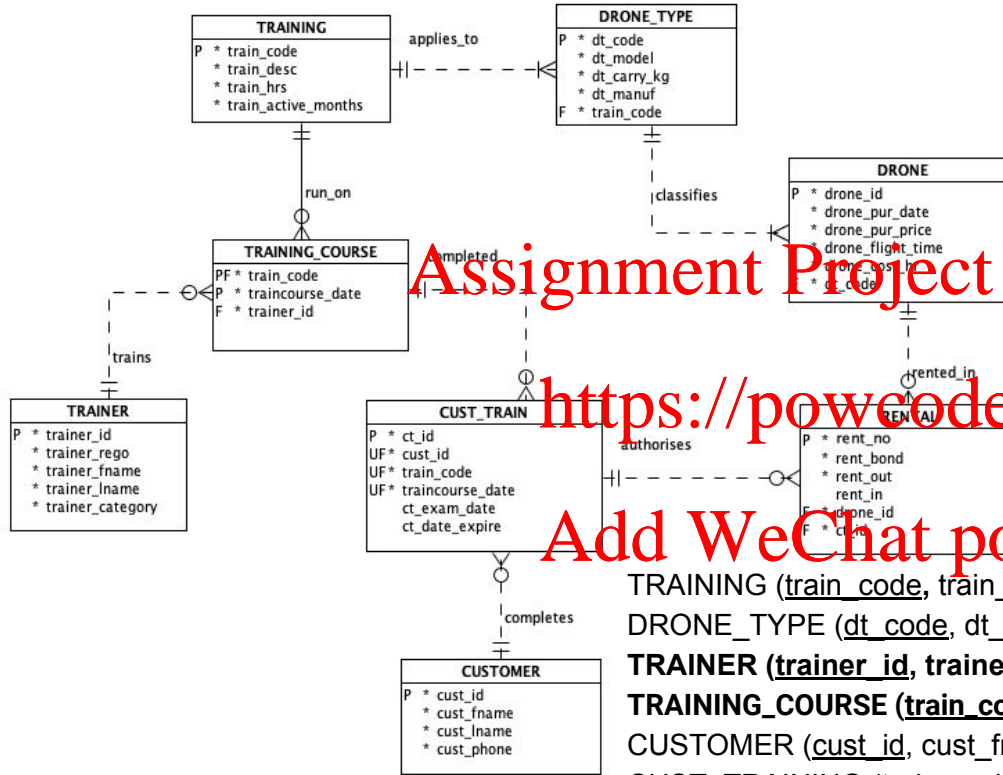

Q5. Name an attribute on this model which exhibits insert/update/delete anomalies

Assignment Project Exam Help

Free text (word cloud) response

<https://powcoder.com>

Add WeChat powcoder

TRAINING (train_code, train_desc, train_active_mnth)

DRONE_TYPE (dt_code, dt_model, dt_manuf, train_code)

TRAINER (trainer_id, trainer_rego, trainer_fname, trainer_lname, trainer_category)

TRAINING_COURSE (train_code, traincourse_date, trainer_id)

CUSTOMER (cust_id, cust_fname, cust_lname)

CUST_TRAINING (train_code, traincourse_date, cust_id, ct_exam_date, ct_date_expire)

Controlling Values

lookup table
- easily extended

check constraint
- small unchanging set => codify

Default and Constraint

Constraint Name:

Default Value:

Use Domain Constraints: ☐ ☒ ☐

trainer_category List Of Values


Value	Description
C	Casual
F	Fixed

List Of Values


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

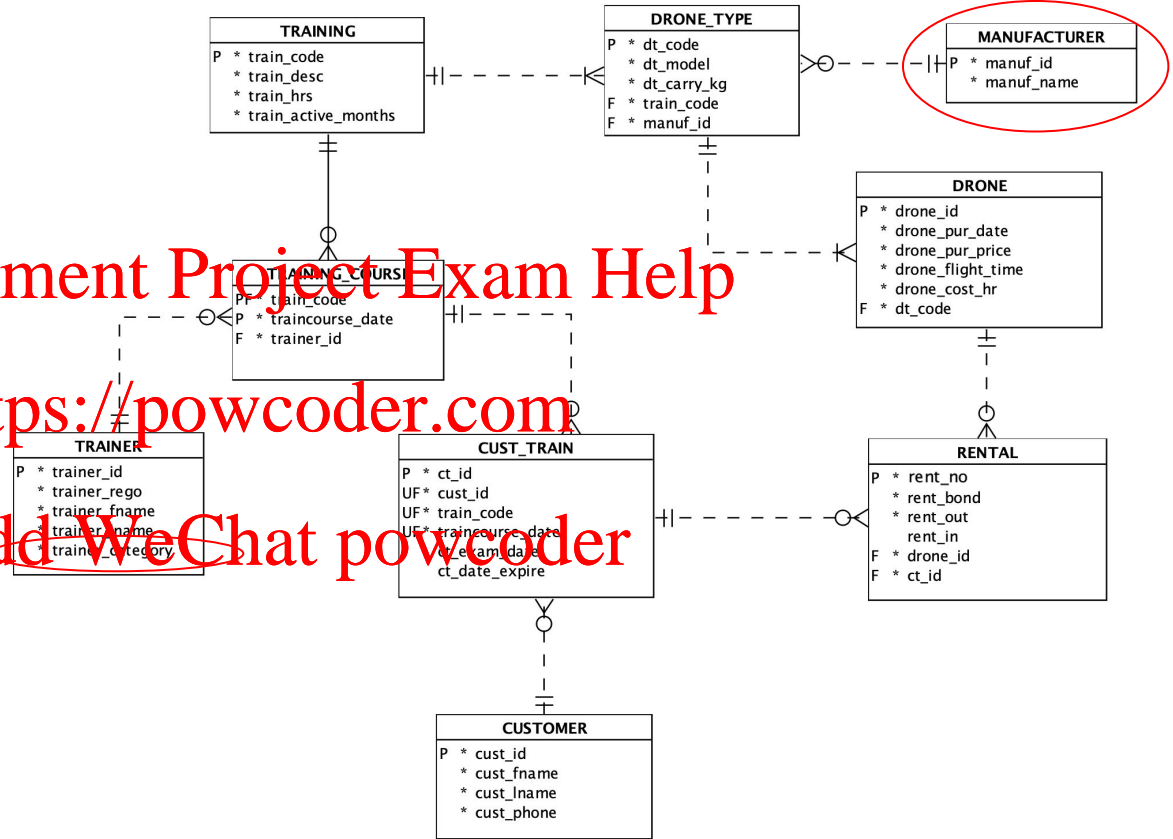

Relational (Physical) Model

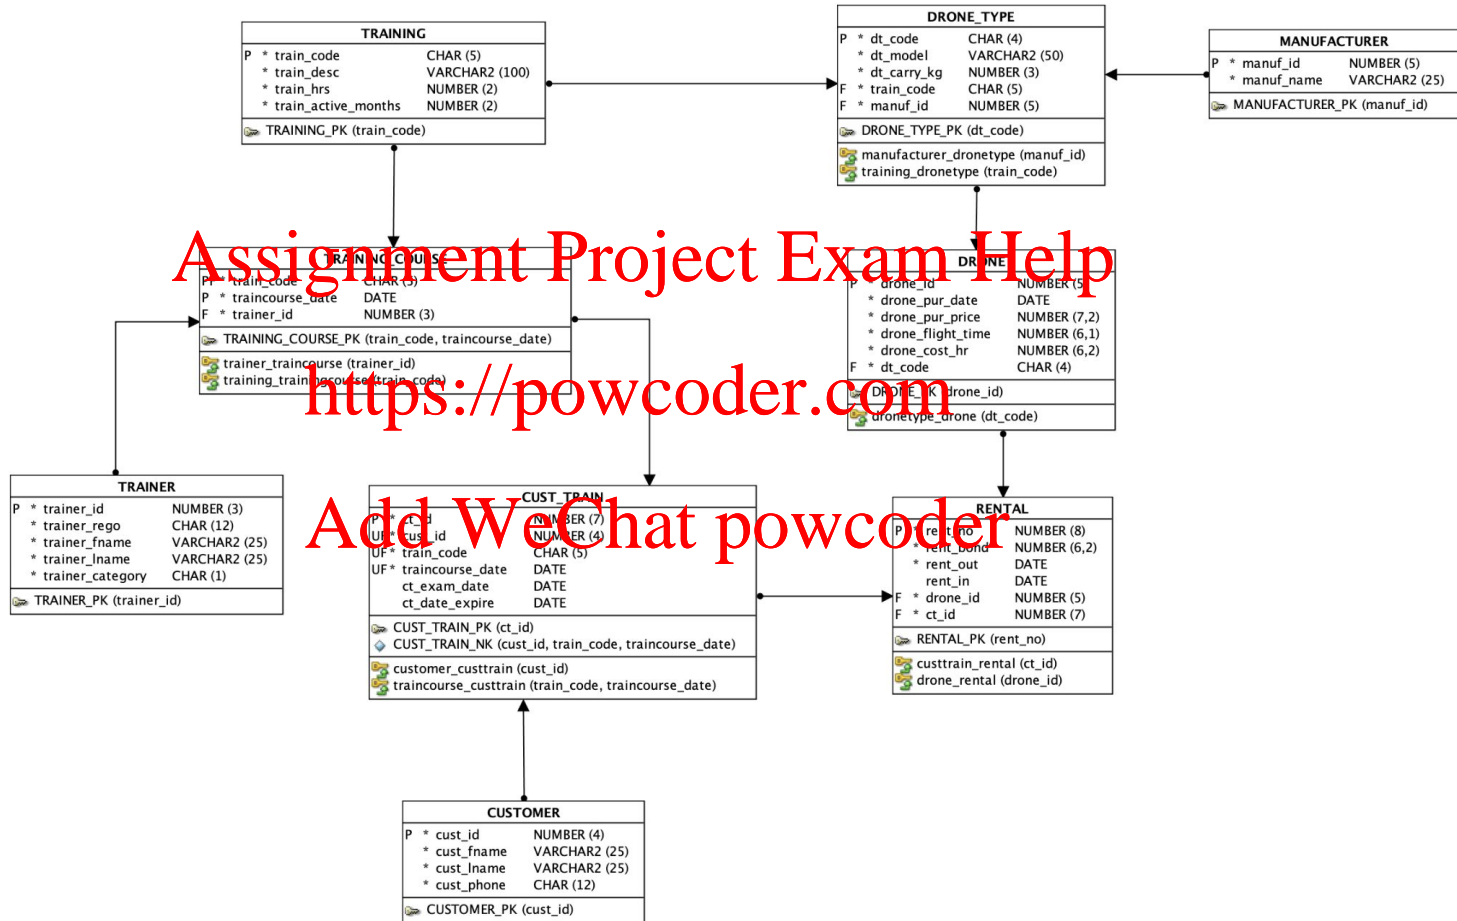

SQL ORDS Testing

Please turn your VPN on and help us to test this application.

Assignment Project Exam Help

<http://ora-fit.ocio.monash.edu:8081/ords/sql-developer>


<https://powcoder.com>

Add WeChat powcoder

Once the page is fully loaded, use your ORACLE username and password to login

Monash Software Conceptual Model

Week 2 Conceptual Model

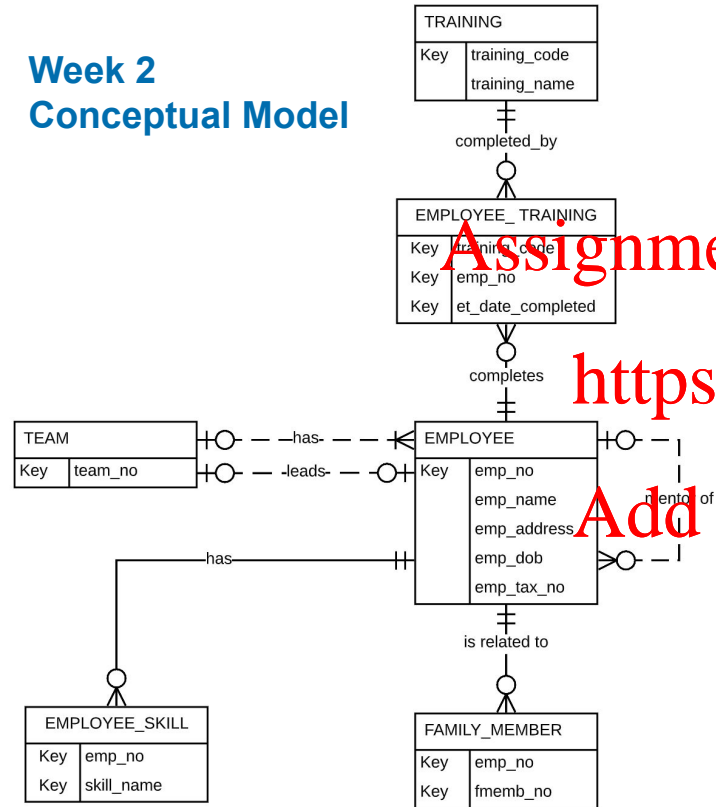

Week 4 Normalisation

3NF

EMPLOYEE (emp_no, emp_fname, emp_lname, emp_dob, emp_street_no, emp_street, emp_town, emp_pcode)

EMP_PHONE (emp_no, phone_no, phone_type)

EMP_QUALIFICATION (emp_no, degree_name, degree_institution, degree_year)

FAMILY_MEMBER (emp_no, fmemb_no, fmemb_name, fmemb_dob)

EMPLOYEE_SKILL (emp_no, skill_name)

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Q6. Post Workshop Task - answer available Sunday 5 PM

Convert this model to a logical model and then integrate the normalisation from the Week 4 Workshop

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

