




MONASH  
University

MONASH  
INFORMATION  
TECHNOLOGY

# Creating & Populating the Database – Data Definition Language

FIT2094

Assignment Project Exam Help  
<https://powcoder.com>  
Add WeChat powcoder

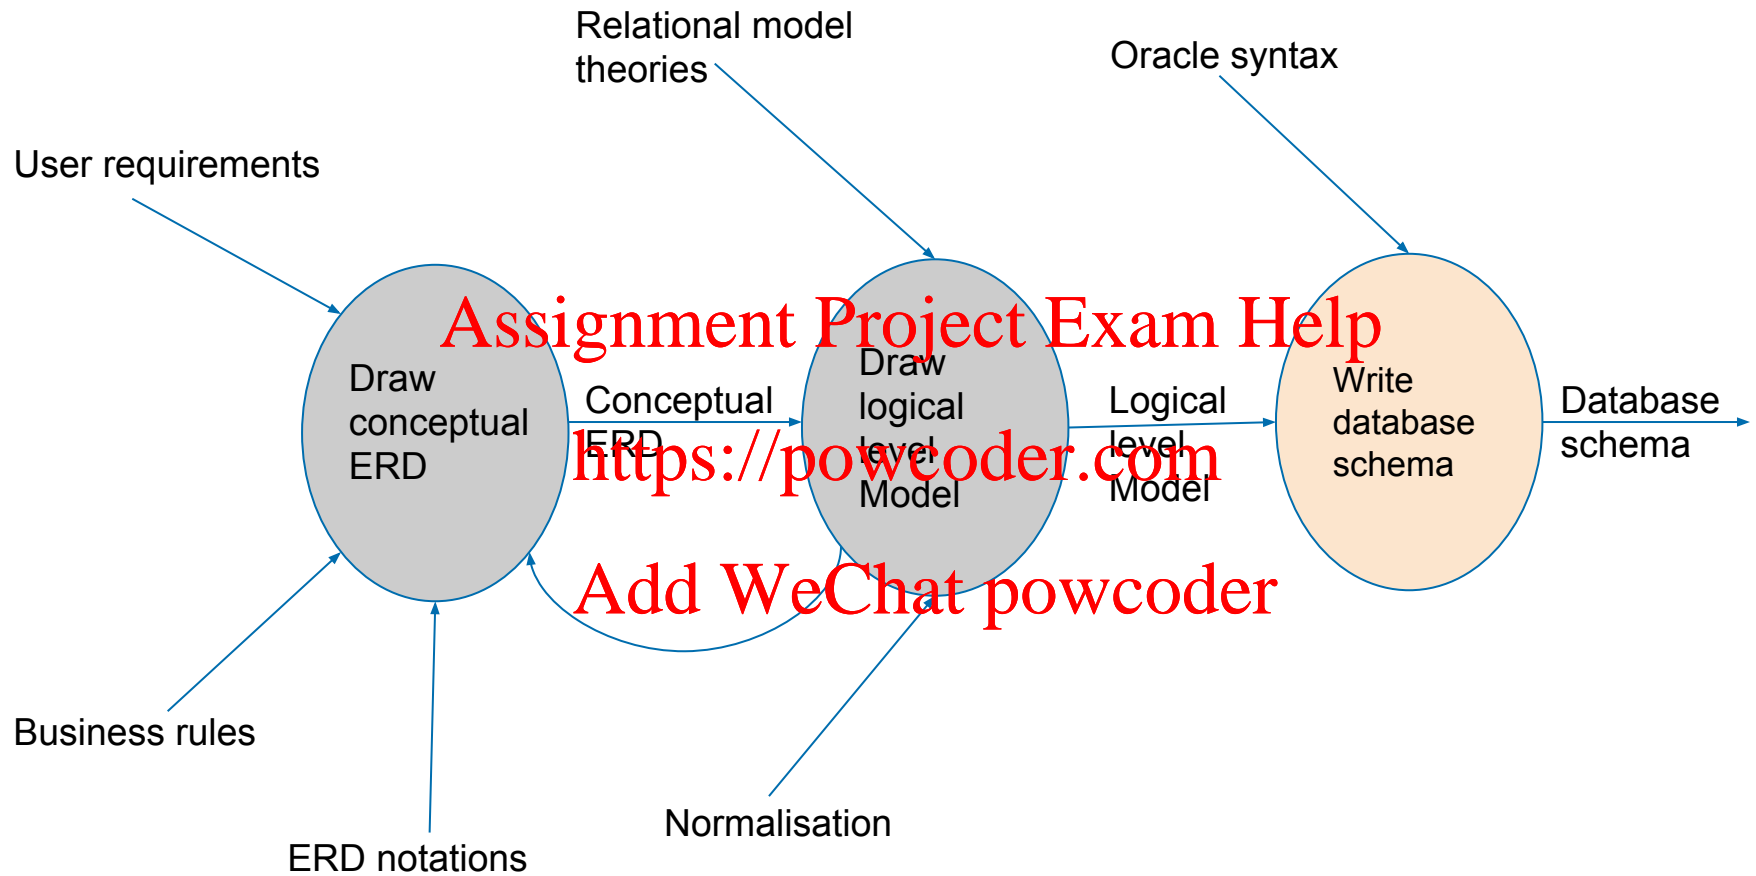

# SQL general syntax

- A single statement is ended with SEMICOLON.
- Predefined KEYWORDS represent clauses (components) of a statement.
- Keywords are NOT case sensitive.

Assignment Project Exam Help

- Examples: <https://powcoder.com>

```
CREATE TABLE unit
```


```
(  
    unit_code CHAR(7) NOT NULL,  
    unit_name VARCHAR2(50) CONSTRAINT uq_unit_name UNIQUE NOT NULL,  
    CONSTRAINT pk_unit PRIMARY KEY (unit_code)  
);
```

```
SELECT * FROM student;
```

Add WeChat powcoder

# SQL Statements

- Data Definition Language (DDL)
  - Creating database structure.
    - CREATE TABLE, ALTER TABLE, DROP TABLE
- Data Manipulation Language (DML)
  - Adding and Manipulating database contents (rows).
    - INSERT, UPDATE, DELETE
  - Retrieving data from database
    - SELECT
- Data Control Language (DCL)
  - GRANT

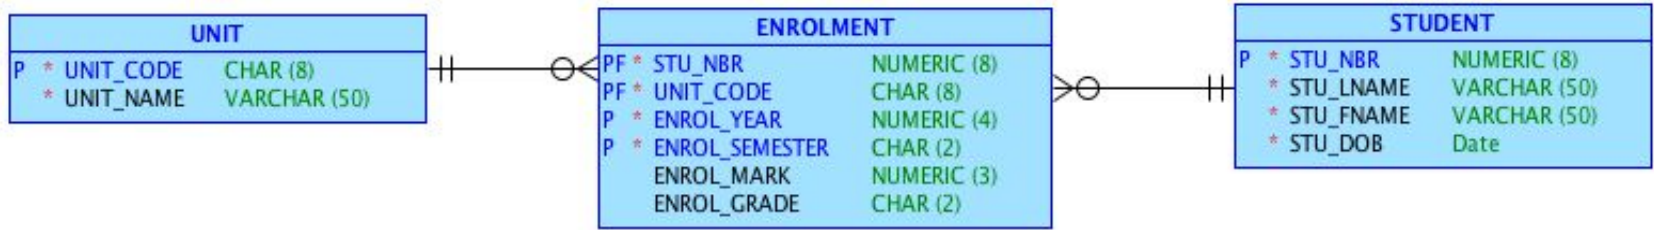

Q1. There are a number of business rule represented by the above model. Choose the statement(s) according to the diagram.

- A. A student enrolls in a maximum of one unit.
- B. An enrolment record is created for a particular student of a unit in a given semester and year.
- C. A student can have more than one grade for a given unit.
- D. A unit can only have a single student enrolled.
- E. More than one option in a to d is correct.

**CREATE A TABLE (DDL)** Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

```
CREATE TABLE STUDENT (  
    stu_nbr      NUMBER(6) NOT NULL,  
    stud_lname   VARCHAR2(50) NOT NULL,  
    stud_fname   VARCHAR2(50) NOT NULL,  
    stu_dob      DATE      NOT NULL,  
    CONSTRAINT STUDENT_PK PRIMARY KEY (stu_nbr)  
);
```

Assignment Project Exam Help

**Q2. What relational model component(s) is/are defined in the above create table statement?**

<https://powcoder.com>

- A. Relation, Attribute, Domain
- B. Primary Key
- C. Foreign Key
- D. Referential Integrity constraint
- E. All of the options in a-d are correct.
- F. Some of the options in a-d are correct.

Add WeChat powcoder

# Common ORACLE data types

- **Text:** CHAR(size), VARCHAR2(size)
  - e.g., CHAR(10), VARCHAR2(10)
  - CHAR(10) → 'apple' = 'apple'
  - VARCHAR2(10) → 'apple' != 'apple'
- **Numbers:** NUMBER(precision, scale)
  - Weight NUMBER(7) or NUMBER(7,0) → Weight = 7456124
  - Weight NUMBER(9,2) → Weight = 7456123.89
  - Weight NUMBER(8,1) → Weight = 7456123.9
- **Data/Time:** DATE, TIMESTAMP
  - DATE can store a date and time (time to seconds), stored as Julian date
  - TIMESTAMP can store a date and a time (up to fractions of a second)
  - TIMESTAMP WITH TIME ZONE




# Column VS Table Level Constraints

```
CREATE TABLE STUDENT (  
  stu_nbr NUMBER(6) NOT NULL,  
  stud_lname VARCHAR2(50) NOT NULL,  
  stud_fname VARCHAR2(50) NOT NULL,  
  stu_dob DATE NOT NULL,  
  CONSTRAINT STUDENT_PK PRIMARY KEY (stu_nbr)  
);
```

Annotations:


- column constraints (pointing to `stu_nbr`, `stud_lname`, `stud_fname`, and `stu_dob`)
- table constraint (pointing to `CONSTRAINT STUDENT_PK PRIMARY KEY (stu_nbr)`)

Watermark text: Assignment Project Exam Help, <https://powcoder.com>, Add WeChat powcoder

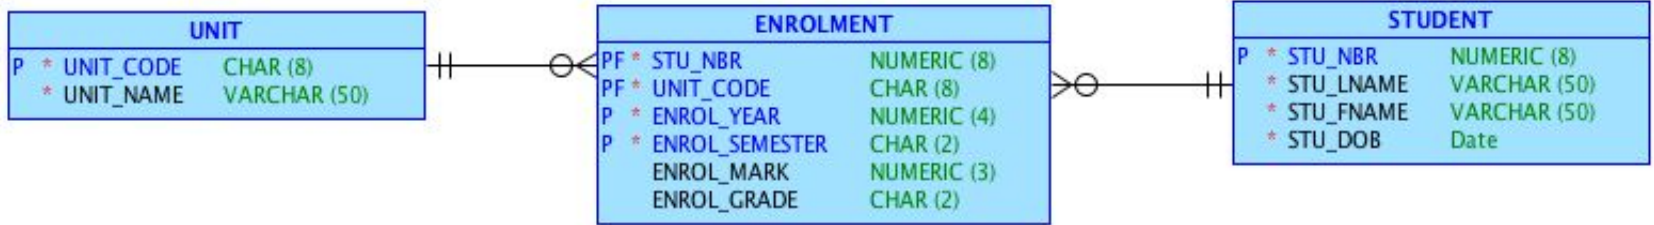

Q3. What would be the order of the CREATE TABLE statements in the schema script to successfully create a database based on the above diagram? (assuming that we will define the FK as part of the create table statement)

- A. UNIT, ENROLMENT, STUDENT
- B. ENROLMENT, STUDENT, UNIT
- C. STUDENT, UNIT, ENROLMENT
- D. UNIT, STUDENT, ENROLMENT
- E. More than one option is correct

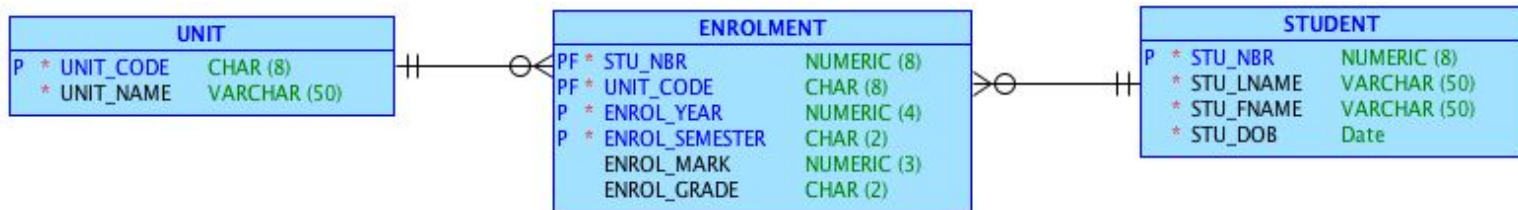

CREATE TABLE student

```

(
  stu_nbr      NUMBER(8) NOT NULL,
  stu_lname    VARCHAR(50) NOT NULL,
  stu_fname    VARCHAR(50) NOT NULL,
  stu_dob      DATE NOT NULL,
  CONSTRAINT pk_student PRIMARY KEY (stu_nbr)
);


```

CREATE TABLE unit

```

(
  unit_code    CHAR(8) NOT NULL,
  unit_name    VARCHAR(50) CONSTRAINT uq_unit_name UNIQUE NOT NULL,
  CONSTRAINT pk_unit PRIMARY KEY (unit_code)
);

```

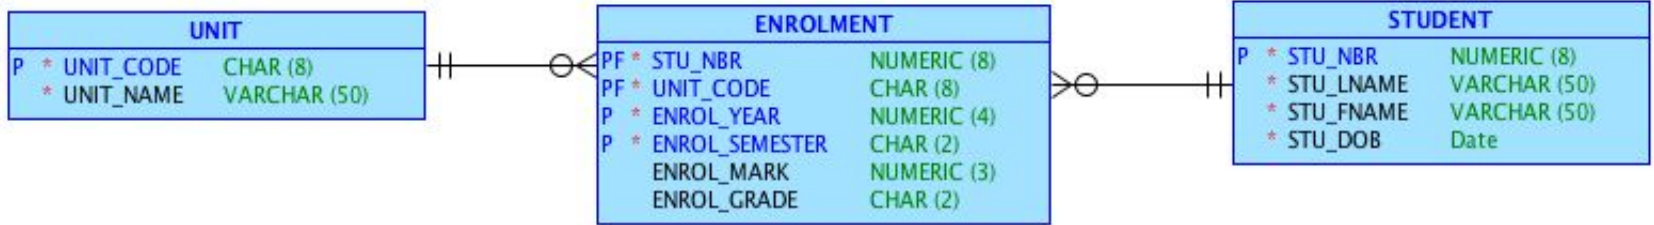


**Q4. How many foreign key/s (FK) will be in the database when the three tables are created?**

- A. 1.
- B. 2.
- C. 3.
- D. 4.

<https://powcoder.com>

Add WeChat powcoder

During discussion, name the attribute(s) that will be assigned as FK and what table(s) would it “link”?

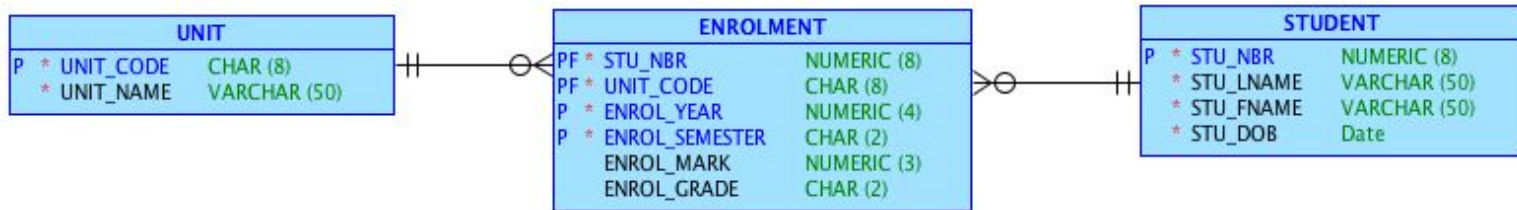

## Assignment Project Exam Help

CREATE  
TABLE enrolment

(

stu\_nbr                   NUMBER(8) NOT NULL,  
unit\_code                CHAR(8)       NOT NULL,  
enrol\_year               NUMBER(4)    NOT NULL,  
enrol\_semester           CHAR(2)     NOT NULL,  
enrol\_mark               NUMBER(3) ,  
enrol\_grade              CHAR(2),

CONSTRAINT pk\_enrolment PRIMARY KEY (stu\_nbr, unit\_code, enrol\_year, enrol\_semester),  
CONSTRAINT fk\_enrolment\_student FOREIGN KEY (stu\_nbr) REFERENCES student (stu\_nbr),  
CONSTRAINT fk\_enrolment\_unit FOREIGN KEY (unit\_code) REFERENCES unit (unit\_code)

);

<https://powcoder.com>

Add WeChat powcoder

## Alternative method of defining FKs


```
CREATE
TABLE enrolment
(
  stu_nbr          NUMBER(8)  NOT NULL,
  unit_code        CHAR(8)    NOT NULL,
  enrol_year       NUMBER(4)  NOT NULL,
  enrol_semester   CHAR(2)    NOT NULL,
  mark            NUMBER(3),
  grade           CHAR(2),
  CONSTRAINT pk_enrolment PRIMARY KEY
    (stu_nbr, unit_code, enrol_year, enrol_semester)
);

ALTER TABLE enrolment
ADD
  ( CONSTRAINT fk_enrolment_student FOREIGN KEY (stu_nbr)
    REFERENCES student ( stu_nbr),
    CONSTRAINT fk_enrolment_unit FOREIGN KEY (unit_code) REFERENCES unit
    (unit_code));
```

# Referential Integrity

- To ensure referential integrity, SQL defines three possible actions for FKs in relations when a deletion of a primary key occurs:
  - RESTRICT (Oracle No Action basically equivalent)
    - Deletion of tuples is NOT ALLOWED for those tuples in the table referred by the FK (the table containing PK) if there is corresponding tuple in the table containing the FK.
  - CASCADE <https://powcoder.com>
    - A deletion of a tuple in the table referred by the FK (the table containing PK) will result in the deletion of the corresponding tuples in the table containing the FK.
  - NULLIFY
    - A deletion of a tuple in the table referred by the FK (the table containing PK) will result in the update of the corresponding tuples in the table containing the FK to NULL.

52 UTC
48 UTC

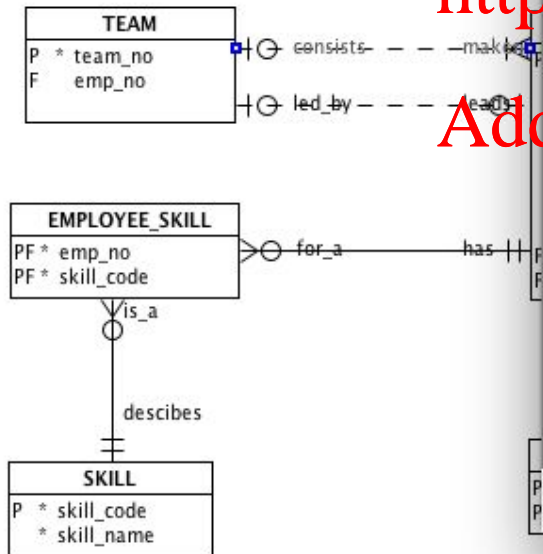

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Relation Properties - team\_employee

General

Name: team\_employee

Use surrogate keys: ☐

Source Cardinality

Source: TEAM

Source key: TEAM.TEAM PK

Name on Source: consists

Source Entity Synonym: TEAM

Source to Target Cardinality: 1 \*

Source Optional: ☐

Transferable: ☒


Dominant Role: None

Identifying: ☐

Delete Rule: NO ACTION


NO ACTION  
CASCADE  
SET NULL  
RESTRICT



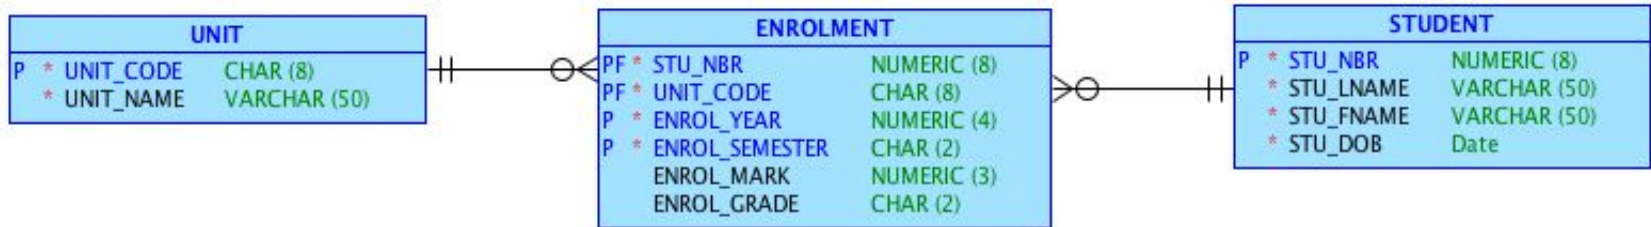

**Assignment Project Exam Help**  
**Q5. Assume that the table ENROLMENT contains enrolment details for students in FIT2094 and FIT2001. The referential integrity constraint is CASCADE. What would happen to tuples in ENROLMENT with the unit\_code='FIT2094' when we delete the FIT2094 record from UNIT?**

- A. They will be deleted.
- B. The value of unit\_code will be updated to NULL.
- C. The deletion is not possible, the DBMS will prevent the deletion.
- D. None of the above.

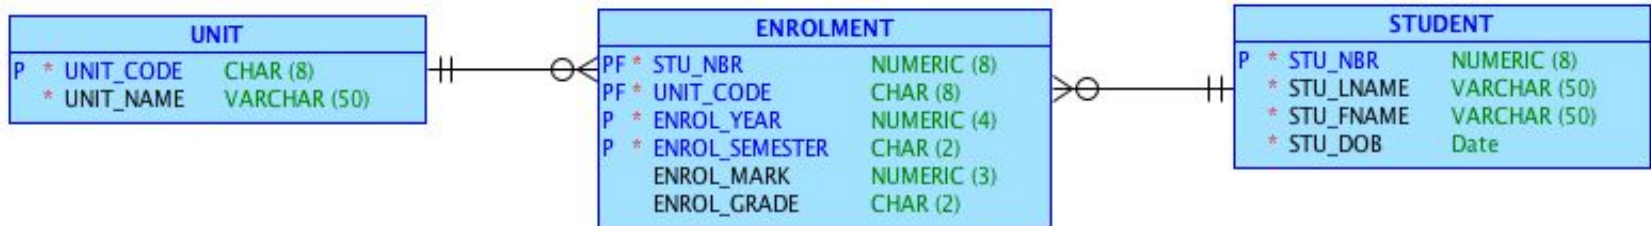

**Assignment Project Exam Help**  
**Q6. What would happen to the student record with stu\_nbr='1234' in the STUDENT table when we delete all tuples with stu\_nbr='1234' in the ENROLMENT table? (Assume referential integrity is CASCADE constraints )**

**Add WeChat powcoder**

- A. Student record with stu\_nbr='1234' in the STUDENT table will be deleted.
- B. Nothing will happen to the STUDENT table.
- C. The stu\_nbr='1234' in the STUDENT table will be updated to NULL.
- D. Deletion will not be permitted by the DBMS.

# What Referential Integrity Constraint to implement?

- Use the model to decide on what referential integrity constraint to implement.  
– Mandatory vs Optional participation.  
<https://powcoder.com>
- The constraints must be decided at the design phase.  
Add WeChat powcoder



## Assignment Project Exam Help

Q7. What referential integrity constraint could be implemented according to the above model for the FKs in the PROJECT table without violating the business rules depicted in the model?

<https://powcoder.com>

Add WeChat powcoder

- A. NULLIFY
- B. CASCADE
- C. RESTRICT
- D. b and c are correct.
- E. a, b and c are correct.

## ALTER TABLE

- Used to change a tables structure.
- For example:
  - Adding column(s).
  - Removing column(s).
  - Adding constraint(s)
  - Removing constraint(s)

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

```
ALTER TABLE student
ADD (stu_address varchar(200),
     status      char(1) DEFAULT 'C',
     constraint status_chk CHECK (status in ('G','C')))
);
```

# Referential Integrity Definition - Example

```
ALTER TABLE enrolment  
  DROP CONSTRAINT fk_enrolment_student;
```

```
ALTER TABLE enrolment  
  DROP CONSTRAINT fk_enrolment_unit;
```

Assignment Project Exam Help

<https://powcoder.com>

```
ALTER TABLE enrolment  
  ADD  
    ( CONSTRAINT fk_enrolment_student FOREIGN KEY (stu_nbr)  
      REFERENCES student ( stu_nbr) ON DELETE CASCADE,
```

Add WeChat powcoder

```
    CONSTRAINT fk_enrolment_unit FOREIGN KEY (unit_code) REFERENCES unit  
      (unit_code) ON DELETE CASCADE  
  );
```

# DELETING A TABLE

- Use the DROP statement.
- Examples:

- `DROP TABLE enrolment PURGE;`
- `DROP TABLE student CASCADE CONSTRAINTS PURGE;`

<https://powcoder.com>

Add WeChat powcoder

# ADDING TUPLES/ROWS TO A TABLE (DML)

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder




# INSERT

- Adding data to a table in a database.
- SYNTAX:

*Assignment Project Exam Help*  
`INSERT INTO table [(column [, column...])]  
VALUES (value [, value...]);`  
*<https://powcoder.com>*

*Add WeChat powcoder*  
`INSERT INTO unit VALUES ('FIT2094', 'Databases');  
INSERT INTO student VALUES (112233, 'Wild',  
                                  'Wilbur', '01-Jan-1995')`

*Role of: to\_date and to\_char*

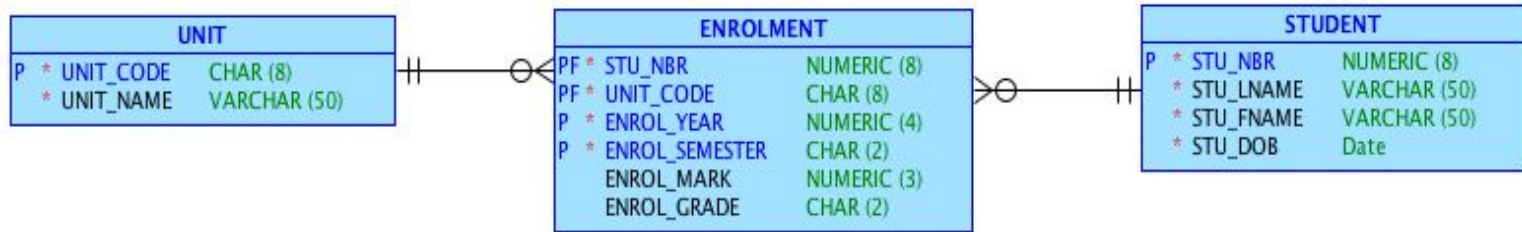

Q8. Assume the tables have been created with primary and foreign key constraints and there is no data currently in the tables. In what order should we populate the table?

A. UNIT- > ENROLMENT -> STUDENT

B. STUDENT -> ENROLMENT -> UNIT

C. STUDENT -> UNIT -> ENROLMENT

D. More than one option is correct.

# COMMIT and ROLLBACK

```
INSERT INTO enrolment VALUES (112233,  
                                'FIT2094',1,2018,45,'N');  
INSERT INTO enrolment VALUES (112233,  
                                'FIT2001',1,2018,80,'HD');  
COMMIT;
```

Assignment Project Exam Help  
<https://powcoder.com>

Add WeChat powcoder

COMMIT makes the changes to the database permanent.

ROLLBACK will undo the changes.

# Using a SEQUENCE

- Oracle supports auto-increment of a numeric PRIMARY KEY.
  - SEQUENCE.

- Steps to use:

- Create sequence

```
CREATE SEQUENCE sno_seq  
INCREMENT BY 1;
```

- Access the sequence using two built-in variables (pseudocolumns):

- NEXTVAL and CURRVAL

- INSERT INTO student

```
VALUES(sno_seq.nextval, 'Bond', 'James',  
       '01-Jan-1994');
```

- INSERT INTO enrolment

```
VALUES(sno_seq.currval, 'FIT2094', ...');
```

**Q9. Two new students and their enrolment details need to be added, James Bond wants to enrol in FIT2094 and FIT2001, Bruce Lee only wants to enrol in FIT2094. The sequence for sno is called sno\_seq. What problems, if any, exist with this script:**

```
-- Add two students
INSERT INTO student VALUES (sno_seq.nextval,'Bond','James','01-Jan-1994');
INSERT INTO student VALUES (sno_seq.nextval,'Lee','Bruce','01-Feb-1994');
-- Add the enrolments
INSERT INTO enrolment VALUES (sno_seq.currval,1,2018,'FIT2094',0,'NA');
INSERT INTO enrolment VALUES (sno_seq.currval,1,2018,'FIT2001',0,'NA');
INSERT INTO enrolment VALUES (sno_seq.currval,1,2018,'FIT2094',0,'NA');
COMMIT;
```

- A. There will be an error message. It states that a violation of primary key constraints in the ENROLMENT has occurred.
- B. Bruce Lee will be enrolled in FIT2001.
- C. There will be NO enrolment record for James Bond.
- D. All of the options a-c are problems that will be caused by the script.
- E. Some of the options in a-c are problems that will be caused by the script.
- F. There will be no problem caused by the script.

**PUTTING THIS TO WORK** Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder


TEAM			
P	*	team_no	NUMERIC (3)
F		emp_no	NUMERIC (5)
TEAM PK (team_no)			

EMPLOYEE			
P	*	emp_no	NUMERIC (5)
		emp_fname	VARCHAR (30)
		emp_lname	VARCHAR (30)
		emp_street	VARCHAR (50)
		emp_town	VARCHAR (30)
		emp_pcode	CHAR (4)
		emp_dob	Date
		emp_taxno	VARCHAR (20)
F		team_no	NUMERIC (3)
F		mentor_no	NUMERIC (5)
EMPLOYEE PK (emp_no)			

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

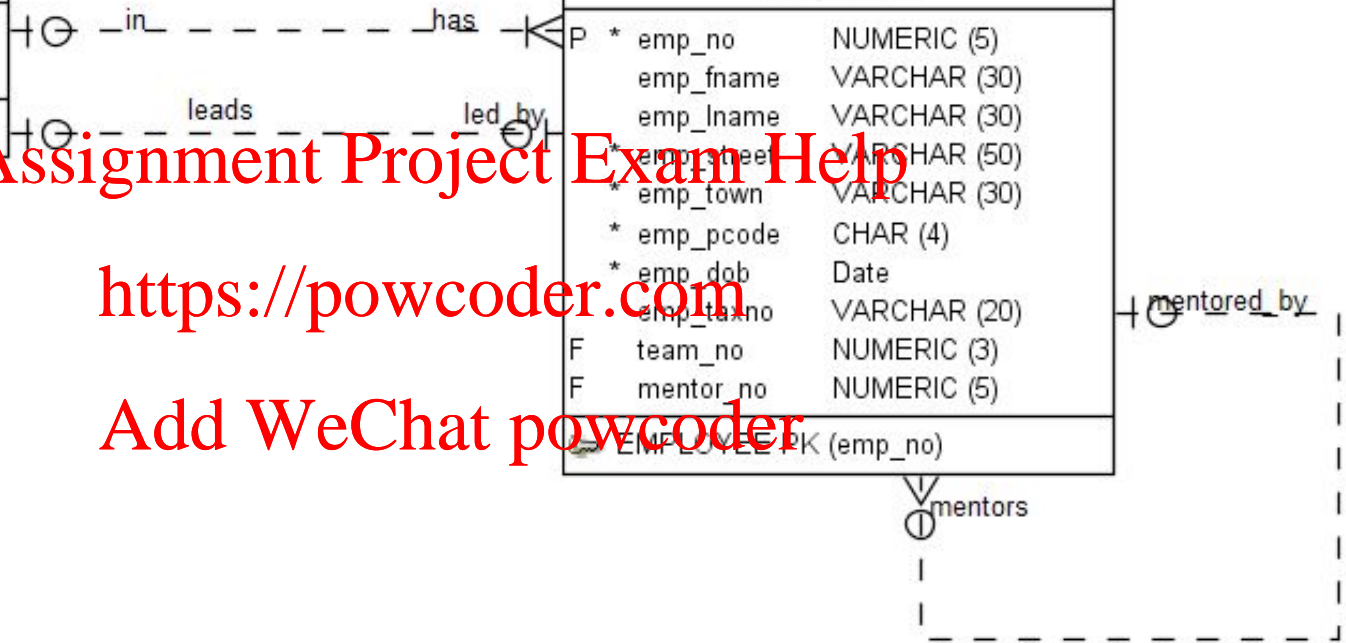

```

CREATE TABLE employee (
    emp_no      NUMBER(5) NOT NULL,
    emp_fname   VARCHAR2(30),
    emp_lname   VARCHAR2(30),
    emp_street  VARCHAR2(50) NOT NULL,
    emp_town    VARCHAR2(30) NOT NULL,
    emp_pcode   CHAR(4) NOT NULL,
    emp_dob     DATE NOT NULL,
    emp_taxno   VARCHAR2(20),
    team_no     NUMBER(3),
    mentor_no   NUMBER(5)
);

```

Assignment Project Exam Help

<https://powcoder.com>

```

ALTER TABLE employee ADD CONSTRAINT employee_pk PRIMARY KEY ( emp_no );

```

Add WeChat powcoder

```

CREATE TABLE team (
    team_no     NUMBER(3) NOT NULL,
    emp_no      NUMBER(5)
);

```

```

ALTER TABLE team ADD CONSTRAINT team_pk PRIMARY KEY ( team_no );

```



```
ALTER TABLE employee
  ADD CONSTRAINT emp_mentors_emp FOREIGN KEY ( mentor_no )
    REFERENCES employee ( emp_no )
    ON DELETE SET NULL;
```

```
ALTER TABLE employee
  ADD CONSTRAINT team_has_employee FOREIGN KEY ( team_no )
    REFERENCES team ( team_no )
    ON DELETE SET NULL;
```

```
ALTER TABLE team
  ADD CONSTRAINT emp_leads_team FOREIGN KEY ( emp_no )
    REFERENCES employee ( emp_no )
    ON DELETE SET NULL;
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder