

Update, Delete and Transaction Management

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



MODIFYING ROWS USING UPDATE AND DELETE

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

UPDATE

- Changes the value of existing data.
- For example, at the end of semester, change the mark and grade from null to the actual mark and grade.

```
UPDATE table  
SET column = (subquery) [, column = value, ...]  
[WHERE condition];
```

```
UPDATE enrolment  
SET mark = 80,  
    grade = 'HD'  
WHERE sno = 112233  
    and .....
```

```
UPDATE enrolment  
SET mark = 85  
WHERE unit_code = (SELECT unit_code FROM unit WHERE  
                   unit_name='Introduction to databases')  
    AND mark = 80;
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

DELETE

- Removing data from the database

```
DELETE FROM table  
[WHERE condition];
```

```
DELETE FROM enrolment
```

```
WHERE sno='112233'
```

```
AND
```

```
unit_code= (SELECT unit_code FROM unit
```

```
WHERE unit_name='Introduction to Database' )
```

```
AND
```

```
semester='1'
```

```
AND
```

```
year='2012';
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Assignment Project Exam Help
TRANSACTIONS
<https://powcoder.com>

Add WeChat powcoder

Transactions

- Consider the following situation.

Assignment Project Exam Help

Sam is transferring \$100 from his bank account to his friend Jim's. <https://powcoder.com>

Add WeChat powcoder

- Sam's account should be reduced by 100.
- Jim's account should be increased by 100.

Sam's account should be reduced by 100.

Q1. Which of the following SQL statements is correct for the above operation? Assume Sam's account number is '123'.

- A. UPDATE account
SET balance = balance - 100;
- B. UPDATE account
SET balance = balance - 100
WHERE acc_no = '123';
- C. UPDATE account
SET acc_no = balance + 100;
- D. UPDATE account
SET balance = balance + 100
WHERE acc_no = '123';

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Assume that Jim's account number is '333'. The transfer of money from Sam's to Jim's account will be written as the following SQL transaction:

T
R
A
N
S
A
C
T
I
O
N

```
UPDATE account  
SET balance= balance - 100  
WHERE acc_no = '123';
```

```
UPDATE account  
SET balance= balance + 100  
WHERE acc_no = '333';
```

```
COMMIT;
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

SQL
statements

All statements need to be run as a single logical unit operation.

Transaction Properties

- A transaction must have the following properties:
 - **Atomicity**
 - all database operations (SQL requests) of a transaction must be entirely completed or entirely aborted
 - **consistency**
 - it must take the database from one consistent state to another
 - **Isolation**
 - it must not interfere with other concurrent transactions
 - data used during execution of a transaction cannot be used by a second transaction until the first one is completed
 - **Durability**
 - once completed the changes the transaction made to the data are durable, even in the event of system failure

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Q2. According to the *atomicity* property, the transaction below is complete when statement number _____ is completed.

UPDATE account

SET balance= balance - 100

WHERE acc_no = '123';

1

UPDATE account

SET balance= balance + 100

WHERE acc_no = '333';

2

COMMIT;

3

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

A. 1

B. 2

C. 3

D. None of the above.

Q3. Which transaction property is violated when a transaction T2 (Jim checking the account balance) is allowed to read the balance of Jim's account while the transaction T1 (the money transfer from Sam's to Jim's) has not been completed?

Assignment Project Exam Help

- A. Atomicity.
- B. Isolation.
- C. Consistency.
- D. Durability.

<https://powcoder.com>

Add WeChat powcoder

Consistency - Example

- Assume that the server lost its power during the execution of the money transfer transaction, only the first statement is completed (taking the balance from Sam's).
- Consistency properties ensure that Sam's account will be reset to the original balance because the money has not be transferred to Jim's account.
- The last consistent state is *when the money transfer transaction has not been started.*

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Durability - Example

- Assume the server lost power after the commit statement has been reached.

Assignment Project Exam Help

- The durability property ensures that the balance on both Sam's and Jim's accounts reflect the completed money transfer transaction.

<https://powcoder.com>

Add WeChat powcoder

Transaction Management

- Follows the ACID properties.
- Transaction boundaries
 - Start
 - first SQL statement is executed (eg. Oracle)
 - Some systems have a BEGIN WORK type command
 - End
 - COMMIT or ROLLBACK
- Concurrency Management
- Restart and Recovery.


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Concurrency

Serial and *Interleaved* transactions.

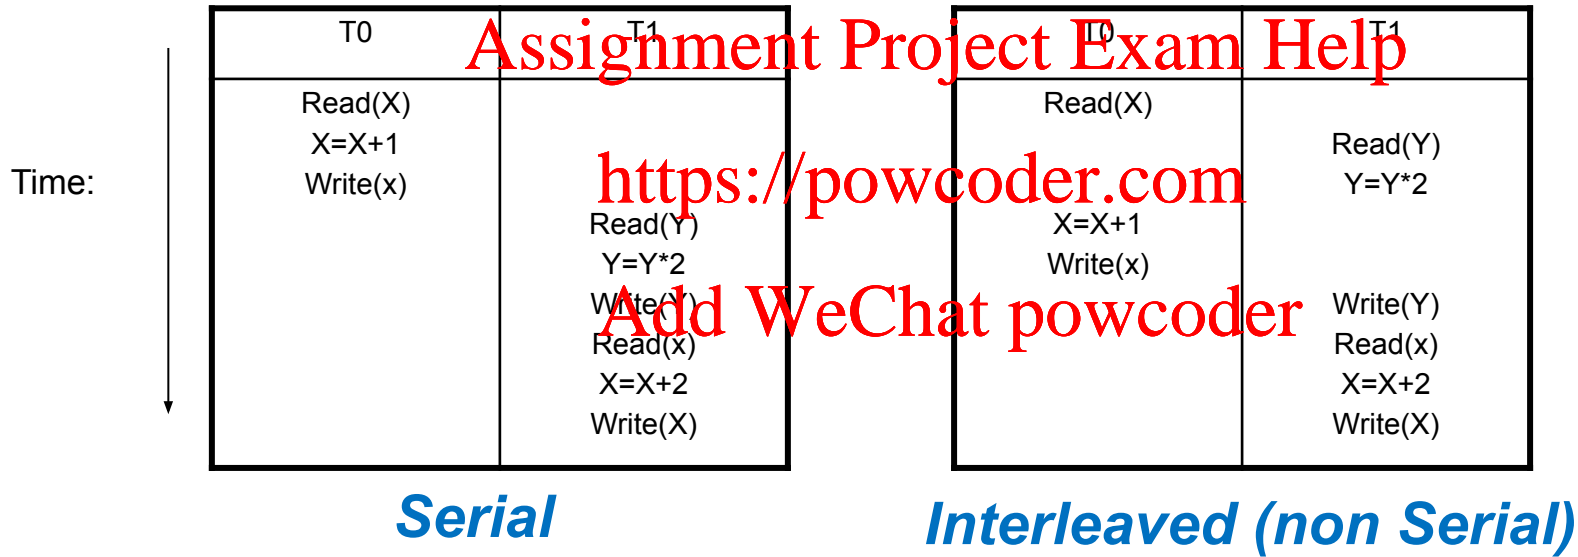

The impact of interleaved transactions

TABLE
10.2

Normal Execution of Two Transactions

TIME	TRANSACTION	STEP	STORED VALUE
1	T1	Read PROD_QOH	35
2	T1	$\text{PROD_QOH} = 35 + 100$	
3	T1	Write PROD_QOH	135
4	T2	Read PROD_QOH	35
5	T2	$\text{PROD_QOH} = 135 - 30$	
6	T2	Write PROD_QOH	105

Assignment Project Exam Help

<https://powcoder.com>

TABLE
10.3

Lost Updates

TIME	TRANSACTION	STEP	STORED VALUE
1	T1	Read PROD_QOH	35
2	T2	Read PROD_QOH	35
3	T1	$\text{PROD_QOH} = 35 + 100$	
4	T2	$\text{PROD_QOH} = 35 - 30$	
5	T1	Write PROD_QOH (Lost update)	135
6	T2	Write PROD_QOH	5

Add WeChat powcoder

Concurrency Management - Solution

- Locking mechanism.
 - A mechanism to overcome the problems caused by interleaved transactions.
- A lock is an indicator that some part of the database is temporarily unavailable for update because:
 - one, or more, other transactions is reading it, or,
 - another transaction is updating it.
- A transaction must acquire a lock prior to accessing a data item and locks are released when a transaction is completed.
- Locking, and the release of locks, is controlled by a DBMS process called the Lock Manager.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Lock Granularity

- Granularity of locking refers to the size of the units that are, or can be, locked. Locking can be done at

- database level
- table level
- page level
- record level

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Allows concurrent transactions to access different rows of the same table, even if the rows are located on the same page.

- attribute level

Allows concurrent transactions to access the same row, as long as they require the use of different attributes within that row.

Lock Types

- Shared lock. Multiple processes can simultaneously hold shared locks, to enable them to read without updating.
 - if a transaction T_i has obtained a shared lock (denoted by **S**) on data item **Q**, then T_i can **read** this item but not **write** to this item
- Exclusive lock. A process that needs to update a record must obtain an exclusive lock. Its application for a lock will not proceed until all current locks are released.
 - if a transaction T_i has obtained an exclusive lock (denoted **X**) on data item **Q**, then T_i can both **read** and **write** to item **Q**


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder


Exclusive Locks – Example 1

- Write-locked items
 - require an Exclusive Lock
 - a single transaction exclusively holds the lock on the item

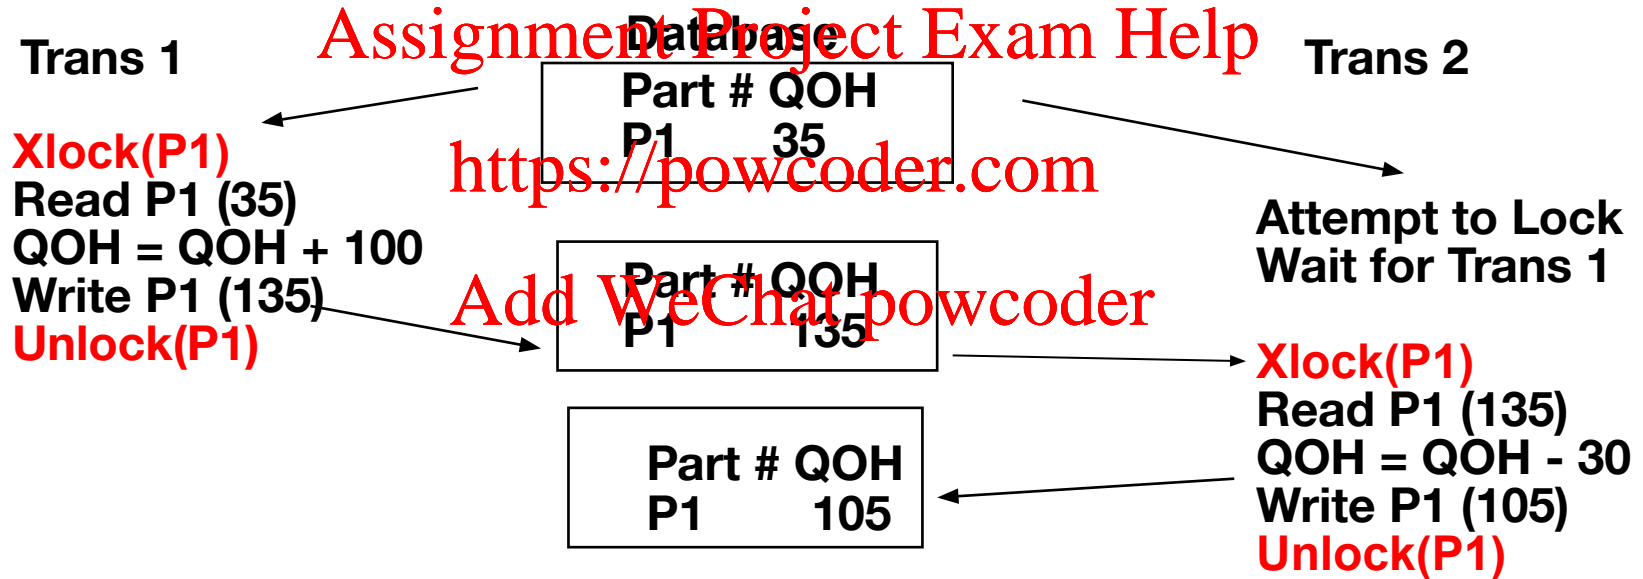

Shared Locks – Example 2

- Read-locked items
 - require a Shared Lock
 - allows other transactions to read the item

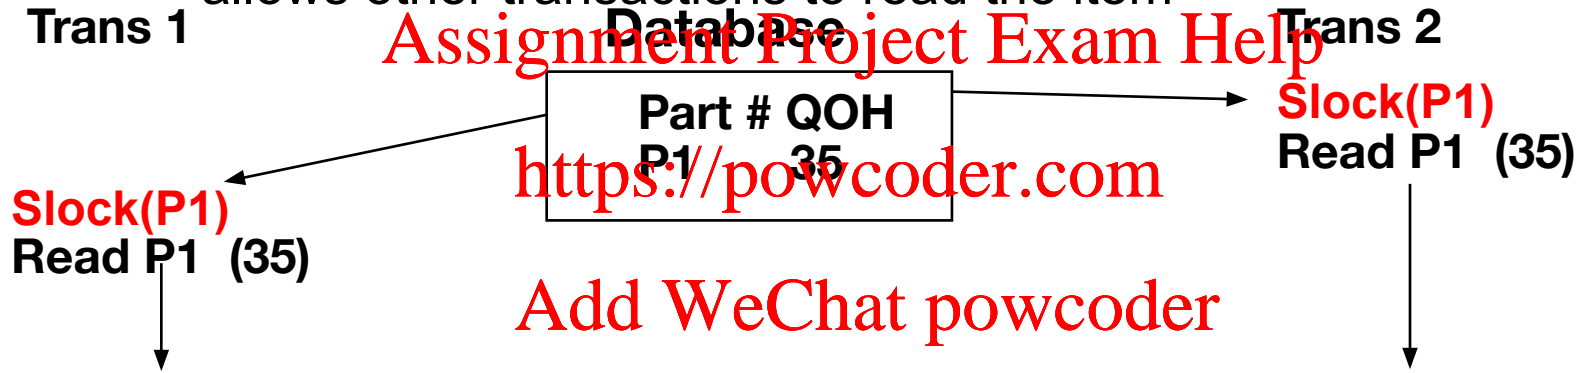

- **Shared locks** improve the amount of concurrency in a system
- If **Trans 1** and **Trans 2** only wished to read **P1** with no subsequent update they could both apply an **Slock** on **P1** and continue

Lock Example 3 – what happens?

Time	Tx	Access	A	B	C
0	(T1)	READ A			
1	(T2)	READ B			
2	(T3)	READ A			
3	(T1)	UPDATE A			
4	(T3)	READ C			
5	(T2)	READ C			
6	(T2)	UPDATE B			
7	(T2)	READ A			
8	(T2)	UPDATE C			
9	(T3)	READ B			

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder


Wait-For-Graph (WFG)

TIME	TX	ACCESS	A	B	C
0	(T1)	READ A	S(T1)		
1	(T2)	READ B		S(T2)	
2	(T3)	READ A	S(T3)		
3	(T1)	UPDATE A	S(T1)		
4	(T3)	READ C			S(T3)
5	(T2)	READ C			S(T2)
6	(T2)	UPDATE B		X(T2)	
7	(T2)	READ A	S(T2)		
8	(T2)	UPDATE C			
9	(T3)	READ B			

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

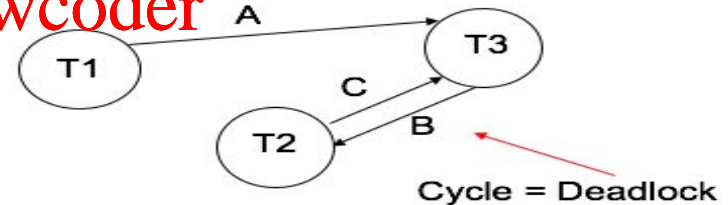

Lock - Problem

- Deadlock.

Scenario:

- Transaction 1 has an exclusive lock on data item A, and requests a lock on data item B.
- Transaction 2 has an exclusive lock on data item B, and requests a lock on data item A.

Result: Deadlock, also known as “deadly embrace”.

Each has locked a resource required by the other, and will not release that resource until it can either commit, or abort. Unless some “referee” intervenes, neither will ever proceed.

Dealing with Deadlock

- Deadlock prevention
 - A transaction must acquire all the locks it requires before it updates any record.
 - If it cannot acquire a necessary lock, it releases all locks, and tries again later.

<https://powcoder.com>

- Deadlock detection and recovery
 - Detection involves having the Lock Manager search the Wait-for tables for lock cycles.
 - Resolution involves having the Lock Manager force one of the transactions to abort, thus releasing all its locks.

Dealing with Deadlock

- If we discover that the system is in a state of deadlock, some of the transactions causing the deadlock must be aborted. Choosing which transaction to abort is called as *victim selection*.
- The algorithm for victim selection should generally avoid selecting transactions that have been running for a long time and that have performed many updates, and should try instead to select transactions that have not made any changes or that are involved in more than one deadlock cycle in the wait-for graph.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Database Restart and Recovery

- Restart

- Soft crashes

- loss of volatile storage, but no damage to disks. These necessitate restart facilities.

- Recovery

- Hard crashes

- hard crashes - anything that makes the disk permanently unreadable. These necessitate recovery facilities.

- Requires transaction log.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Transaction Log

- The **log**, or journal, tracks all transactions that update the database. It stores
 - For each transaction component (SQL statement)
 - Record for beginning of transaction
 - Type of operation being performed (update, delete, insert)
 - Names of objects affected by the transaction (the name of the table)
 - “Before” and “after” values for updated fields
 - Pointers to previous and next transaction log entries for the same transaction
 - The ending (COMMIT) of the transaction

The log should be written to a **multiple** separate physical devices from that holding the database, and must employ a force-write technique that ensures that every entry is immediately written to stable storage, that is, the log disk or tape.

Sample Transaction Log

TABLE
10.1

A Transaction Log

TRL_ID	TRX_NUM	PREV_PTR	NEXT_PTR	OPERATION	TABLE	ROW_ID	ATTRIBUTE	BEFORE_VALUE	AFTER_VALUE
341	101	Null	350	START	**** Start Transaction				
352	101	341	363	UPDATE	PRODUCT	1558-QW1	PROD_QOH	25	23
363	101	352	365	UPDATE	CUSTOMER	10011	CUST_BALANCE	525.75	615.73
365	101	363	Null	COMMIT	**** End of Transaction				



TRL_ID = Transaction log record ID

PTR = Pointer to a transaction log record ID

TRX_NUM = Transaction number

(Note: The transaction number is automatically assigned by the DBMS.)

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Checkpointing


- Although there are a number of techniques for checkpointing, the following explains the general principle. A checkpoint is taken regularly, say every 15 minutes, or every 20 transactions.
- The procedure is as follows:
 - Accepting new transactions is temporarily halted, and current transactions are suspended.
 - Results of committed transactions are made permanent (force-written to the disk).
 - A checkpoint record is written in the log.
 - Execution of transactions is resumed.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Oracle database – *not examined*

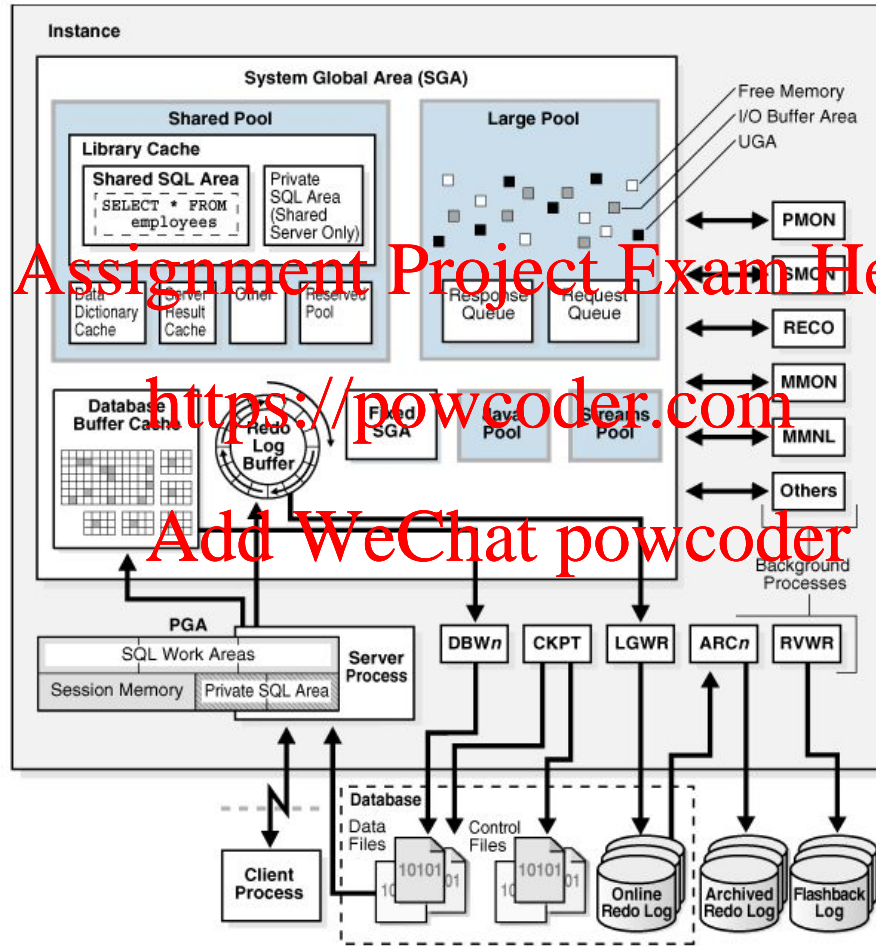

Assignment Project Exam Help
<https://powcoder.com>
Add WeChat powcoder

Write Through Policy

- The database is immediately updated by transaction operations during the transaction's execution, before the transaction reaches its commit point

Assignment Project Exam Help

- If a transaction aborts before it reaches its commit point a ROLLBACK or UNDO operation is required to restore the database to a consistent state

<https://powcoder.com>
Add WeChat powcoder

- The UNDO (ROLLBACK) operation uses the log before values

Restart Procedure for Write Through


- Once the cause of the crash has been rectified, and the database is being restarted:
 - The last checkpoint before the crash in the log file is identified. It is then read forward, and two lists are constructed
 - a REDO list containing the transaction-ids of transactions that were committed.
 - and an UNDO list containing the transaction-ids of transactions that never committed
- The database is then rolled forward, using REDO logic and the after-images and rolled back, using UNDO logic and the before-images.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Q4. What transaction will need to be REDONE (in the REDO list)?

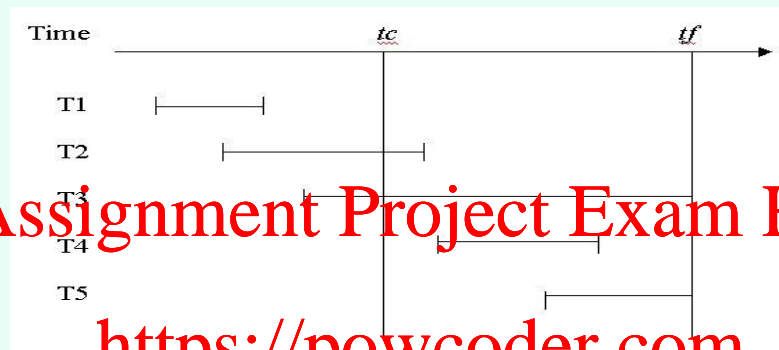

tc = time of checkpoint
tf = time of failure

Assignment Project Exam Help

<https://powcoder.com>

A. T1 and T2.

B. T2 and T4.

C. T2 and T5.

D. T1, T2 and T3.

E. None of the above.

An alternative - Deferred Write

- The database is updated only after the transaction reaches its commit point
- Required rollforward (committed transactions redone) but does not require rollback

Assignment Project Exams Help

<https://powcoder.com>

Add WeChat powcoder

Recovery

- A hard crash involves physical damage to the disk, rendering it unreadable. This may occur in a number of ways:
 - Head-crash. The read/write head, which normally “flies” a few microns off the disk surface, for some reason actually contacts the disk surface, and damages it.
 - Accidental impact damage, vandalism or fire, all of which can cause the disk drive and disk to be damaged.
- After a hard crash, the disk unit, and disk must be replaced, reformatted, and then re-loaded with the database.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Backup

- A backup is a copy of the database stored on a different device to the database, and therefore less likely to be subjected to the same catastrophe that damages the database. (NOTE: A backup is not the same as a checkpoint.)
- Backups are taken say, at the end of each day's processing.
- Ideally, two copies of each backup are held, an on-site copy, and an off-site copy to cater for severe catastrophes, such as building destruction.
- Transaction log – backs up only the transaction log operations that are not reflected in a previous backup of the database.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Recovery

- Rebuild the database from the most recent backup.
This will restore the database to the state it was in say, at close-of-business yesterday.
- **REDO** all committed transactions up to the time of the failure - no requirement for **UNDO**

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder