



INFO20003 Database Systems

Assignment Project Exam Help

<https://powcoder.com>

Dr. Renata Borovica-Gajic
Add WeChat powcoder

Lecture 05
Modelling with MySQL Workbench




- Modelling with MySQL Workbench
- Recap & further design
 - Conceptual Design
 - Logical Design
 - Physical Design

Assignment Project Exam Help


<https://powcoder.com>

Add WeChat powcoder

- Entity



- Attributes

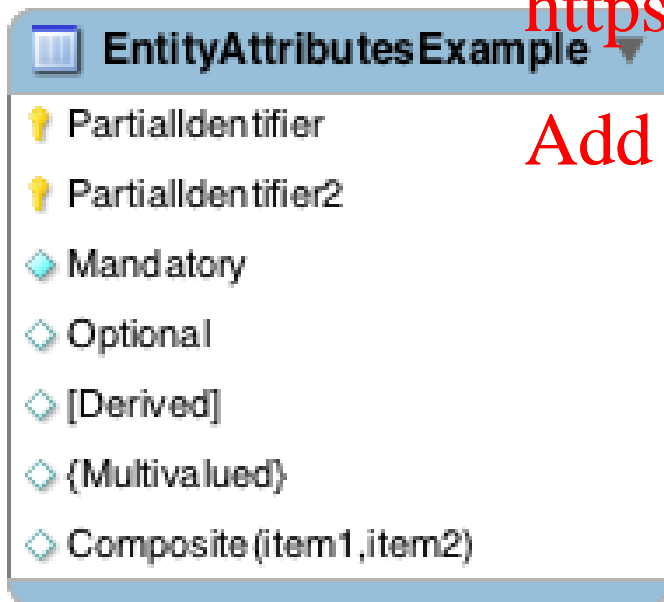

- Identifier or key:

- Fully identifies an instance

- Partial Identifier:

- Identifies an instance in conjunction with one or more partial identifiers

- Attributes types:

- Mandatory – NOT NULL (blue diamond)
 - Optional - NULL (empty diamond)
 - Derived []
 - [YearsEmployed]
 - Multivalued {}
 - {Skill}
 - Composite ()
 - Name (First, Middle, Last)

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder


- Derived attributes imply that their values can be derived from some other attributes in the database. As a result, they do not need to be stored physically – they disappear at the physical design.

Example:

Assignment Project Exam Help

For employees we want to be able to show for how many years they have been employed.


<https://powcoder.com>

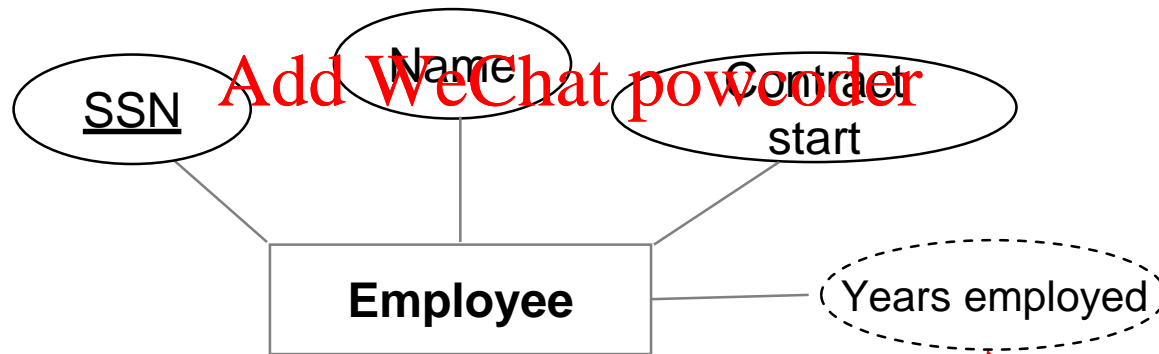

**Derived attribute
(Chen's notation)**

Relationship Degrees

Unary




contains

Assignment Project Exam Help

<https://powcoder.com>


Add WeChat powcoder

Binary

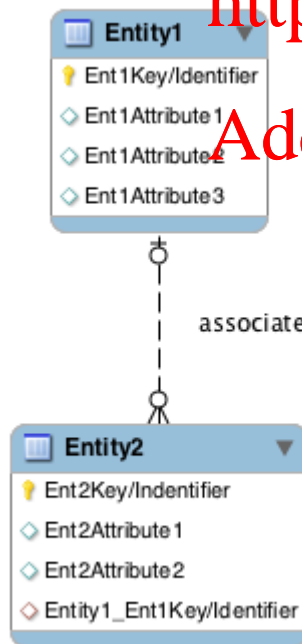


associated with


Ternary

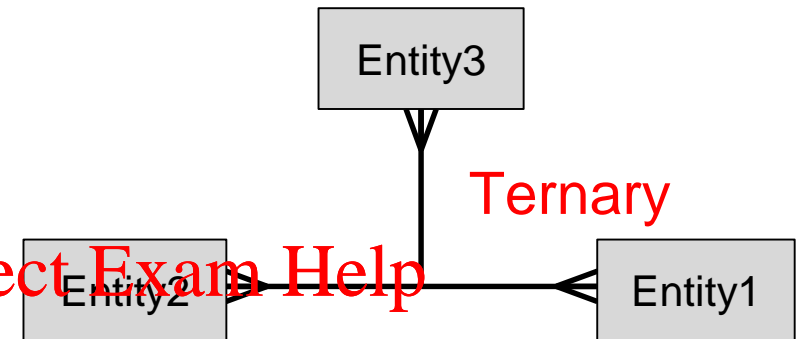


Ternary with attributes

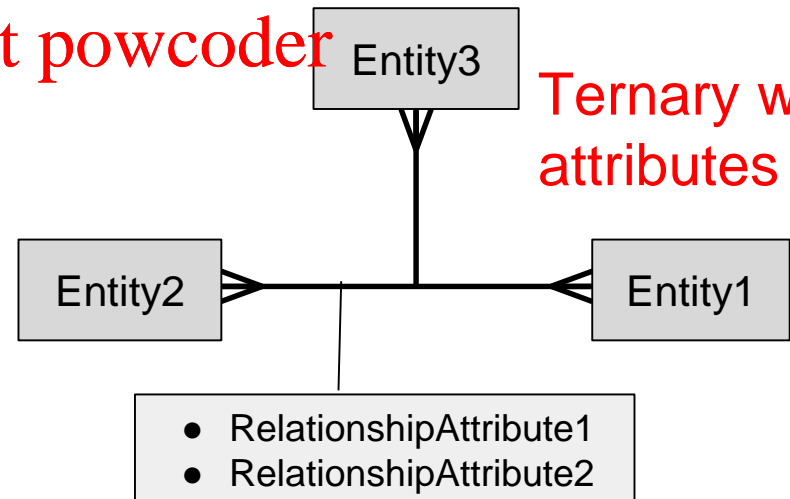


• Cardinality Constraints




Optional Many
Partial participation
Without key constraint



Mandatory Many
Total participation
Without key constraint



Optional One
Partial participation
Key constraint



Mandatory One
Total participation
Key constraint

• Relationship Cardinality

– One to One

Each entity will have exactly 0 or 1 related entity

– One to Many

One of the entities will have 0, 1 or *more* related entities, the other will have 0 or 1.

– Many to Many

Each of the entities will have 0, 1 or *more* related entities


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder


Strong Entity:

- Can exist by itself
- E.g. Customer Card & Customer

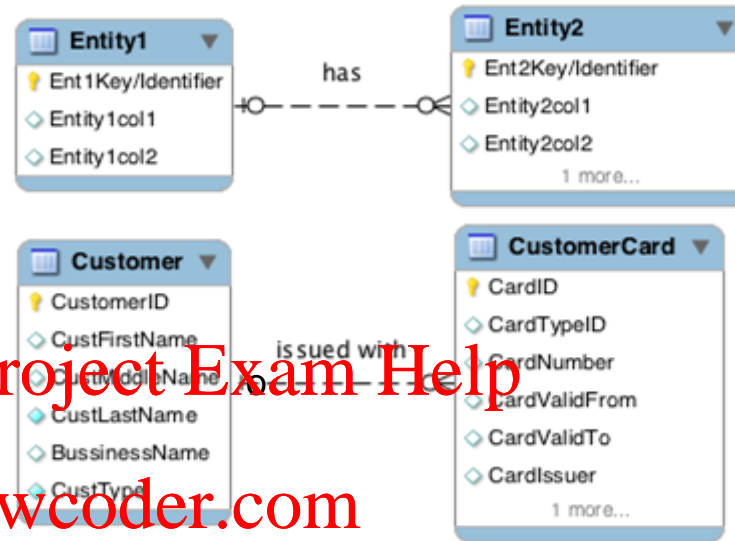

Weak Entity


- Can't exist without the owner
- E.g. BillDetailLine

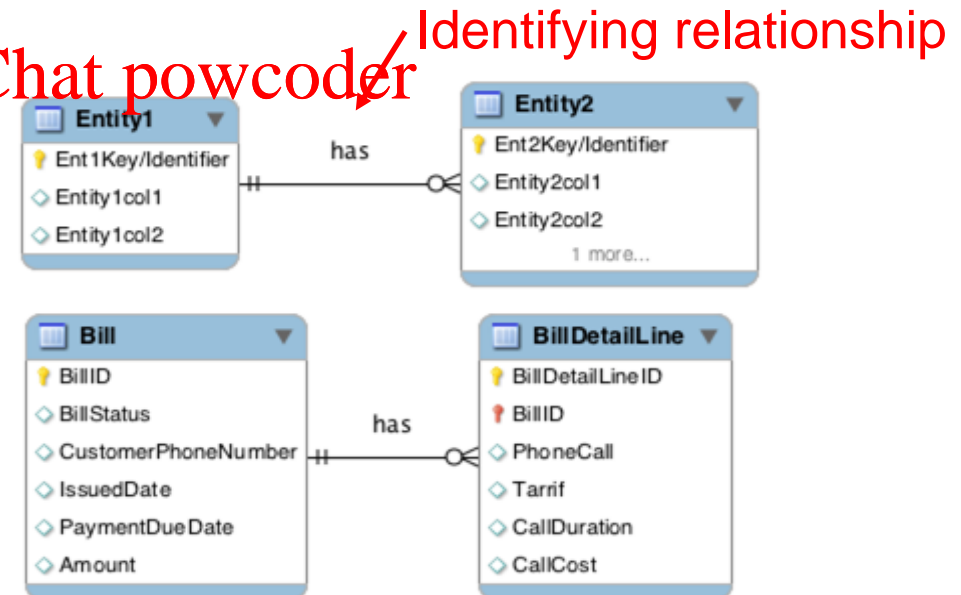

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder/ Identifying relationship

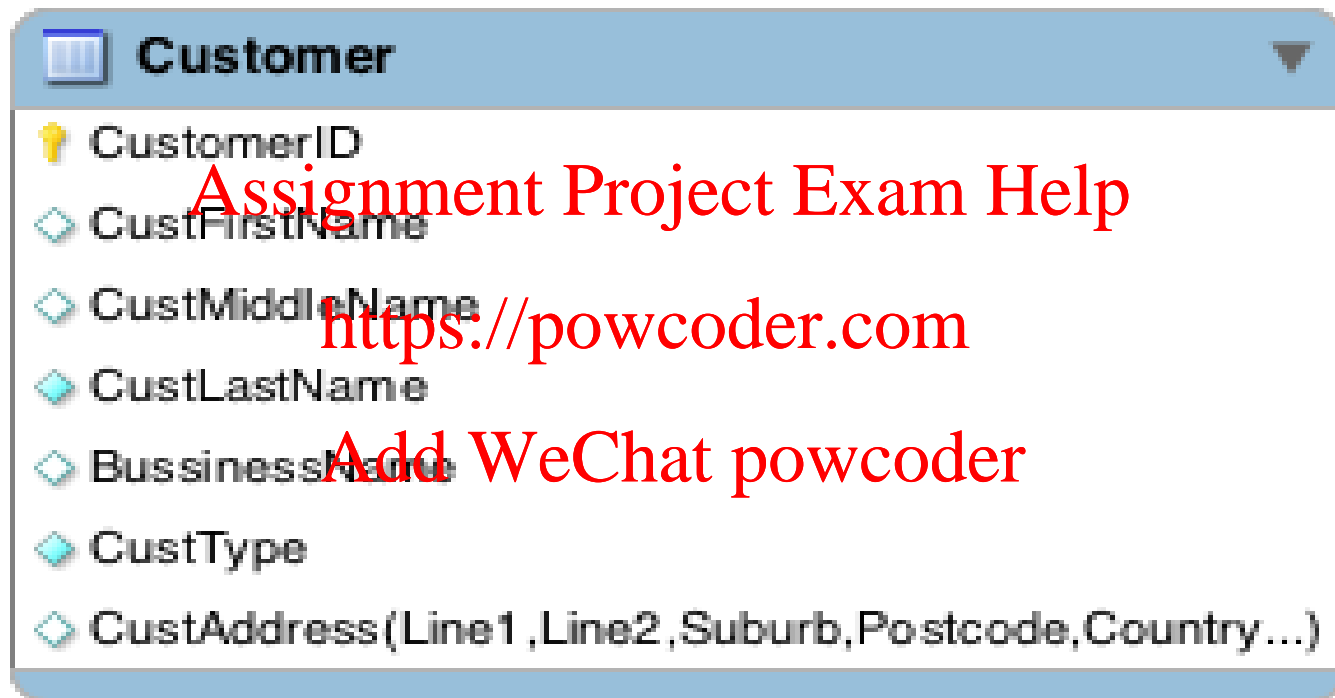


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



Convert from Conceptual to Logical design

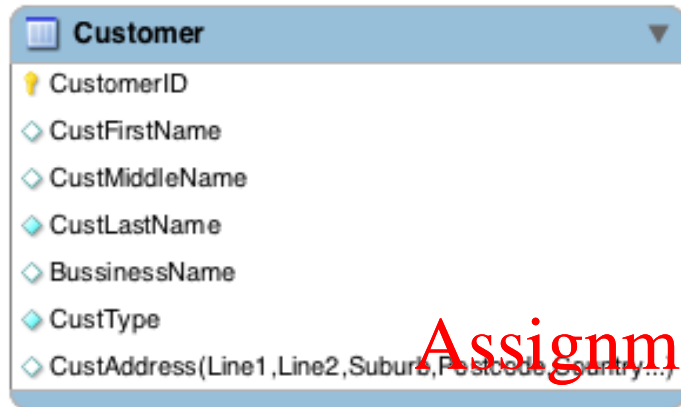

- Convert the ER into a logical (rel.) model
 - Customer(CustomerID, CustFirstName, CustMiddleName, CustLastName, BusinessName, CustType, CustAddLine1, CustAddLine2, CustSuburb, CustPostcode, CustCountry)

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

- **Tasks checklist (from conceptual to logical):**
 1. Flatten composite and multi-valued attributes
 - Multi-value attributes can become another table
 2. Resolve many-many relationships
 - Create an associative entity
 3. Resolve one-many relationships
 - Add foreign keys at crows foot end of relationships (on the many side in the case of crows foot)





- **Generate attribute data types (with NULL/NOT NULL)**

Physical Design:

Customer	
CustomerID	INT
CustomerFirstName	VARCHAR(100)
CustomerMiddleName	VARCHAR(100)
CustomerLastName	VARCHAR(100)
BussinessName	VARCHAR(100)
CustomerType	CHAR(1)
CustAddLine1	VARCHAR(100)
CustAddLine2	VARCHAR(100)
CustSuburb	VARCHAR(60)
CustPostcode	CHAR(6)
CustCountry	VARCHAR(60)

Implementation:

```
CREATE TABLE Customer(  
  CustomerID INT NOT NULL,  
  CustFirstName VARCHAR(100),  
  CustMiddleName VARCHAR(100),  
  CustLastName VARCHAR(100) NOT NULL,  
  BussinessName VARCHAR(100),  
  CustType VARCHAR(1) NOT NULL,  
  CustAddressLine1 VARCHAR(100) NOT NULL,  
  CustAddressLine2 VARCHAR(100) NOT NULL,  
  CustSuburb VARCHAR(60) NOT NULL,  
  CustPostcode CHAR(6) NOT NULL,  
  CustCountry VARCHAR(60) NOT NULL,  
  PRIMARY KEY (CustomerID));
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

- A customer can have a number of Accounts
- The tables are linked through a foreign key


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder


CustID	CustomerF irstName	CustMiddle Name	CustLast Name	BusinessN ame	CustType
1	Peter		Smith		Personal
2	James		Jones	JJ Enterprises	Company

AccountID	AccountName	OutstandingB alance	CustID
01	Peter Smith	245.25	1
05	JJ Ent.	552.39	2
06	JJ Ent. Mgr	10.25	2

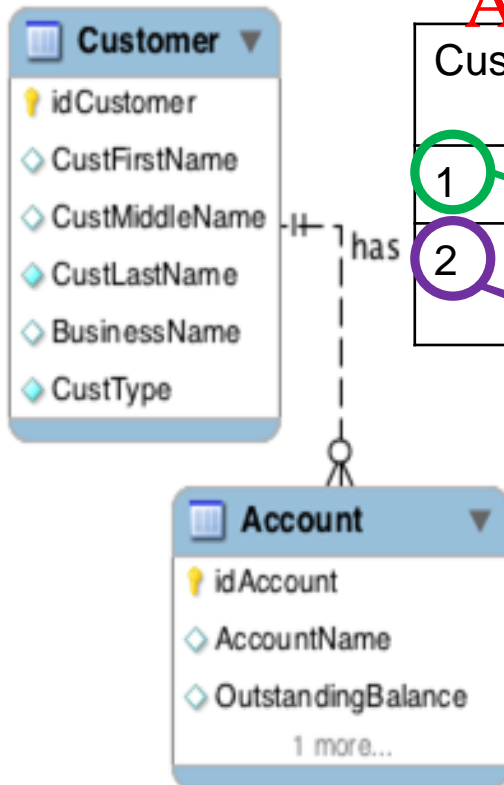



Conceptual Design:

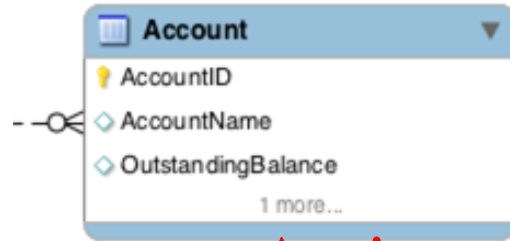

Logical Design:

Account(AccountID,
AccountName,
OutstandingBalance,
CustomerID)

Assignment Project Exam Help


Tasks checklist:

1. Flatten composite and multi-valued attributes **X**
2. Resolve many-many relationships **X**
3. Resolve one-many relationships
 - See FK1 – CustomerID
 - Every row in the account table must have a CustomerID from Customer (referential integrity)

<https://powcoder.com>


Add WeChat powcoder

Note: Underline = PK,
italic and underline = FK,
underline and bold = PFK

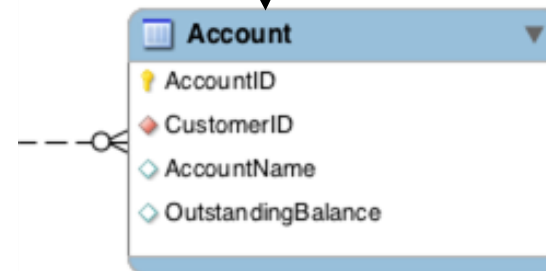




Physical design:

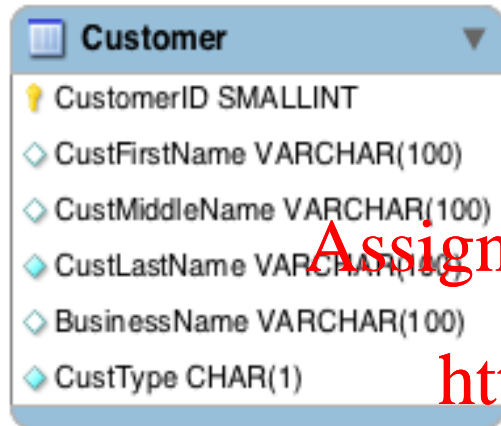

Implementation:

```
CREATE TABLE Account (  
    AccountID int auto_increment,  
    AccountName varchar(100) NOT NULL,  
    OutstandingBalance DECIMAL(10,2) NOT NULL,  
    CustomerID smallint NOT NULL,  
    PRIMARY KEY (AccountID),  
    FOREIGN KEY (CustomerID) REFERENCES Customer(CustomerID)  
    ON DELETE RESTRICT  
    ON UPDATE CASCADE  
) ENGINE=InnoDB;
```

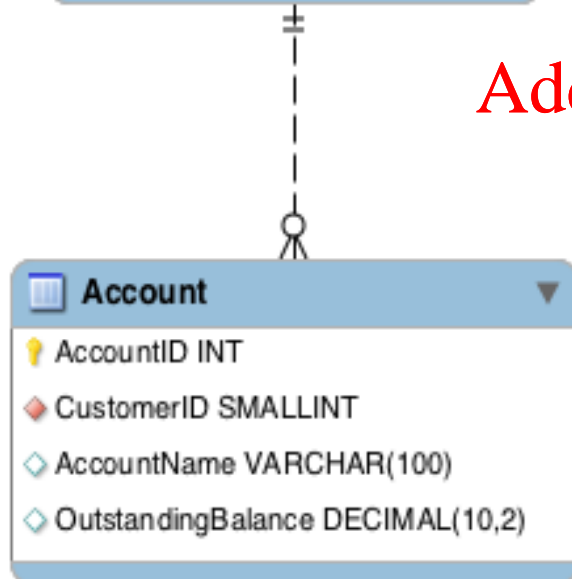


Assignment Project Exam Help

<https://powcoder.com>


Add WeChat powcoder




Conceptual Design:

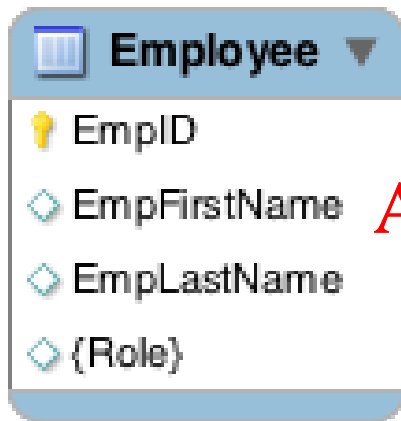

Logical Design:

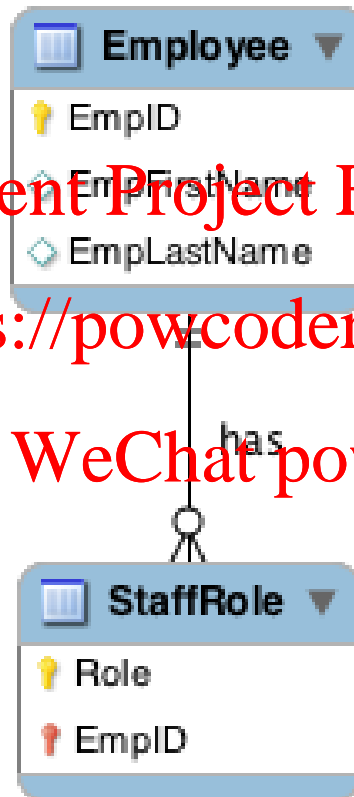

Physical Design:

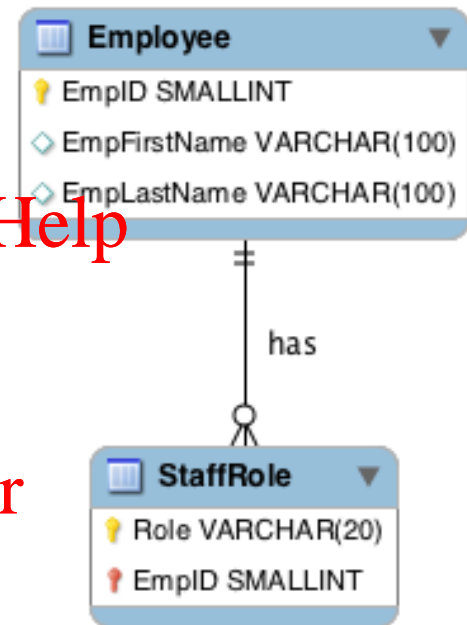

StaffRole is an example of a weak entity

- We show this with a *solid* line in Workbench


If staff have only 2-3 roles you may decide to have these within the Employee table at physical design to save on “JOIN” time

Assignment Project Exam Help


<https://powcoder.com>

Add WeChat powcoder

- How do we deal with customer addresses?
 - If customers can change addresses
 - AND imagine that we *need* to store a history of addresses for customers.
 - At the conceptual level it looks like this:

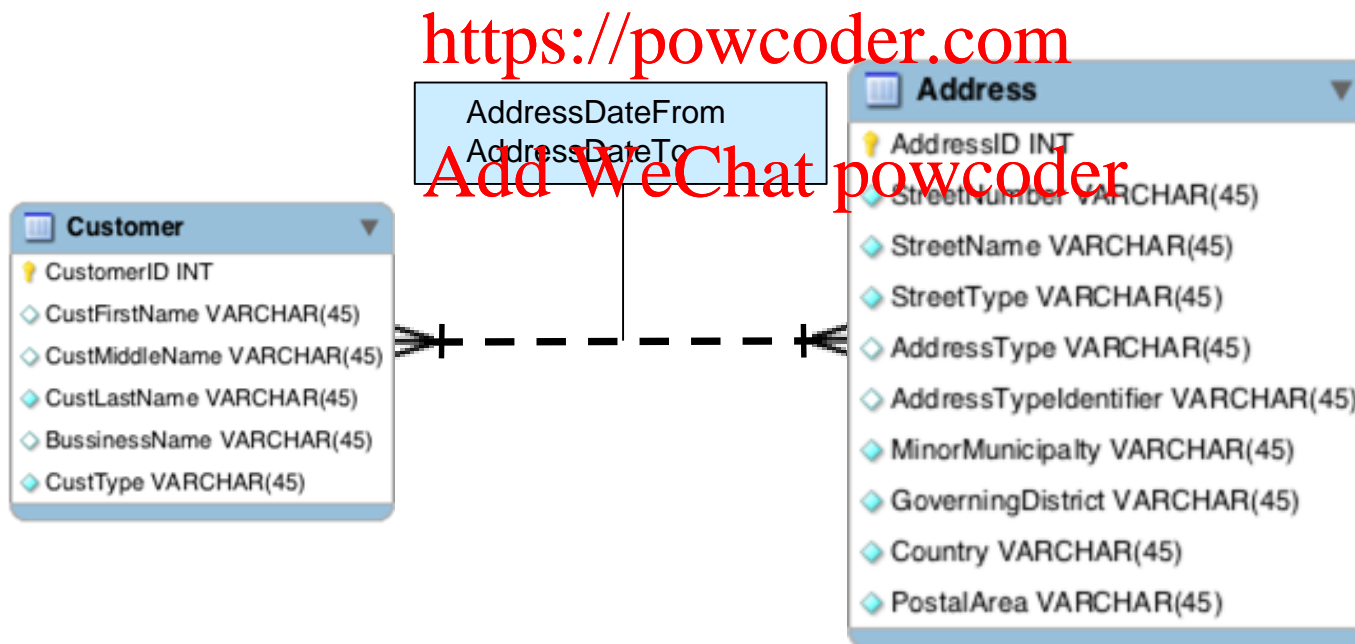

- When converting the conceptual to logical diagram we create an **Associative Entity** between the other 2 entities

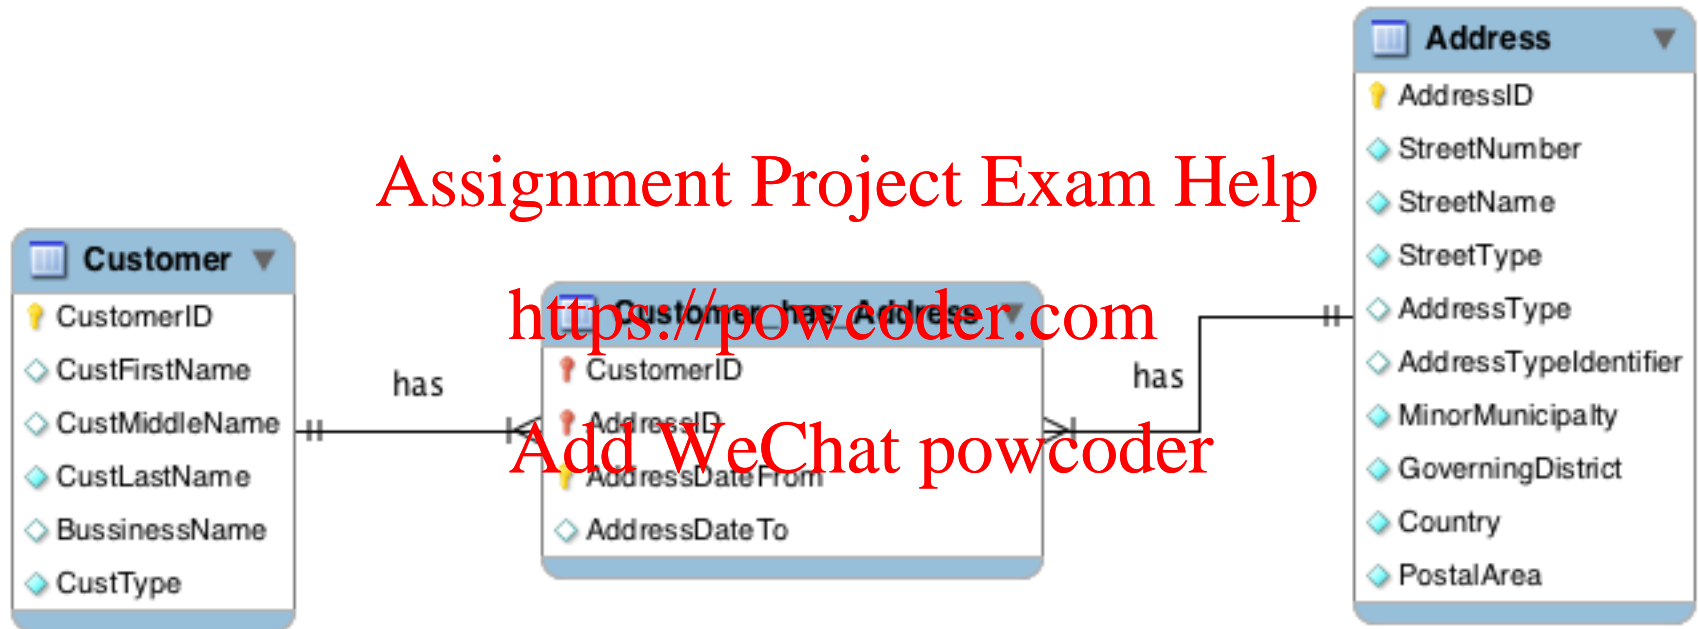

Note: AddressDateFrom/To are descriptive attributes of the relationship
They go into the associative entity for M-M



Many to Many - Logical Model


- Customer(CustomerID, CustFirstName, CustMiddleName, CustLastName, BusinessName, CustType)
- Address(AddressID, StreetNumber, StreetName, StreetType, AddressType, AddressTypeIdentifier, MinorMunicipality, MajorMunicipality, GoverningDistrict, Country, PostalArea)
- Customer_Has_Address(CustomerID, AddressID, AddressDateFrom, AddressDateTo)

Note: Underline = PK, italic and underline = FK, underline and bold = PFK

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

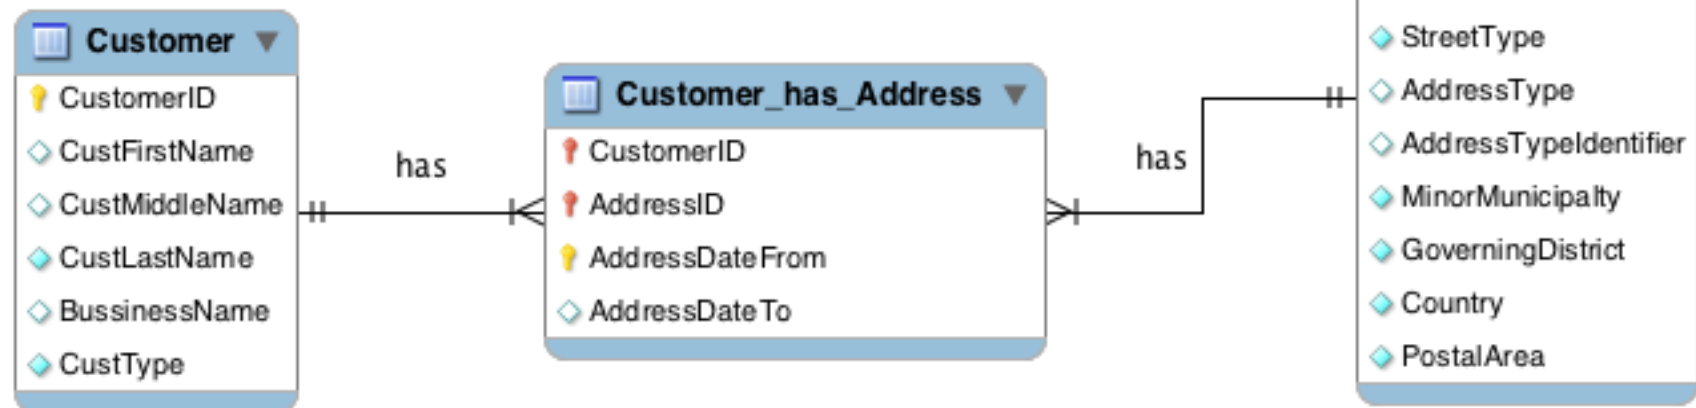




Many to Many - Physical Model & Implementation

Assignment Project Exam Help


<https://powcoder.com>

Add WeChat powcoder

```
CREATE TABLE CustomerAddress {  
  CustomerID          smallint,  
  AddressID           smallint,  
  AddressDateFrom     DATE,  
  AddressDateTo       DATE,  
  PRIMARY KEY (CustomerID, AddressID, AddressDateFrom),  
  FOREIGN KEY (CustomerID) REFERENCES Customer(CustomerID)  
    ON DELETE RESTRICT  
    ON UPDATE CASCADE,  
  FOREIGN KEY (AddressID) REFERENCES Address(AddressID)  
    ON DELETE RESTRICT  
    ON UPDATE CASCADE  
} ENGINE=InnoDB;
```

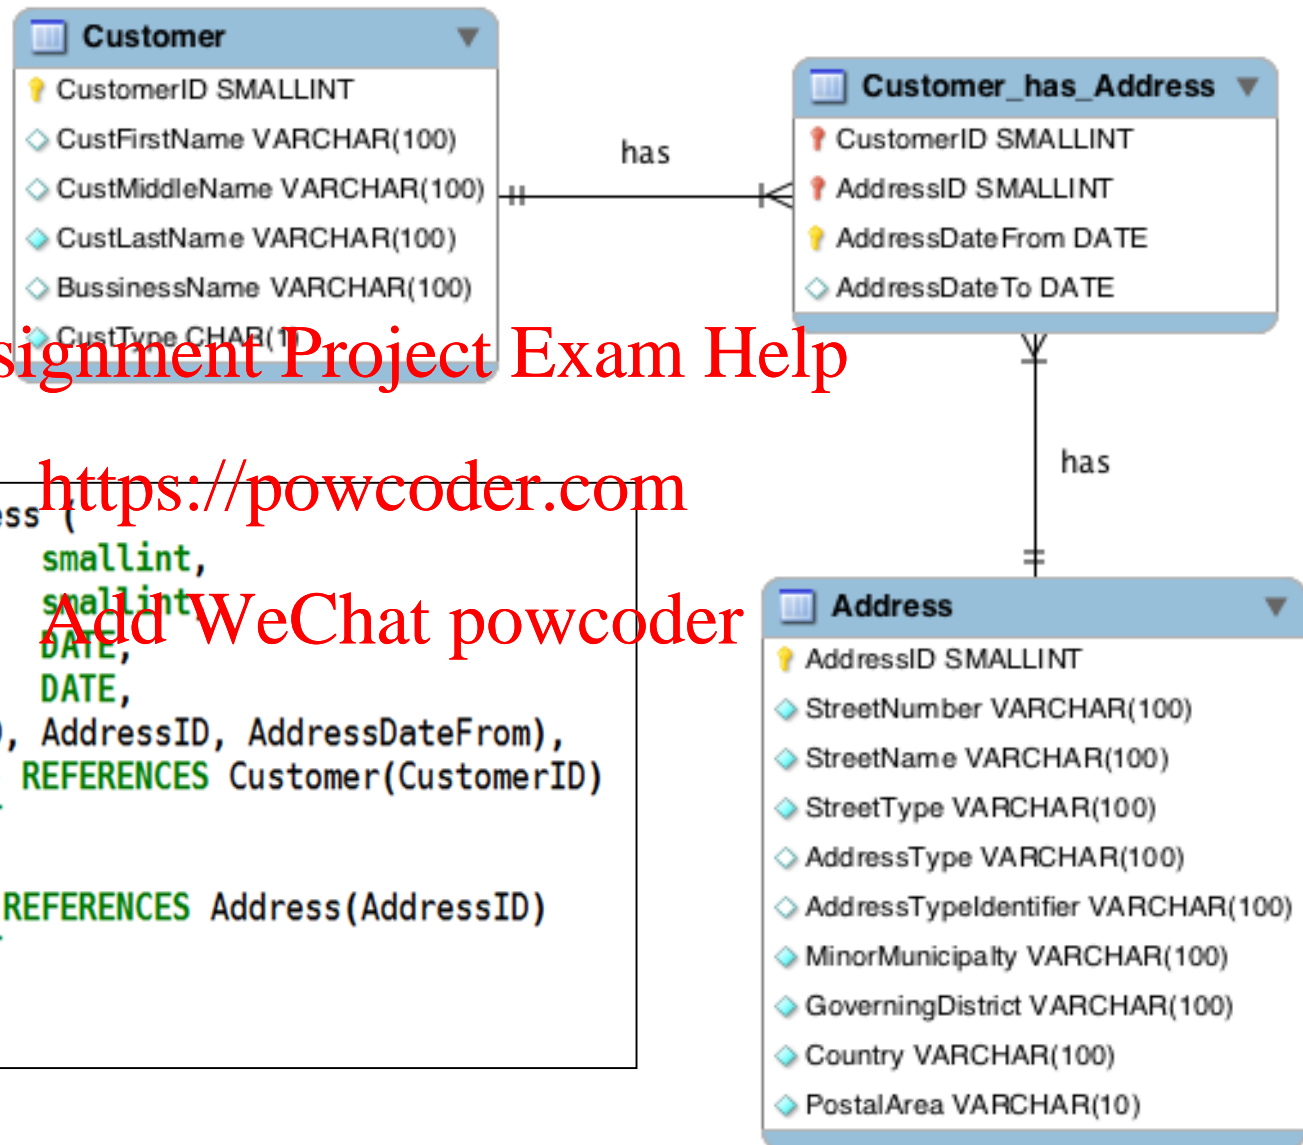

- Rule: Move the key from the *one* side to the other side

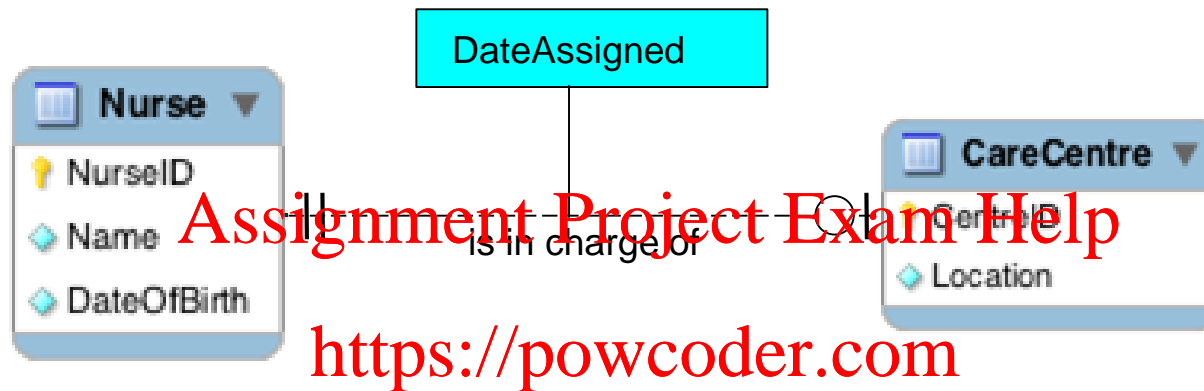


Add WeChat powcoder


- But we have 2 “one” sides. Which one?
- Need to decide whether to put the foreign key inside Nurse or CareCentre (in which case you would have the Date_Assigned in the same location)
 - Where would the least NULL values be?
 - The rule is the OPTIONAL side of the relationship gets the foreign key

- Logical Design:**

- Nurse(NurseID, Name, DateOfBirth)
- CareCentre(CentreID, Location, NurseID, DateAssigned)

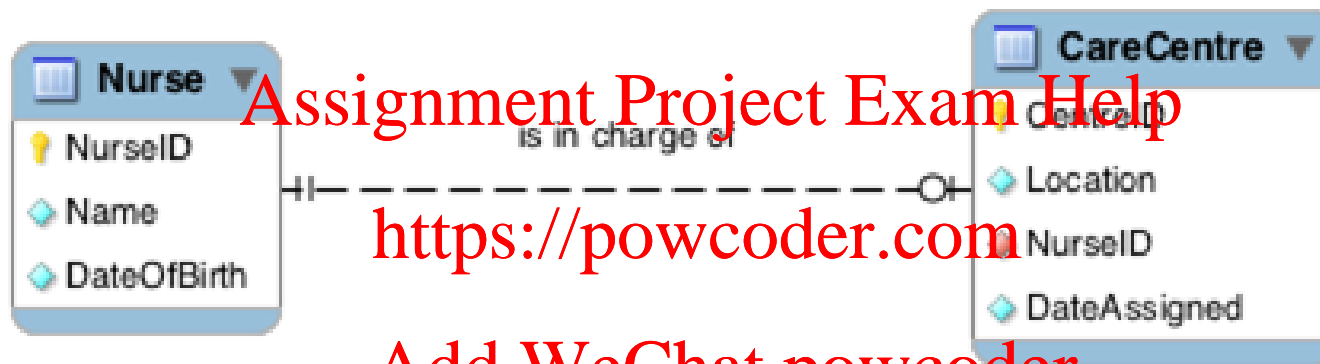

- Physical Design:**

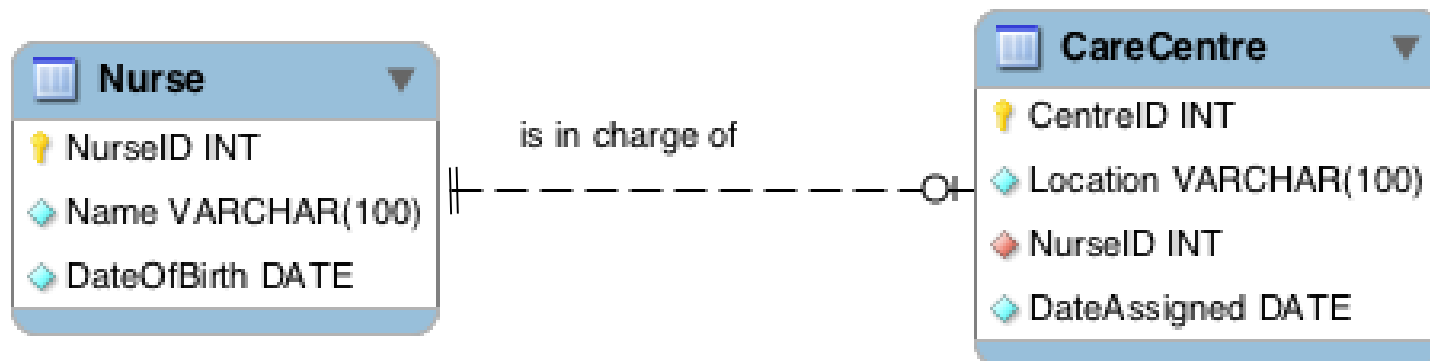

- **One-to-Many**

- Primary key on the one side becomes a foreign key on the many side (in the case of Crow's foot)

- **Many-to-Many**

- Create an Associative Entity (a new relation) with the primary keys of the two entities it relates to as the combined primary key

- **One-to-One**

- Need to decide where to put the foreign key
- The primary key on the mandatory side becomes a foreign key on the optional side
- If two optional or two mandatory, pick one arbitrarily

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder




- Operate in the same way as binary relationships
 - **One-to-One**
 - Put a Foreign key in the relation
 - **One-to-Many**
 - Put a Foreign key in the relation
 - **Many-to-Many**
 - Generate an Associative Entity
 - Put two Foreign keys in the Associative Entity
 - Need 2 different names for the Foreign keys
 - Both Foreign keys become the *combined* key of the Associative Entity

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Conceptual Design:

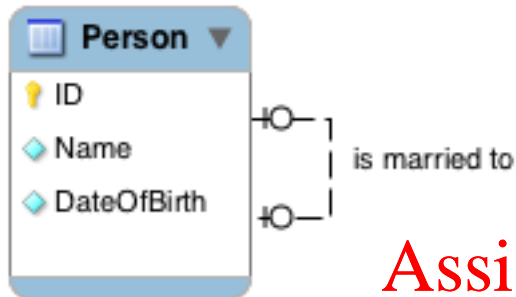

Assignment Project Exam Help

Implementation:


```
CREATE TABLE Person (
  ID INT NOT NULL,
  Name VARCHAR(100) NOT NULL,
  DateOfBirth DATE NOT NULL,
  SpouseID INT,
  PRIMARY KEY (ID),
  FOREIGN KEY (SpouseID)
  REFERENCES Person (ID)
  ON DELETE RESTRICT
  ON UPDATE CASCADE);
```

Logical Design:

- Person (ID, Name, DateOfBirth, SpouseID)

<https://powcoder.com>


Add WeChat powcoder

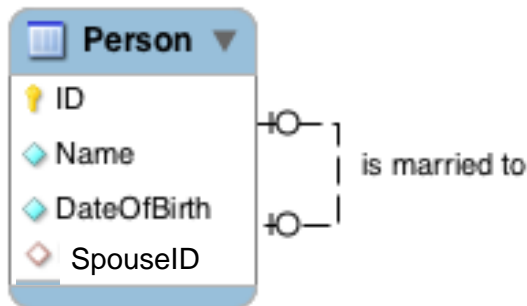

ID	Name	DOB	SpouseID
1	Ann	1969-06-12	3
2	Fred	1971-05-09	NULL
3	Chon	1982-02-10	1
4	Nancy	1991-01-01	NULL



Conceptual Design:

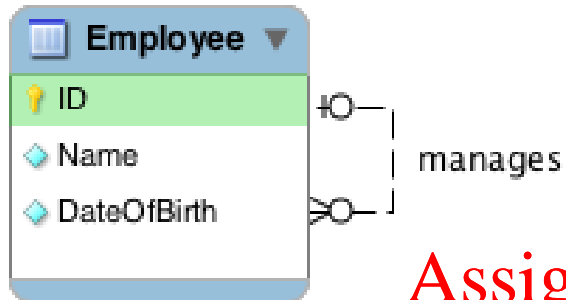

Implementation:


```
CREATE TABLE Employee(
  ID smallint NOT NULL,
  Name VARCHAR(100) NOT NULL,
  DateOfBirth DATE NOT NULL,
  ManagerID smallint ,
  PRIMARY KEY (ID),
  FOREIGN KEY (ManagerID)
  REFERENCES Employee(ID)
  ON DELETE RESTRICT
  ON UPDATE CASCADE);
```

Logical Design:

- Employee (ID, Name, DateOfBirth, ManagerID)


<https://powcoder.com>

Add WeChat powcoder

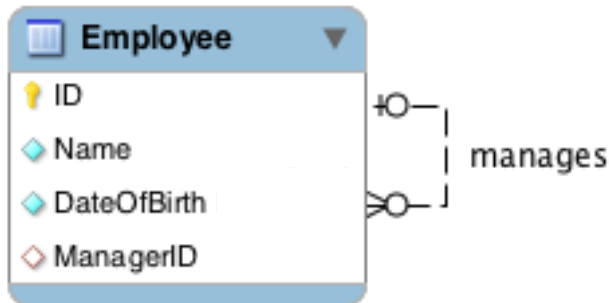

ID	Name	DOB	MngrID
1	Ann	1969-06-12	NULL
2	Fred	1971-05-09	1
3	Chon	1982-02-10	1
4	Nancy	1991-01-01	1


Unary: Many-to-Many

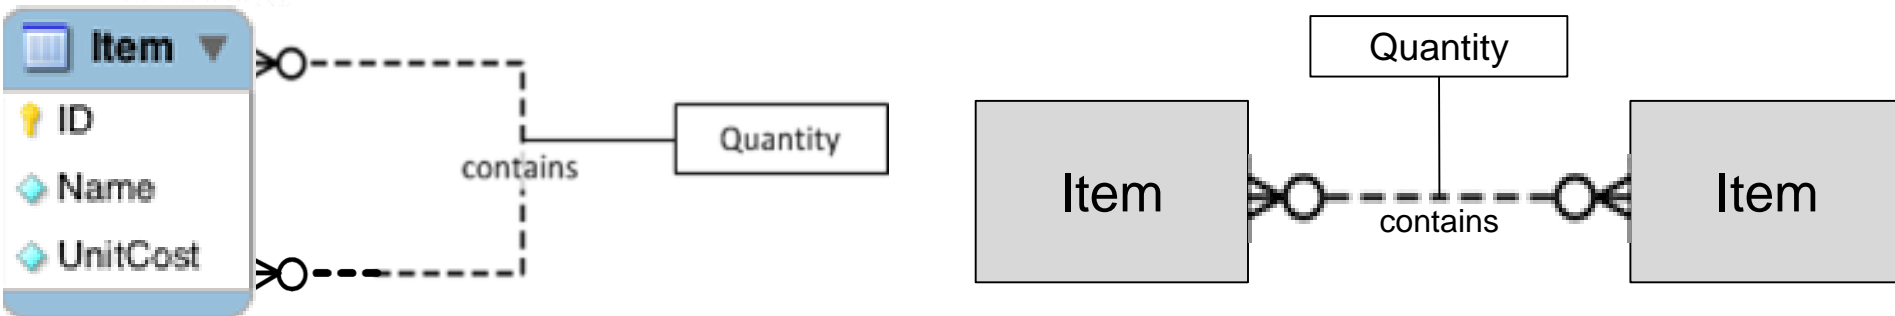

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

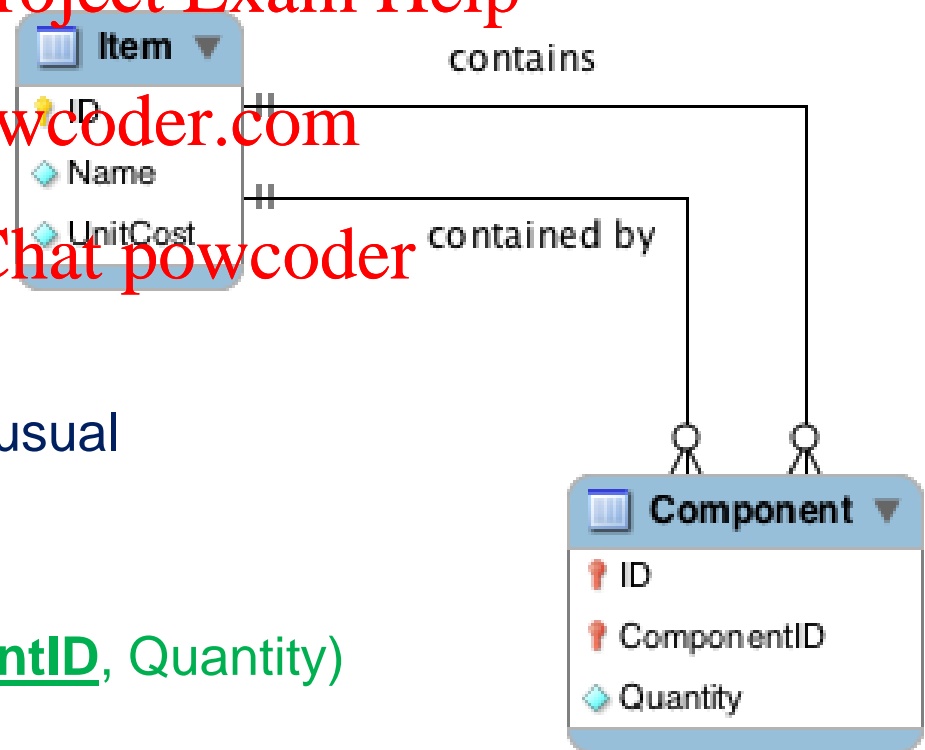

• Logical Design:

- Create Associative Entity like usual
- Generate logical model
 - Item(ID, Name, UnitCost)
 - Component(ID, ComponentID, Quantity)



- Implementation

```
CREATE TABLE Part (  
  ID                smallint,  
  Name              VARCHAR(100) NOT NULL,  
  UnitCost          DECIMAL(6,2) NOT NULL,  
  PRIMARY KEY (ID)  
) ENGINE=InnoDB;
```

Assignment Project Exam Help


<https://powcoder.com>

Add WeChat powcoder

```
CREATE TABLE Component (  
  ID                smallint,  
  ComponentID       smallint,  
  Quantity          smallint NOT NULL,  
  PRIMARY KEY (ID, ComponentID),  
  FOREIGN KEY (ID) REFERENCES Part(ID)  
    ON DELETE RESTRICT  
    ON UPDATE CASCADE,  
  FOREIGN KEY (ComponentID) REFERENCES Part(ID)  
    ON DELETE RESTRICT  
    ON UPDATE CASCADE  
) ENGINE=InnoDB;
```


Ternary relationships: Many to Many

- Relationships between three entities
- Logical Design:**
 - Generate an Associative Entity
 - Three One-to-Many relationships
 - Same rules then apply as One-to-Many

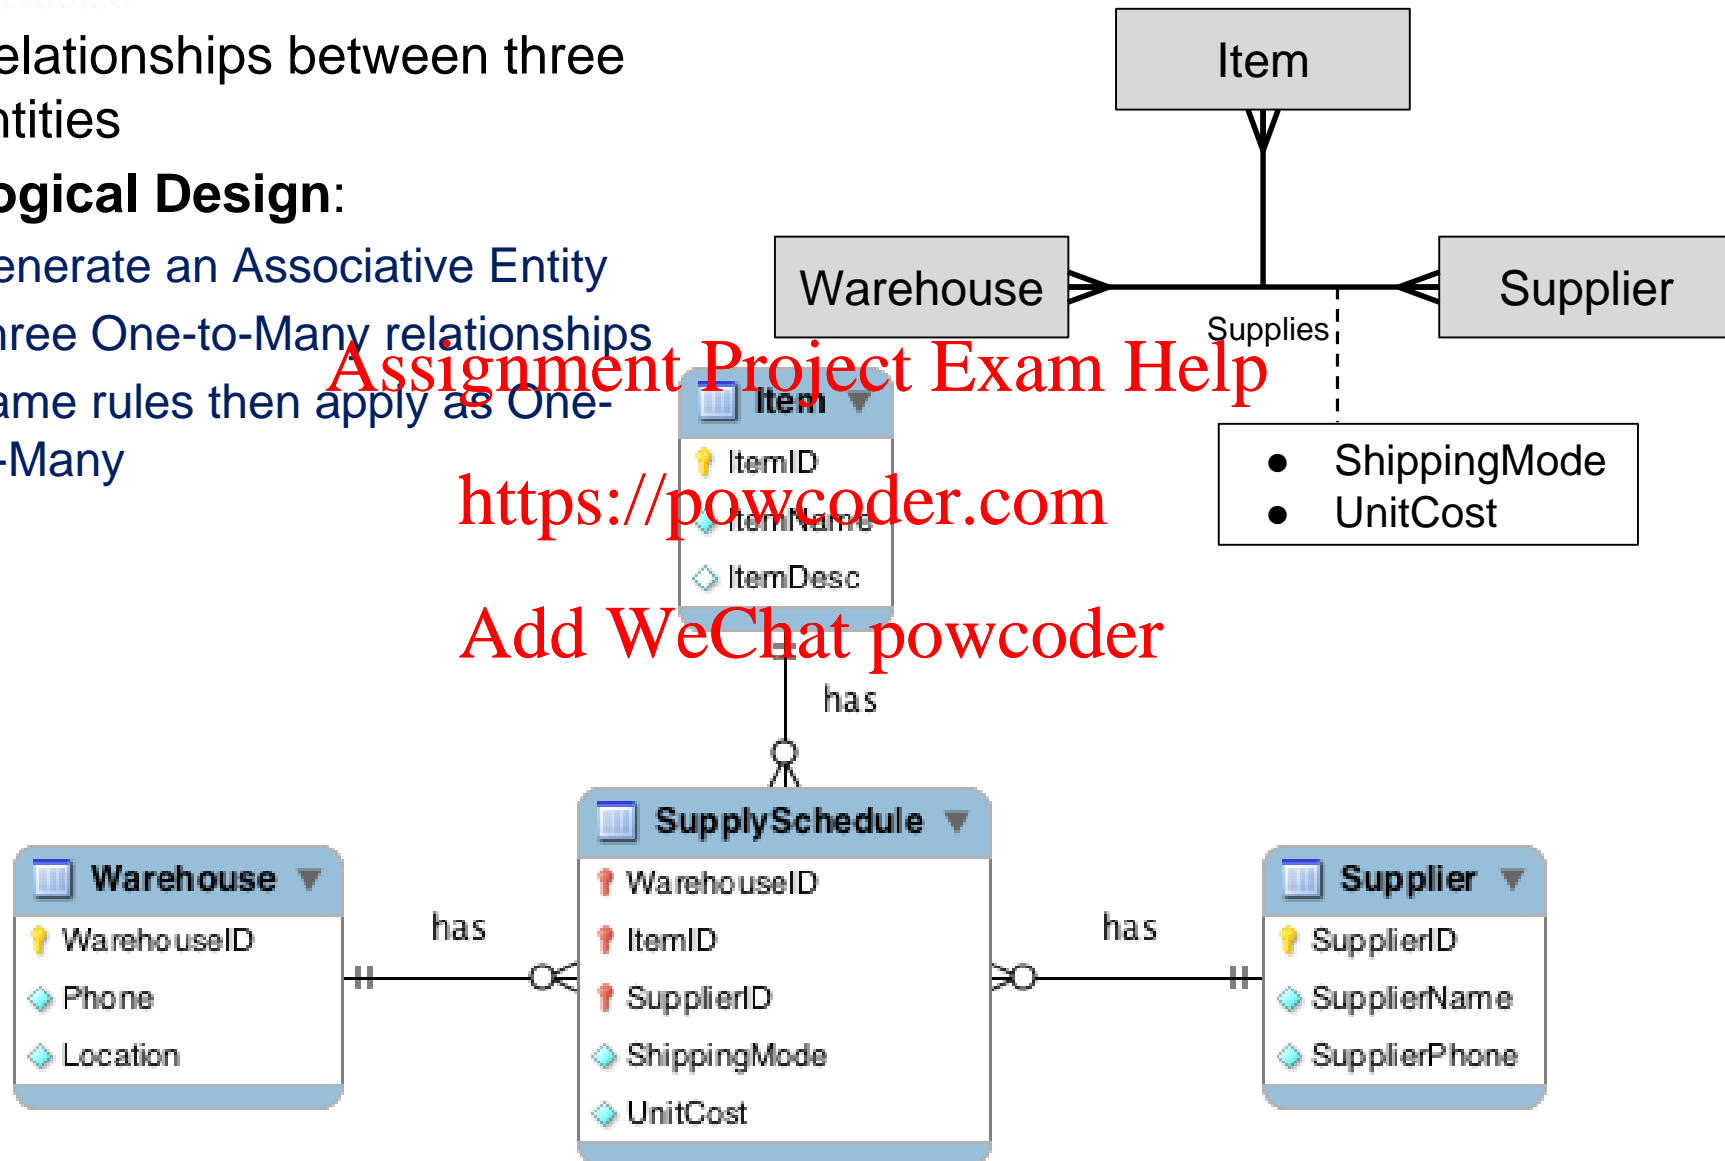

Assignment Project Exam Help
<https://powcoder.com>
 Add WeChat powcoder

- How to map an Identifying relationship
 - Map it the same way: Foreign Key goes into the relationship at the crow's foot end.
 - Only Difference is: The Foreign Key becomes **part of the Primary Key**

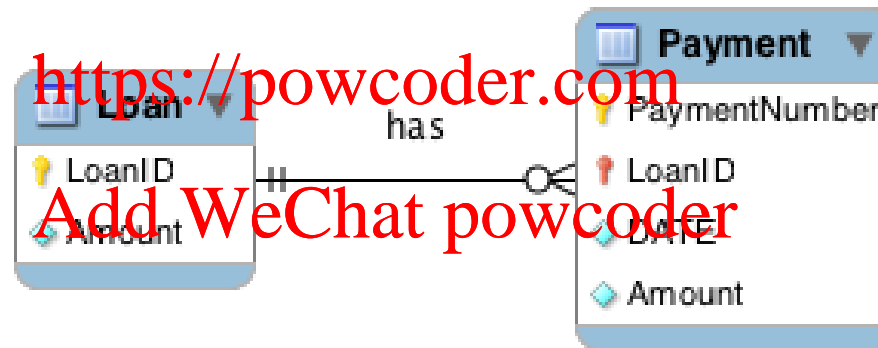

- **Logical Design:**
 - **Loan**(LoanID, Amount)
 - **Payment**(PaymentNumber, LoanID, Date, Amount)
- **Physical Design:** as per normal one-to-many



Concept Chen's not. Crow's foot not.

Entity		
Weak Entity		
Attribute		
Multivalued A.		
Composite A.		
Derived A.		
Key A.		
Weak (or Partial) Key A.		
Relationship		
Weak (Identifying) Relationship		

Relationship cardinalities and constraints

	Chen's notation	Crow's foot notation
Optional Many 0..m		
Mandatory Many 1..m		
Optional One 0..1		
Mandatory One 1..1		

BINARY Relationship Cardinalities

Here we just looked at cardinalities and omitted participation constraints (optional/mandatory) for clarity

Many to Many		
One to Many		
One to One		

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



- Need to be able to draw conceptual, logical and physical diagrams
 - Assignment 1: Conceptual Chen's pen and paper, Physical Crow's foot with MySQL Workbench
- Create table SQL statements

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



- Hands on Modelling
- Please read the case study prior to the lecture:
 - LMS/Week 3 Medicare study

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder