

Predicate Logic

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder
Fariba Sadri

Example: MSc regulations

- Passing the exams and the project implies passing the MSc.

Assignment Project Exam Help

<https://powcoder.com>

- You do not pass the MSc and you do not get a certificate if you do not pass the exams or you do not pass the project.

Let us take the following propositions for
formulating the MSc regulations.

<https://powcoder.com>

pe: pass exams

pp: pass project

pm: pass MSc

gc: get certificate

In propositional logic:

$pe \wedge pp \rightarrow pm$ Assignment Project Exam Help

$\neg pe \vee \neg pp \rightarrow \neg pm$ <https://powcoder.com>

Add WeChat powcoder


Not expressive enough if we want to consider individual students, to check who has passed the MSc, and who has not, for example.

Example

John:

passes the project
but not the exams:

<https://powcoder.com>

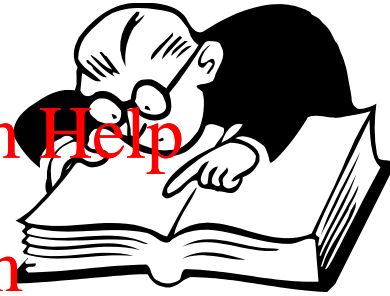

Mary:

Add WeChat powcoder

passes the exams

passes the project

Who passes the MSc?

Example

For all individuals X:

$(pe(X) \wedge pp(X) \rightarrow pm(X))$

Assignment Project Exam Help

<https://powcoder.com>

For all individuals X:

Add WeChat powcoder

**$(\neg pe(X) \vee \neg pp(X) \rightarrow$
 $\neg pm(X) \wedge \neg gc(X))$**

Assignment Project Exam Help
Increase the expressive power of the
Propositional Logic language by adding:

- **Predicates:** <https://powcoder.com> that take arguments (extending propositions)
Add WeChat powcoder
- **Parameters:** as arguments of the predicates
- **Variables:** as arguments of the predicates
- **Quantification**

More formal expression of the MSc regulations

$$\forall X (\text{pe}(X) \wedge \text{pp}(X) \rightarrow \text{pm}(X))$$

Assignment Project Exam Help

$$\forall X (\neg \text{pe}(X) \vee \neg \text{pp}(X) \rightarrow$$

<https://powcoder.com>

Add WeChat powcoder

$$\neg \text{pm}(X) \wedge \neg \text{gc}(X))$$

\forall : Universal Quantifier

Now given:

pe(mary) Assignment Project Exam Help

pp(mary)

Using

$\forall X (\text{pe}(X) \wedge \text{pp}(X) \rightarrow \text{pm}(X))$

With instance $X=\text{mary}$, i.e.

$\text{pe}(\text{mary}) \wedge \text{pp}(\text{mary}) \rightarrow \text{pm}(\text{mary})$

We can conclude:

pm(mary)



Also given:

pp(john)

\neg pe(john)

Using **Assignment Project Exam Help**

$\forall X(\neg \text{pe}(X) \vee \neg \text{pp}(X) \rightarrow \neg \text{pm}(X) \wedge \neg \text{gc}(X))$

With instance $X = \text{john}$, i.e.

$\neg \text{pe}(\text{john}) \vee \neg \text{pp}(\text{john}) \rightarrow$

$\neg \text{pm}(\text{john}) \wedge \neg \text{gc}(\text{john})$

We can conclude:

$\neg \text{pm}(\text{john}) \wedge \neg \text{gc}(\text{john})$

Another example

Every student has a tutor.
for all X
(if X is a student then
there is a Y such that Y is tutor of X)

$\forall X (\text{student}(X) \rightarrow \exists Y \text{tutor}(Y,X))$

\exists : Existential Quantifier

The Predicate Logic Language Alphabet:

- Logical connectives (same as propositional logic): $\wedge, \vee, \neg, \rightarrow, \leftrightarrow$
- Predicate symbols (as opposed to propositional symbols): a set of symbols each with an associated arity ≥ 0 .
- A set of constant symbols.
E.g. mary, john, 101, 10a, peter_jones
- Quantifiers \forall, \exists
- A set of variable symbols. E.g. X, Y, X1, YZ.

Arity

In the previous examples:

Predicate Symbol Arity

student <https://powcoder.com> 1

tutor Add WeChat powcoder 2

pm 1

pp 1

A predicate symbol with
arity = 0 is called a **nullary predicate** (it is
a proposition),
arity = 1 is called a **unary predicate**,
arity = 2 is called a **binary predicate**.
A predicate symbol with arity = n (usually $n > 2$)
is called an **n -ary predicate**.

Definition:

A **Term** is any constant or variable symbol.

<https://powcoder.com>

Add WeChat powcoder

Syntax of a grammatically correct sentence (wff) in predicate logic

- $p(t_1, \dots, t_n)$ is a wff if p is an n -ary predicate symbol and the t_i are terms.
- If W , $W1$, and $W2$ are wffs then so are the following:
 - $\neg W$
 - $W1 \wedge W2$
 - $W1 \vee W2$
 - $W1 \rightarrow W2$
 - $W1 \leftrightarrow W2$
 - $\forall X(W)$
 - $\exists X(W)$
 where X is a variable symbol.
- There are no other wffs.

From the description above you can see that propositional logic is a special case of predicate logic.

Assignment Project Exam Help

Predicate Logic: the predicates are n -ary, $n \geq 0$, and we have terms and quantifiers

<https://powcoder.com>
Add WeChat powcoder

Propositional Logic:
all the predicates are nullary

Convention used in most places in these notes:

Assignment Project Exam Help

- Predicate and constant symbols start with lower case letters.
- Variable symbols start with upper case letters.

<https://powcoder.com>

Add WeChat powcoder

Examples

The following are wffs:

1. $\neg \text{married}(\text{john})$

<https://powcoder.com>

2. $\forall X(\text{alive}(X) \wedge \text{adult_human}(X) \wedge \neg \text{married}(X) \rightarrow \text{single}(X) \vee \text{divorced}(X) \vee \text{widowed}(X))$

3. $\exists X (\text{bird}(X) \wedge \neg \text{fly}(X))$

The following are not wffs:

4. $\neg X$ Assignment Project Exam Help

<https://powcoder.com>

5. $\text{single}(X) \rightarrow \forall Y$ Add WeChat powcoder

6. $\forall \exists X (\text{bird}(X) \rightarrow \text{feathered}(X))$

Exercise

which of the following are wffs?

1. $\forall X p(X)$

2. $\forall X p(Y)$

3. $\forall X \exists Y p(Y)$

4. $q(X,Y,Z)$

5. $p(a) \rightarrow \exists q(a,X,b)$

6. $p(a) \vee p(a,b)$

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



$$7. \neg \neg \forall X r(X)$$

$$8. \exists X \exists Y p(X, Y)$$

$$9. \exists X, Y p(X, Y)$$

$$10. \forall X (\neg \exists Y p(X, Y))$$

$$11. \forall x (\neg \exists Y p(x, Y))$$

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Exercise



Formalise the following in predicate logic
using the following predicates (with their
more or less obvious meaning):

Assignment Project Exam Help

<https://powcoder.com>

lecTheatre/1, office/1, contains/2, lecturer/1,
has/2, same/2, phd/1, supervises/2, happy/1,
completePhd/1.

Add WeChat powcoder

1. 311 is a lecture theatre and 447 is an office. [Assignment Project Exam Help](https://powcoder.com)
2. Every lecture theatre contains a projector. <https://powcoder.com>
3. Every office contains a telephone and either a desktop or a laptop computer. [Add WeChat powcoder](https://powcoder.com)
4. Every lecturer has at least one office.
5. No lecturer has more than one office.

6. No lecturers share offices with anyone.
7. Some lecturers supervise PhD students and some do not.
<https://powcoder.com>
8. Each PhD student has an office, but all PhD students share their office with at least one other PhD student.
Add WeChat powcoder

9. A lecturer is happy if the PhD students
he/she supervises successfully complete
their PhD. <https://powcoder.com>
10. Not all PhD students complete their PhD.
Add WeChat powcoder

Note:

$\exists X$ p(X) states that there is **at least** one X
such that p is true of X.

Add WeChat powcoder

E.g. **$\exists X$ father(X, john)**

says John has **at least** one father (assuming
father(X, Y) is to be read as X is father of Y).

Exercise



Assuming a predicate $same(X, Y)$ that expresses that X and Y are the same individual, express the statement that John has exactly one father. You may also assume a binary predicate “father” as above.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder