

# Agile Software Development Practices SOF2412 / COMP9412


System Build Automation Assignment Project Exam Help

Dr. Basem Suleiman

<https://powcoder.com>

Add WeChat powcoder

School of Information Technologies

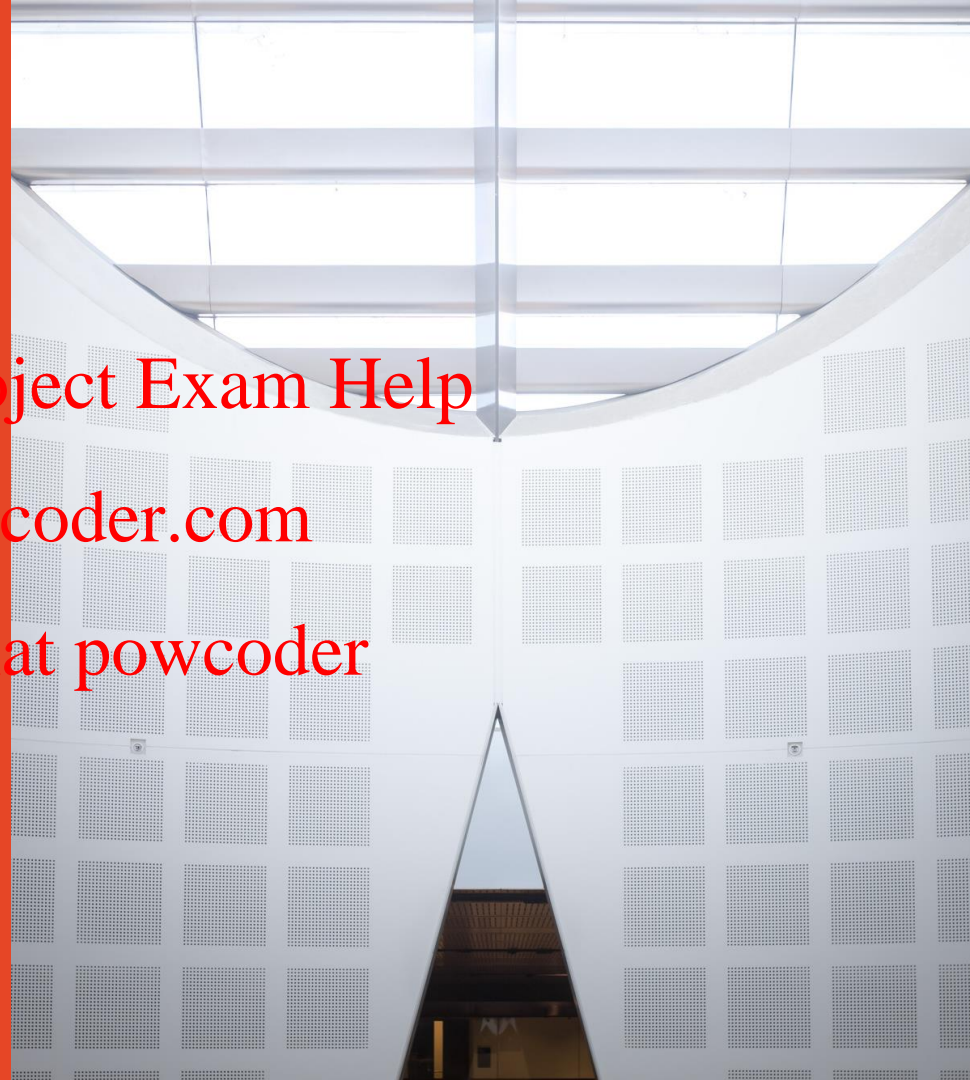

# Agenda

- Software Configuration Management

- System Building

- Agile System Building

Assignment Project Exam Help

<https://powcoder.com>

- Software Build Automation Tools

- Ant

- Maven

- Gradle

Add WeChat powcoder

# Software Configuration Management

Assignment Project Exam Help


<https://powcoder.com>

Add WeChat powcoder




# Revisit – Software Development Process Model

- Rational Unified Process (RUP) iterative and incremental approach to develop OO software systems

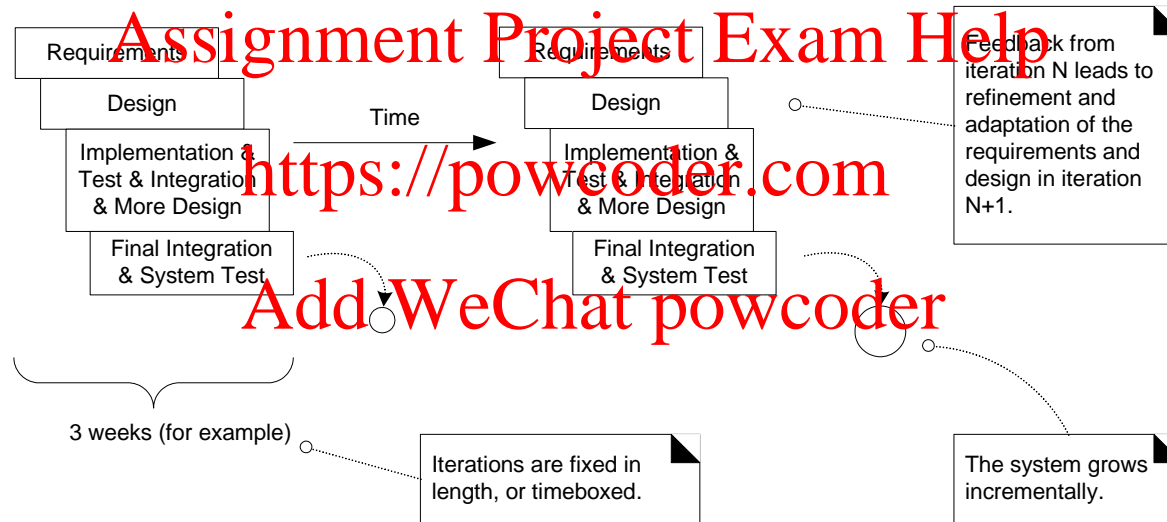

# Agile Development – Increments


- Software is incrementally developed

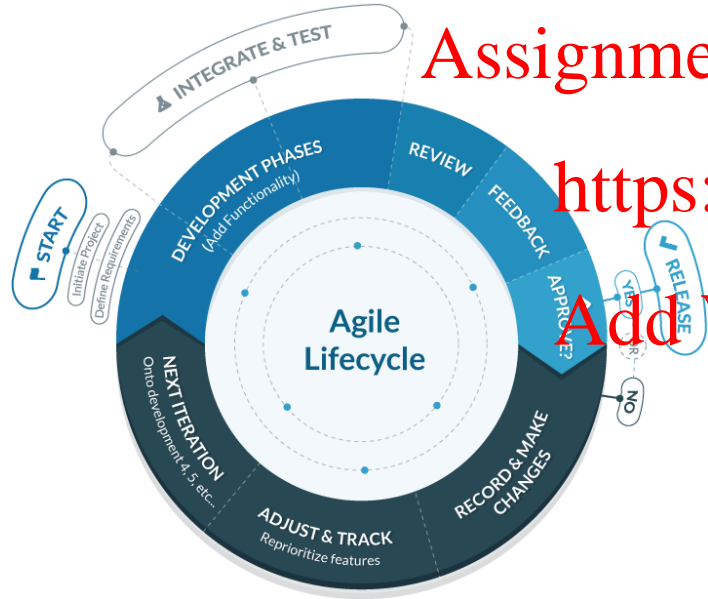

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

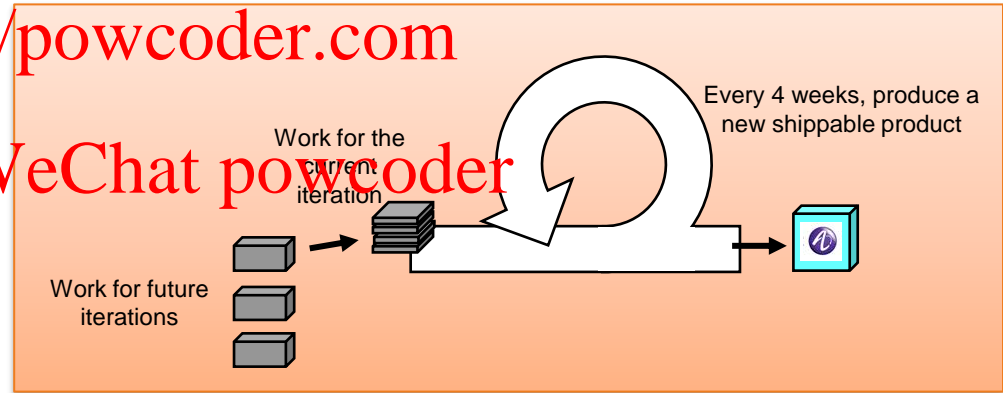

<https://blog.capterra.com/agile-vs-waterfall/>

# Configuration Management (CM)

- Configuration management (CM) is concerned with the policies, processes and tools for managing changing software systems

Assignment Project Exam Help


- Track of what changes and component versions incorporated into each system version

<https://powcoder.com>

Add WeChat powcoder

- Essential for team projects to control changes made by different developers

# Configuration Management Activities

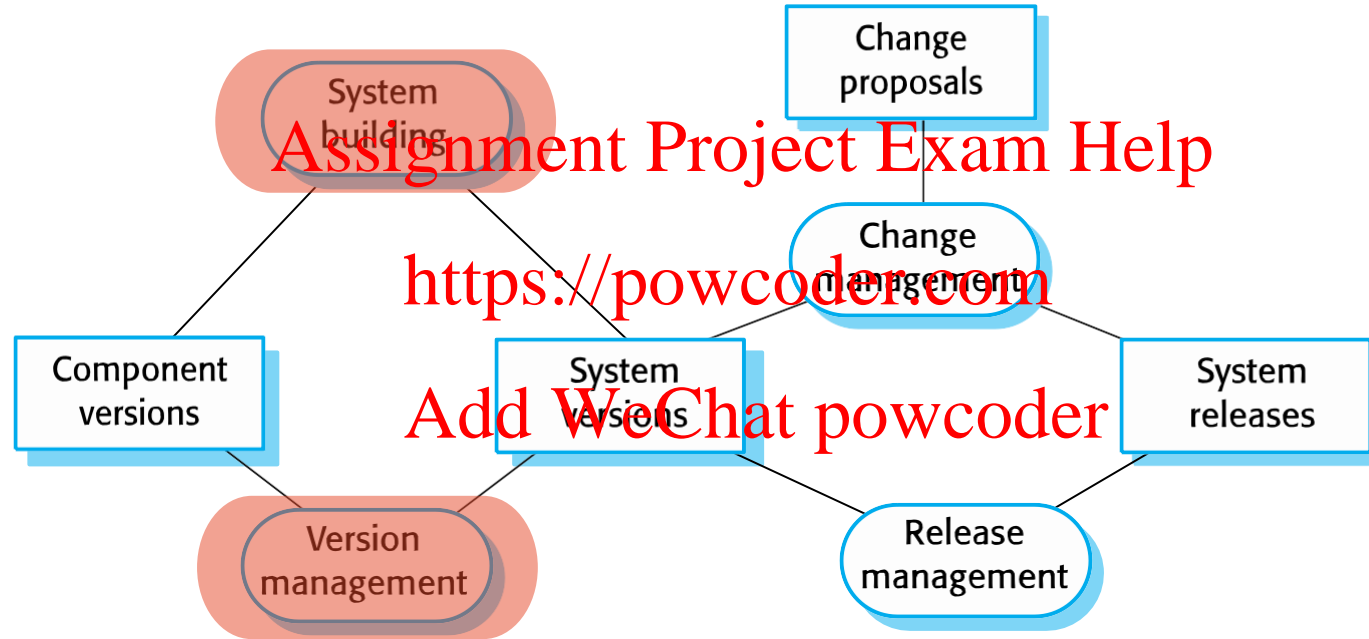

Assignment Project Exam Help

<https://powcoder.com>


Add WeChat powcoder

# Configuration Management Activities

- **System building:** assembling program components, data and libraries, then compiling these to create an executable system
- **Version management:** keeping track of the multiple versions of system components and ensuring that changes made to components by different developers do not interfere with each other
- **Change management:** keeping track of requests for changes to the software from customers and developers, working out the costs and impact of changes, and deciding the changes should be implemented
- **Release management:** preparing software for external release and keeping track of the system versions that have been released for customers



# Multi-version System Development

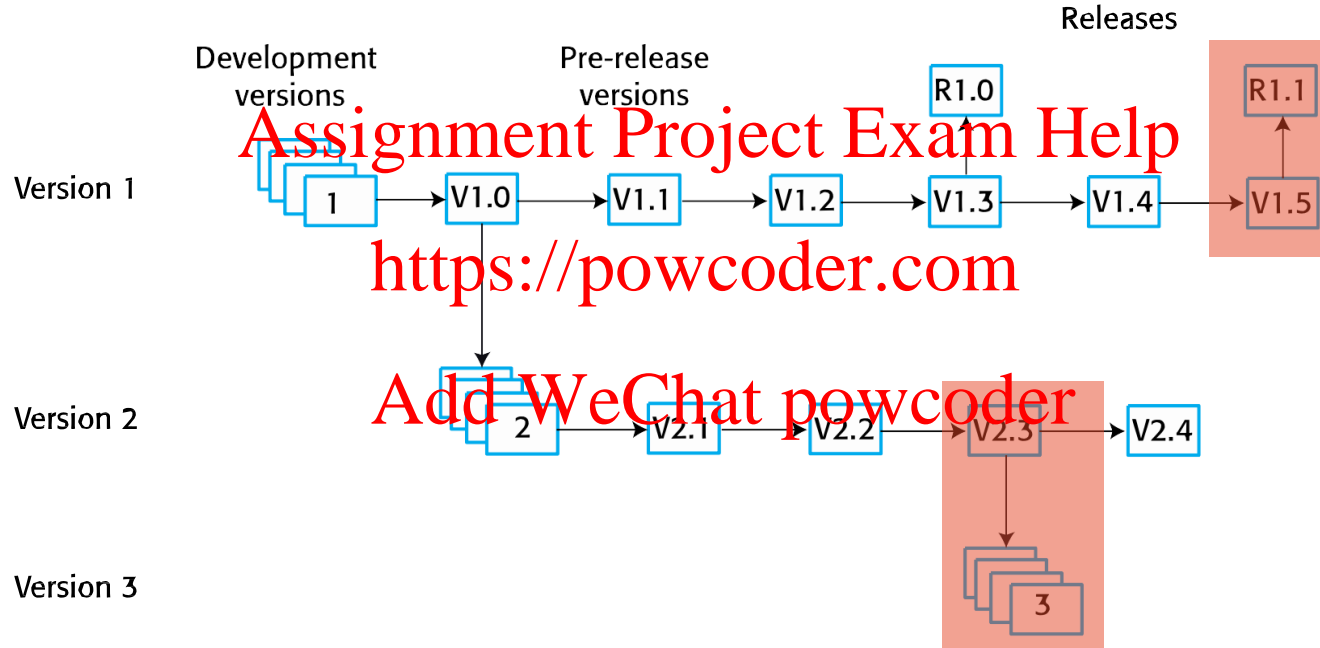

# Version Management (VM)

- Keep track of different versions of software components or configuration items and the systems in which these components are used

Assignment Project Exam Help

- Ensuring changes made by different developers to these versions do not interfere with each other


<https://powcoder.com>

- The process of managing code-lines and baselines

Add WeChat powcoder

# Baselines

Codeline (A)



Codeline (B)




Codeline (C)




Libraries and external components



Baseline - V1

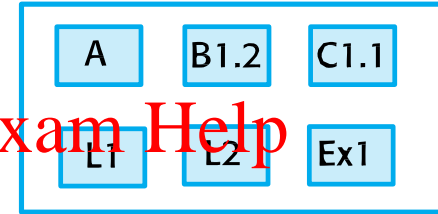

Baseline - V2

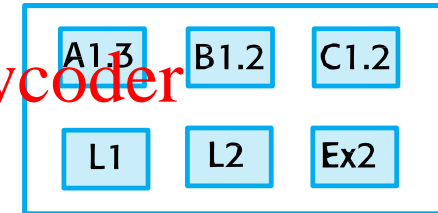

# Version Management – Codelines and Baselines

- Version Management can be thought of as the process of managing *codelines* and *baselines*
- **Codeline:** a sequence of versions of source code with later versions in the sequence derived from earlier versions
  - System's components often have different versions
- **Baseline:** a definition of a specific system
  - Specifies the component versions that are included in the system plus a specification of the libraries used, configuration files, etc.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Baselines

- Baselines may be specified using a configuration language, which allows you to define what components are included in a version of a particular system.
- Baselines are important because you often have to recreate a specific version of a complete system
  - E.g., individual system versions for different customers. If a customer reports bugs in their system one can recreate the version delivered to a specific customer

# Semantic Versioning (SemVer)

- Set of rules and requirements that determine how version numbers should be assigned and incremented for software being developed
  - Semantic numbers; numbers with meaning in relation to a certain version
- Why SemVer?
  - Helps managing versioning numbers in a meaningful and standard way
  - Managing dependencies: the bigger your system grows, the more packages/libraries/plugins you integrate into your software
- Given a version number **MAJOR.MINOR.PATCH**, increment the:
  1. **MAJOR** version when you make incompatible API changes,
  2. **MINOR** version when you add functionality in a backwards-compatible manner,
  3. **PATCH** version when you make backwards-compatible bug fixes.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

<https://semver.org/>

# Semantic Versioning – Example

Stage	Code	Rule	Example
New product	1 <sup>st</sup> release	Start with 1.0.0	1.0.0
Patch Release	Bug fixes, other minor changes	Increment the 3 <sup>rd</sup> digit	1.0.1
Minor Release	New features that do not break existing features	Increment the 2 <sup>nd</sup> digit	1.1.0
Major Release	Changes that break backward compatibility	Increment the 1 <sup>st</sup> digit	2.0.0

<https://docs.npmjs.com/getting-started/semantic-versioning>

More details on semantic versioning - <https://semver.org/>

# SemVer Example – Dependencies

- “**Firetruck**” library requires a semantically versioned package “**Ladder**”
- **Firetruck** uses **Ladder 3.1.0**.
- Assume that Ladder3.1.9 is released, can you safely use it safely to release it in your system?
- Assume that Ladder3.7.7 is released, can you safely use it safely to release it in your system?
- Assume that Ladder4.1.0 is released, can you safely use it safely to release it in your system?

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



# Agile Development in CM

- Agile development, where components and systems are changed several times per day, is impossible without using CM tools

## Assignment Project Exam Help


- The definitive versions of components are held in a shared project repository and developers copy these into their own workspace

<https://powcoder.com>

- They make changes to the code then use system building tools to create a new system on their own computer for testing. Once they are happy with the changes made, they return the modified components to the project repository.

Add WeChat powcoder

# System Building

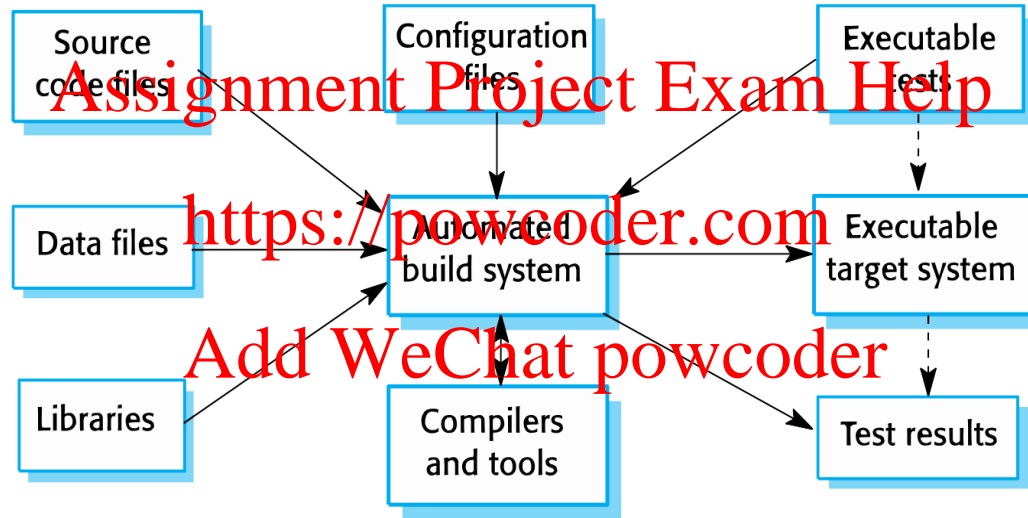

# System Building

- System building is the process of creating a complete, executable system by compiling and linking the system components, external libraries, configuration files, etc.
- System building tools and version management tools must communicate as the build process involves checking out component versions from the repo managed by the version management system.
- The configuration description used to identify a baseline is also used by the system building tool

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder


# Software Build Automation Tools

Ant, Maven, Gradle

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

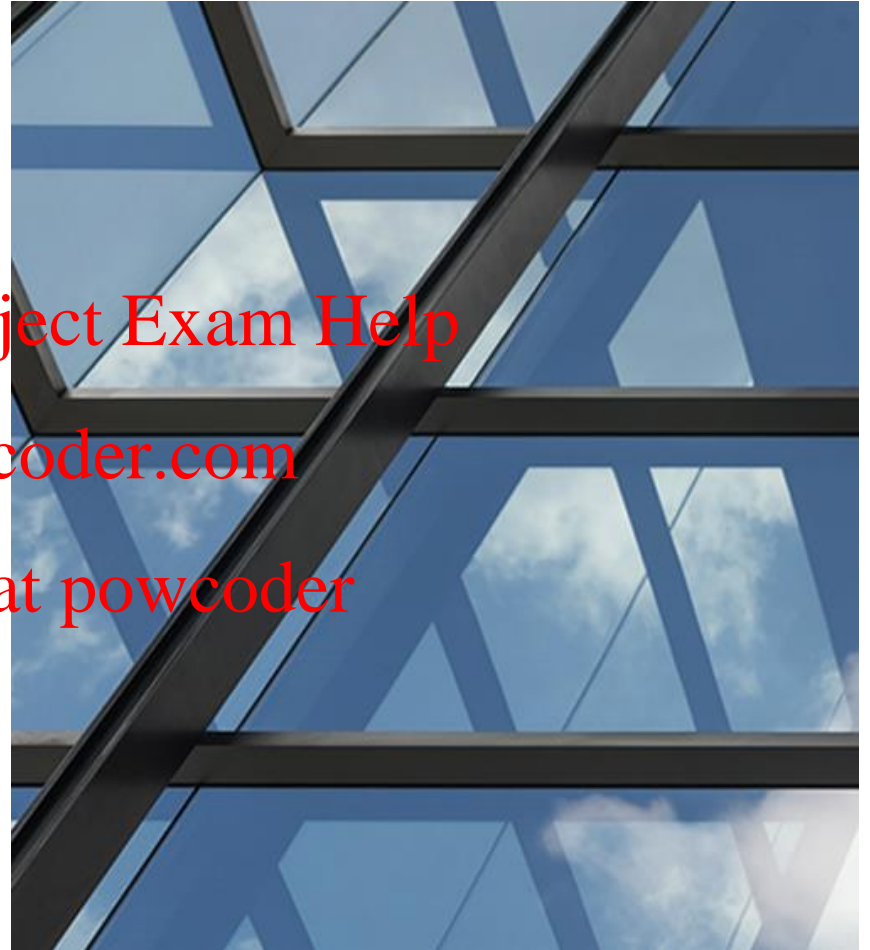

# Tools for Agile Development

Assignment Project Exam Help

<https://powcoder.com>  
Version Control Build Automation  
Add WeChat powcoder

# Build Tools – Apache Ant

- Java-based software build tool for automating build processes
  - Requires Java platform and best suited for building Java projects

Assignment Project Exam Help

<https://powcoder.com>

- Does not impose coding conventions
- Does not impose any heavyweight dependency management framework
- XML to describe the code build process and its dependencies
  - Default *build.xml*

Add WeChat powcoder



# Apache ANT – Example

```
1 <?xml version="1.0"?>
2 <project name="Hello" default="compile">
3   <target name="clean" description="remove intermediate files">
4     <delete dir="classes"/>
5   </target>
6   <target name="clean" depends="clean" description="remove all artifact files">
7     <delete file="hello.jar"/>
8   </target>
9   <target name="compile" description="compile the Java source code to class files">
10    <mkdir dir="classes"/>
11    <javac srcdir="." destdir="classes"/>
12  </target>
13  <target name="jar" depends="compile" description="create a Jar file for the application">
14    <jar destfile="hello.jar">
15      <fileset dir="classes" includes="**/*.class"/>
16      <manifest>
17        <attribute name="Main-Class" value="HelloProgram"/>
18      </manifest>
19    </jar>
20  </target>
21 </project>
```

[https://en.wikipedia.org/wiki/Apache\\_Ant](https://en.wikipedia.org/wiki/Apache_Ant)

# Apache ANT – Drawbacks

- Too flexible
- Complexity (XML based build files)
  - Need to specify a lot of things to make simple builds
- No standard structure/layout
  - Developers can create their own structure/layout of the project

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



# Apache Maven



- A build automation tool primarily for java projects
- XML-based description of the software being built
  - Dependencies on other external modules and components, the build order, directories, and required plug-ins
- Central repository (e.g., Maven 2)
- Coding by convention: it uses conventions over configuration for the build procedure
- Supported by Eclipse, IntelliJ, JBuilder, NetBeans
- Plugin-based architecture
  - Plugin for the .NET framework and native plugins for C/C++ are maintained

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Apache Maven – Minimal Example

- Maven projects are configured using Project Object Model (POM) stored in a *pom.xml* file

```
1 <project>
2   <!-- model version is always 4.0.0 for Maven 2.x POMs -->
3   <modelVersion>4.0.0</modelVersion>
4
5   <!-- project coordinates, i.e. a group of values which
6       uniquely identify this project -->
7
8   <groupId>com.mycompany.app</groupId>
9   <artifactId>my-app</artifactId>
10  <version>1.0</version>
11
12  <!-- <!-- dependencies -->
13
14  <dependencies>
15    <dependency>
16
17      <!-- coordinates of the required library -->
18
19      <groupId>junit</groupId>
20      <artifactId>junit</artifactId>
21      <version>3.8.1</version>
22
23      <!-- this dependency is only used for running and compiling tests -->
24
25      <scope>test</scope>
26
27    </dependency>
28  </dependencies>
29 </project>
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Apache Maven – Project Structure


– The command *mvn package* will

- compile all the Java files
- run any tests
- package the deliverable code and resources into target (e.g., target/my-app-1.0.jar)

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

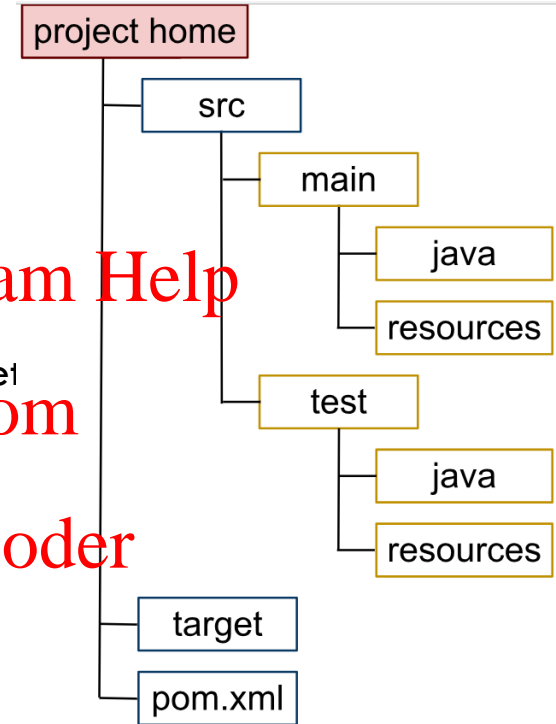

The Maven software tool auto-generated this directory structure for a Java project

[https://commons.wikimedia.org/wiki/File:Maven\\_CoC.svg#/media/File:Maven\\_CoC.svg](https://commons.wikimedia.org/wiki/File:Maven_CoC.svg#/media/File:Maven_CoC.svg)

# Apache Maven – Central Repository

- Maven uses default Central Repository that maintains required software artefacts (libraries, plug-ins) to manage dependencies
- E.g., project that is dependent on the Hibernate library needs to specify that in the pom.xml project file
  - Maven checks if the referenced dependency is already in the user's local repository
  - It references the dependency from the local repository or
  - Dynamically download the dependency and the dependencies that Hibernate itself needs (transitive dependency) and store them in the user's local repository
- You can configure repositories other than the default (e.g., company-private repository)

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Apache Maven – Drawbacks

- Again, XML-based files increase complexity (verbose)

Assignment Project Exam Help

- Rigid; developers are required to understand follow the conventions

<https://powcoder.com>

Add WeChat powcoder

# Gradle

- Build automation tool that builds upon the concepts of Ant and Maven
  - build conventions, and redefine conventions
  - Project descriptions using Groovy-based Domain Specific Language (DSL)
  - Tasks orders determined using a directed acyclic graph (DAC)
  - Multi-project builds
  - Incremental builds; up to date parts of the build tree do not need to be re-executed
  - Dependency handling (transitive dependency management)

<https://en.wikipedia.org/wiki/Gradle>

# Gradle – Groovy

- Gradle build files are Groovy scripts
- Groovy is a **Dynamic Language of the JVM**
  - Can be added as a plug-in
  - <https://powcoder.com>
  - Allows developers to write general programming tasks in the build files
  - **Add WeChat powcoder**
  - Relief developers from the lacking control flow in Ant or being forced into plug-in development in Maven to declare nonstandard tasks

<https://en.wikipedia.org/wiki/Gradle>

# Gradle – DSL

- Gradle also presents a DSL tailored to the task of building code
  - Not general-purpose or programming language
  - Gradle DSL contains the language needed to describe how to build Java code and create a WAR file from the output
- Gradle DSL is extensible through plug-ins

<https://en.wikipedia.org/wiki/Gradle>



# Gradle – Extensible DSL

- Extensibility using plug-ins (if it doesn't have the language to describe what you want your build to do)
  - E.g., describe how to run database migration scripts or deploy code to a set of cloud-based QA servers
- Gradle plug-ins allow:
  - Adding new task definitions
  - Change the behavior of existing tasks
  - Add new objects
  - Create keywords to describe tasks that depart from the standard Gradle categories

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Gradle Basics

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



# Gradle – Tasks

- **Task:** a single atomic piece of work for a build
  - e.g., compiling classes
- **Project:** a composition of several tasks
  - e.g., Creation of a jar file
- Each task has a **name**, which can be used to refer to the task within its owning project, and a **fully qualified path**, which is unique across all tasks in all projects

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Gradle – Task Actions

- A task is made up of sequence of **Action objects**

- *Action.execute(T)* to execute a task

Assignment Project Exam Help

- Add actions to a task

- *Task.doFirst()* or *Task.doLast()*

<https://powcoder.com>

- Task action exceptions
- Add WeChat powcoder

- **StopActionException** to abort execution of the action
  - **StopExecutionException** to abort execution of the task and continue to the next task

<https://en.wikipedia.org/wiki/Grade>

# Gradle – Simplest Build File Example

## Build.gradle

```
task helloWorld << {  
    println 'hello, world'  
}
```

Results of Hello World build file

```
$ gradle -q helloWorld  
hello, world
```

## Build.gradle

```
task hello << {  
    print 'hello, '  
}  
task world(dependsOn: hello) << {  
    println 'world'  
}
```

execute the second task, world

```
$ gradle -q world  
hello, world
```


Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Gradle – Simplest Build File for Java Example (1)

```
1 |  
2 package org.gradle.example.simple;  
3  
4 public class HelloWorld {  
5     public static void main(String args[]) {  
6         System.out.println("hello, world");  
7     }  
8 }
```

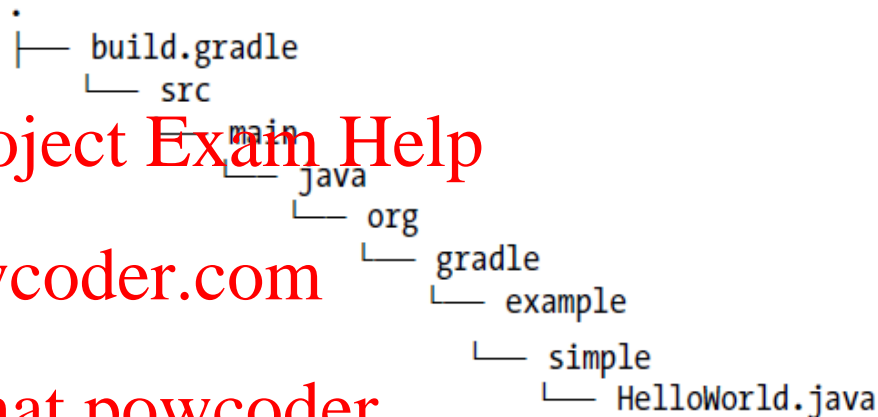

```
build.gradle x  
1 apply plugin: 'java'
```

Project layout of HelloWorld.java

Simplest possible Gradle file for java

# Gradle – Simplest Build File for Java Example (2)

## gradle build


Gradle automatically introduces number of tasks for us to run

Note:

- Class files generated and place in a directory
- Test report files (for unit test results)
- JAR built using the project directory

Run HelloWorld Java

```
$ java -cp build/classes/main/  
org.gradle.example.simple.HelloWorld  
hello, world
```

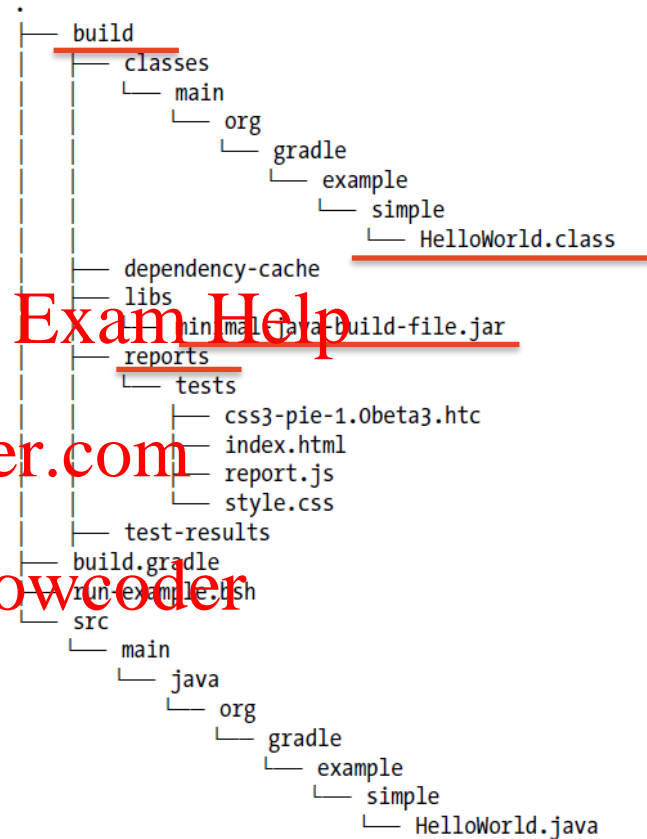

Project Layout of Hello World Java After Build

# Gradle – Build Lifecycle

- Phases of executing a build file in gradle:
- **Initialization:** projects are to participate in the build
- **Configuration:** task objects are assembled into an internal object model called Directed Acyclic Graph (DAG)
- **Execution:** build tasks are executed in the order required by their dependency relationship



# Gradle – Task Configuration

- **Configuration block:** to setup variables and data structures needed by the task action when it runs in the build
  - Make tasks rich object model populated with information about the build
  - Runs during gradle's configuration lifecycle when task actions executed
- **Closure:** a block of code specified by curly braces
  - Holding blocks of configuration and build actions

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Gradle – Task Configuration Example

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

build.gradle

```
1 .....
2 task initializeDatabase {
3     initializeDatabase << { println 'connect to database' }
4     initializeDatabase << { println 'update database schema' }
5     initializeDatabase { println 'configuring database connection' }
```

] Task actions

Configuration block

# Gradle – Tasks are Objects

- Every task is represented internally as an **object**
  - Task's methods and properties
  - Gradle creates an internal object model of the build before executing it
  - Each new task is of *DefaultTask* type - task type can be changed
  - *DefaultTask* contains functionality required for them to interface with Gradle project model

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Gradle – Methods of Default Task

Method	Description
<code>dependsOn(task)</code>	Adds a task as a dependency of the calling task. A depended-on task will always run before the task that depends on it
<code>doFirst(closure)</code>	Adds a block of executable code to the beginning of a task's action. During the execution phase, the action block of every relevant task is executed.
<code>doLast(closure)</code>	Appends behavior to the end of an action
<code>onlyIf(closure)</code>	Expresses a predicate which determines whether a task should be executed. The value of the predicate is the value returned by the closure.

# Gradle – dependsOn() Example

```
task loadTestData {  
    dependsOn createSchema  
}
```

// An alternate way to express the same dependency

```
task loadTestData {  
    dependsOn << createSchema  
}
```

// Do the same using single quotes (which are usually optional)

```
task loadTestData {  
    dependsOn 'createSchema'  
}
```

// Explicitly call the method on the task object

```
task loadTestData  
loadTestData.dependsOn createSchema
```

// A shortcut for declaring dependencies

```
task loadTestData(dependsOn: createSchema)
```

// Declare dependencies one at a time

```
task loadTestData {  
    dependsOn << compileTestClasses  
    dependsOn << createSchema  
}
```

// Pass dependencies as a variable-length list

```
task world {  
    dependsOn compileTestClasses, createSchema  
}
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Different ways to call the *dependsOn* method

# Gradle – doFirst() Example

```
task setupDatabaseTests << {  
    // This is the task's existing action  
    println 'load test data'  
}
```

```
setupDatabaseTests.doFirst {  
    println 'create schema'  
}
```

OR

```
task setupDatabaseTests << {  
    println 'load test data'  
}
```

```
setupDatabaseTests {  
    doFirst {  
        println 'create schema'  
    }  
}
```

*Call the doFirst on the task object (top) and inside task's configuration block (bottom)*

```
task setupDatabaseTests << {  
    println 'load test data'  
}  
  
setupDatabaseTests.doFirst {  
    println 'create database schema'  
}  
  
setupDatabaseTests.doFirst {  
    println 'drop database schema'  
}
```

**Repeated calls** to the doFirst method are additive.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Gradle – onlyIf() Example

```
task createSchema << {  
    println 'create database schema'  
}
```

```
task loadTestData(dependsOn: createSchema) << {  
    println 'load test data'  
}
```

```
loadTestData.onlyIf {  
    System.properties['load.data'] == 'true'  
}
```

– **onlyIf** method can be used to switch individual tasks on and off using any logic you can express in Groovy code

<https://powcoder.com>

– E.g., read files, call web services, check security credentials

Add WeChat powcoder

Using onlyIf method to do simple system property tests

# Gradle – Default Task's Properties

Method	Description
didWork	A Boolean property indicating whether the task completed successfully
enabled	A Boolean property indicating whether the task will execute.
path	A string property containing the fully qualified path of a task (levels; DEBUG, INFO, LIFECYCLE, WARN, QUIET, ERROR)
logger	A reference to the internal Gradle logger object
logging	The logging property gives us access to the log level
temporaryDir	Returns a File object pointing to a temporary directory belonging to this build file. It is generally available to a task needing a temporary place in to store intermediate results of any work, or to stage files for processing inside the task
description	a small piece of human-readable metadata to document the purpose of a task



# Gradle – Dynamic Properties

- Properties (other than built-in ones) can be assigned to a task
- A task object functions can contain other arbitrary property names and values we want to assign to it (do not use built-in property names)

Assignment Project Exam Help

<https://powcoder.com>  
Add WeChat powcoder

```
task copyFiles {  
    // Find files from wherever, copy them  
    // (then hardcode a list of files for illustration)  
    fileManifest = [ 'data.csv', 'config.json' ]  
}  
  
task createArtifact(dependsOn: copyFiles) << {  
    println "FILES IN MANIFEST: ${copyFiles.fileManifest}"  
}
```

# Gradle Task Types – Copy

- A copy task copies files from one place into another

```
task copyFiles(type: Copy) {  
    from 'resources'  
    into 'target'  
    include '**/*.xml', '**/*.txt',  
    '**/*.properties'  
}
```

**Note:** the *from*, *into*, and *include* methods are inherited from the Copy

# Gradle Task Types – Jar

- A *Jar* task creates a jar file from source files
- The *Java plug-in's jar* creates a task of this type
- It packages the main source set and resources together with a trivial manifest into a jar bearing the project's name in the build/libs directory
- highly customizable

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Gradle Task Types – Jar Example

```
apply plugin: 'java'
task customJar(type: Jar) {
    manifest {
        attributes firstKey: 'firstValue', secondKey: 'secondValue'
    }
    archiveName = 'hello.jar'
    destinationDir = file("${buildDir}/jars")
    from sourceSets.main.classes
}
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Gradle Task Types – JavaExec

- A *JavaExec* task runs a Java class with a `main()` method

Assignment Project Exam Help

- Tries to take the hassle away and integrate command-line Java invocations into your build

<https://powcoder.com>

Add WeChat powcoder

# Gradle Task Types – JavaExec Example

```
apply plugin: 'java'
repositories {
    mavenCentral()
}
dependencies {
    runtime 'commons-codec:commons-codec:1.5'
}
task encode(type: JavaExec, dependsOn: classes) {
    main = 'org.gradle.example.commandline.MetaphoneEncoder'
    args = "The rain falls mainly in the plain".split().toList()
    classpath sourceSets.main.classesDir
    classpath configurations.runtime
}
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Gradle Custom Task Types

- Gradle's built-in tasks might not be sufficient for all scenarios
- Gradle allows defining custom task types in:
  - The **Build File** and must extend the `DefaultTask` class or one of its descendants
  - The **Source Tree**: when the task's logic is significant has its own class hierarchy and might rely on external interface
    - When the custom task logic outgrows the build file, it can be migrated to the **buildSrc** directory at the project root
    - This directory is automatically compiled and added to the build classpath

# Gradle Custom Task Types – Build File

- Suppose your build file needs to issue arbitrary queries against a MySQL database

```
task createDatabase(type: MySQLTask) {  
    sql = 'CREATE DATABASE IF NOT EXISTS example'  
}  
  
task createUser(type: MySQLTask, dependsOn: createDatabase) {  
    sql = "GRANT ALL PRIVILEGES ON example.*  
        TO exampleuser@localhost IDENTIFIED BY 'password'"  
}  
  
task createTable(type: MySQLTask, dependsOn: createUser) {  
    username = 'exampleuser'  
    password = 'password'  
    database = 'example'  
    sql = 'CREATE TABLE IF NOT EXISTS users  
        (id BIGINT PRIMARY KEY, username VARCHAR(100))'  
}
```

\* Actual build tasks inherits MySQLType's properties and actions

```
class MySQLTask* extends DefaultTask {  
    def hostname = 'localhost'  
    def port = 3306  
    def sql  
    def database  
    def username = 'root'  
    def password = 'password'  
  
    TaskAction  
    def runQuery() {  
        def cmd  
        if(database) {  
            cmd = "mysql -u ${username} -p${password} -h ${hostname}  
                -P ${port} -e ${database} -e \"  
                \"  
        }  
        else {  
            cmd = "mysql -u ${username} -p${password} -h ${hostname} -P ${port} -e \"  
            \"  
        }  
        project.exec {  
            commandLine = cmd.split().toList() + sql  
        }  
    }  
}
```

Task's properties  
(Groovy idiom)

Task method will run  
when the task runs

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



# Gradle Custom Task Types – Source Tree

```
import org.gradle.api.DefaultTask
import org.gradle.api.tasks.TaskAction
```

```
class MySqlTask extends DefaultTask {
    def hostname = 'localhost'
    def port = 3306
    def sql
    def database
    def username = 'root'
    def password = 'password'

    @TaskAction
    def runQuery() {
        def cmd
        if(database) {
            cmd = "mysql -u ${username} -p${password} -h ${hostname}
                -P ${port} ${database} -e "
        }
        else {
            cmd = "mysql -u ${username} -p${password} -h ${hostname} -P ${port} -e "
        }
        project.exec {
            commandLine = cmd.split().toList() + sql
        }
    }
}
```

Similar to the code in the build script (previous example).

Assignment Project Exam Help

However, source tree provides a robust way for

elaborating on that simple task behavior, growing an object model, writing tests, and doing everything else we normally do when developing software

<https://powcoder.com>

Add WeChat powcoder

# Gradle – Plug-ins

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Java Plug-in



# Gradle – Java Plug-in

- A plug-in is an extension to Gradle which configures projects
- **Java plug-in** adds some tasks to your project which will compile and unit test your Java source code, and bundle into a JAR
  - Convention-based; default values for many aspects of the project are pre-defined
    - In your build.gradle: `apply plugin: 'java'`
  - Can customize projects if you do not follow the convention

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Gradle – Java Plug-in (Project Structure)

- Gradle expects to find production source code under ***src/main/java*** and test source code under ***src/test/java***
- Files under ***src/main/resources*** will be included in the JAR as resources
- Files under ***src/test/resources*** will be included in the classpath used to run tests
- All output files are created under the build directory, with the JAR file will end up in the ***build/libs*** directory

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

[https://docs.gradle.org/current/userguide/java\\_plugin.html](https://docs.gradle.org/current/userguide/java_plugin.html)

# Gradle – Java Plug-in (Project Build)

- *Java plug-in* will add a few tasks
- Run *gradle tasks* to list the tasks of a project
- Gradle will compile and create a JAR file containing main classes and resources – run *gradle build*

```
> gradle build
> Task :compileJava
> Task :processResources
> Task :classes
> Task :jar
> Task :assemble
> Task :compileTestJava
> Task :processTestResources
> Task :testClasses
> Task :test
> Task :check
> Task :build

BUILD SUCCESSFUL in 0s
6 actionable tasks: 6 executed
```

*Example of output of gradle build*

# Gradle – Java Plug-in (Project Build)

- **clean**
  - Deletes the build directory, removing all built files
- **assemble**
  - Compiles and jars your code, but does not run the unit tests
  - Other plugins add more artefacts to this task;
- **check**
  - Compiles and tests your code
  - Other plugins add more checks to this task; e.g., *checkstyle* plugin to run checkstyle against your source code

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# Gradle Java Plug-in – Dependencies

- Reference external JAR files that the project is dependent on:
  - JAR files in a repository (artefacts/dependencies needed for a project)
  - Different repositories types are supported in Gradle (see [Gradle Repository Types](#))
  - Example (using Central Maven Repository)

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

```
build.gradle
1 ....
2 repositories {
3     mavenCentral()
4 }
5 dependencies {
6     compile group: 'commons-collections', name: 'commons-collections', version: '3.2.2'
7     testCompile group: 'junit', name: 'junit', version: '4.+'
8 }
```

production classes have a compile-time dependency on commons collections

Test classes have a compile-time dependency on junit

[https://docs.gradle.org/current/userguide/java\\_plugin.html](https://docs.gradle.org/current/userguide/java_plugin.html)

# Gradle – Java Plug-in (Project Customization)

- The Java plug-in adds many properties with default values to a project
- Customize default values to suit project needs
- Use *Gradle properties* to list properties of a project

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

```
build.gradle
1 ...|
2 version = '1.0'
3 jar {
4     manifest {
5         attributes 'Implementation-Title': 'Gradle Quickstart',
6                   'Implementation-Version': version
7     }
8 }
```

[https://docs.gradle.org/current/userguide/java\\_plugin.html](https://docs.gradle.org/current/userguide/java_plugin.html)



# Gradle – Java Plug-in (Publish JAR file)

- Artefacts such as JAR files can be published to repositories

- To publish a JAR file

- `gradle uploadArchives`

```
build.gradle
1  ...
2  uploadArchives {
3      repositories {
4          flatDir {
5              dirs 'repos'
6          }
7      }
8  }
```

<https://powcoder.com>

Add WeChat powcoder

Publish a JAR file to a local repository

[https://docs.gradle.org/current/userguide/java\\_plugin.html](https://docs.gradle.org/current/userguide/java_plugin.html)

# Gradle – Complete Build file for Java

build.gradle

```
apply plugin: 'java'
apply plugin: 'eclipse'
```

← Eclipse plug-in to create the Eclipse-specific descriptor files, like .project

```
version = '1.0'
```

```
jar {
```

```
    manifest {
```

```
        attributes 'Implementation-Title': 'Gradle quickstart',
                   'Implementation-Version': version
    }
```

```
    }
```

```
}
```

```
repositories {
```

```
    mavenCentral()
```

```
}
```

```
dependencies {
```

```
    compile group: 'commons-collections', name: 'commons-collections', version: '3.2.2'
```

```
    testCompile group: 'junit', name: 'junit', version: '4.11'
```

```
}
```

```
test {
```

```
    systemProperties 'property': 'value'
```

```
}
```

```
uploadArchives {
```

```
    repositories {
```

```
        flatDir {
```

```
            dirs 'repos'
```

```
        }
```

```
    }
```

```
}
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

# References

- Ian Sommerville 2016. Software Engineering: Global Edition (3<sup>rd</sup> edition). Pearson, Englad
- Wikipedia, Apache Ant, [https://en.wikipedia.org/wiki/Apache\\_Ant](https://en.wikipedia.org/wiki/Apache_Ant)
- Wikipedia, Apache Maven, [https://en.wikipedia.org/wiki/Apache\\_Maven](https://en.wikipedia.org/wiki/Apache_Maven)
- Apache Maven, <https://maven.apache.org/>
- Gradle documentation, <https://docs.gradle.org/current/userguide/>
- Tim Berglund and Matthew McCullough. 2011. Building and Testing with Gradle (1st ed.). O'Reilly Media, Inc.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder