

Parallel Computing with GPUs: CUDA Streams

Assignment Project Exam Help

<https://powcoder.com>

Dr Paul Richmond

Add WeChat powcoder

<http://paulrichmond.shef.ac.uk/teaching/COM4521/>



The
University
Of
Sheffield.



GPU
RESEARCH
CENTER

☐ Synchronous and Asynchronous execution

☐ CUDA Streams

☐ Synchronisation

☐ Multi GPU Programming

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Blocking and Non-Blocking Functions

☐ Synchronous vs Asynchronous

☐ Synchronous:

- ☐ Blocking call

- ☐ Executed sequentially

☐ Asynchronous:

- ☐ Non-Blocking call

- ☐ Control returns to host thread

☐ Asynchronous Advantages

- ☐ Overlap execution and data movement on different devices

- ☐ Not just GPU and CPU

- ☐ Also consider disk or network (low latency)

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Asynchronous Behaviour so far...

❑ CPU pipeline

- ❑ Programmer writes code considering it to be synchronous operations
- ❑ Compiler generates overlapping instructions to maximise pipe utilisation
- ❑ Same end result as non overlapping instructions (hopefully)

❑ CPU threading

- ❑ Similar threads execute asynchronously on different multiprocessors
- ❑ Requires careful consideration of race conditions
- ❑ OpenMP gives us critical sections etc. to help with this

❑ CUDA Warp execution

- ❑ Threads in the same warp execute instructions synchronously
- ❑ Warps on a SMP are interleaved and executed asynchronously
- ❑ Careful use of `__syncthreads()` to ensure no race conditions

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

CUDA Host and Device

- ❑ Most CUDA Host functions are synchronous (blocking)
- ❑ Exceptions (synchronous with the host)
 - ❑ Kernel calls
 - ❑ `cudaMemcpy` within a device (`cudaMemcpyDeviceToDevice`)
 - ❑ `cudaMemcpy` host to device or less than 64KB
 - ❑ *Asynchronous memory copies and streams... (this lecture)*
- ❑ Asynchronous functions will block when
 - ❑ `deviceSynchronize()` is called
 - ❑ A new kernel must be launched (implicit synchronisation)
 - ❑ Memory must be copied to or from the device (implicit synchronisation)

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



Asynchronous Execution

```
//copy data to device
cudaMemcpy(d_a, a, size * sizeof(int), cudaMemcpyHostToDevice);
cudaMemcpy(d_b, b, size * sizeof(int), cudaMemcpyHostToDevice);

//execute kernels on device
kernelA<<<blocks, threads>>>(d_a, d_b);
kernelB<<<blocks, threads>>>(d_b, d_c);

//copy back result data
cudaMemcpy(c, d_c, size * sizeof(int), cudaMemcpyDeviceToHost);
```

Assignment Project Exam Help

<https://powcoder.com>

Is there any Asynchronous Execution? Add WeChat powcoder

Asynchronous Execution

```
//copy data to device
cudaMemcpy(d_a, a, size * sizeof(int), cudaMemcpyHostToDevice);
cudaMemcpy(d_b, b, size * sizeof(int), cudaMemcpyHostToDevice);

//execute kernels on device
kernelA<<<blocks, threads>>>(d_a, d_b);
kernelB<<<blocks, threads>>>(d_b, d_c);

//copy back result data
cudaMemcpy(c, d_c, size * sizeof(int), cudaMemcpyDeviceToHost);
```

- Completely Synchronous

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

time





Asynchronous Execution

```
//copy data to device
cudaMemcpy(dev_a, a, size * sizeof(int), cudaMemcpyHostToDevice);
cudaMemcpy(dev_b, b, size * sizeof(int), cudaMemcpyHostToDevice);

//execute kernel on device
addKernel<<<blocks, threads>>>(dev_c, dev_a, dev_b);

//host execution
myCPUFunction();

//copy back result data
cudaMemcpy(c, dev_c, size * sizeof(int), cudaMemcpyDeviceToHost);
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Is there any Asynchronous Execution?

Asynchronous Execution

```
//copy data to device
cudaMemcpy(dev_a, a, size * sizeof(int), cudaMemcpyHostToDevice);
cudaMemcpy(dev_b, b, size * sizeof(int), cudaMemcpyHostToDevice);

//execute kernel on device
addKernel<<<blocks, threads>>>(dev_c, dev_a, dev_b);

//host execution
myCPUFunction();

//copy back result data
cudaMemcpy(c, dev_c, size * sizeof(int), cudaMemcpyDeviceToHost);
```


Asynchronous GPU and CPU Execution

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

time

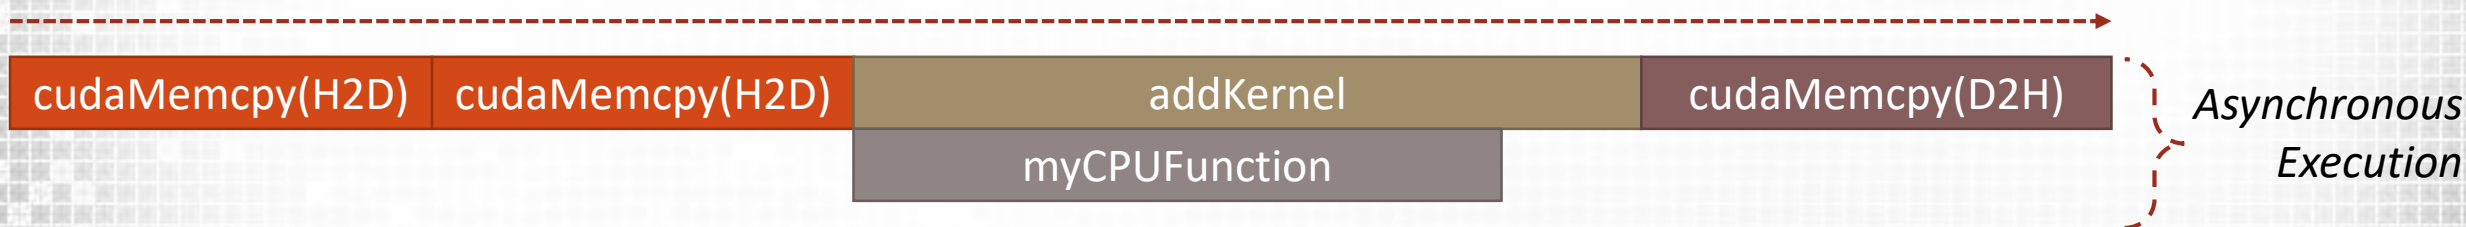

❑ Synchronous and Asynchronous execution

❑ CUDA Streams

❑ Synchronisation

❑ Multi GPU Programming

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Concurrency through Pipelining

- ❑ Most CUDA Devices have an asynchronous Kernel execution and Copy Engine
 - ❑ Allows data to be moved at the same time as execution
 - ❑ Maxwell and Kepler cards have dual copy engines
 - ❑ PCIe upstream (D2H)
 - ❑ PCIe downstream (H2D)
 - ❑ Ideally we should hide data movement with execution
- ❑ All devices from Compute 2.0+ are able to execute kernels simultaneously
 - ❑ Allows task parallelism on GPU
 - ❑ Each kernel represents a different task
 - ❑ Very useful for smaller problem sizes

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Streams

- ❑ CUDA Streams allow operations to be queued for the GPU device
 - ❑ All calls are asynchronous by default
 - ❑ The host retains control
 - ❑ Device takes work from the streams when it is able to do so
- ❑ Operations in a stream are ordered and can not overlap (FIFO)
- ❑ Operations in different streams are unordered and can overlap

```
// create a handle for the stream
cudaStream_t stream;
//create the stream
cudaStreamCreate(&stream);

//do some work in the stream ...

//destroy the stream (blocks host until stream is complete)
cudaStreamDestroy(stream);
```


Work Assignment for Streams

```
//execute kernel on device in specified stream  
fooKernel<<<blocks, threads, 0, stream>>>();
```

❑ Kernel Execution is assigned to streams as 4th parameter of kernel launch

Assignment Project Exam Help

❑ Care must be taken with the default stream

❑ Only stream which is synchronous with others!


<https://powcoder.com>

```
fooKernel<<<blocks, threads, 0>>>();  
barKernel<<<blocks, threads, 0>>>();
```

Add WeChat powcoder

```
fooKernel<<<blocks, threads, 0>>>();  
barKernel<<<blocks, threads, 0, stream>>>();
```

```
fooKernel<<<blocks, threads, 0, stream1>>>();  
barKernel<<<blocks, threads, 0, stream2>>>();
```

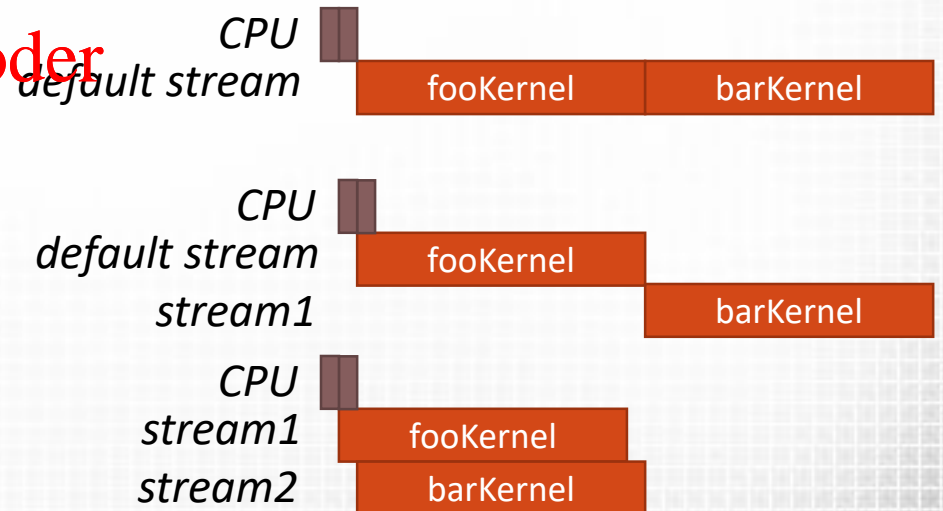

Asynchronous Memory

- ❑ CUDA is able to asynchronously copy data to the device
 - ❑ Only if it is Pinned (Page-locked) memory
- ❑ Paged Memory
 - ❑ Allocated using `malloc ()` on host and released using `free (...)`
- ❑ Pinned Memory
 - ❑ Can not be swapped (paged) out by the OS
 - ❑ Has higher overhead for allocation
 - ❑ Can reach higher bandwidths for large transfers
 - ❑ Allocated using `cudaMallocHost (...)` and released using `cudaFreeHost (...)`
 - ❑ Can also pin non pinned memory using `cudaHostRegister (...)` / `cudaHostUnregister (...)`
 - ❑ Very slow

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Concurrent Copies in Streams

❑ Memory copies can be replaced with `cudaMemcpyAsync()`

❑ Requires an extra argument (a stream)

❑ Places transfer into the stream and returns control to host

❑ Conditions of use **Assignment Project Exam Help**

❑ Must be pinned memory

❑ Must be in the non-default stream **<https://powcoder.com>**

```
int *h_A, *d_A;
cudaStream_t stream1;

cudaStreamCreate(&stream1);
cudaMallocHost(&h_A, SIZE);
cudaMalloc(&d_A, SIZE);
initialiseA(h_A);

cudaMemcpyAsync(d_A, h_A, SIZE, cudaMemcpyHostToDevice, stream1);

//work in other streams ...


cudaStreamDestroy(stream1);
```

Add WeChat powcoder

Stream Scheduling


- ❑ CUDA operations dispatched to hardware in sequence that they were issued
 - ❑ Hence issue order is important (FIFO)
- ❑ Kernel and Copy Engine (x2) have different queues
- ❑ Operations are de-queued if
 1. Preceding call in the same stream have completed
 2. Preceding calls in the same queue have been dispatched, and
 3. Resources are available
 - ❑ i.e. kernels can be concurrently executed if in different streams
- ❑ Blocking operations (e.g. `cudaMemcpy` will block all streams)

Issue Ordering

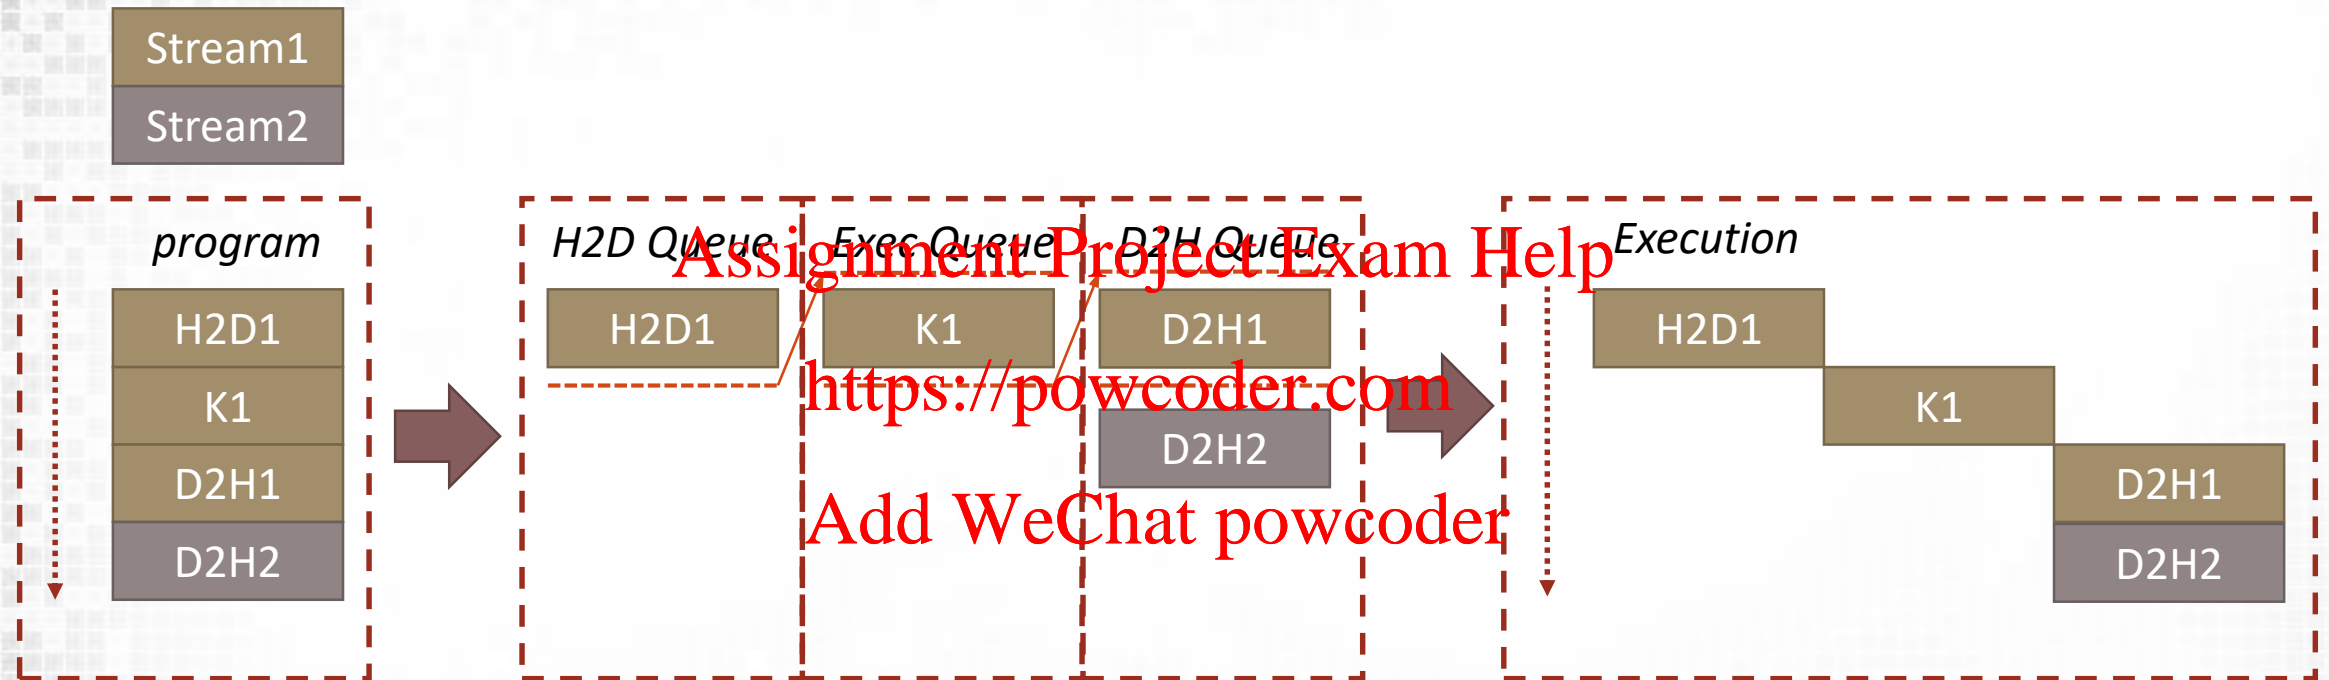

- ❑ No Concurrency of D2H2
- ❑ Blocked by D2H1
 - ❑ Issued first (FIFO)

Issue Ordering

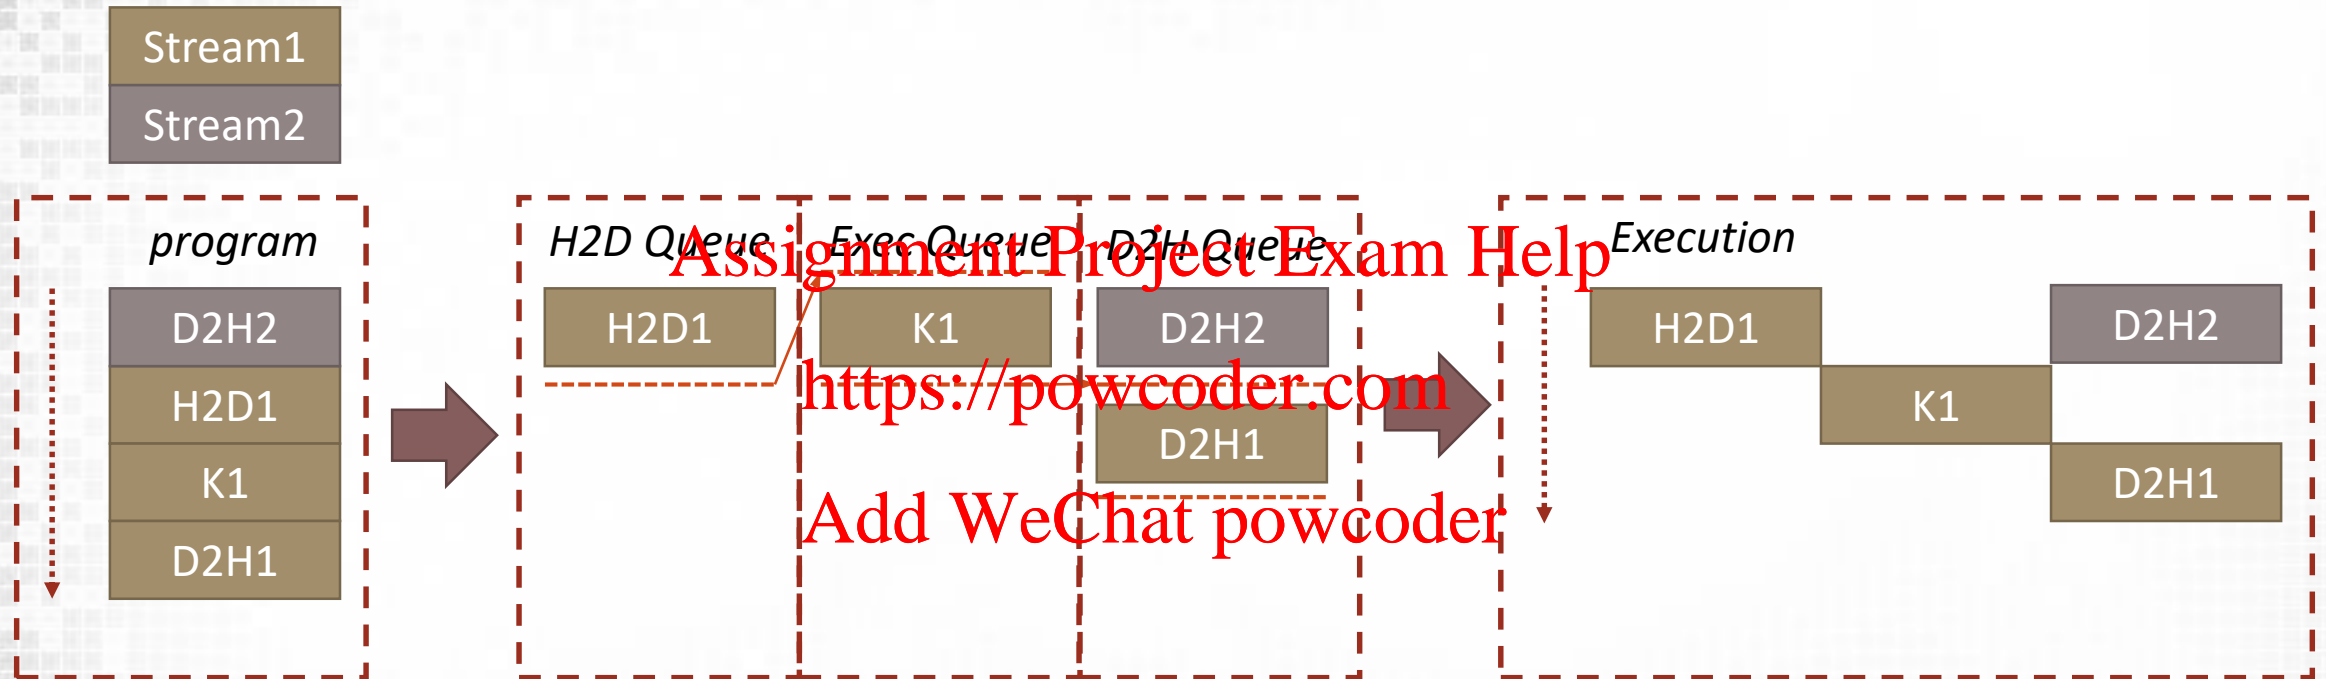


❑ Concurrency of D2H2 and H2D1





Issue Ordering (Kernel Execution)

Stream1
Stream2

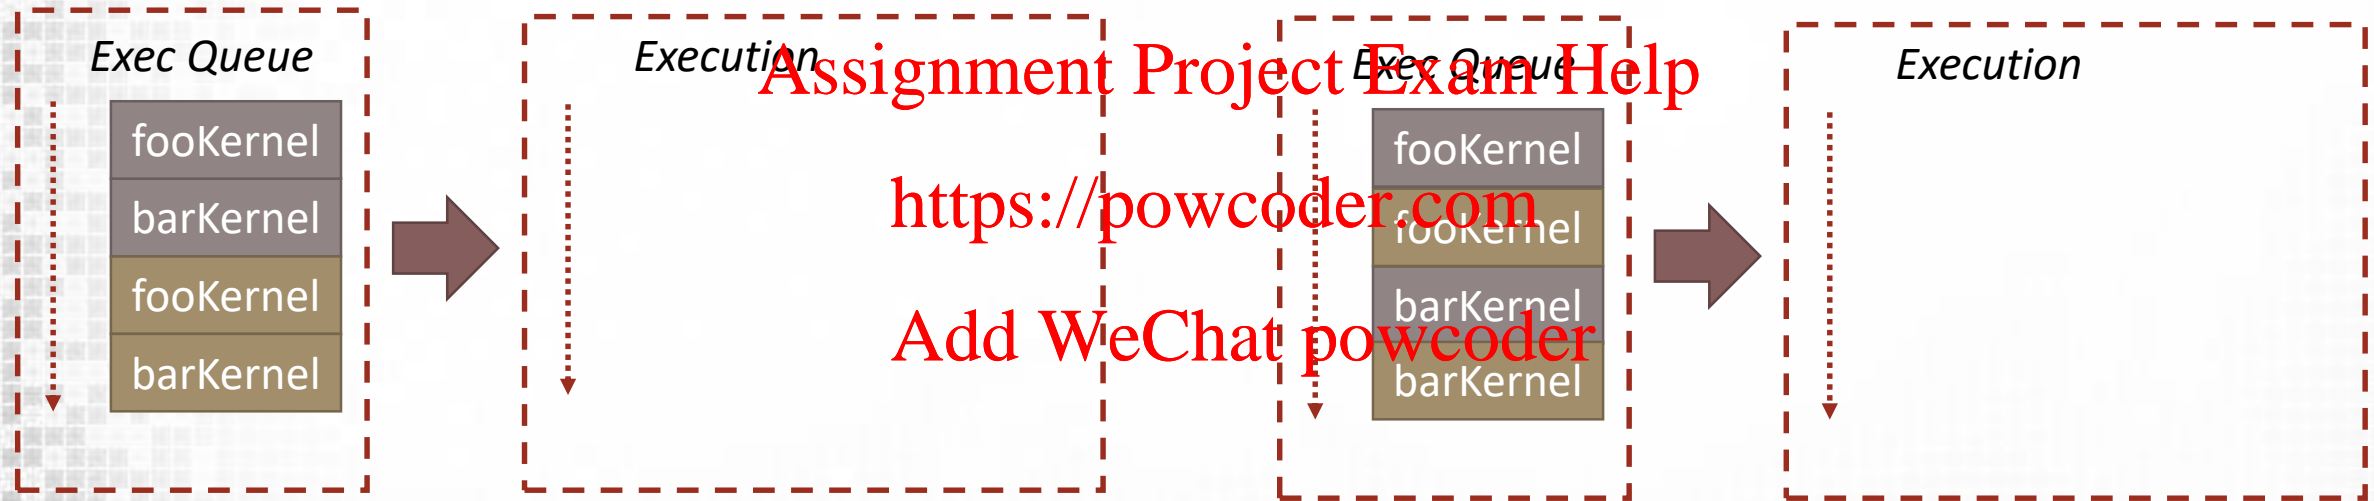

❑ Which has best Asynchronous execution?

Issue Ordering (Kernel Execution)

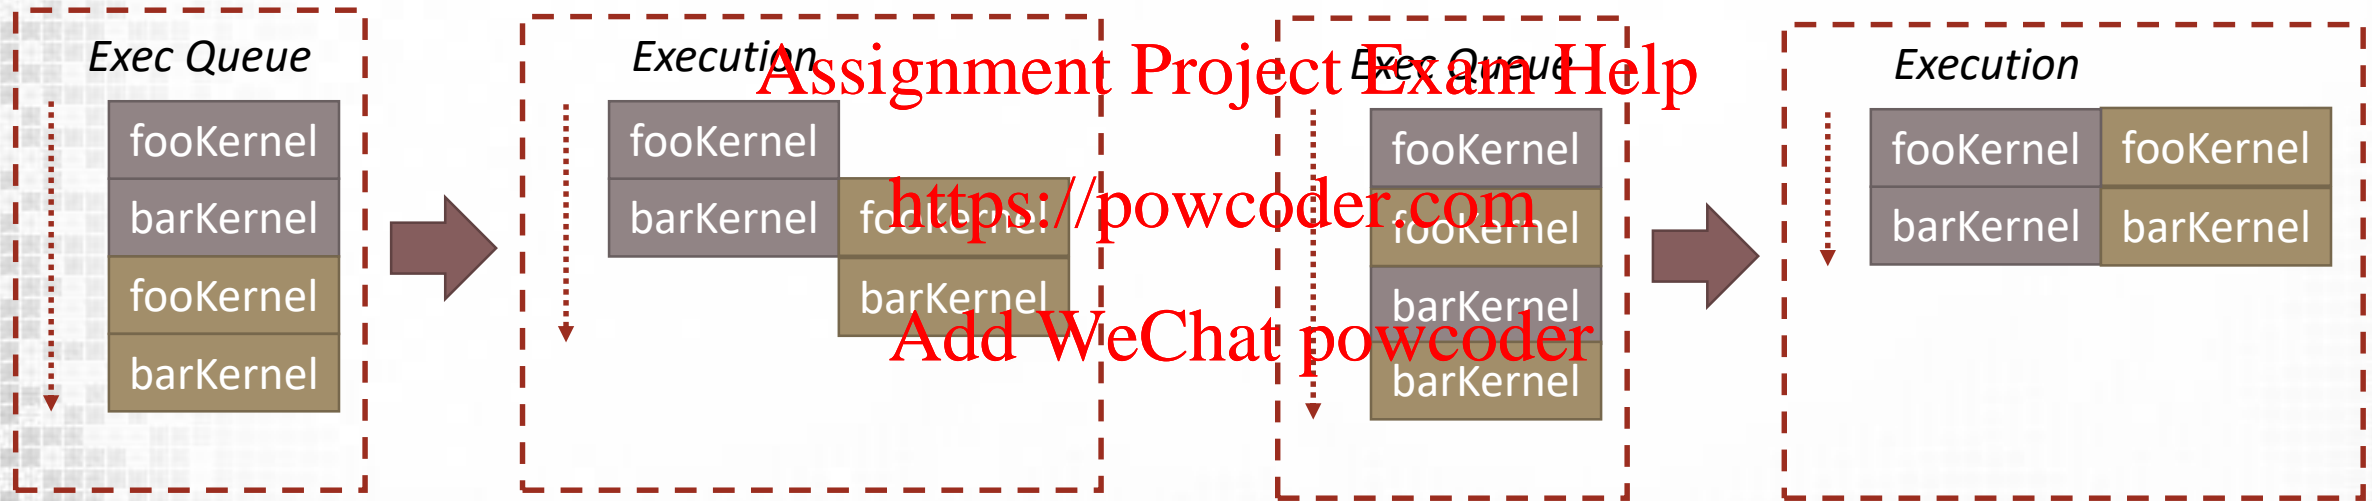


- ❑ barKernel can't be removed from queue until fooKernel has completed
- ❑ Blocks fooKernel

- ❑ Both fooKernels can be concurrently executed
- ❑ Both barKernels concurrently executed

Levels of Concurrency




Fully Synchronous (Serial Execution)

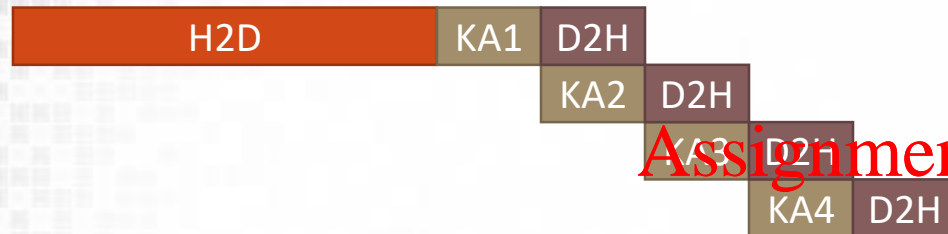

2-way Concurrency

☐ H2D and D2H not concurrent

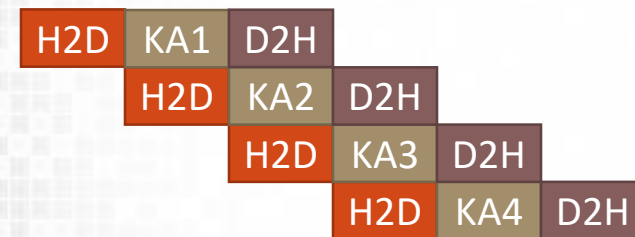


3-way Concurrency

☐ Both Copy Engines active

☐ Execution Engine active

☐ May or may not be fully utilised

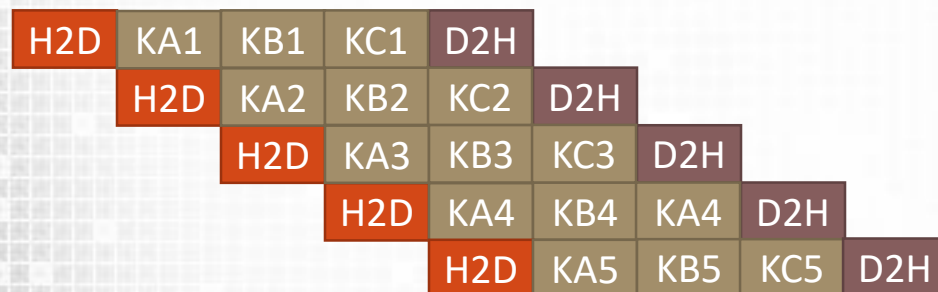

5-way Concurrency

☐ Both Copy Engines active

☐ Execution Engine active

☐ Higher independent workload

☐ Better chance of 100% utilisation

☐ What about Host?

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

☐ Synchronous and Asynchronous execution

☐ CUDA Streams

☐ Synchronisation

☐ Multi GPU Programming

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Explicit Device Synchronisation

- ❑ What if we want to ensure an asynchronous kernel call has completed?
 - ❑ For timing kernel execution
 - ❑ Accessing data copied asynchronously without causing race conditions
- ❑ `cudaDeviceSynchronize()`
 - ❑ Will ensure that all asynchronous device operations are completed
 - ❑ Synchronise everything!
- ❑ `cudaStreamSynchronize(stream)`
 - ❑ Blocks host until all calls in stream are complete
- ❑ *CUDA Event synchronisation...*

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Events

- ❑ Mechanism in which to signal when operations have occurred in a stream
 - ❑ Places an event into a stream (default stream unless specified)
- ❑ We have seen events already!
- ❑ When timing our code...

Assignment! Project Exam Help

<https://powcoder.com>

```
cudaEvent_t start, stop;  
cudaEventCreate(&start);  
cudaEventCreate(&stop);
```

Add WeChat powcoder

```
cudaEventRecord(start);  
my_kernel <<<(N / TPB), TPB >>>();  
cudaEventRecord(stop);
```

```
cudaEventSynchronize(stop);  
float milliseconds = 0;  
cudaEventElapsedTime(&milliseconds, start, stop);
```

```
cudaEventDestroy(start);  
cudaEventDestroy(stop);
```


Events and Streams

- ❑ `cudaEventRecord(event, stream)`
 - ❑ Places an event in the non default stream
- ❑ `cudaEventSynchronize(event)`
 - ❑ Blocks until the stream completes all outstanding calls
 - ❑ Should be called after the event is inserted into the stream
- ❑ `cudaStreamWaitEvent(event, stream)`
 - ❑ Blocks the stream until the event occurs
 - ❑ Only blocks launches after event
 - ❑ Does not block the host
- ❑ `cudaEventQuery(event, stream)`
 - ❑ Has the event occurred in the stream

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

```
cudaMemcpyAsync(d_in, in, size, H2D, stream1);
cudaEventRecord(event, stream1); // record event

cudaStreamWaitEvent(stream2, event); // wait for event in stream1
kernel << <BLOCKS, TPB, 0, stream2 >> > (d_in, d_out);
```

Callbacks

- ❑ Callbacks are functions on the host which should be called when an event is reached
- ❑ `cudaStreamAddCallback(stream, callback, user_data, 0)`
 - ❑ Available since CUDA 5.0
 - ❑ Good for launching host code once event has completed
 - ❑ Allows GPU to initiate operations that only the CPU can perform
 - ❑ Disk or network IO
 - ❑ System calls, etc.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

```
void CUDART_CB MyCallback(void *data) {  
    //some host code  
}  
  
MyKernel << <BLOCKS, TPB, 0, stream >> >(d_i);  
cudaStreamAddCallback(stream, MyCallback, (void*)d_i, 0);
```

☐ Synchronous and Asynchronous execution

☐ CUDA Streams

☐ Synchronisation

☐ Multi GPU Programming

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Multi GPU Programming

- ❑ By default CUDA uses the first device in the system
 - ❑ Not necessarily the fastest device!
- ❑ Device can be changed using `cudaSetDevice(int)`
 - ❑ Device capabilities can be queried using device properties API

<https://powcoder.com>

Add WeChat powcoder

```
int deviceCount = 0;
cudaGetDeviceCount(&deviceCount);

for (int dev = 0; dev < deviceCount; ++dev)
{
    cudaSetDevice(dev);
    cudaDeviceProp deviceProp;
    cudaGetDeviceProperties(&deviceProp, dev);
    ...
}
```


Multi GPU Devices and Streams

- ❑ Streams and events belong to a single device
 - ❑ The device which is active when created
 - ❑ Synchronising and Querying of streams across devices is allowed

Assignment Project Exam Help

```
cudaStream_t streamA, streamB;  
cudaEvent_t eventA, eventB;
```

```
cudaSetDevice(0);  
cudaStreamCreate(&streamA); // streamA and eventA belong to device-0  
cudaEventCreate(&eventA);
```

```
cudaSetDevice(1);  
cudaStreamCreate(&streamB); // streamB and eventB belong to device-1  
cudaEventCreate(&eventB);  
kernel << <..., streamB >> >(...);  
cudaEventRecord(eventB, streamB);
```

```
cudaSetDevice(0);  
cudaEventSynchronize(eventB);  
kernel << <..., streamA >> >(...);
```

<https://powcoder.com>

Add WeChat powcoder

Multi GPU Devices and Streams

- ❑ Streams and events belong to a single device
 - ❑ The device which is active when created
 - ❑ Synchronising and Querying of streams across devices is allowed

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

```
cudaStream_t streamA, streamB;  
cudaEvent_t eventA, eventB;
```

```
cudaSetDevice(0);  
cudaStreamCreate(&streamA); // streamA and eventA belong to device-0  
cudaEventCreate(&eventA);  
  
cudaSetDevice(1);  
cudaStreamCreate(&streamB); // streamB and eventB belong to device-1  
cudaEventCreate(&eventB);  
kernel << <..., streamB >> >(...);  
cudaEventRecord(eventB, streamB);
```

```
cudaSetDevice(0);  
cudaEventSynchronize(eventB);  
kernel << <..., streamA >> >(...);
```

Event can be synchronised across devices

Multi GPU Devices and Streams

❑ Recording of events between streams is not allowed

Assignment Project Exam Help

```
cudaStream_t streamA, streamB;  
cudaEvent_t eventA, eventB;
```

```
cudaSetDevice(0);  
cudaStreamCreate(&streamA); // streamA and eventA belong to device 0  
cudaEventCreate(&eventA);
```

```
cudaSetDevice(1);  
cudaStreamCreate(&streamB); // streamB and eventB belong to device-1  
cudaEventCreate(&eventB);  
kernel << <..., streamB >> >(...);  
cudaEventRecord(eventA, streamB);
```

```
cudaSetDevice(0);  
cudaEventSynchronize(eventB);  
kernel << <..., streamA >> >(...);
```

<https://powcoder.com>

Add WeChat powcoder

Error: eventA belongs to device 0

Peer to Peer Memory Copies

❑ For devices to interact memory must be copied between them

❑ Memory can be copied using

❑ `cudaMemcpyPeerAsync(void* dst_addr, int dst_dev, void* src_addr, int src_dev, size_t num_bytes, cudaStream_t stream)`

❑ Uses shortest PCI path or GPUDirect if available

❑ Not staged through CPU

❑ You can check that a peer (device) can access another using

❑ `cudaDeviceCanAccessPeer(&accessible, dev_X, dev_Y)`

❑ Also possible to use CUDA aware MPI

❑ Allows direct transfers over the network

❑ With NVLink this will allow GPU to GPU peer access via infiniband

❑ *Not covered in this course...*

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Summary

- ❑ GPU operations can be either synchronous or asynchronous
- ❑ Synchronous operations will block the host in the default stream
- ❑ It is possible to overlap data movements and kernel executions using streams
- ❑ Streams can be used to asynchronously launch both kernel executions and data movement
- ❑ Keeping the copy engines and compute engines busy can improve execution performance
- ❑ The order of operations queued in the stream will dictate how they are scheduled for execution on the device
- ❑ Streams provide a method for handling multi GPU code execution

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Further Reading & Acknowledgements

❑ Most slide examples are based on the excellent GTC and SC material

❑ <http://www.sie.es/wp-content/uploads/2015/12/cuda-streams-best-practices-common-pitfalls.pdf>

❑ <http://on-demand.gputechconf.com/gtc-express/2011/presentations/StreamsAndConcurrencyWebinar.pdf>

❑ <http://www.nvidia.com/docs/IO/116711/sc11-multi-gpu.pdf>

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

❑ More reading

❑ <https://devblogs.nvidia.com/parallelforall/gpu-pro-tip-cuda-7-streams-simplify-concurrency/>

❑ <https://devblogs.nvidia.com/parallelforall/how-overlap-data-transfers-cuda-cc/>